TalKase

Contents

1.1 Install SIM Card

The SIM card slot is on the right side of the back of Talkase, first remove the cover as instructed, then put the SIM card into the slot, close the cover, the installing is done.

Only support micro SIM card.

Attention the direction to insert card

SIM
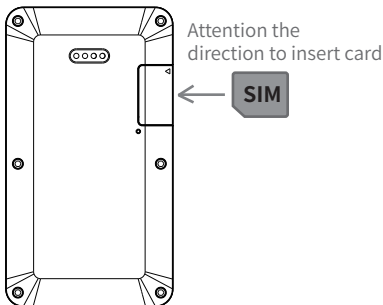
1.2 Charging Method

Let the four metal contacts of charging slip correspond to the four of Talkase, then press the charging clip to ensure it is tightly attached to the back of Talkase, connect the computer using USB cable or an adapter for charging. Take out the clip from down to up in vertical direction, sliding way is not suggested for protecting the four contacts in charging clip.

Wrong way of installing charging clip	Right way of installing charging clip
Slide up and down is not allowed	Install from virtical direction

Screen Lock Key

Long press to enter voice mail

Bluetooth dialer

GSM dialer

Top select menu key

Long press to calculator Short press to delete

Bottom select menu key

Return Button

Confirm

ON/OFF Reject call Main interface
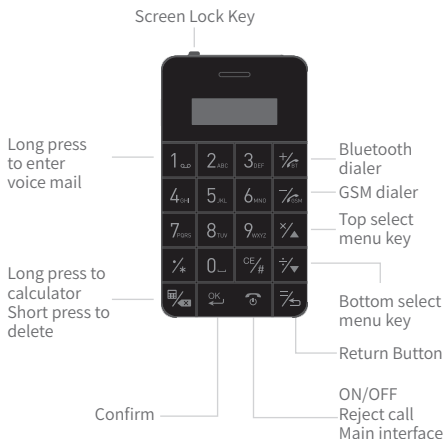
3.1.Standby Interface

Long press the power key to start up, standby interface show the internet signal, Battery Capacity, and the message notification when there is message you have not read. When open the Bluetooth it will show on the interface too. The middle of the interface is the present time. Press top or bottom menu key for changing different function.

`💬* 10:23 ▪▪▪▪`

Lock and Unlock
Press power on/off key and "#" simultaneously to lock or unlock.

3.2 How to Use Dialer
Press the number key can make a call directly, or dial by GSM SIM card, or use the BT call to make a dial after connecting with your smart phone through Bluetooth. (There must be a SIM card in your smart phone, how to pair the Bluetooth please refer to BT3.5) . If there is error in input number using the delete key to correct.

`13500002344`   `📞••••••`

4.1 Bluetooth Music Control

After connecting with the smart phone by Bluetooth can use the music player. (Note：Only can control music but can not play, control smart phone to play the previous and next one.)

4.1.1 How to control music
Press "OK" to enter the function interface when in the music control menu, press top and bottom key to select the previous and the next one, press "OK" to play or pause.

| Music Play | Previous Pause Next | Previous Play Next |

4.2 Record
Begin Recording
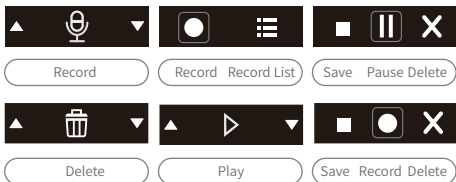Press "OK" to enter the function interface when in the recording menu, press top and bottom key to select the function you want, choose the record mark and begin to record.

Save/Pause/Give up
When recording the screen will show the record time, press "OK" will show "save/pause/give up ", select function by press top and bottom key, press "OK" to confirm, press recording key to continue recording.
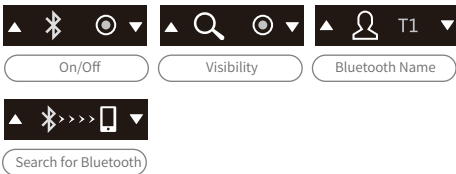
Play and Delete Record List
Press top or bottom key to select, press OK to enter
the record list, press top or bottom key to choose
that you want to play, press "OK" will show "play" or
"delete" , select by press top or bottom key, press
"OK" to confirm.

▲ 🎤 ▼	▲ ⬤ ☰ ▼	▲ ■ ⏸ ✕
Record	Record Record List	Save Pause Delete

▲ 🗑 ▼	▲ ▷ ▼	■ ⬤ ✕
Delete	Play	Save Record Delete

4.3 Bluetooth
4.3.1 Instrcution of Bluetooth

▲ ✳ ◎ ▼	▲ 🔍 ◎ ▼	▲ 👤 T1 ▼
On/Off	Visibility	Bluetooth Name

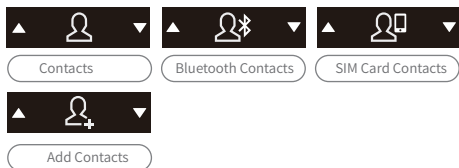| ▲ ✳ ›››› 📱 ▼ |
|---|
| Search for Bluetooth |

Open the Bluetooth, search the Talkase Bluetooth on
your smart phone, then pair it.

4.4 Contacts

Press "OK" to enter the contacts list when in the contacts menu, press top or bottom key to select SIM card contacts, Bluetooth contacts and add contacts.

▲ ☖ ▼	▲ ☖✶ ▼	▲ ☖▢ ▼
Contacts	Bluetooth Contacts	SIM Card Contacts

| |
|---|
| ▲ ☖₊ ▼ |
| Add Contacts |

4.4.1 Add Contacts

Press "OK" will show the pop-up circle in add contacts menu, press top or bottom key to input name and number to the input area, press "OK" to save or cancel. Press "#" to choose input method.

Name ANDY ABC	Phone Number 138xxx...... ABC	▲ 💾 ▼
Input Name	Input Number	Save

▲ ✕ ▼
Cancel
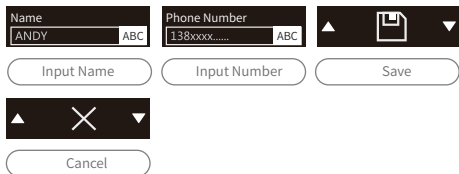
4.4.2 Call SIM Card Contacts

Press top and bottom key to choose contacts from SIM Card Contacts, then press "OK" will show "Find Contacts", "Send Message", "Call the Contacts", "Edit Contacts", "Delete Contacts", "Choose the Save Area" and so on. Press top or bottom key to select "Call the Contacts".

▲ Q ▼	▲ 💬 ▼	▲ 📞 ▼
Search	Text Message	Call

▲ 📝 ▼	▲ 🗑 ▼	▲ 📱⇌SIM ▼
Edit	Delete	transfer between SIM and phone
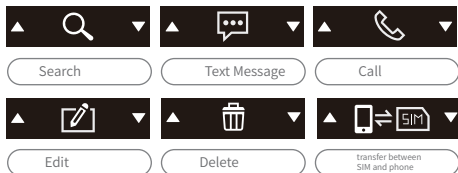
4.4.3 Dialer to Bluetooth Contacts

Press "OK" to enter the Bluetooth contacts, another press to choose different functions, press top or bottom key to "Text Message", "Dial to the Contacts ", "Save to the phone book".

| ▲ 💬 ▼	▲ 📞 ▼
Text Message	Dial

Note: select contacts in the contact list, dial the BT Key or GSM Key to call directly.

Note: Press "#" could exchange input method, press "*" could choose different punctuation mark when texting message or edit the contacts' name.

4.5 Message

Press "OK" to enter the message operation interface when in the message menu, press top or bottom key to "Text Message", "Inbox", "Drafts", "Outbox".

▲ 💬 ▼	▲ 💬 ▼	▲ ⬆ ▼
Message	Text Message	Outbox

| ▲ ⬇ ▼	▲ 📰 ▼
Inbox	Drafts
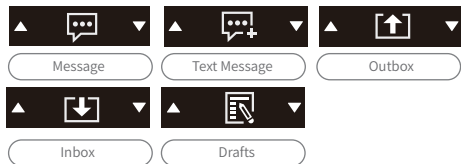
4.5.1 Text and Send Message

Choose "Text Message", press "OK" when the message is done and the screen will show "send", recipient could be chosen from contacts or input number directly, press "OK" to send. Press top or bottom key could choose "Save Message", "Punctuation", "Input Method" and so on.

▲ ✏ ▼	▲ ✈ ▼	▲ [;] ▼
Input Method	Send	Punctuation

▲ 💾 ▼
Save as Drafts
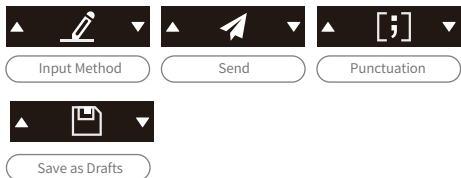
4.5.2 Inbox

Choose "Inbox", press "OK" to enter the list, press top and bottom key to select, press "OK" to read, press again to "Reply", "Add Contacts", "Delete", "Forward", "Dial" and so on.

▲ ✉ 10086 ▼	▲ 📭 10086 ▼	▲ ↰ ▼
Unread	Read	Reply
▲ 👤₊ ▼	▲ 🗑 ▼	▲ ⮕ ▼
Add Contacts	Delete	Forward
▲ 📞 ▼		
Dial		
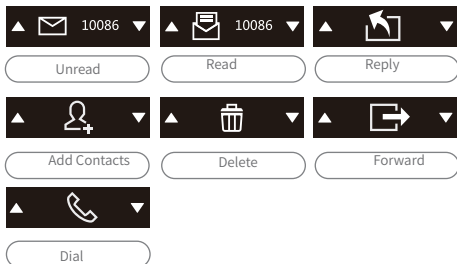
4.5.3 Outbox

Choose "Outbox", Press "OK" to the list, press top or bottom key to choose, and press "OK" to read, press "OK" again to "Forward" or "Delete".

4.5.4 Drafts

Choose "Drafts", press "OK" to the list, press top or bottom key to choose, and press "OK" to read, "OK" again to "Send", "Edit", "Delete" and so on.

Note: Press "#" could exchange input method, press "*" could choose different punctuation mark when texting message or edit the contacts' name.

4.6 Call History
Press "OK" to the call history, another press to choose and "OK" again to "Add contacts", "Dial ", "Send Message", "Delete Call History".

▲ ☎ ▼	▲ ANDY ← ▼	▲ ANDY → ▼
Call History	Received Calls	Dialed Calls

▲ ANDY ? ▼
Missed Calls
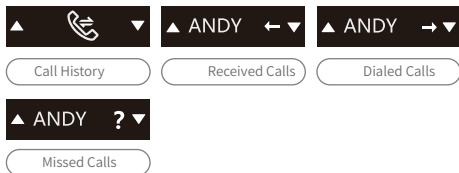
4.7 Setting

▲ ⚙ ▼
Setting

4.7.1 Alarm Clock Setting
Enter setting-alarm, press "OK" begin to set time, Press "OK" could enjoy the following functions after setting done: "Ringtone Setting", "Repeat Setting", "Save Alarm Clock" and so on. The circle could become solid after successful setting.

4.7.1.1
How to turn off
Enter setting-Alarm Clock, choose the one you want to delete, press "OK" to confirm, the circle would be hollow.

▲ ⏰ ▼	▲ 06:06 ◉ ▼
Alarm Clock	Setting

4.7.2 Phone Setting

This including: "Date Setting", "Time Setting", "Zone Setting", "Time Format Setting", "System Language Setting", "Ringtone Setting", "Volume Setting", "Operator Manul Setting", "Screen display Time Setting", Details See Below：

Phone Setting

Date Setting

Input date by keyboard

Time Setting

Input time by keyboard

Zone Setting

Top and bottom key to select OK to confirm

▲ Washing. ●

Time Format Setting

Top and bottom key to select OK to confirm

▲ 12 ●

Language Setting

Top and bottom key to select OK to confirm

▲ English ●

Volume Setting

Volume up by top key Volume down by bottom key

Operator Manul

Top and bottom key to select OK to confirm

▲ AT&T ●

Screen Display Time

Top and bottom key to select OK to confirm

▲ 15 Seco... ●

4.7.3 Profiles

It including: "Standard Mode", "Silent Mode", "Conference Mode", "Outdoors Mode", "Airplane Mode". Press "OK" to confirm the one you like.

Profiles	Standard Mode	Mute
Outdoors Mode	Airplane Mode	Meeting mode

### 4.7.4 Restore Factory Setting

Enter setting- restore factory settings, press "OK" get a notification and "OK" again could accomplish the setting, press return button to cancel. It can be restored to the initial status.

Restore Factory Setting

4.8 Calculator
Long press calculator key to enter when in standby interface, then Talkase will be a calculator, input number to count directly.

CE Zero Clearing

Calculator
Long press to enter or exit the calculator

Return to main menu
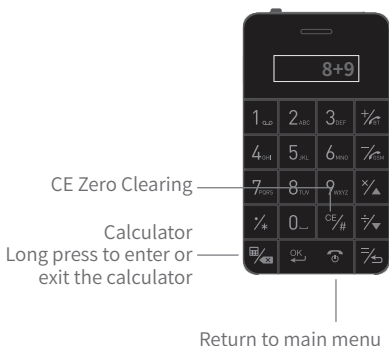
Anti-Lost
Press "OK" to enter Anti-Lost function, another press to switch on or off (Only available after connected by bluetooth).

Anti-Lost   On and Off

Shortcut Key

1. When the Bluetooth is turned off, press return botton on standby interface, "Connect by..." comes out, press "OK" can activate Bluetooth rapidly, otherwise it will be turned on by press the return botton when the Bluetooth is turned off.

2. Press "#" could exchange input method, press "*" could choose different punctuation mark when texting message or edit the contacts' name.

3. Press OK key to turn on/off the loudspeaker while in the call status.

NOTICE

This product complies with the requirement of the 1999/5/EC directive.

The maximum operating temperature of the product is 40 ℃.

FCC Statement

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

The grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

Specific Absorption Rate(SAR)

Information SAR tests are conducted using standard operating positions accepted by the FCC with the Phone transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the phone While operating can be well below the maximum value, in general,the closer you are to a Wireless base station antenna, the lower the power output.Before a new model phone is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC, Tests for each the FCC that it does not exceed the exposure limit established by the FCC,Tests for each required by the FCC.

For body worn operation, this phone has been tested and meets FCC RF exposure guidelines when

used with an accessory that contains no metal and that positions the handset a minimum of 1.0cm

from the body. Use of other accessories may not ensure compliance with FCC RF exposure

guidelines.