




WATCH

INSTALLATION GUIDE




TECHNICAL SPECIFICATION

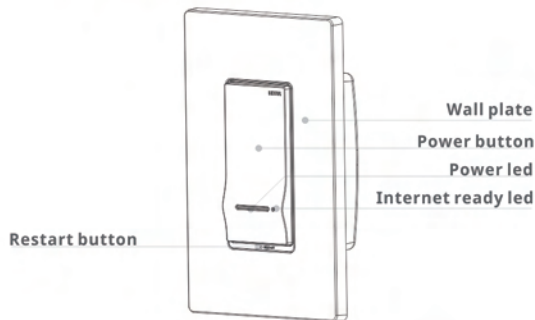

-
- Product Name: Match
 - Model No.: ML1101
 - Input voltage : 120/208/240 Vac
 - Frequency : 50Hz/60Hz
 - Max Output : 10 A@120Vac, 10 A@240Vac
 - Ambient : 25 degree C
 - METER tolerance : < 2%
 - WIFI support: IEEE 802.11 b/g/n.
 - Replace single pole switch: Fit in single/double/multi-switch rocker-style plates.
 - Item weight: 0.28 pounds
 - Item dimension L x W x D: 4.7 X2.94 X1.81 inches
 - Meter support: Report Voltage, current, power consumption, PF, accumulated energy cost, day, month and year.
 - OS support: Currently support iOS7 and higher.App runs on iphone/ipad/ipad mini.
 - Dual mode control: Direct control on/off from mobile device or through internet connection.
 - Timer support: Up to six (6) timers can be programmed for each device or group to control on/off.
 - Battery: Not required. Device will not work without AC power supply.



CONTENTS

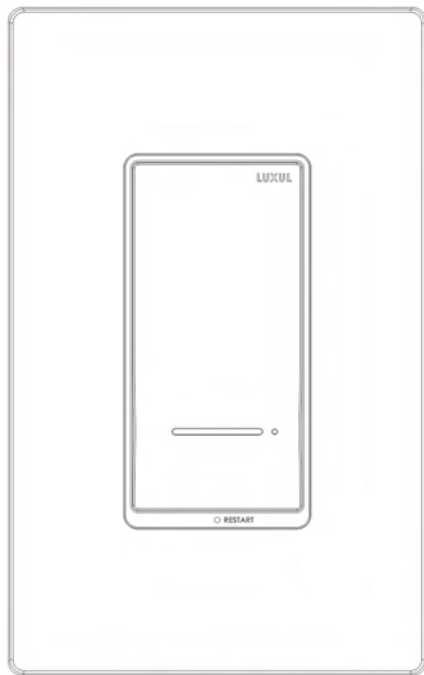

Match smart light switch



Wall Screws X 2



Wire nuts X 4



Restart pin X1

IMPORTANT SAFETY INSTRUCTIONS

SAFETY INSTRUCTIONS

- It is required to turn off the power before installation. To install the MATCH smart light switch with power on has the risk of causing shock and/or damages to the switches.
- Be sure to connect all wires including ground by all following installation steps on next page.
- MATCH smart light switch only works with both Live(L) and Neutral(N) wires properly connected. Don't short neutral with light wire if no neutral wire is not seen in the electrical box.
- Cover of MATCH smart light switch must be installed to avoid direct contact to metal or electrical part of the switch. You have option to use your own cover with standard size to fit the switches.

WARNING: RISK OF FIRE OR ELECTRIC SHOCK


MATCH smart light switches installation requires knowledge of electrical switch wiring systems. If not qualified, please do not attempt to install it. Contact a licensed electrician.

- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.


WARNING: RISK OF INJURY

- Some metal parts in the existing electrical boxes may have sharp edges. To prevent cuts and scrapes, wear gloves when working on wiring in the electrical boxes.
- Use sturdy ladder to reach high position switches. Have a person around to assist you.


Switch off power.

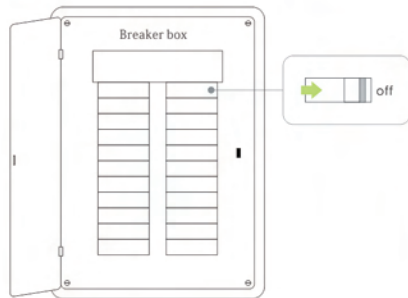

Remove wall plate.

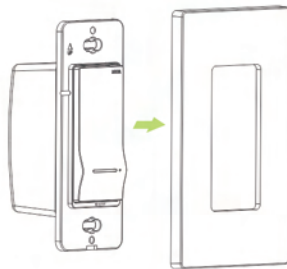


Replace old switch with MATCH smart light switch.
Ground, neutral, live, load lines should be connected as below:

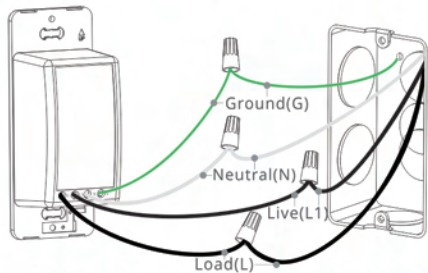


NOTE: Neutral is required. If you don't find it in the electrical box, please refer to online support FAQs session.

Screw in Match smart light switch and then attach wall plate.

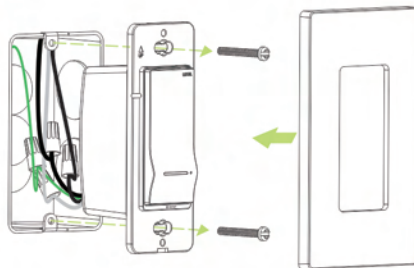

Switch power back on.

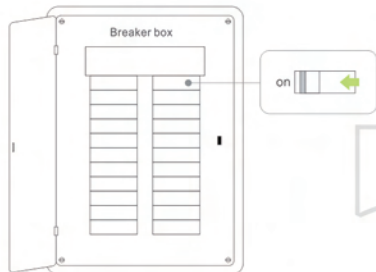

Download and install Match App. In settings, select WiFi and connect to the Match network. Open MATCH application and follow step by step instructions to complete the software installation.



Enjoy your Match smart light switch.



For further assistance, please check
Consumer Products Technical Support at :
www.matchlux.com

A video installation guide is also available
on the same website.



2995 Gordon Ave, Santa Clara, CA 95051
Tel : 1-408-988-8808
Fax : 1-408-245-3903



Please recycle Match's 100%
recyclable packaging.

FCC COMPLIANCE STATMENT

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Note: The country code selection is for non-US model only and is not available to all US model. Per FCC regulation, all WiFi product marketed in US must fixed to US operation channels only.

MATCH WARRANTY

WARRANTY

Luxul Technology Inc. (LUXUL) warrants to the original receiver of MATCH Smart Light Switch (MATCH) that its products are free from defects in material and workmanship for a period of one (1) year from the date of shipment arrival. This warranty may not be extended. If the MATCH device fails to operate during the warranty period, LUXUL will attempt to correct any failure of MATCH to conform to specifications. If the Product is deemed not repairable, a replacement product or a prorated refund of the purchase price will be given to the Purchaser, at the discretion of LUXUL.

LUXUL may ask the receiver to send the defective product to LUXUL, with the transportation charges prepaid as well as a \$5.00 charge to cover handling costs. Please note, this is not a repair charge. Proof of purchase must accompany the defective product when it is returned.

TERMS AND CONDITIONS

Should MATCH be installed with a voltage source greater than 264V, LUXUL shall not be liable. This warranty will also not apply in the event of conditions demonstrating abnormal use or stress including, but not limited to: operating temperatures in excess of maximum rated temperatures, under/over voltage conditions, wet areas, outdoor, rusty, dirty or cracked light switches, installation with the power on, unauthorized modification of MATCH by users, as well as improper installation. The MATCH device must remain intact and free from tampering. LUXUL is NOT responsible for death, dismemberment, or injury while installing LUXUL products with the power on. Terms of warranty for the product shall not change regardless of installation with the power being on or off. Any violation of these conditions will void this MATCH warranty.

Please note that all MATCH devices must connect to fully functional WiFi-certified routers. This MATCH warranty is not transferable and applies to the original installation of the sealed MATCH smart light switch for as long as the original purchaser owns them.

SERVICE CLAIMS / RETURN OF DEFECTIVE PRODUCT

Service claims can be made by contacting 1-408-988-8808, or email service@luxultek.com to receive instructions for problem resolution. The receiver will be requested to provide its original bill of sale, or such other evidence showing the date of purchase and the identity of the purchaser. Should it be determined that MATCH is defective through no fault of the user, LUXUL shall assume cost of shipping for returns, and a Return Merchandise Authorization number (RMA) will be issued. The Purchaser shall promptly return the faulty MATCH to LUXUL's Corporate Headquarters, 2995 Gordon Avenue, Santa Clara, CA, 95051. Defective MATCH devices returned after thirty (30) days of RMA's date will not be accepted, and replacements will not be issued. Failure to follow this procedure shall void this warranty.

REPLACEMENT OF PRODUCT

LUXUL will attempt to correct any defective MATCH devices to conform to specifications within a reasonable period of time and at LUXUL's expense. If the MATCH device is not repairable, a replacement product will be delivered to the purchaser. All replacement or repaired MATCH devices are warranted only for the remainder of the original warranty period.

LIMITATION OF REMEDIES

At no time shall LUXUL be liable for any special, incidental, or consequential damages based on breach of warranty, breach of contract, negligence, strict tort, or any other legal theories. Damages that LUXUL will not be responsible for include, but not limited to: Loss of profits; loss of facilities or services; downtime the claims of third parties, including customers; and/or the injury to property. LUXUL reserves the right to provide warranty replacement with suitable substitutes that do not adversely affect the soundness or quality of the MATCH devices.

SAMPLE ORDERS RETURNS

Please note that should any sample items require return, Luxul Technology must be informed within 72 hours of receiving shipment for credit.