Door Window Sensor

USER MANUAL

Model: D06

-1-

Thanks for choosing our wifi smart door window sensor, which will provides you a whole-home security.
Please read this manual carefully before use and keep it for future reference.

Product Presentation:

Main body
LED Indicator   Reset Button
Small body

Specification:

Material: ABS
Size: 71*25*20mm (Main body）
　　　36*10*17mm (Small body)
Battery: LR03-1.5V/AAA*2 (Alkaline battery)
Battery Life: 6000 times trigger
Standby Current: 8uA
Alarm Current: 70mA～120mA
Wireless Type: 2.4GHz
Wireless Standard: IEEE 802.11b/g/n
Working Temperature: 0°C～40°C (32℉～104℉)
Working Humidity: 20%～85% RH
Storage Temperature: 0°C～60°C(32℉～140℉)
Storage Humidity: 0%～90% RH
Supports Android 4.4 and iOS 8.0 or newer

-2-

How to Use

Slide to open the back cover of battery compartment of the main sensor, take out the insulation sheet .

Insulation sheet

(Notes: when the batteries are run out, please choose Alkaline battery instead of Carbon-zinc battery.)

-3-

Checklist before using the device:

a. Your smartphone has connected to a 2.4GHz WiFi internet.

b. You have the correct WiFi Password.

c. Your smartphone or tablet must be Android 4.0 + and iOS 8.0 +.

d. Your router is MAC-open.

e. If the number of devices connected to the router reach the limit,you can try to disable a device to vacate the channel or try with another router.
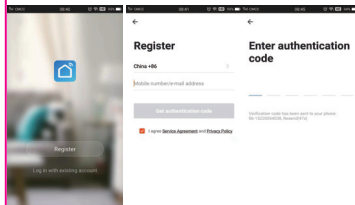
How to Set up

1. Use your phone to scan QR code or search "Smart Life" app in Google Play store or APP Store to download and install it.
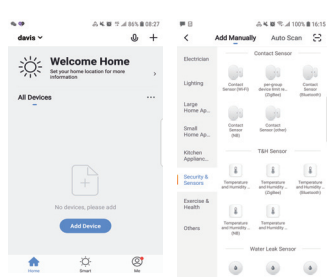
Scan QR Code to download   Smart Life

Google Play   App Store

-4-

4

---

2. Create an account with your mobile number and enter authentication code.
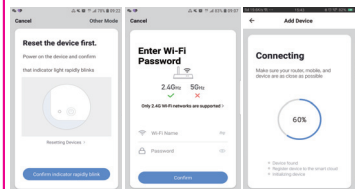
Register   Enter authentication code

-5-

---

3. Connect your mobile to your WiFi router at your home, click"+" at the upper right corner of homepage or click "Add Device", then select " Contact Sensor (Wi-Fi) " under "Contact Sensor" type from"Security & Sensors".

-6-

---

4. If the LED indicator is not flashing rapidly, hold the reset button for about 6 seconds till the LED indicator flash rapidly.Enter Wifi name and password,then click "Confirm". it will connect to your wifi. Once connection completed, push the back cover to close the battery compartmemt.

5. Peel off the 3M adhesive tapes to mount the sensors onto the frame of door/window or secure them with the screws. make both bodies as close as possible.

the gap between two bodies is ≤10mm

-7-

Main Functions

1. Low Voltage Remind
When the battery level is low, it will remind you to change batteries, never worry about running out of battery.

2. Push Notification
Push instant notification to your phone immediately when door or window is opened or closed. Keeping you informed all the time.

3. Alarm Alert
Whenever the sensor is triggered to open/close, it will send alarm to alert you that someone open your door or window.

4. Alarm Recording
Support checking open/close records in the app.Never worry about missing any important moments.

5. Device Sharing
Select "Home Management" in the "Me" page to share your added sensors with your family members, so they can also monitor the status of doors/windows anytime when you are outside.

6. Works with amazon alexa and Google assistant.

-8-

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:
The equipment complies with FCC Radiation exposure limits set forth for uncontrolled enviroment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.