THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS THE PROPERTY OF ALTIUM LIMITED AND MAY BE FREELY DISTRIBUTED IN WHOLE. NO RIGHTS ARE RESERVED OR EXPRESS OR IMPLIED WARANTEE GIVEN.

REVISION	DESCRIPTION	DATE	APPROVED

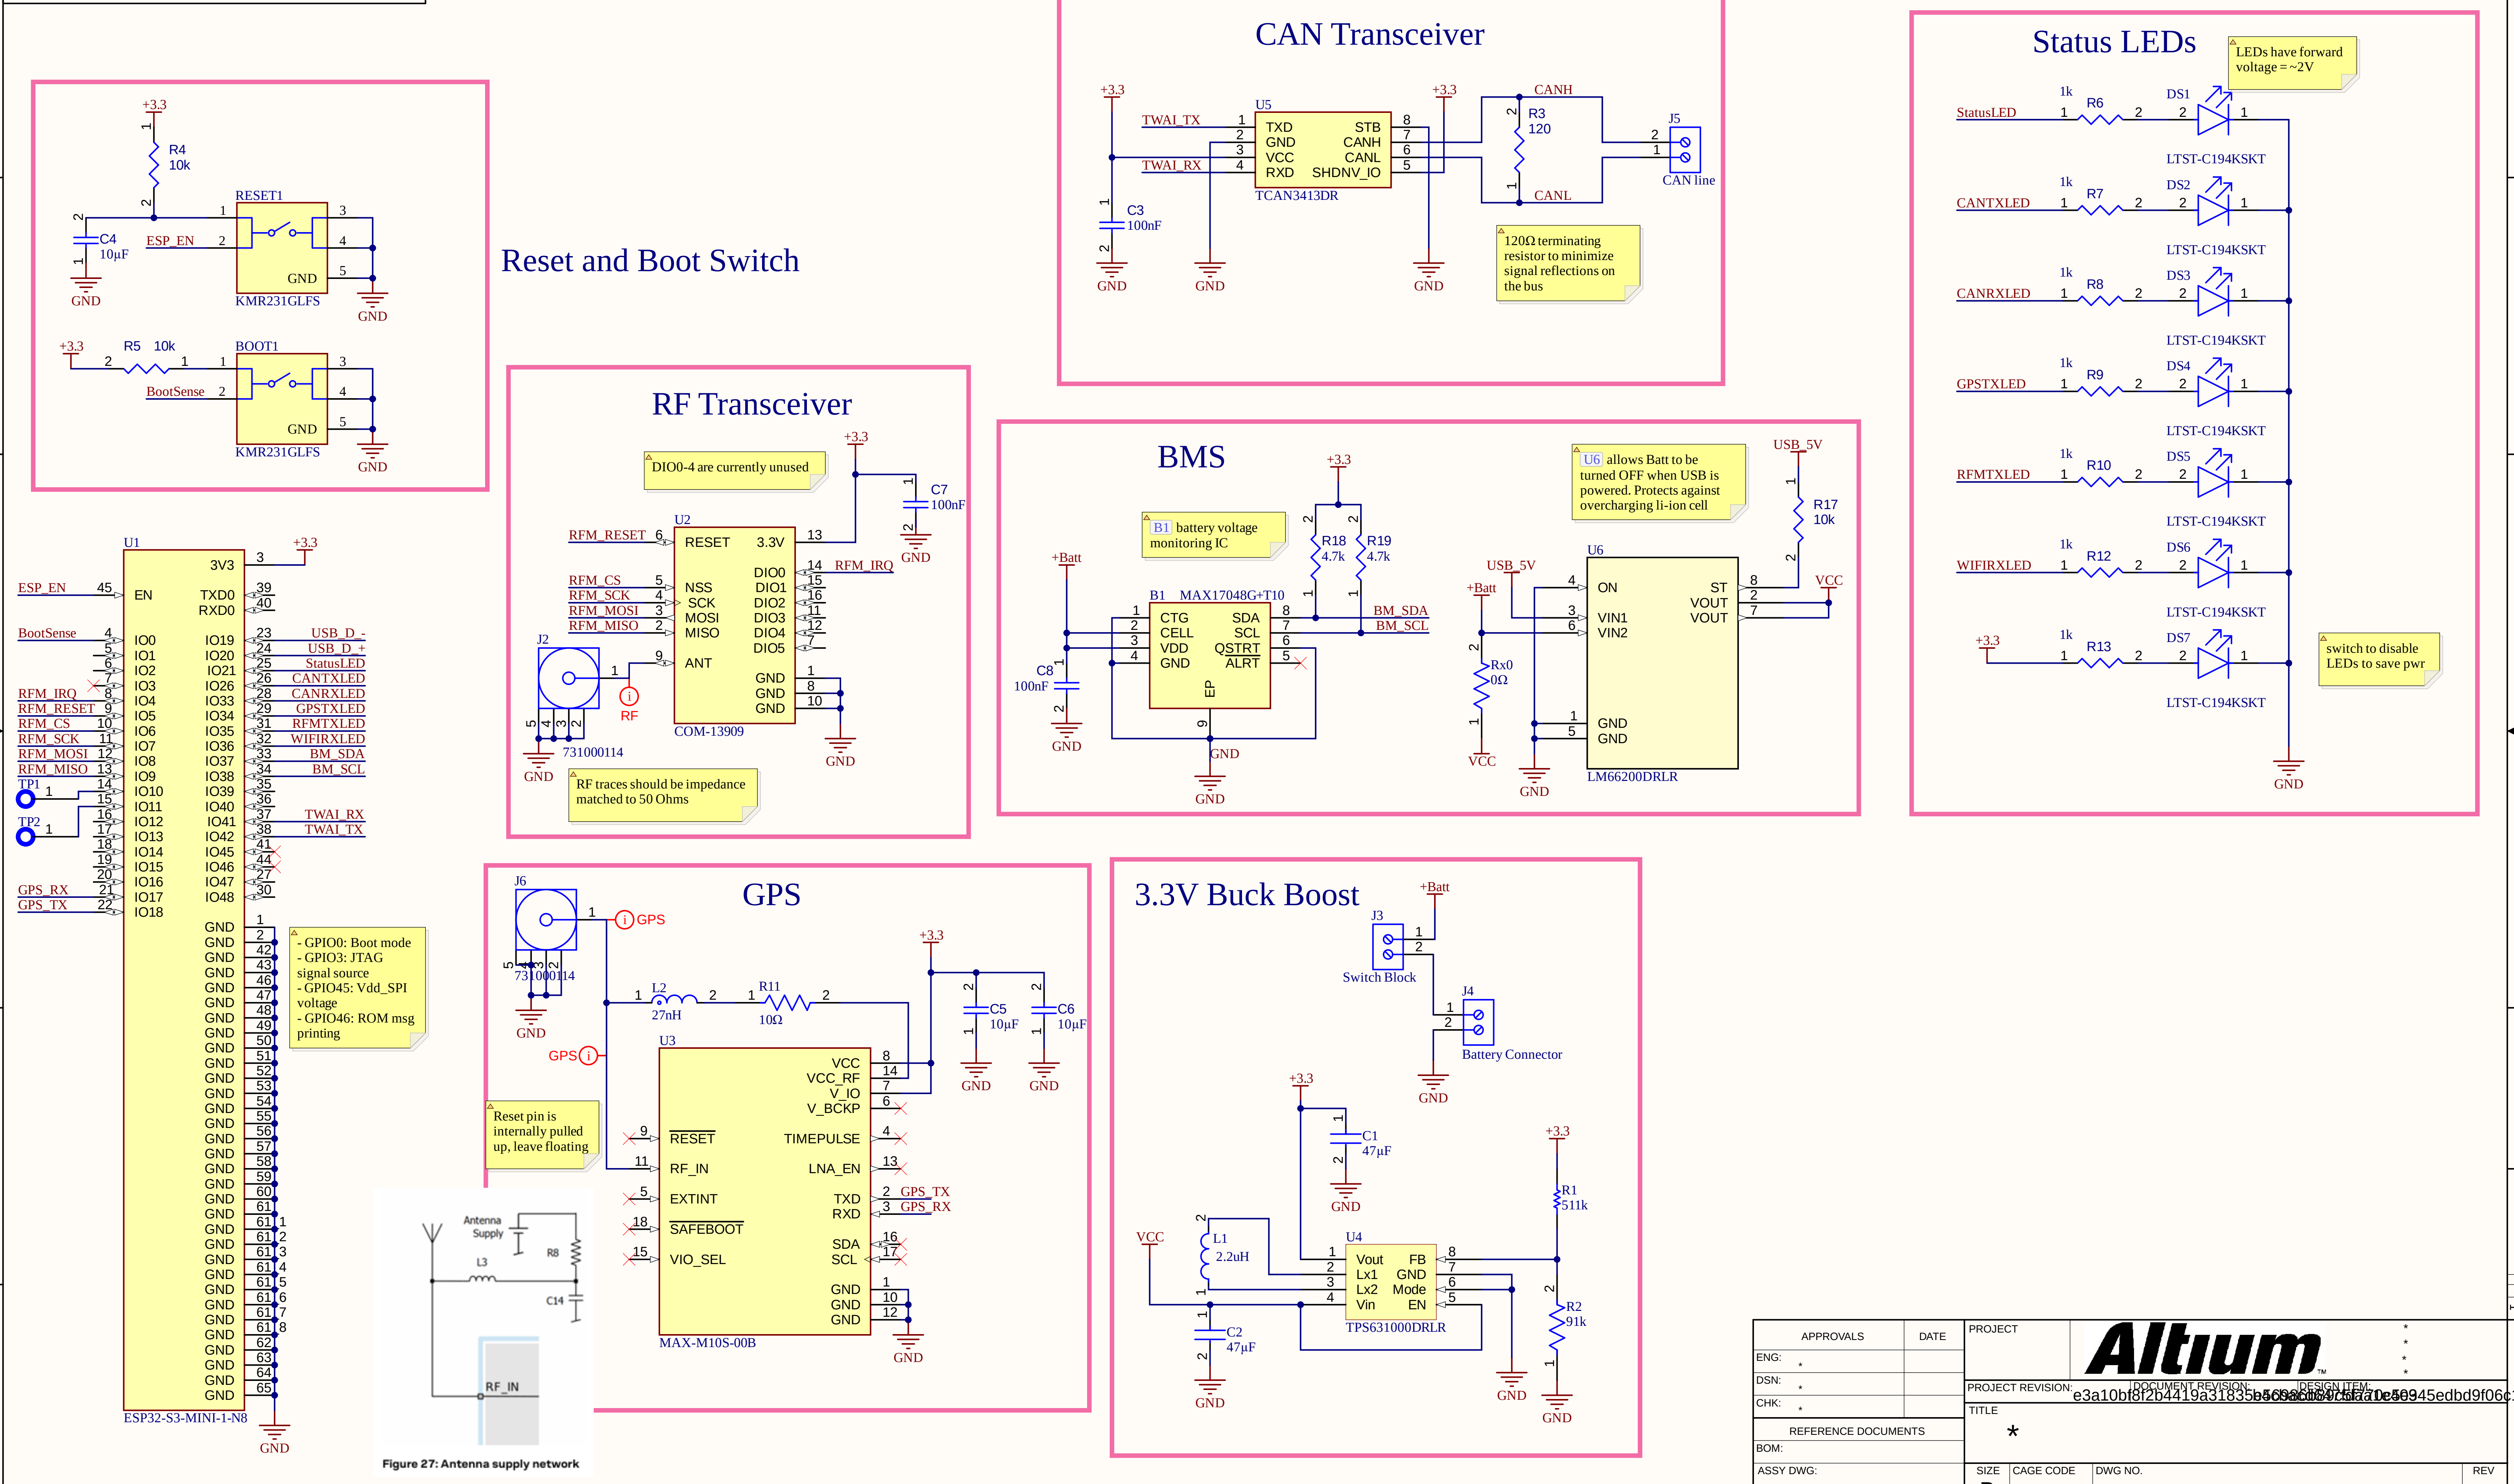

LEDs have forward voltage = ~2V

120Ω terminating resistor to minimize signal reflections on the bus

DIO0-4 are currently unused

RF traces should be impedance matched to 50 Ohms

B1 battery voltage monitoring IC

U6 allows Batt to be turned OFF when USB is powered. Protects against overcharging li-ion cell

switch to disable LEDs to save pwr

- GPIO0: Boot mode
- GPIO3: JTAG signal source
- GPIO45: Vdd_SPI voltage
- GPIO46: ROM msg printing

Reset pin is internally pulled up, leave floating

Figure 27: Antenna supply network

APPROVALS	DATE
ENG: *	
DSN: *	
CHK: *	

REFERENCE DOCUMENTS
BOM:
ASSY DWG:
FAB DWG:
PCB DWG:

PROJECT *
PROJECT REVISION: *
DOCUMENT REVISION: e3a10bf8f2b4419a31835b[illegible]
DESIGN ITEM: [illegible]0e58945edbd9f06c1ec
TITLE *

SIZE	CAGE CODE	DWG NO.	REV
B			

SCALE:
FILE NAME tracker_main.SchDoc
SHEET 1 OF 2

USB-C 2.0 Receptacle

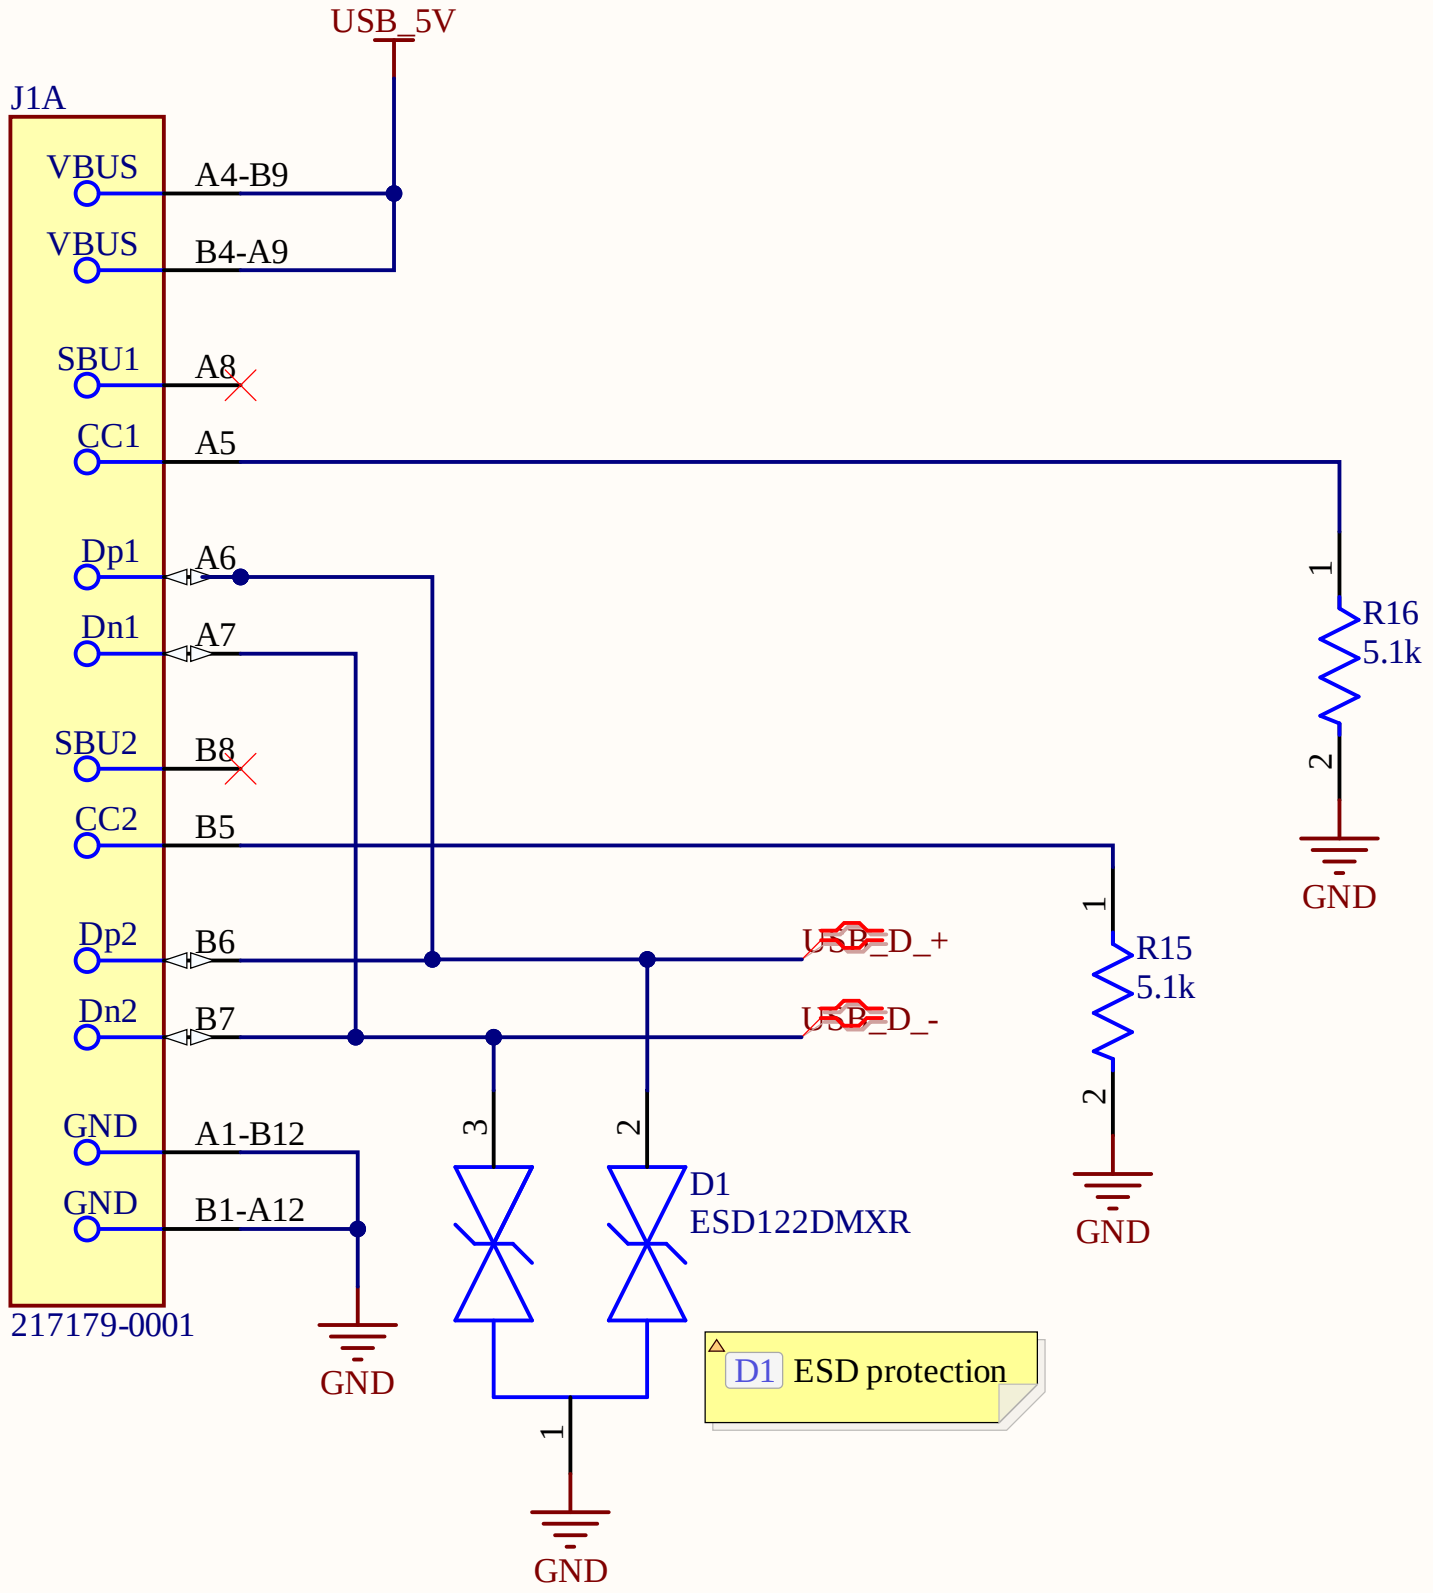

Title

Size
A

Number

Revision

Date: 7/08/2026
Sheet of
File: C:\Users\..\tracker_usb_c.SchDoc
Drawn By: