iPager™

Professional Pager User Guide

200

User Guide
Model IP200

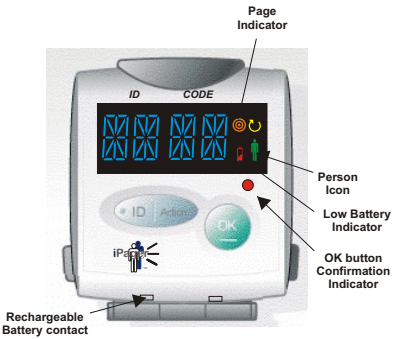

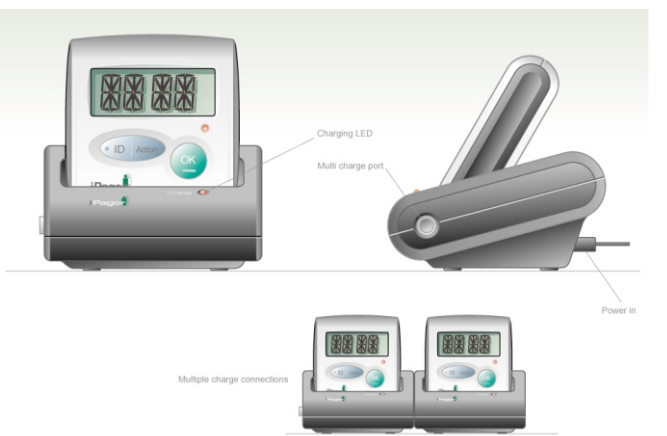

User Guide
Model IP200

Version 3.1

Table Of Contents

INTRODUCTION

Diagram 5
Ipager Use. 6
Configuration Setup Sheets 7

OVERVIEW

Quick Reference Guide. 9

PAGER SETUP

Overview Map of Setup 10
Office or Personal Network Setup 11
Pager ID Setup 12
Contact ID Setup 13
Emergency ID Setup 14
Personal Notification Setup 15
Time Setup 16

BASIC OPERATION

Power On/Off 18
Paging 19
Receiving Pages 20
Timer Setup & Use. 21
Emergency Page Use 22

TECHNICAL SPECIFICATIONS

Specifications
Accessories
FCC Regulations

200

© Copyright 2006
US & Foreign Patents Pending

User Guide

INTRODUCTION

The ipager 2-Way pager is the simplest and most cost effective professional pager. It requires no satellites, no expensive network wiring, and no telephone. The Ipager is easily viewed with its flip up belt clip or its built in stand. The iPager 2-Way Pager allows any user to page anyone on a private wireless network by providing a simple two digit Alphanumeric ID and a two digit numeric action code. Once a private network code is established, each pager is then personalized with its unique user ID and ID contact ids. You simply use your thumb to scroll or toggle through the ipagers contact ids by pressing the ID side of the blue button showing most frequent id first, this identifies the person you want to be ipaged, then on the action side of the blue button scroll or toggle through the action codes (this could be a room number) then just press the Ok green button to page, the led confirmation indicator will light-up, letting you know the page was sent. The unique design of the Ipager flip up belt clip is designed for right hand or left hand use. The 3/4 inch size characters make it easy to read without removing the unit. Setup configuration sheets are provided to setup contact ids and your office defined action codes.

Ipager flip up belt clip

Model IP200

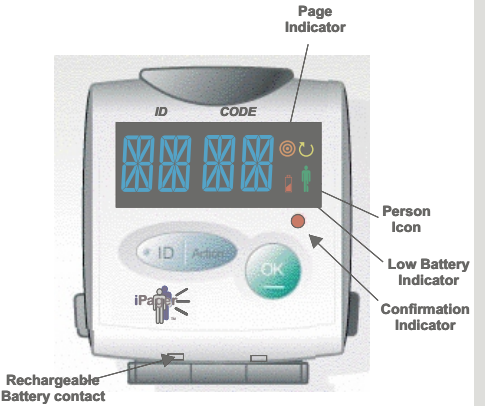

Low Battery Indicator Red– indicates when battery power is below 25%.
Person Icon Green– indicates when the unit is in personal mode.
Confirmation Indicator – gives a visual indication when the OK button has been pressed.
Page Indicator Orange– indicates when a page has been received.

Ipager Use

Ipager is designed for right or left handed users with dimpled buttons for the thumb.

Ipager built in stand for desk top use

Ipager Configuration Setup Sheet

Office Network ID

10 Units or less

Your Contact IDs

Ipager Contact ID Name	ID	

2- Digit ID Example:

A	**P**

Alphanumeric Examples

AP JP RS
D1 D2 D3
A1 A2 A3
AZ AA BJ

Ipager Configuration Action Codes

10 Units or less

Office Network ID

Every office may have a different concept or design to their action codes based on the office room configuration and the type of business or practice. The Ipager does not require you to program action codes. The action codes are determined by the user. Below are some suggestions. Our recommendation is to start with simple meaningful action codes make it easier to get started with your Ipager system. After some experience is gained, create more detailed action codes. For example, using the first digit of the action code for room number. Using two digit action codes require more keystrokes, however it can communicate more information to the pagee which may be beneficial.

Action Code		Description

1- Digit Action Code Example:

2	

2- Digit Action Code Example:

2	1
0-9 Room Number	0-9 Action Code

Example of Action Codes:

0 -Your assistance needed or please come to room.
1 - X-rays taken/take.
2 - dismiss patient.

The front desk is room 0. If there is a call, the front desk will page 0 1 for telephone call line 1. 03 telephone call line 3. 00 your needed at the front desk

Quick Reference Guide

Version 3.1

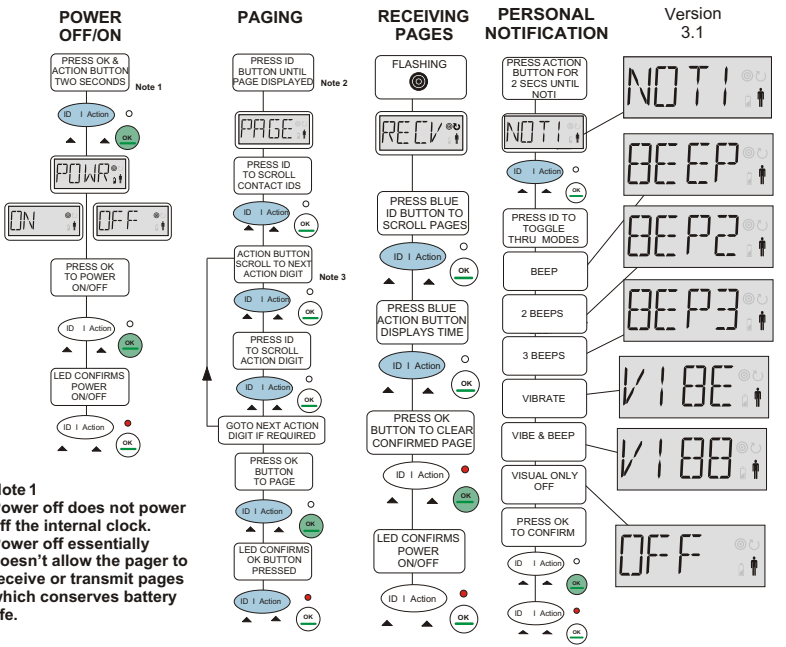

Note 1
Power off does not power off the internal clock. Power off essentially doesn't allow the pager to receive or transmit pages which conserves battery life.

Note 2
Paging cannot be done until received pages have been acknowledged. Pressing the left ID side of blue button and ok button acknowledges a page. Page mode is indicated by the word PAGE present in display when he ID portion of the blue button is pressed. The unit shows the time when in receive default mode.

Note 3
Press the Blue Button Action code side of button to advance to the 1st Action code Digit. Press left ID side of button to advance action code starting at 0. The user can then scroll up from 0- 9. If the action code is overshot the , holding the Left blue button down allows fast scroll of 10 numbers a second. Press Action code side of the blue button to advance to the next action code digit.

IPAGER SETUP

The ipager requires four basic steps for setup. Once the unit is powered on, the first step is to setup your office code ID or network id which is the same for all pagers in your office. You can select any four digit code, but the four digit code must be the same for all units on your private wireless network. This prevents other ipagers from receiving your pages. The second step is to setup your ipager with a personal alphanumeric ID. DO NOT USE the same ID as another ipager in your office. The third step is to setup Contact ID's of your other pagers. The ipager stores 50 ID's, and will memorize in order the most frequently used ID's when selecting a page to send. The fourth and final step is to setup your ipager personal notification, whether it be audio, visual or vibrate.

Overview Map of Setup

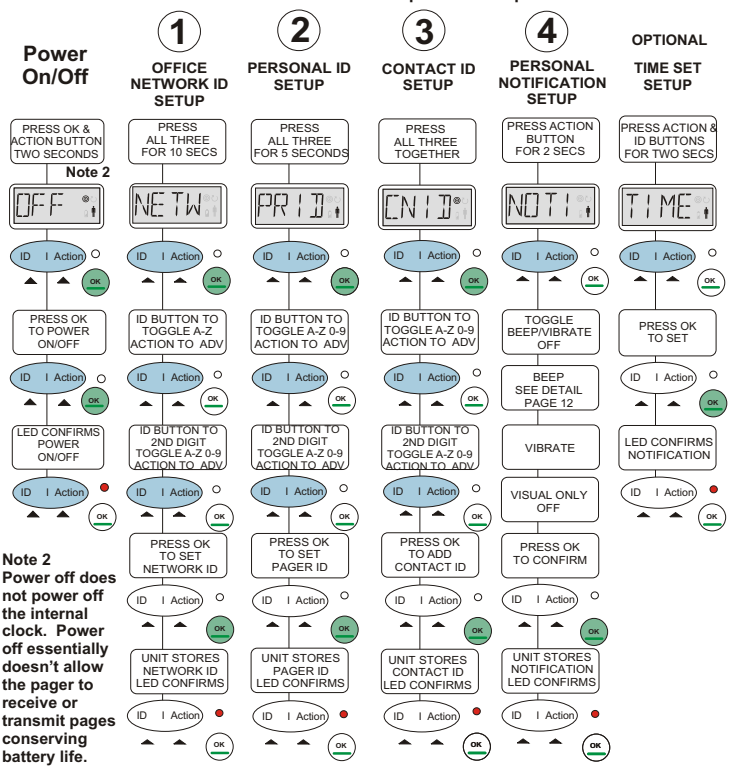

Note 2
Power off does not power off the internal clock. Power off essentially doesn't allow the pager to receive or transmit pages conserving battery life.

OFFICE NETWORK ID SETUP

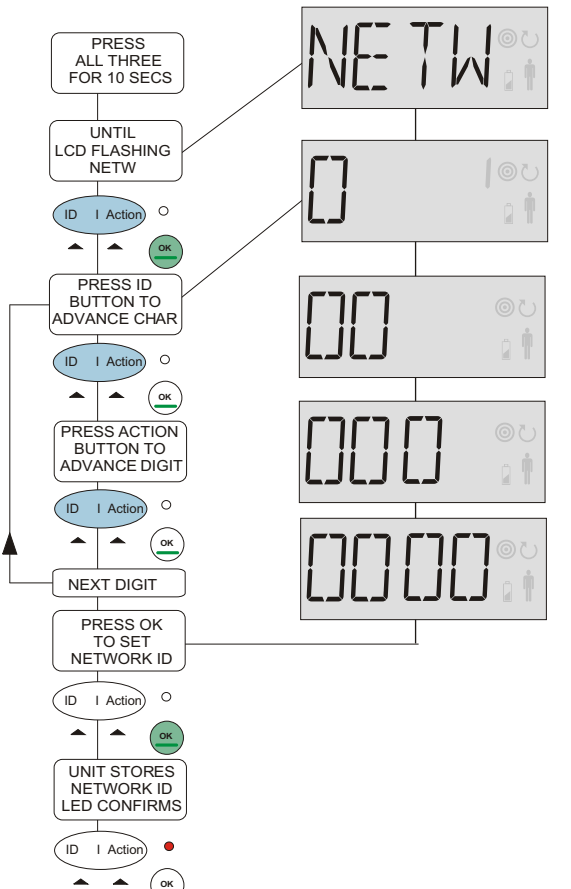

PERSONAL ID SETUP

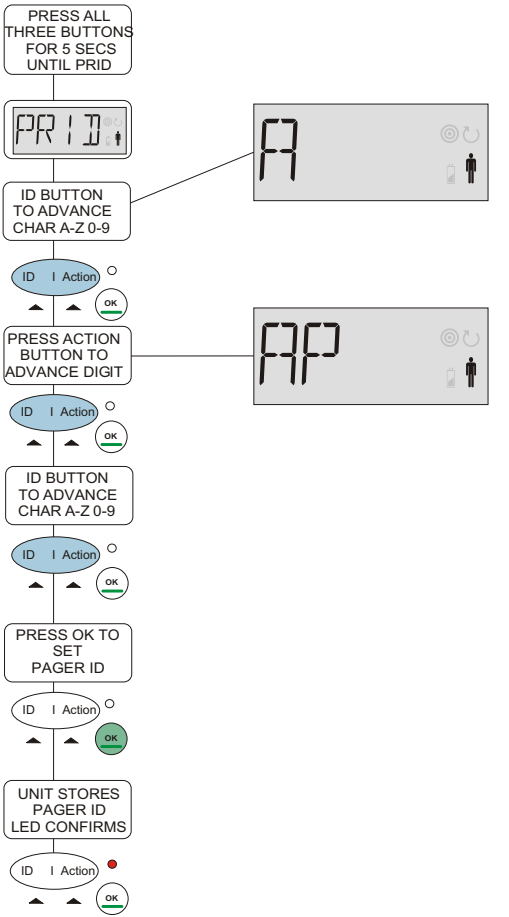

CONTACT ID SETUP

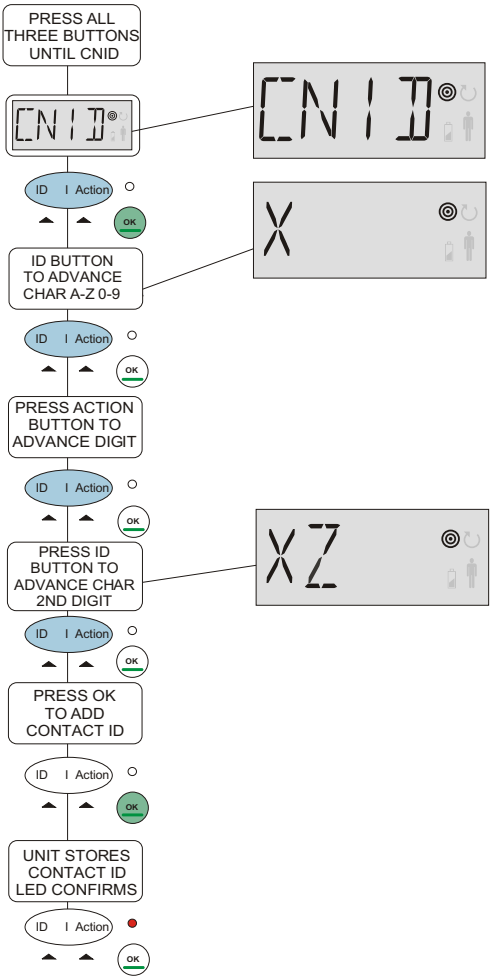

EMERGENCY ID SETUP

Optional Feature

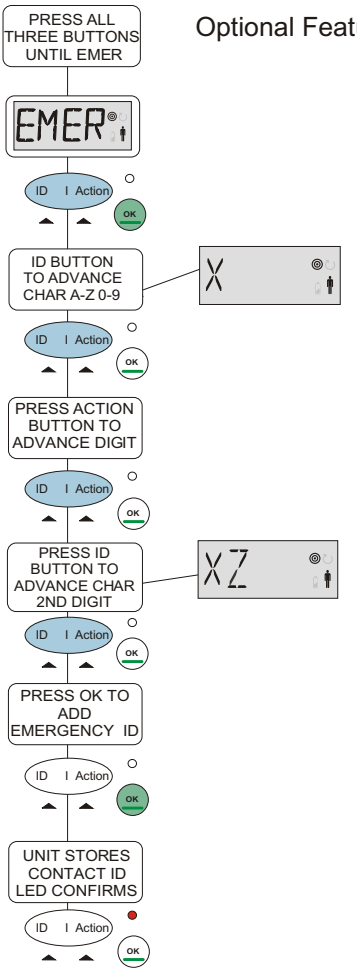

PERSONAL NOTIFICATION SETUP

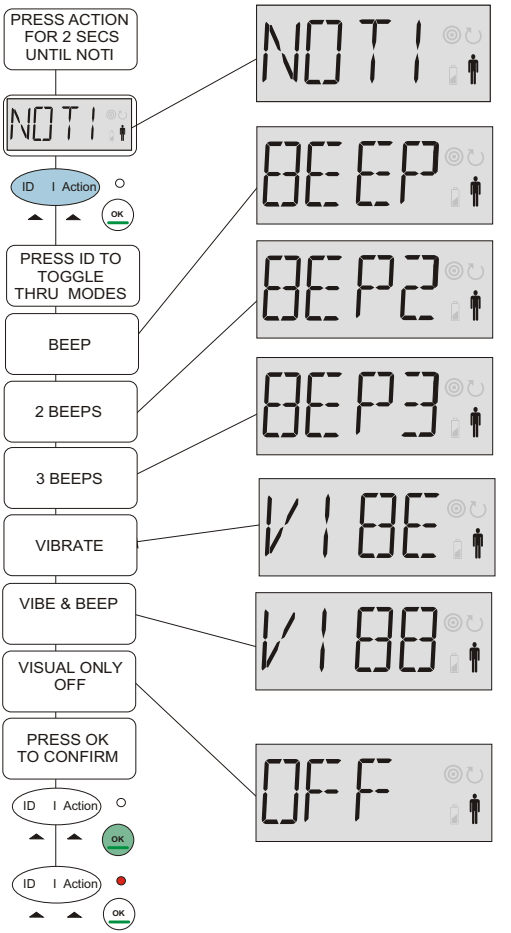

TIME SET SETUP

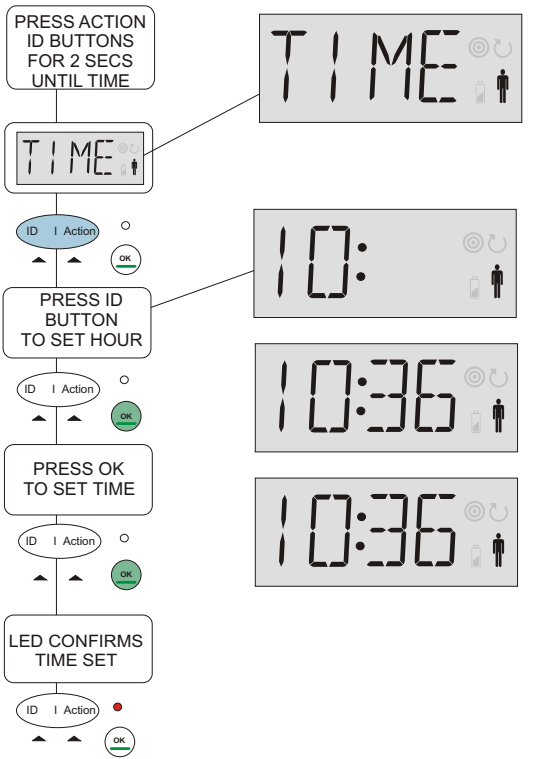

POWER OFF/ON

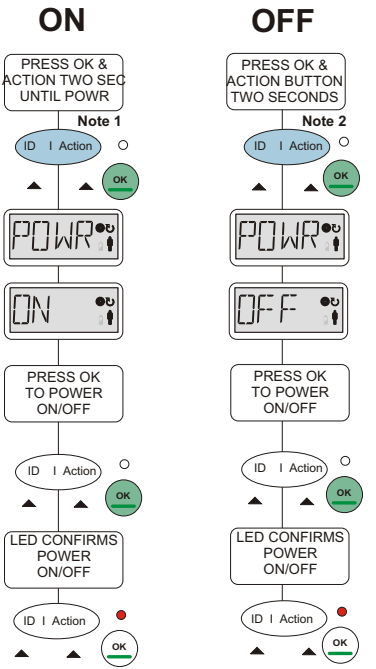

Note 1
When the unit is powered up, the LCD display shows the user id portion only of the pager for five seconds.

Note 2
Power off does not power off the internal clock. Power off essentially doesn't allow the pager to receive or transmit pages, conserving battery life.

PAGING

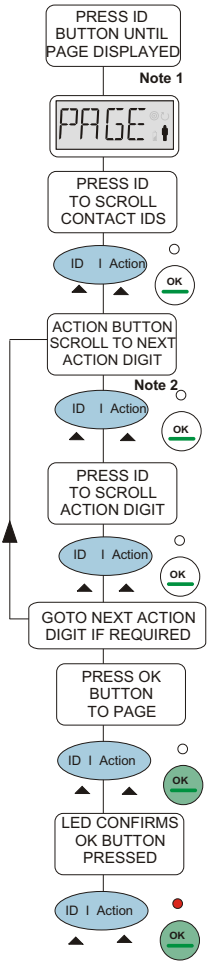

Note 1

Paging cannot be done until received pages have been acknowledged. Pressing the left id side of blue button and ok button acknowledges a page. Page mode is indicated by the word PAGE present in display when he ID portion of the blue button is pressed. The unit shows the time when in receive default mode.

Note 2

Press the Blue Button Action code side of button to advance to the 1st Action code Digit. Press left ID side of button to advance action code starting at 0. The user can then scroll up from 0- 9. If the action code is overshot the , holding the Light blue button down allows fast scroll of 10 numbers a second. Press Action code side of the blue button to advance to the next action code digit.

RECEIVING PAGES

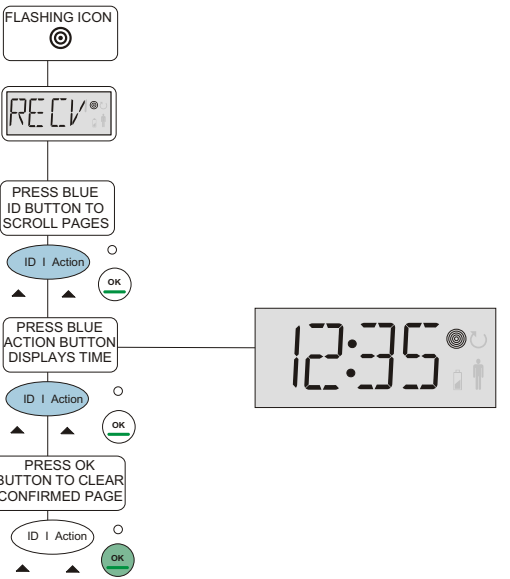

COUNTDOWN TIMER USE

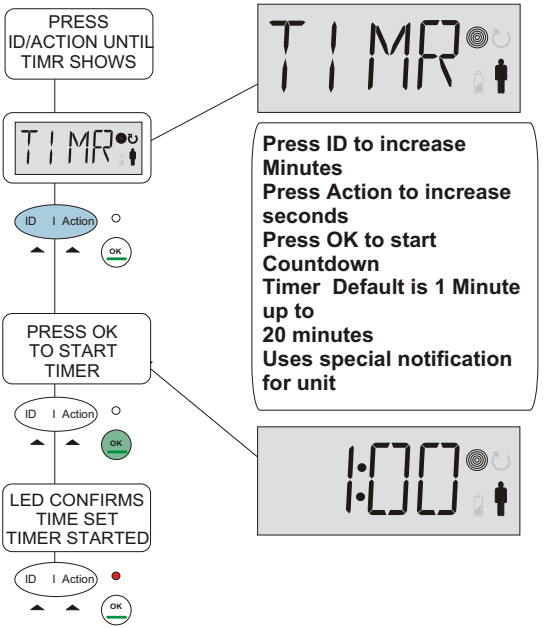

EMERGENCY ID USE

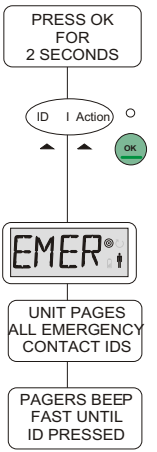

Emergency Pages are used in urgent situations. By depressing the green OK button for two seconds, the pager pages all Emergency contact Id's up to five. When a Emergency page is received, the unit will not stop its notification (beep or vibrate) until the ID button is pressed on the receiving pager.

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS

433MhZ Frequency
Range 200 feet

1.2volt AAA 650mah Rechargeable Batteries(2)
Docking Station Charger 12DC1250mA (UL 6950) Approved

ACCESSORIES:

Docking Charging Station with Power Supply	IP200CP
Docking Charging Station no Power Supply	IP200C
Waterproof sleeves 100 Pack	IP200S
Batteries – 1.2 volt rechargeable 650mah	IP200B
Plug in Charger Power Supply Interface only	IP200PS
Flip up Belt Clip & Stand	IP200BC
Wall Mounting Kit	IP200W

FCC Regulations

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice : The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

200

© Copyright 2006