



## Altai AX500-T Outdoor 2x2 802.11ac Wave 2 AP


### Quick Setup Guide

Version 1.0

## Introduction

Thank you for purchasing the Altai AX500 Series product. This guide provides instructions to install the product and set it up as AP with minimal effort.

## Package Contents

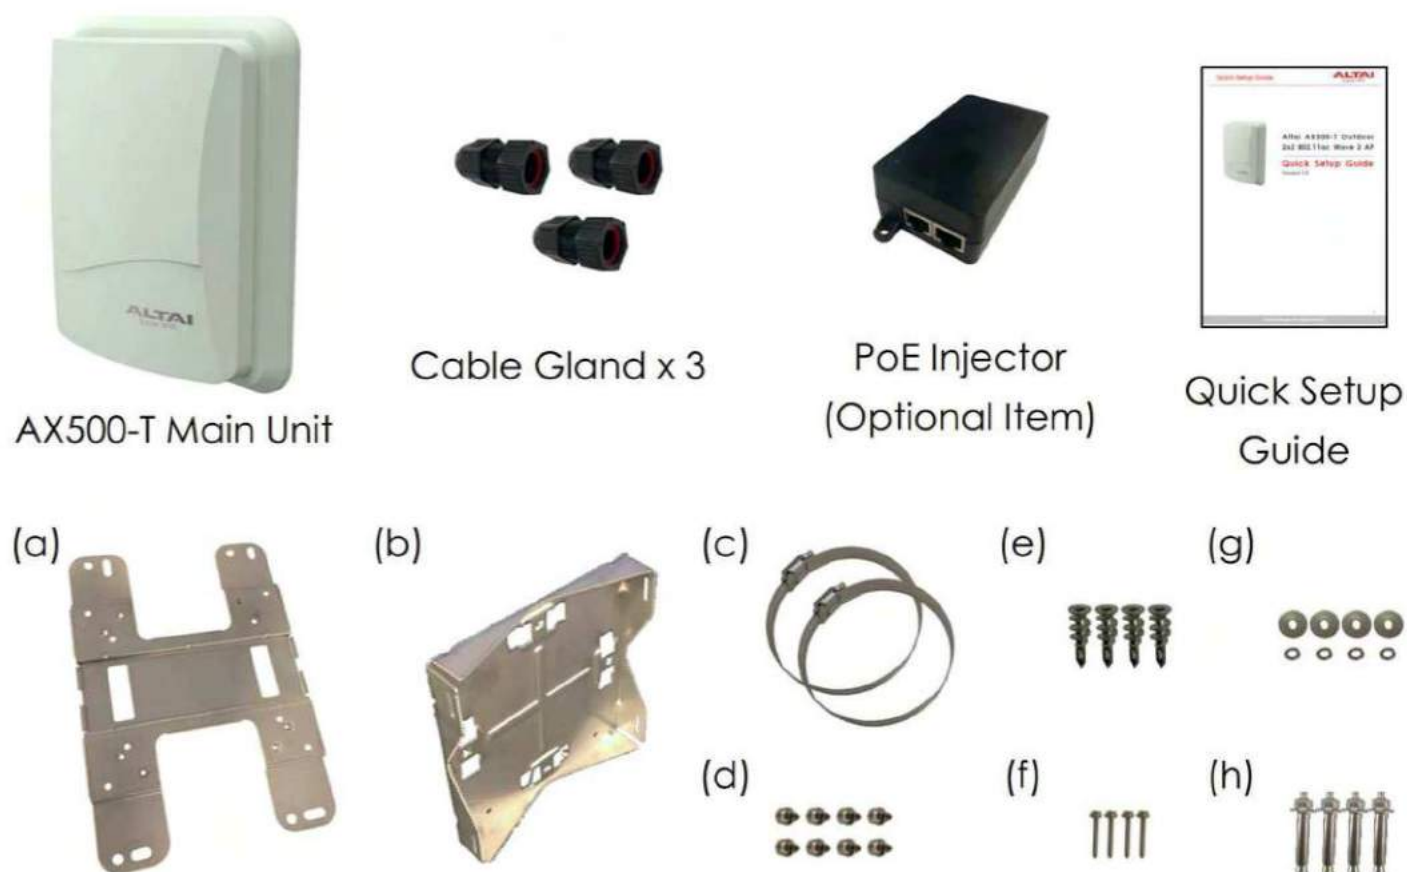

### Mounting Kit

(a) Back Mounting Plate	x 1
(b) Pole Mount Bracket	x 1
(c) Hose Clamp	x 2
(d) M4*8 Round Head Screw with Flat and Spring Washers	x 8
(e) Mounting Screw	x 4
(f) P3.5*32 Screw	x 4
(g) Flat and Spring Washers	x 4
(h) Anchor with Flat Washer and Nut	x 4

## Hardware Overview

### LED Panel

#### 2.4G/5G WiFi Radios

(AP/Repeater/Bridge Modes)

- Solid Green
  1. AP Mode on but with no Clients Associated
  2. Repeater Mode on but not connected to Remote AP
  3. Bridge Mode on but not connected to Remote Peer

☀ Flashing Green: Data Transmitting/Receiving

○ Off: Radio Disabled

#### Power

○ Off: No Power

☀ (1) Flashing Yellow: AP Booting Up  
(2) Flashing Green: AP Discovering/Connecting to AltaiCare/AltaiGate/Access Controller

- (1) Solid Yellow: AP Boot Up Finished and Running in Standalone Mode  
(2) Solid Green: AP Boot Up Finished and Running in Thin AP Mode



#### LAN (Ethernet 0/1)


● Solid Blue/Green: LAN Connected with 1Gbps/100Mbps of Ethernet Speed

☀ Flashing Blue/Green: Data Transmitting/Receiving

○ Off: LAN Disconnected

Not Applicable for this AP Model

### Ethernet Ports, Console Port and Ground Point

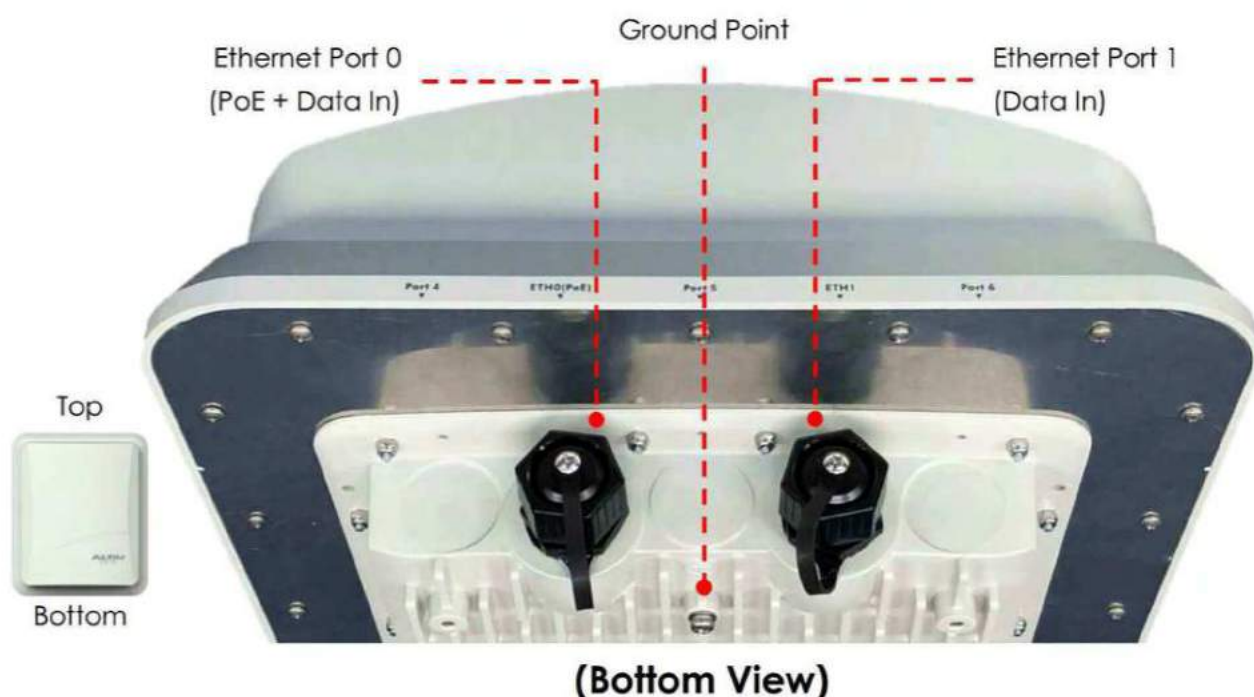





## ETH0 (PoE):

It is used to connect to power source (see the Power Options in the later section) and provides 10/100/1000 Mbps network interface for LAN connection.

## ETH1:

It provides 10/100/1000 Mbps network interface for LAN connection with peripherals.


## Console:

It is used to connect to the computer for local Command Line Interface (CLI) access using a standard DB9 to RJ45 console cable.

## Ethernet/Console Cable Feed-Through

Seal the RJ45 cable Connector with the provided cable gland.


1. Feed the end of the cable through the cap nut, sealing sleeve and cable gland body as shown in the picture below.
2. Connect the cable to the Ethernet/Console Port.

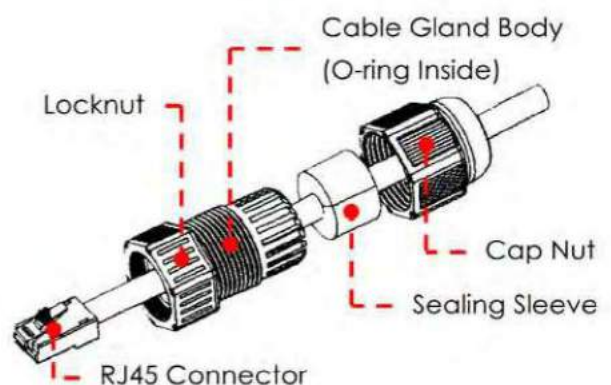

3. Tighten the locknut to fix the cable gland body to the AP chassis.
4. Tighten the cap nut.

## Ground Point:

It is for AP chassis grounding. Use size 10 AWG ground wire (not included) and attach it to the chassis using the provided ground screw. Connect the other end of ground wire to a reliable earth ground point at site.

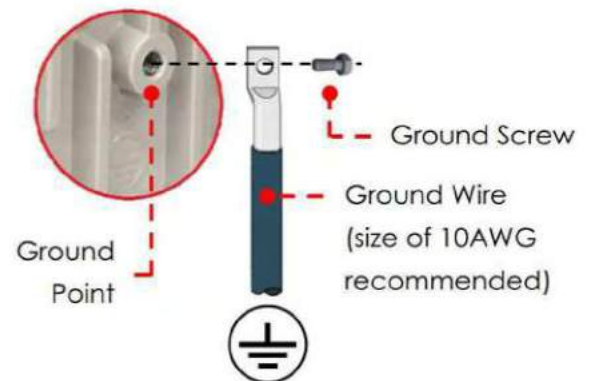


## Mounting Options



**Note:** AX500-T is an integrated-antenna AP model which is designed to provide omni WiFi coverage. When mounting AP on site, make sure the front antenna panel points downwards to the target area. For details of antenna information and installation, refer to AX500 installation guide.

### Option 1: Ceiling Mount Installation angle: 180 °

1

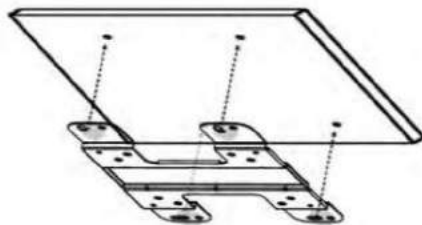


Determine where the AP is to be placed and mark location on the ceiling surface for the four mounting holes.


2

#### Concrete Wall Ceiling Mount:

Use the appropriate drill bit to drill four holes of 8mm diameter and 37mm depth on the markings and hammer the bolts into the openings.

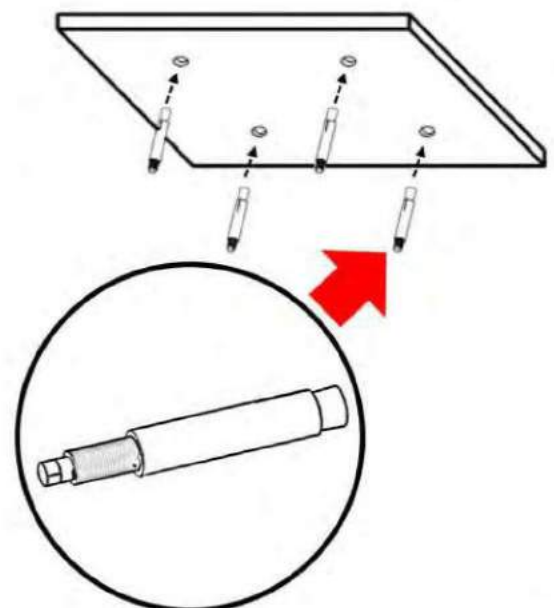





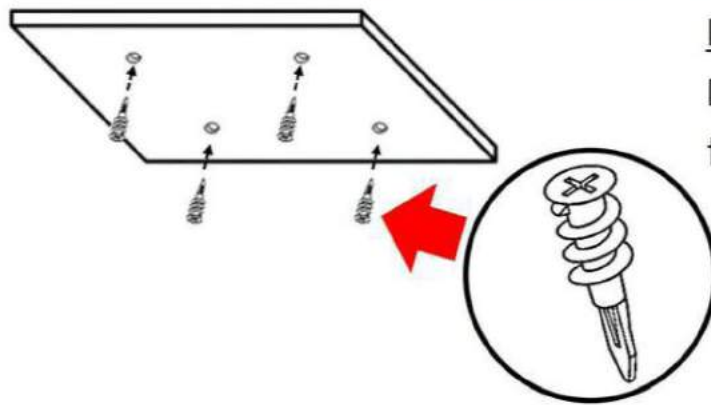

## Drywall Ceiling Mount:

Drive the mounting screws into the ceiling on the markings.

- 3** Place the spring and flat washers on the M4 round head screws and drive the screws to attach the mounting plate to the back of the Access Point.

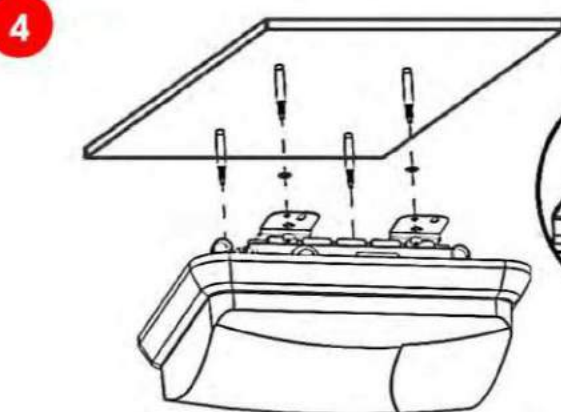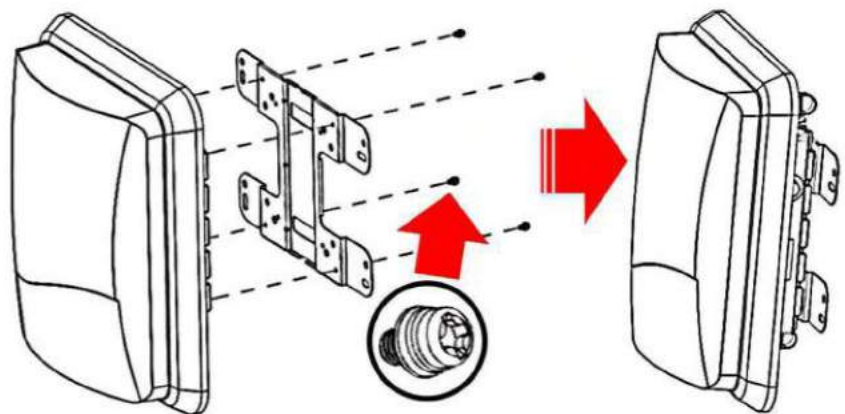


## Concrete Wall Ceiling Mount:

Attach the device onto the ceiling by tightening the bolt's nuts with flat and spring washers to secure the mounting plate to the mounting surface.


## Drywall Ceiling Mount:

Insert the screws through the flat and spring washers. Then attach the device onto the ceiling by tightening the screws to secure the mounting plate to the mounting surface.

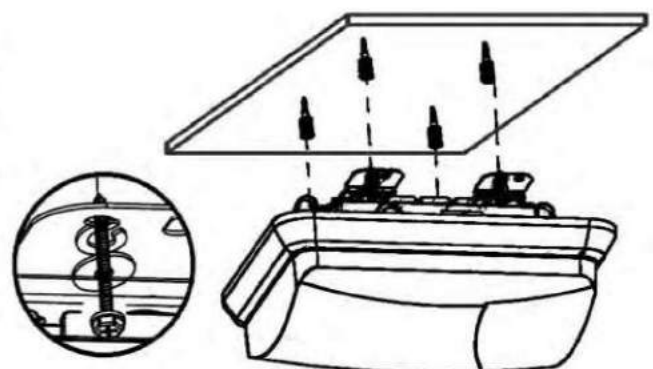

## **Option 2: Pole Mount (For 3 to 4 inches of pole diameter)** Installation angle: 180 °


1

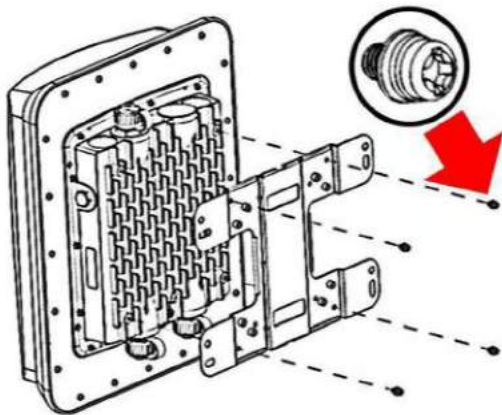


Place the spring and flat washers on the M4 round head screws and drive the screws to attach the mounting plate to the back of the Access Point.

2


Place the spring and flat washers on the M4 round head screws and drive the screws to attach the pole mount bracket to the mounting plate.

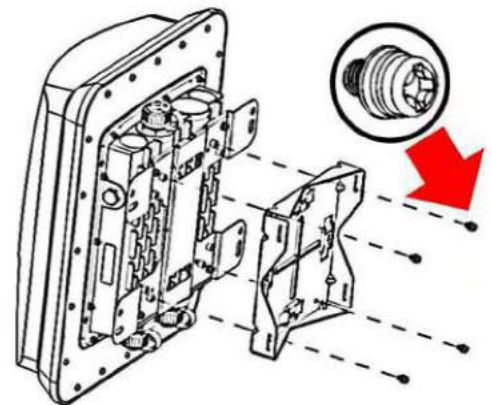

3

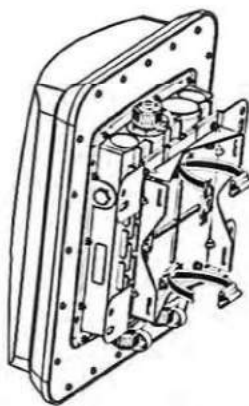

**For the Pole of  
Vertical Alignment**

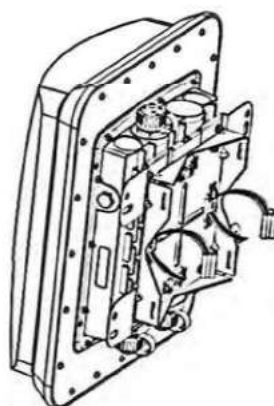



**For the Pole of  
Horizontal Alignment**

Thread the open end of the hose clamp through the two slots on the pole mount bracket.

4

Determine where the AP is to be placed. Lock and tighten hose clamp to secure pole mount bracket to the pole.

**For the Pole of  
Vertical Alignment**

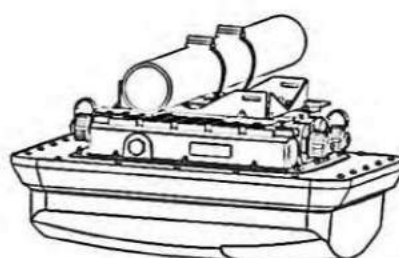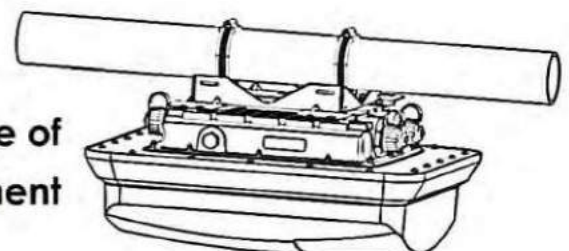

**For the Pole of  
Horizontal Alignment**



## Setup Requirements and Preparation

- A computer with Web Browser: Google Chrome, Mozilla Firefox, or Microsoft Internet Explorer 8 (or above)
- Two Cat 5e/6 Ethernet cables
- AltaiCare account (Optional) for cloud AP management and user service

## Power Options and Cable Connection Instructions

You can follow one of the options below for AX500-T configuration as described in the following sections.

### **Option 1: 802.3at-Compliant PoE switch**

1. Connect AX500-T Eth0 (PoE) port to an 802.3at PoE Switch with an Ethernet Cable.
2. Connect a computer to the switch.
3. Make sure the Power LED light is yellow and the LAN LED light is blue.



### **Option 2: PoE Injector (Ordered separately)**

1. Connect AX500-T Ethernet port to a PoE Injector's "PoE" port with an Ethernet Cable.
2. Connect a computer to the PoE Injector's "LAN" port with another Ethernet Cable.
3. Connect the PoE Injector to AC power socket using a power cord (Not provided in the package).
4. Make sure the Power LED light is yellow and the LAN LED light is blue.








## 1. Change TCP/IP Setting on Your Computer

For Windows 7 users,

1. Go to **Control Panel**, click **Network and Sharing Center** and then choose the adapter that you want to connect to AX500-T unit. In this example, adapter "**Local Area Connection**" is in connection with AX500-T. Click it and then click **Properties**.

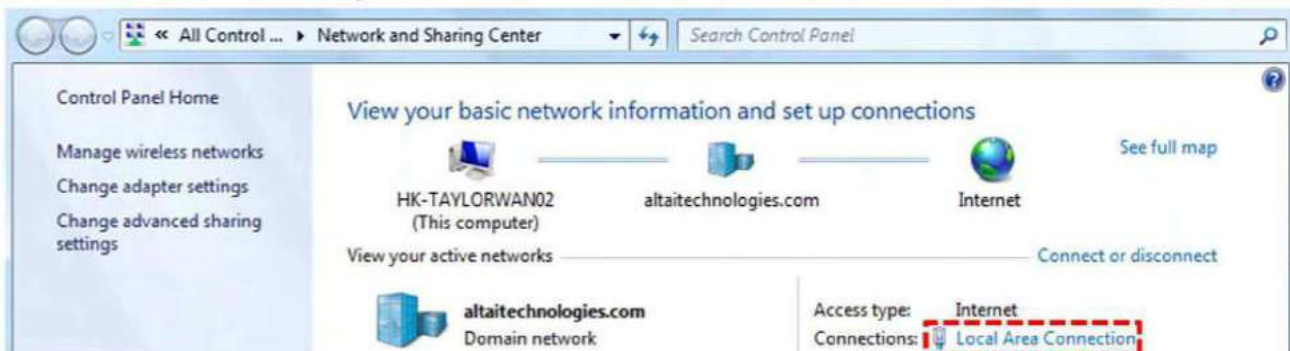

2. Under the **Networking** tab, click **Internet Protocol Version 4 (TCP/IPv4)** in the list box "This connection uses the following items", and then click **Properties**.
3. Type in the following IP address and Subnet mask:
  - IP address: 192.168.1.2
  - Subnet mask: 255.255.255.0
4. Click **OK** to close the **Internet Protocol Version 4 (TCP/IP) Properties** dialog box and click **OK** again to close the **Local Area Connection Properties** dialog box.

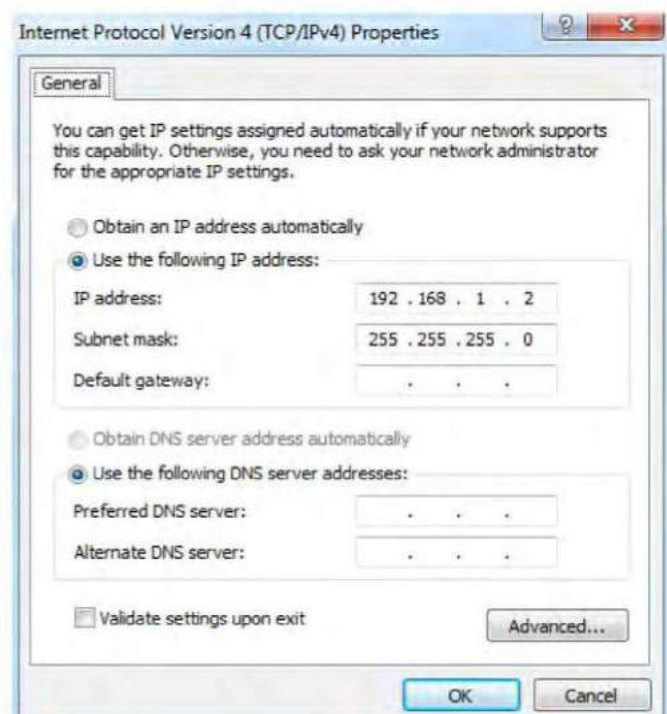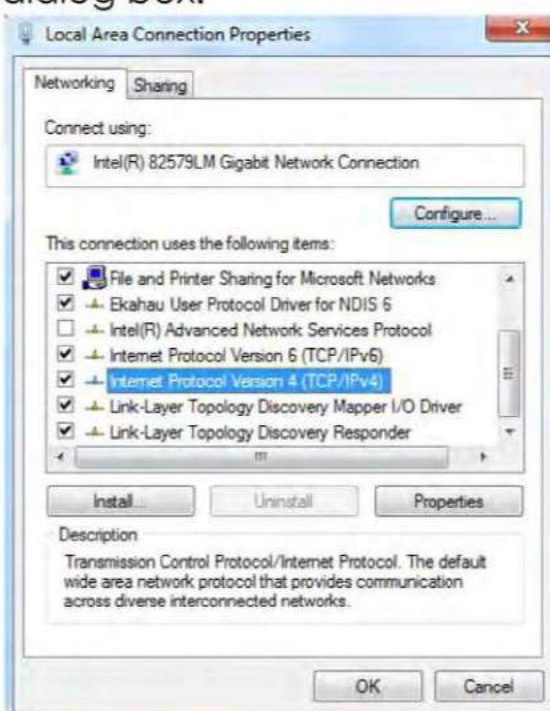

## 2. Access to Web Interface


1. Open a web browser. Type **192.168.1.222** in the address bar and then hit **Enter**.



2. Login page will come up and you are required to enter username and password. By default, the credentials are:

- **Username:** admin
- **Password:** admin


3. Click Login.

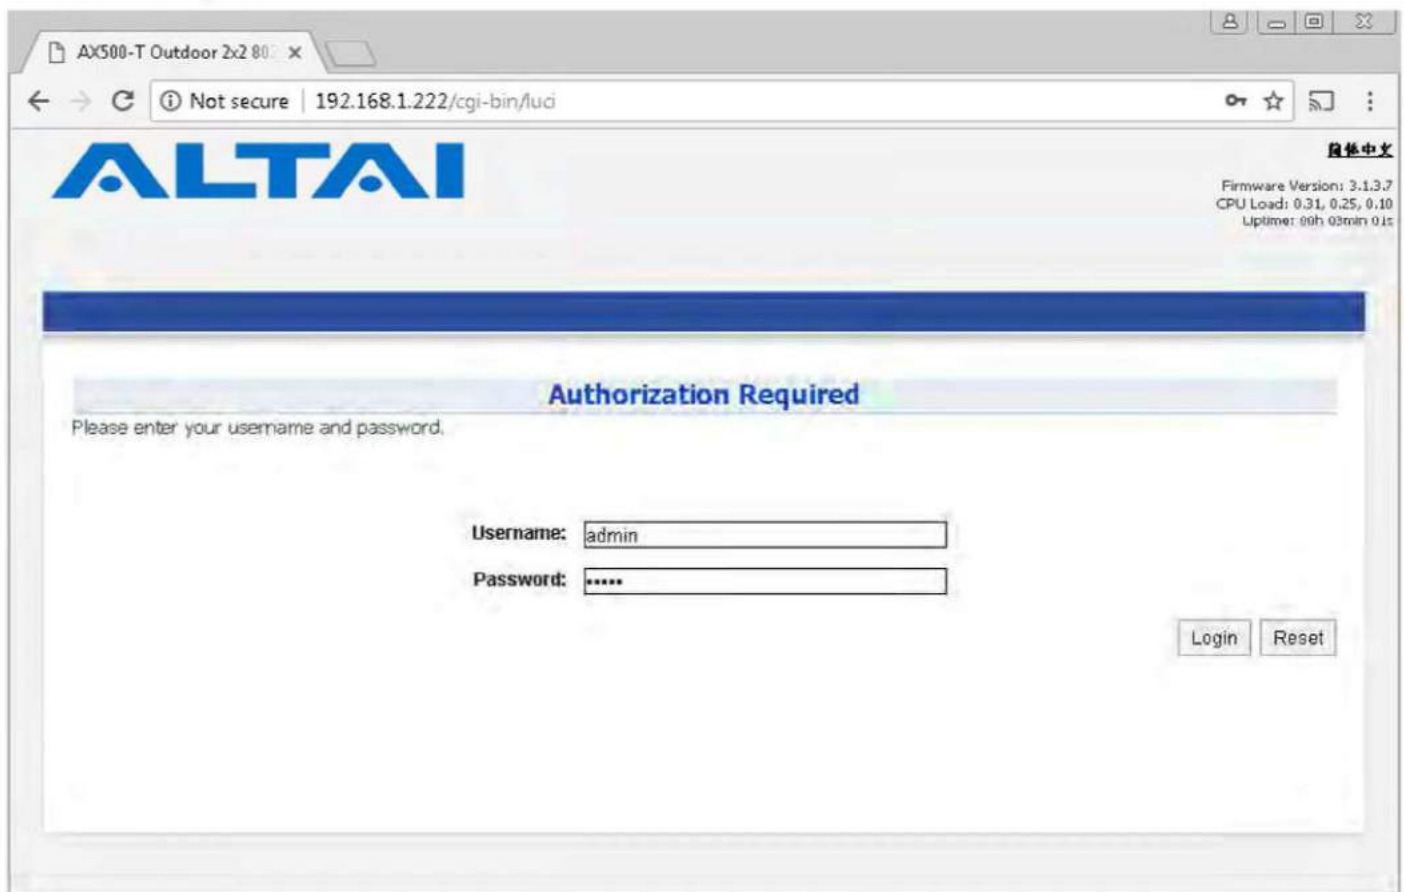



## 3. Configure AP Mode (2.4G/5G)

### Network Scenario

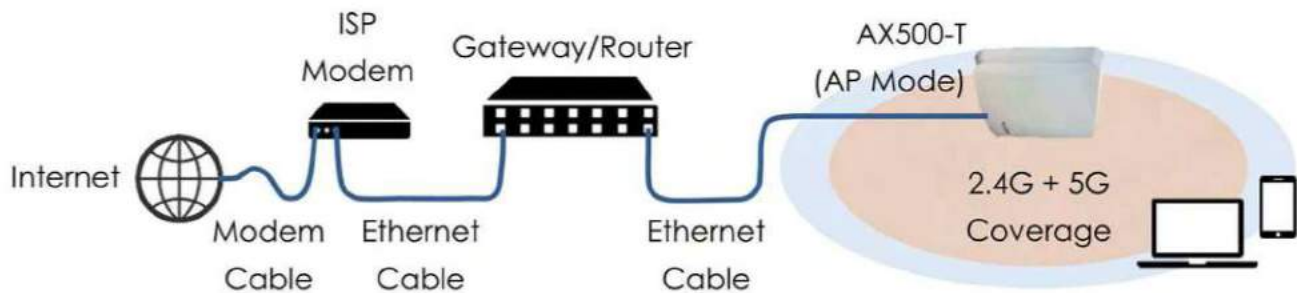

Go to **Configuration > Wireless > Radio0(2.4G)/Radio1(5G) > General**. Below screenshots show an example for 2.4G radio configuration only. Same procedures can be applied to 5G radio configuration.

1. Make sure the box of **Enable Radio** is checked. Select **AP mode** for the field of **Radio Mode**. Then click **Submit**.

The screenshot shows the 'Radio0(2.4G) Setting' page. The 'General' tab is selected. The 'Enable Radio' checkbox is checked. The 'Radio Mode' dropdown is set to 'AP'. The 'Wireless Mode' is set to '2.4GHz 144Mbps(802.11n HT20)'. The 'Legacy 11b Data Rate Support' is set to '5.5/11M (Good compatibility/Good performance)'. The 'Channel' is set to '2412MHz(Channel 1)'. The 'Maximum Clients' is set to '256'. The 'User Isolation in different WLAN (SSID)' checkbox is unchecked. The 'Band Steering Mode' is set to 'Disabled'. The 'Client OS Detection' checkbox is unchecked, with a '[Status]' link next to it. A 'Submit' button is located at the top right.

2. Click **WLAN** and click **More...** in **Detail** of WLAN 0 to go to another page for SSID and security configuration.

The screenshot shows the 'WLAN Configuration' table. The 'WLAN' tab is selected. The table has columns: 'Enable WLAN', 'SSID', 'Max Clients', 'Isolation', 'Auth Mode', 'Access Traffic Right', 'WLAN Uplink/Downlink Control', 'Station Uplink/Downlink Control', and 'Detail'. The first row shows '0' for 'Enable WLAN', 'Superwifi Network' for 'SSID', '256' for 'Max Clients', 'checked' for 'Isolation', 'open' for 'Auth Mode', 'Full Access' for 'Access Traffic Right', '0' for 'WLAN Uplink/Downlink Control', '0' for 'Station Uplink/Downlink Control', and a 'More...' link in the 'Detail' column. A 'Submit' button is located at the top right.

Enable WLAN	SSID	Max Clients	Isolation	Auth Mode	Access Traffic Right	WLAN Uplink/Downlink Control	Station Uplink/Downlink Control	Detail
<input checked="" type="checkbox"/> 0	Superwifi Network <input type="checkbox"/> Hide SSID	256	<input checked="" type="checkbox"/>	open	Full Access	0	0	More...



- Make sure **WLAN** is enabled by checking the box. Type in **SSID** to name the wireless network you want to broadcast and then click **Submit**.

**Radio0(2.4G) WLAN0 Setting**

WLAN General | WLAN Security | Portal | Rogue Station List | QoS | Bandwidth Control | Passpoint | Submit

Enable WLAN: ☒

Hide SSID: ☐

SSID: Altai AX500

User Isolation: ☒

DHCP Trusted Port: ☐

Enable WiFi Syslog: ☐

Access Traffic Right: Full Access

Max Clients: 256 (1-256)

802.11r FT Roaming: ☐

Mobility Domain ID: 900 (1-65535)

802.11w PMF: ☐

Client SNR Threshold for Association: 0 (0-50 dB)

Back to WLAN List | Submit

- Click the tab **WLAN Security**. Select **WPA2-PSK** from the drop down menu of **Authentication Mode** and select **AES** for **Cipher Mode**. Type in a password within 8~64 characters or numbers in **Pass Phrase** and click **Submit**.

**Radio0(2.4G) WLAN0 Setting**

WLAN General | WLAN Security | Portal | Rogue Station List | QoS | Bandwidth Control | Passpoint | Submit

**WLAN Security Setting**

Authentication Mode: WPA2-PSK

Cipher Mode: AES

Group Key Update Interval: 86400 (s)


Pass Phrase: ..... Show  
Length: 8-63 (ASCII Characters); Length: 64 (HEX Characters)

- Click **Save & Apply** at the top right corner to have all changes take effect.
- Hook up the AX500-T as shown in Network Scenario. The SSID should now be broadcast from AX500-T and can be seen in the computer for wireless connection.



## 4. Connect with Cloud-Based Controller – AltaiCare

### Network Scenario:

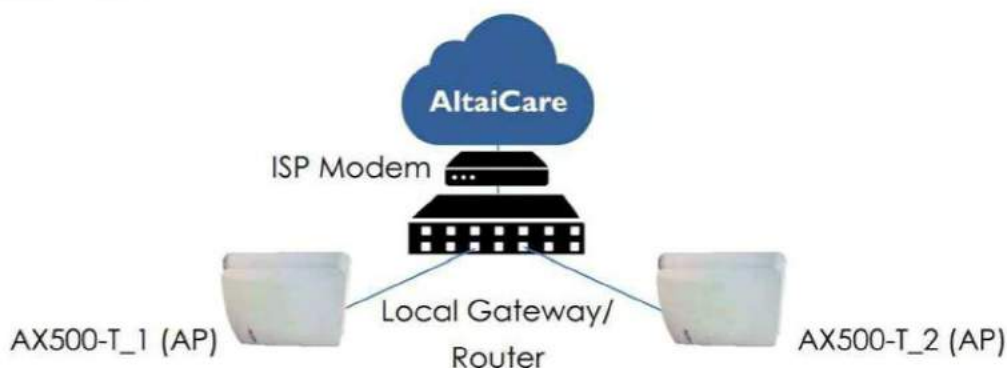

1. You can manage your AX500-T and set up hotspot service for the subscribers with AltaiCare, which is a cloud-based system.
2. Go to **Configuration > Network > General**. Select **Switch Mode** for **Network Setting** and make sure the AX500-T can reach Internet and communicate with AltaiCare by inputting valid IP settings either via DHCP or with Static IP configuration. Google Public DNS Server can be considered, e.g. 8.8.8.8 or 8.8.4.4 if you are not sure about the ISP DNS's Server IP.

The screenshot shows the 'General Network Setting' page in a web interface. The page has a navigation bar with tabs: Status, Configuration, Administration, Tools, and About. Under 'Configuration', there are sub-tabs: System, Network, Wireless, and Remote Mgmt. The 'Network' tab is selected, and the 'General' sub-tab is active. The page title is 'General Network Setting'. There are several sections: 'Network Setting' with a dropdown set to 'Switch Mode' and an 'Enable IPv6' checkbox; 'WAN Setting(IPv4)' with fields for Internet Connection Type (Static), IPv4 Address (192.168.100.30), IPv4 Subnet Mask (255.255.255.0), IPv4 Default Gateway (192.168.100.1), and IPv4 DNS Server IP (8.8.8.8); 'WAN Setting(IPv6)' with an Internet Connection Type dropdown set to 'Static'; 'Ethernet Setting' with a table for interface settings; and 'STP Setting' with an 'Enable STP Mode' checkbox. A 'Submit' button is located at the top right of the 'WAN/LAN Interface Assignment' section.

Mode	Speed	
eth1	Auto Detect	100Mbps/Full
eth0	Auto Detect	100Mbps/Full



- Click **Remote Mgmt** and check the box of **Enable Remote Management**. Select AltaiCare as **Management Type** and Cloud as **Connection Type**.

System | Network | Wireless | Remote Mgmt

### Remote Management

Enable Remote Management: ☒

Management Type: AltaiCare

Connection Type: Cloud

Radio0(2.4G): Full Management


Radio1(5G): Full Management

Submit

- Select **Full Management** if the device is running in **AP Mode**. For **Station Mode**, **Bridge Mode** and **Repeater Mode**, select **Monitor Mode** instead.
- Click **Submit** and then **Save & Apply** at the top right corner to make all the changes take effect.
- Follow AltaiCare Quick Start Guide and register the AX500-T in the system for AP management and user service and admission control.
- AX500-T will appear as online in AltaiCare AP list if the connection is successful.

AP List [Show Filter](#)

STATUS	NAME	BRANCH	MODEL	ETHERNET MAC	SERIAL	IP ADDRESS	CHANNEL	ALERT	STATION	AVG RSSI	LAST CONNECTED TIME	
	AX500-T	-	AX500-T	00:19:be:2e:00:12	AX50053300009	223.255.161.226(WAN) 192.168.100.30(LAN)	Radio1: 6 Radio2: 136	3	2.4G: 0 5G: 0	2.4G: -- 5G: --	2017-12-26 21:05:42	

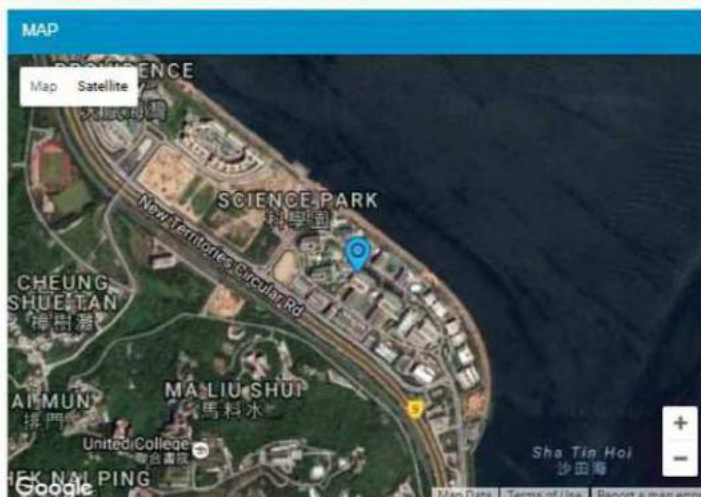



## Federal Communication Commission Interference Statement (FCC) – USA

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Please install a lightning arrestor to protect the base station from lightning dissipation during rainstorms. Lightning arrestors are mounted outside the structure and must be grounded using a ground wire to the nearest ground rod or item that is grounded.

### IMPORTANT NOTE:

#### FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 36cm between the radiator & your body.

The antenna gain, antenna type, and output power that can be used for the device, that the info listed below are correct and represent the product in consideration under this filing.

Model	Type	Gain (dBi)		Connector	Limit of MAX. Output Power(mW)		
		2.4GHz Band	5GHz Band		2.4GHz	5GHz U-NII-1	5GHz U-NII-3
AX500-T	Internal Sector Smart ANT	6.6	7.9	NA	110.666	19.515	573.526

AX500 transmit power setting

Product	2.4 GHz	5.150 – 5.250 GHz	5.725 – 5.850 GHz
AX500-T	<b>11b</b> Ch 1: 9dBm Ch6: 11dBm Ch11: 13dBm <b>11g</b> Ch1: 16dBm Ch6: 18dBm Ch11: 20dBm <b>11n(HT20)</b> Ch1: 17dBm Ch6: 19dBm Ch11: 20dBm <b>11n(HT40)</b> Ch3: 18dBm Ch6: 19dBm Ch9: 19dBm	<b>11a</b> Ch36: 12dBm Ch40: 12dBm Ch48: 12dBm <b>11n(HT20)</b> Ch36: 12dBm Ch40: 12dBm Ch48: 12dBm <b>11n(HT40)</b> Ch38: 12dBm Ch46: 12dBm <b>11ac(VHT80)</b> Ch42: 12dBm	<b>11a</b> Ch149: 25dBm Ch157: 26dBm Ch165: 27dBm <b>11n(HT20)</b> Ch149: 26dBm Ch157: 26dBm Ch165: 27dBm <b>11n(HT40)</b> Ch151: 26dBm Ch159: 26dBm <b>11ac(VHT80)</b> Ch155: 24dBm

## European Conformity (CE) – EU

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.



## Warning

AX500-T may require professional installation depending on the deployment scenario.

Only use the power adaptor supplied with AX500-T. Using a different power adaptor might damage the device.

## Disclaimer

All specifications are subject to change without prior notice. Altai Technologies assumes no responsibilities for any inaccuracies in this document or for any obligation to update information in this document. This document is provided for information purposes only. Altai Technologies reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Copyright © 2018 Altai Technologies Limited

ALL RIGHTS RESERVED.

### Altai Technologies Limited

Unit 209, 2/F, Lakeside 2,  
10 Science Park West Avenue,  
Hong Kong Science Park,  
Shatin, New Territories,  
Hong Kong

Telephone: +852 3758 6000

Fax: +852 2607 4021

Web: [www.altaittechnologies.com](http://www.altaittechnologies.com)

### Customer Support Centre:

Email: [support@altaittechnologies.com](mailto:support@altaittechnologies.com)