AB1122 User Manual
(OEM/Integrators Installation Manual)
BT4.2 Smart Ready Solution for Game Controller, Smart Home and Wearable Device Applications

Product Overview

AB1122 is an optimized single-chip solution which integrates baseband, radio and flash memory for remote controller, game controller, and wearable device applications. It complies with Bluetooth version 4.2 with EDR and low energy functions. The embedded 8Mbit flash has high flexibility for customer software development. AB1122 integrates Li-ion battery charger which provides 600mA charging current and reduces customer charging time. The support of 16 AIOs is used for the joystick for game controller application.

Key Features

- Embedded 80251 MCU with 12/24MHz clock rate
- Embedded 8Mbit Flash
- 16 AIO support (12bit)
- 23 GPIO support
- Integrated Li-mode battery charger support 600mA fast charging and over-discharging protection
- Integrate 1.35V switching regulator and 1.8V/3V LDO regulator
- Ultra low power consumption for battery enabled applications
- RoHS Compliant

Block Diagram
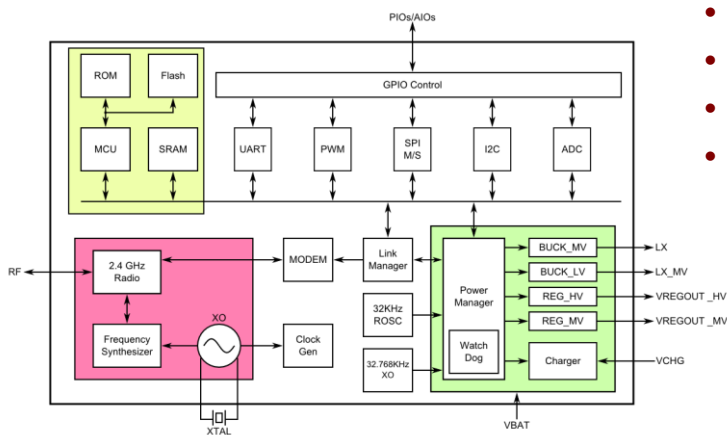
Applications

- Game Controller
- Wearable Device
- Remote sensors
- Smart Home

Specifications

Standard	Bluetooth v4.2
Frequency Band	2.4GHz ISM
Modulation	GFSK
	π/4 DQPSK
	8DPSK
Bluetooth Profile	HID v1.1
	SPP v1.2
Output Power	Maximum 5.21 dBm
Module Antenna	Type : PCB
	Peak Gain : 0 dBi
	Average Gain : -1.2 dBi
Sensitivity	-92 dBm at 1Mbps
	-91 dBm at 2Mbps
Flash	8Mb
IC Package	QFN 6x6 52 pin
Physical Intefaces	UART, I2C, SPI
Temperature Range	-40 - 85℃
Operation Voltage	1.8V ~ 4.2V

1   Introduction

The Airoha AB1500 Family Lab Test Tool provides a quick-and-easy test suite for Airoha AB1500 devices. Three basic functions including TX, RX and Crystal Trim are included in this utility. User may use this tool to perform continuous TX, Burst TX, RX BER and Crystal Clock Trimming to test Airoha AB1500 Family products.

1.1 Supported Chips

The Airoha AB1500 Family Lab Test Tool supports AB1122.

AIROHA

Airoha Technology Corp.

2   Environment Setup

2.1   Hardware Setup

An UART interface is used for PC-to-DUT connection. User may also use an USB-to-UART adaptor at PC side and then connect to DUT side. A reference connection diagram is shown in figure 2-1.
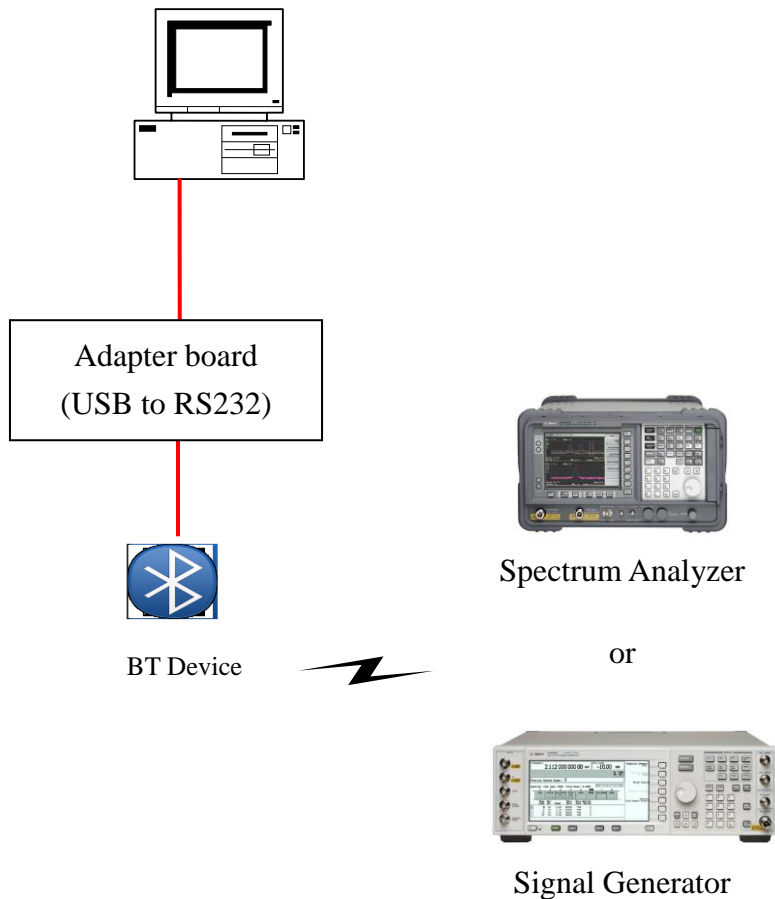

Spectrum Analyzer

or

Signal Generator

BT Device

Figure 2-1

If an USB-to-UART adaptor made by Airoha is used (as in Figure 2-2), the J1 connector (to DUT) pin definition is shown in Figure 2-3. The VCC selection on JP12 should be set to +3.3V (with a jumper).
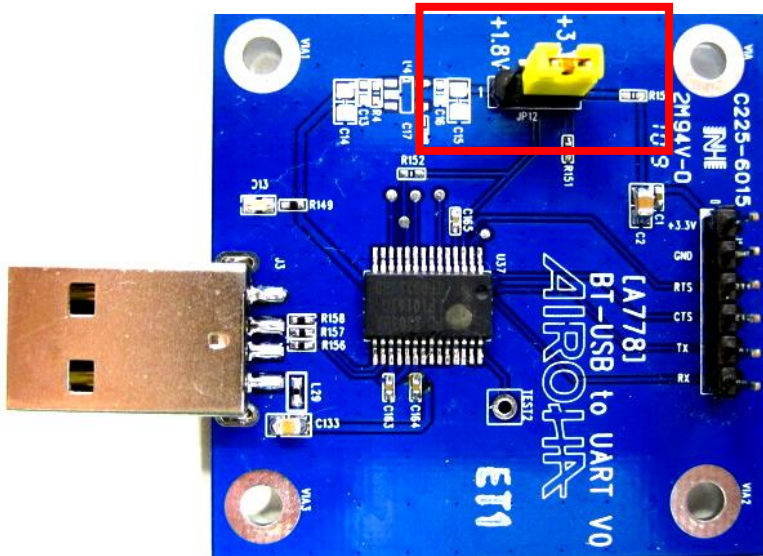
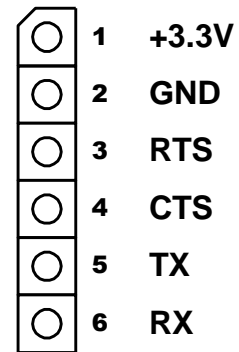Airoha Technology Corp.

Figure 2-2

○	1	+3.3V
○	2	GND
○	3	RTS
○	4	CTS
○	5	TX
○	6	RX

Figure 2-3

2.2   Software Setup

If the AIROHA USB-to-UART adaptor board is used, the driver should be installed at first (PL2303_Prolific_DriverInstaller_v110.exe). When the driver is installed and the board is connected to PC, an USB-to-Serial COM port would be presented in the device manager as in figure 2-4.
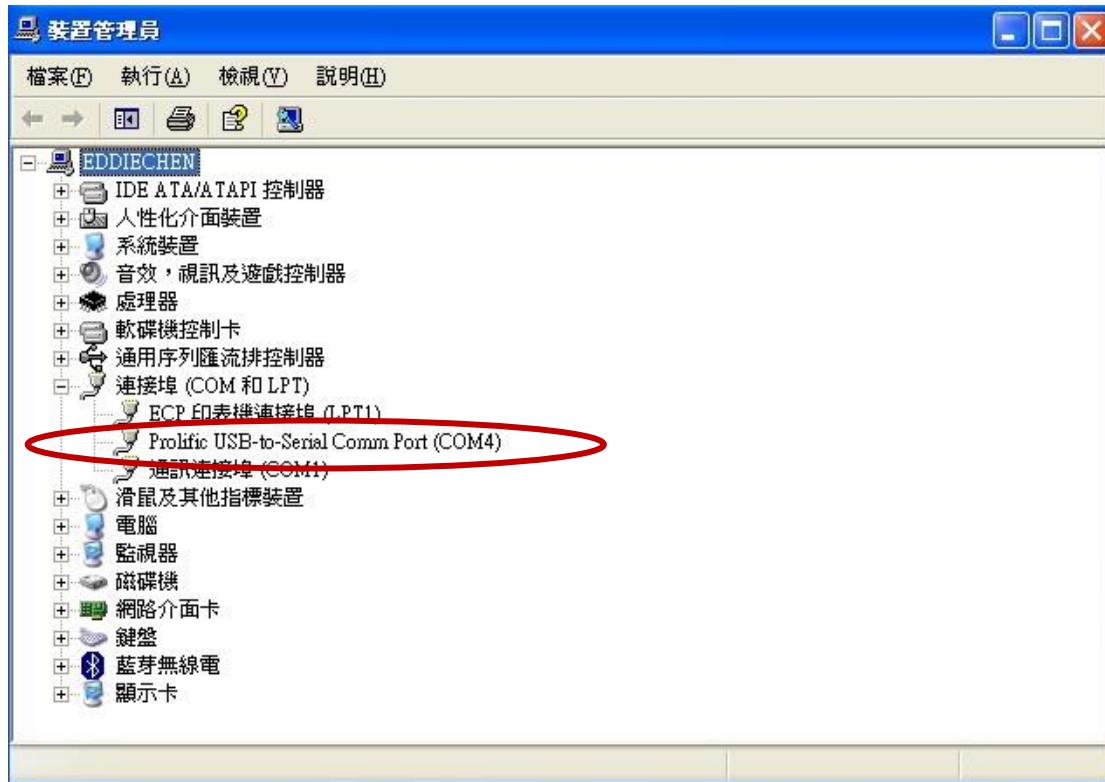

Figure 2-4

When installing the Airoha AB1500 Family Lab Test tool, execute the file "setup.exe" in the "Airoha.AB1500FamilyLabTestTool" pack. Several message boxes will be shown during the installation. Click "Next" step by step and the "Close" to complete the whole process as in figure 2-5.
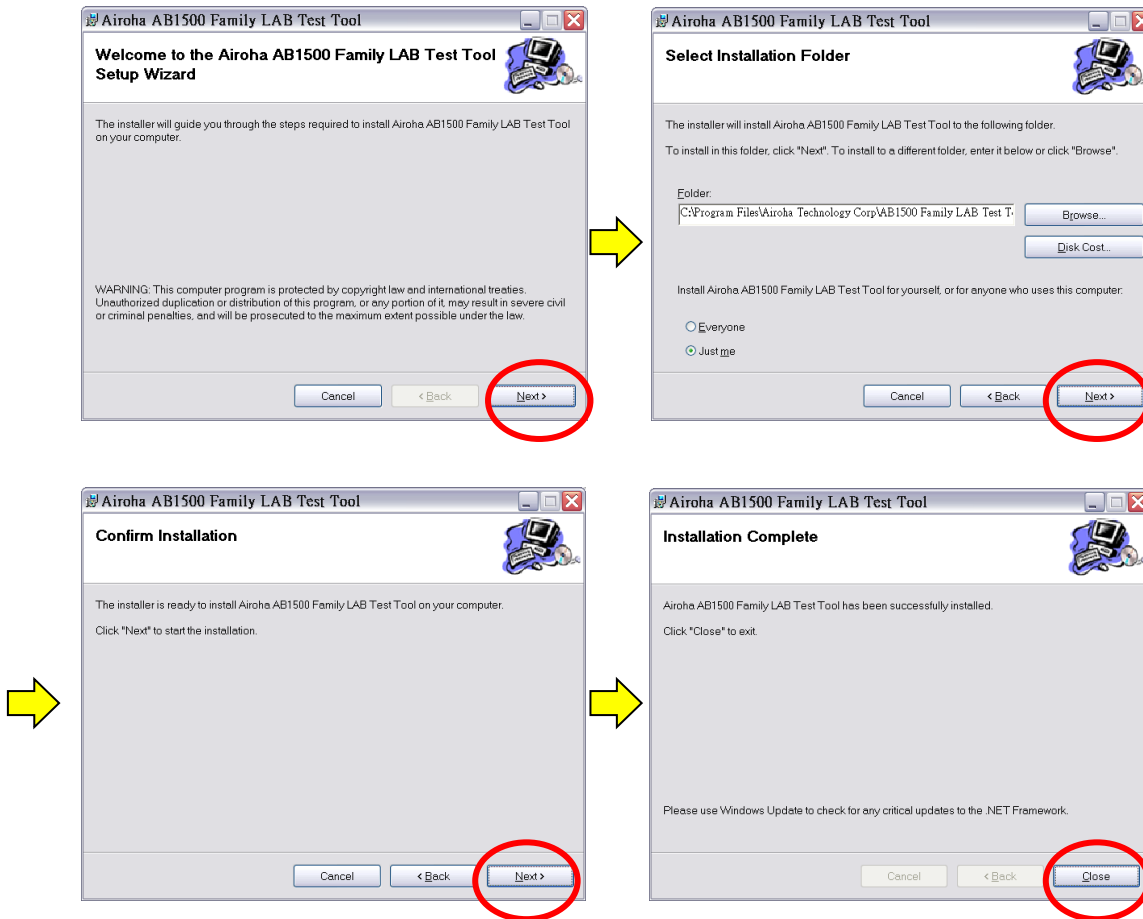
Figure 2-5

3   The User Interface

Figure 3-1 shows the user interface when Airoha Lab Test Tool is launched. Three regions: COM port selection & .airoha save/write, Function Tab, and Output Window are included in the user interface.

Figure 3-1

Connection Process

- Power-on the DUT, and press the connection button of the device to enter discoverable mode.

- Select corresponding COM port number of DUT in the COM Select region of the Lab Test Tool, and then press "Enable COM port" button.

If the device is correctly plugged in and the "Enable COM port" is clicked, a message "COMxx is Open." will be shown in the output window, as in figure 3-2 and figure 3-3.
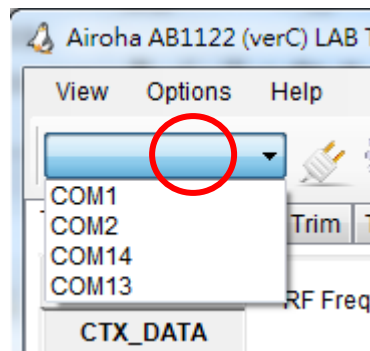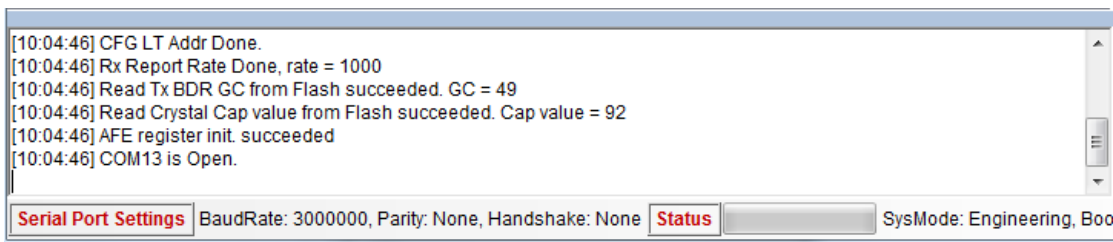

Figure 3-2

Figure 3-3

If the success message is not shown, please check if the DUT is correctly powered up, the link between DUT and PC is correctly connected, and the DUT is in discoverable mode, then click "Enable COM port" again.

4   Test Functions

4.1   TX Test

There are three modes supported in the TX Test functions, i.e. Single-tone TX, Continuous TX and Burst TX.

Airoha Technology Corp.

Single Tone Transmission

When CTX_START is selected, a continuous single-tone signal without any modulation (i.e. Carrier Only) will be sent out at RF port. User may first set different RF frequency and TX power setting on the Parameter block, and then click "Execute" to start single tone transmission. The RF frequency ranges from 2402 to 2480, and Tx GC ranges from 16 to 63.

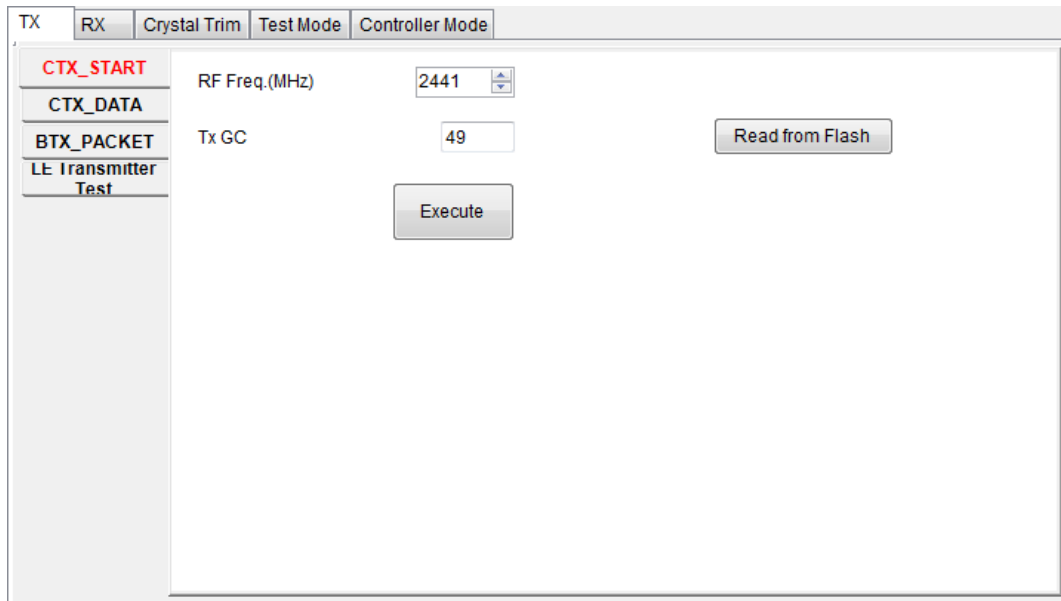To save the current Tx GC setting, click the Write to EEPROM button.

Figure 4-1 Single tone transmission setting of Tx Tab

Continuous Data Transmission

When CTX_DATA is selected, a continuous modulated signal will be sent out at RF port. User may first set different RF frequency, TX power setting, and choose modulation type with data format on the Parameter block, and then click "Execute" to start single tone transmission. The RF frequency ranges from 2402 to 2480, and Tx GC ranges from 16 to 63. The data format supports all 0, all 1, 1010, and PN. GFSK, 1⁄4pi-DQPSK, and D8PSK are supported for the modulation type.

To save the current Tx GC setting, click the Write to EEPROM button.

Figure 4-2 Continuous data transmission setting of Tx Tab

Burst Data Transmission

When BTX_PACKET is selected, a burst-type modulated signal will be sent out at RF port. User may select a RF frequency for transmit. Then set TX GC value, packet type (DH1, DH3, DH5, 2-DH1, 2-DH3, 2-DH5, 3-DH1, 3-DH3 and 3-DH5 are supported) and Data type (all 0, all 1, 1010, 11110000 and PN) and then click "Execute" to start packet transmission.
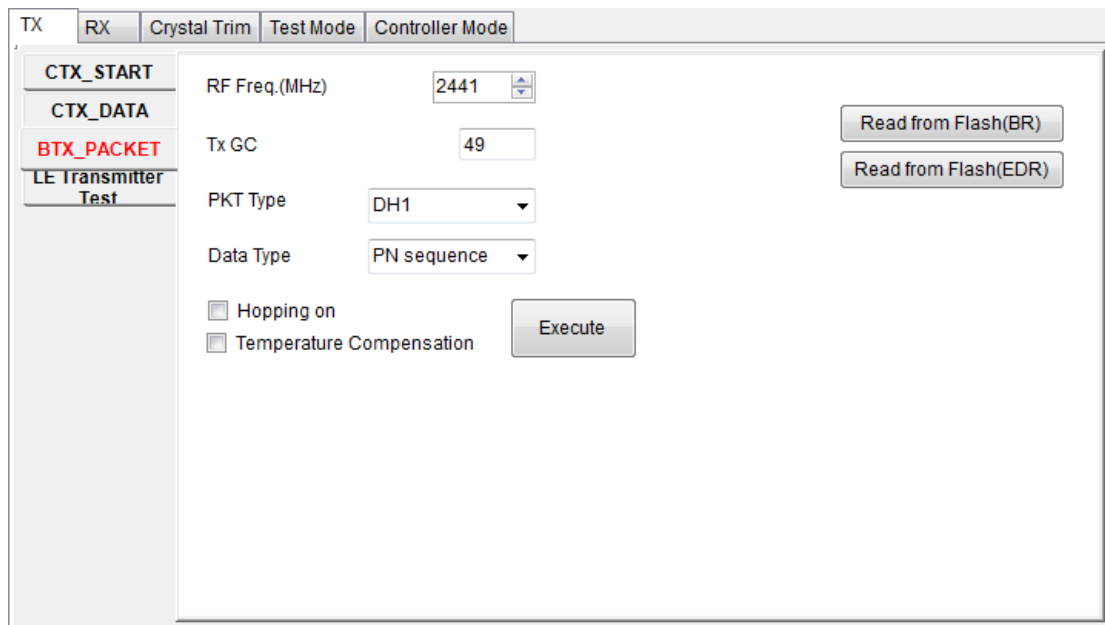
To save the current Tx GC setting, click the Write to EEPROM button.

Figure 4-3 Burst data transmission setting of Tx Tab

If you want to do hopping in specific channels, set channel information in 'Specific Channels Hopping by continuous fixed channel switching'. 1 is for enabled and 0 is for disabled.

This function is enabled by sending continuous fixed channel BTx command. You could set the sending interval by 'Hopping Interval (ms)' setting.

After setting channels and interval, click 'Start specific channels BTx' to start specific channel hopping.

If this function is executed, click 'Stop' to stop it.

LE Transmitter Test

Figure 4-4 LE Transmitter Test setting of Tx Tab

4.2   RX Test

Two RX modes, continuous receiving and burst receiving, are supported in the RX Test function. The former is used for CE/FCC tests, and the later is used for bit error rate (BER) calculation.
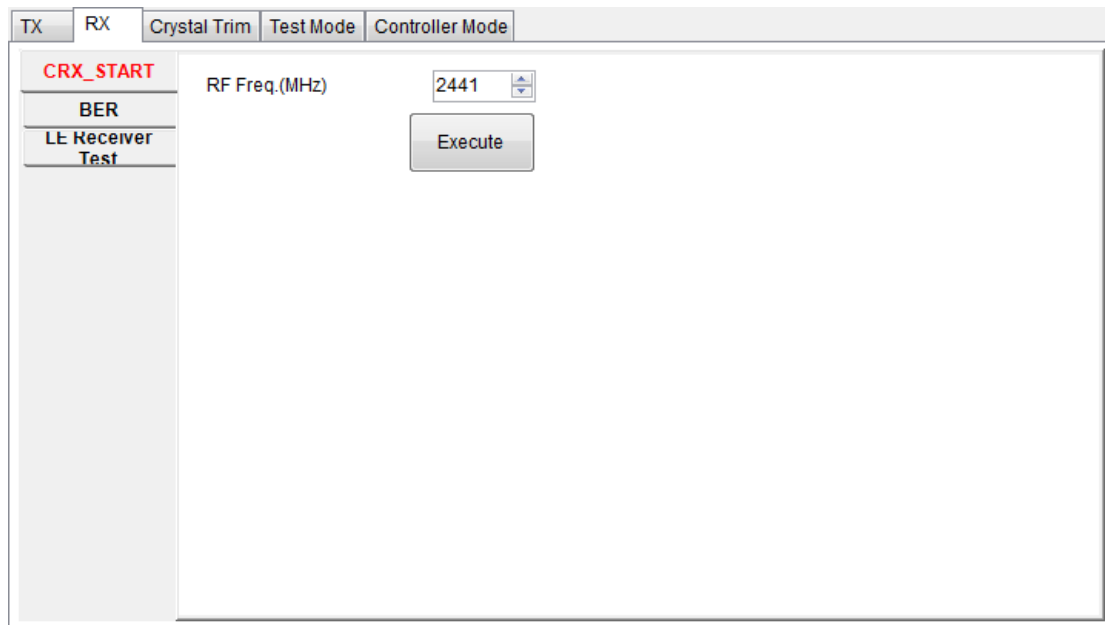
Continuous Data Receiving

Figure 4-5 Continuous Data Receiving setting of Rx Tab

When CRX_START is selected, user may set different RF frequency at first, and then click "Execute" to start continuous receiving. The RF frequency ranges from 2402 to 2480.

Airoha Technology Corp.
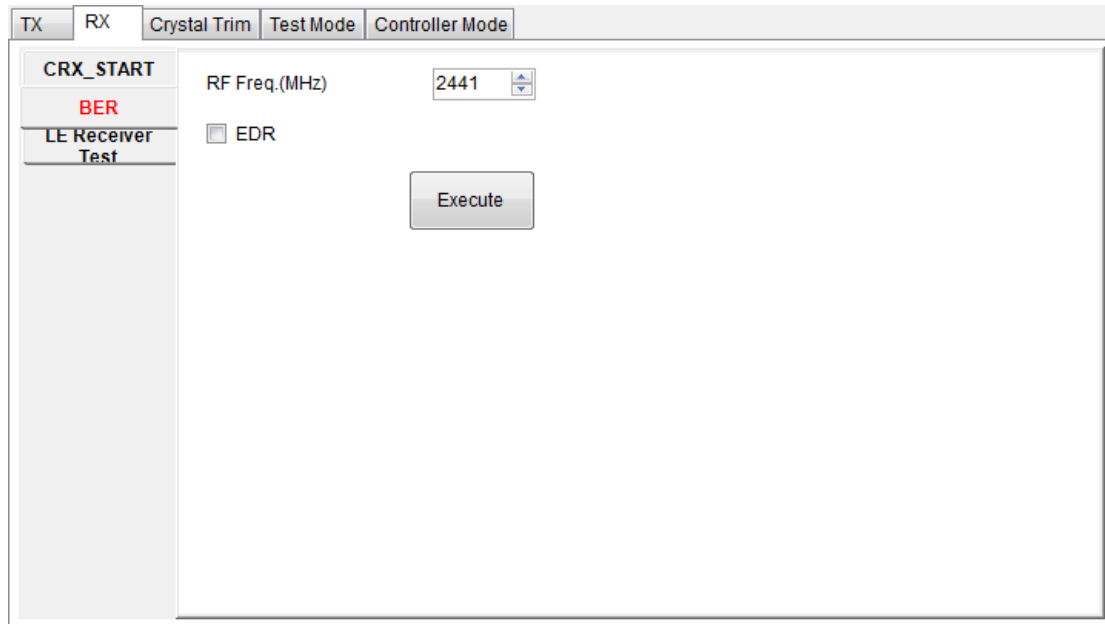
Burst Data Receiving

Figure 4-6 Burst Data Receiving setting of Rx Tab

When BER is selected, user should set a RF frequency at first, and then click "Execute" to start burst receiving. In order to measure BER, a signal generator is required to generate Bluetooth standard packets and transmitted to the DUT. The associated settings of the signal generator must be set as follows,

- BD address = 0x006BC6967E
- LT_ADDR = 7
- Payload data = PN9 with initial seed = 0x01FF

If the transmitted data of signal generator is successfully received and decoded by DUT, a group of BER test results will be shown in the output window including: (as in figure 4-6)

- BER(%): Bit error rate
- Bits: Number of received data bits
- #RPkt: Number of received packets
- #EPkt: Number of expected packets
- #ACloss: Number of packets with AC_Loss
- #Hdr: Number of packets with header error
- #CRC: Number of packets with CRC error
- RSSI: Received Signal Strength Indication

Airoha Technology Corp.

Figure 4-7

BER results

LE Receiver Test

Figure 4-8 LE Receiver test setting of Rx Tab

4.3   Crystal Trim

When a 16MHz crystal is used on the DUT, user may adjust cap value to fine tune the output reference 16MHz clock frequency ("crystal trim") to meet the clock accuracy spec., and write the tuned cap value into EEPROM. Whenever DUT is powered on, the parameters in EEPROM will be read out and write into DUT, thus the output 16MHz reference clock frequency could be set to the trimmed value.

The crystal trimming can be performed either by a spectrum analyzer or a frequency counter. The method is described below,
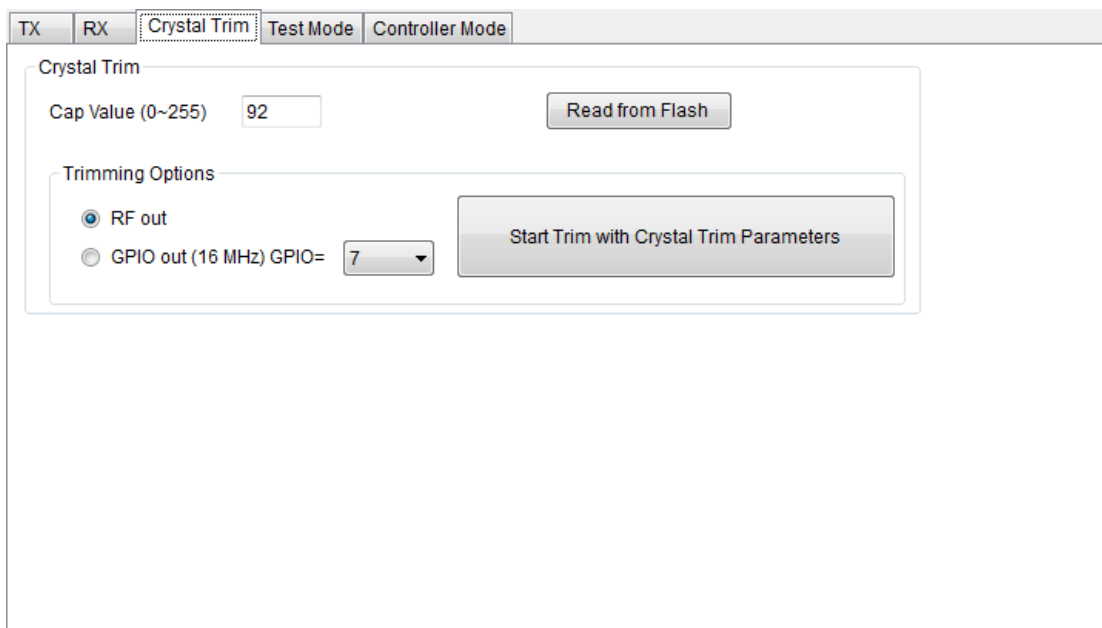

Figure 4-9

Crystal Trim function

- ■ **When a spectrum analyzer is used:** Choose the "RF out" item in figure 4-7 and click "Start Trim with Crystal Trim Parameters" to transmit a single-tone RF signal at 2441MHz. Using spectrum analyzer to measure the frequency of the tone at RF output port, and then fine-tune the cap value until the carrier frequency offset is less than (2.4 G * n ppm) Hz. (n ppm is the reference clock accuracy spec of the Bluetooth specifications)

- ■ **When a frequency counter is used:** Choose the "PIO7 out" item in figure 4-7 and click "Start Trim with Crystal Trim Parameters" to send out the reference 16 MHz clock at pin PIO7. Measure the clock with a frequency counter, and then fine-tune the cap value until the reference clock frequency offset is less than (16 M * n PPM) Hz. (n ppm is the reference clock accuracy spec of the Bluetooth specifications)

Airoha Technology Corp.

■ After the trimming finished, click the "Write to EEPROM" button to write the tuned cap value to EEPROM.

4.4　　　Test Mode

AB1500 supports entering test mode by UART.

The feature 'Enable CC UART' should be turned on for this function.
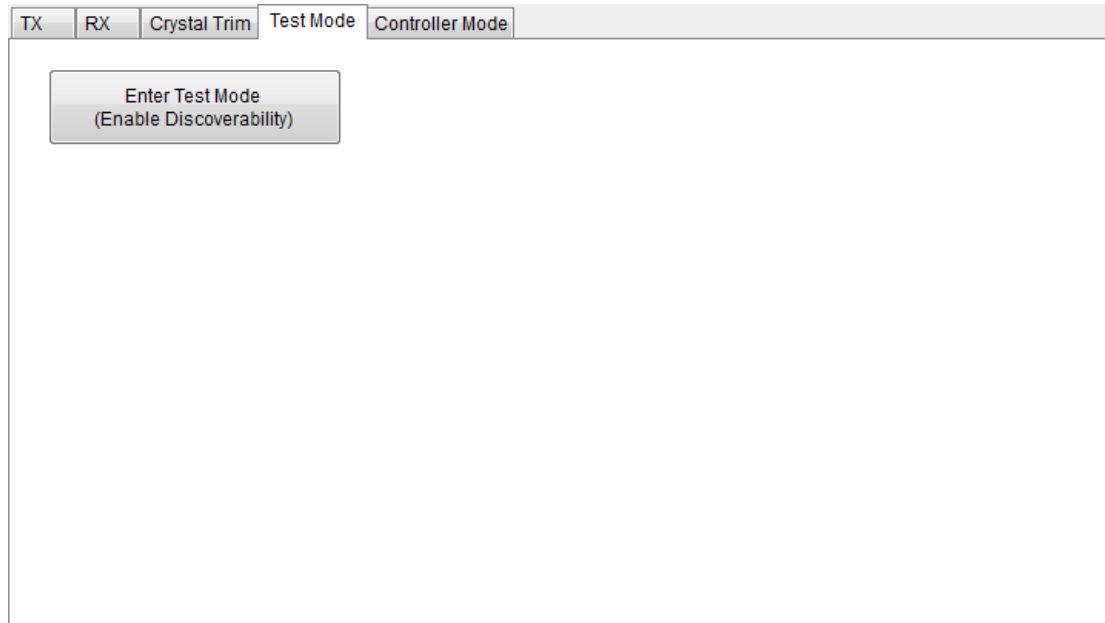

Figure 4-10 Enter Test Mode function

- Do not click Enable COM port because test mode conflicts with LAB test mode

- Click 'Enter Test Mode' button to force DUT into test mode directly.

- If DUT is already in LAB test mode, reset it before entering test mode function.
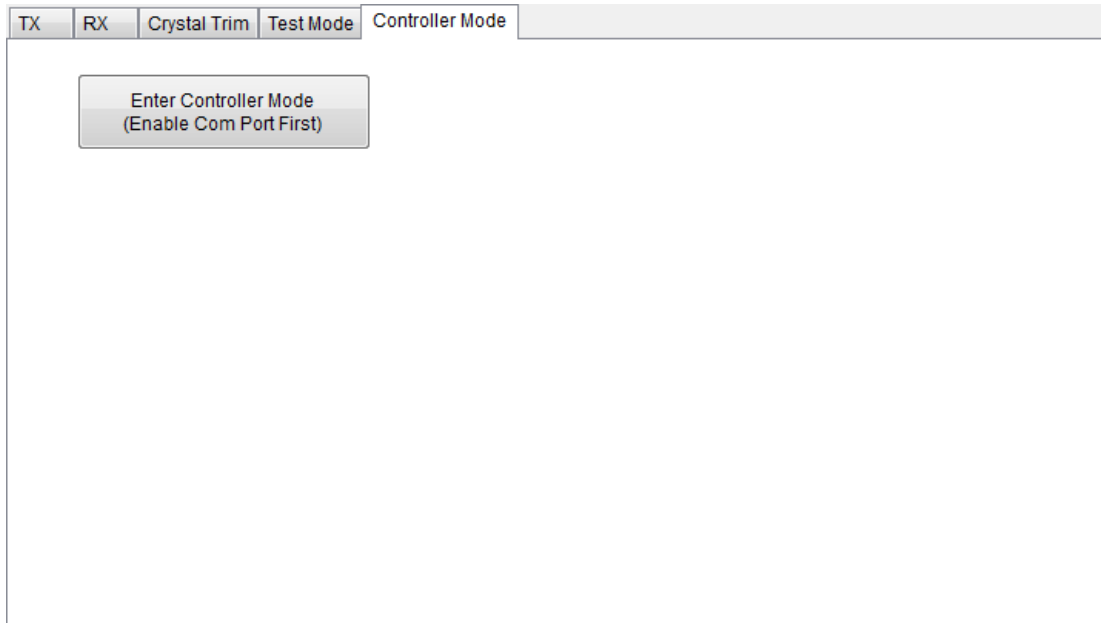
4.5   Controller Mode

Figure 4-11 Controller Mode function

Warning

This device complies with Part 15 of the FCC rules standard. Operation is subject to the following two conditions:

(1)   This device may not cause harmful interference, and

(2)   This device must accept any interference received, including interference that may cause undesired operation.

This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated. Additional testing and certification may be necessary when multiple modules are used.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated

simultaneously without C2P.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following "Contains FCC ID: UOW-AB1122

Manual Information To the End User

This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated

Additional testing and certification may be necessary when multiple modules are used

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.