

iCHIME™ Operational Description

Background.

The iCHIME™ is 2.4GHz bi-directional radio transceiver. A User may configure the device to operate as a Radio Frequency Identification Device (RFID) to support tracking shipping containers in a worldwide supply chain using the Marine Asset Tag Tracking System (MATTS) communication protocol. An iCHIME™ module utilizes a low power, wireless, radio operating in the 2.4 GHz band as its primary mode of communication. The wireless radio operates in compliance with IEEE Standard 802.15.4-2006. The iCHIME™ utilizes the same radio, processor, and User interface software as iControl's iTAG™. The iCHIME™ also supports the same command list as iControl's iTAG™. The iCHIME™ is User configurable to periodically transmit the iCHIME™'s status via the MATTS radio network. The module may operate as stand alone device or may be used as a radio transceiver for devices that communicate data as a part of a larger system.

There are no physical connections to the iCHIME™ other than two charging contacts for the rechargeable LI button cell battery.



iTAG™ Repeater for
iCHIME™'s



iCHIME™



iCHIME™ and iTAG™ Reader

Figure 1 iCHIME™ and Network Related Devices

iCHIME™ Radio Operation.

The iCHIME™ is controlled via the radio network for initial configuration and checkout. All commands for controlling the iCHIME™ radio are identified in the iTAG™ Command List. Once a User has completed the initial iCHIME™ configuration, complete control and operation of the iCHIME™ can be accomplished through the radio interface using the same commands available in the iTAG™ Command List.

The radio in the iCHIME™ is normally operated in a power saving mode with the receiver periodically enabled and “listening” for commands or data requests. A key element to the power saving mode is the principle of “tag-talks-last”. In this mode, battery power is conserved by only responding to messages that are sent directly to the specific iCHIME™ MAC address or mutual broadcast address. For a majority of iCHIME™ operation, the iCHIME™ is in a deep power saving mode (~98% of the time). The iCHIME™ will only transmit when it receives a properly encrypted message while its receiver is active. The encrypted message directed to the iCHIME™ may include information about which channel the iCHIME™ uses for further transmissions. Once, the communication parameters are exchanged, there will typically be a period of several seconds of active radio transmission as the iCHIME™ relays data. The data transmitted may either be security data destined for government servers, and/or commercial data destined for the end customer. This data may originate from internal flash storage or it may be received and relayed from another compatible device.

Other Features.

In addition to the wireless radio, the iCHIME™ provides other features for system integration.

1. There is an onboard temperature sensor integrated with iCHIME™. The default iCHIME™ data packet includes the device temperature, radio signal strength, and battery status.
2. The iCHIME™ has non-volatile on board data storage which may collect data for later upload
3. iCHIME™ provide date time stamps for all data. The onboard clock for the iCHIME™ is set to UTC by readers in the network or from the iTAG™ GPS by commands.


Functional Block Diagram.

The iCHIME™ module integrates a low power microprocessor and a 2.4Ghz radio . The iCHIME includes a software user interface for radio control and data transmission.

Please note that the iCHIME™ uses the same command list as the **iTAG™ command list** . For iCHIME™ command and control, please refer to the *iTAG Command List* for a complete description of commands that control the iCHIME™ module.

The iCHIME™ module is equipped with an integrated trace antenna rated at 3.0 dBi. All mobile applications will utilize the integral antenna provided with the iCHIME™ module.

NOTE: Users may not modify the antenna or it's connection in anyway or risk violating radio law.

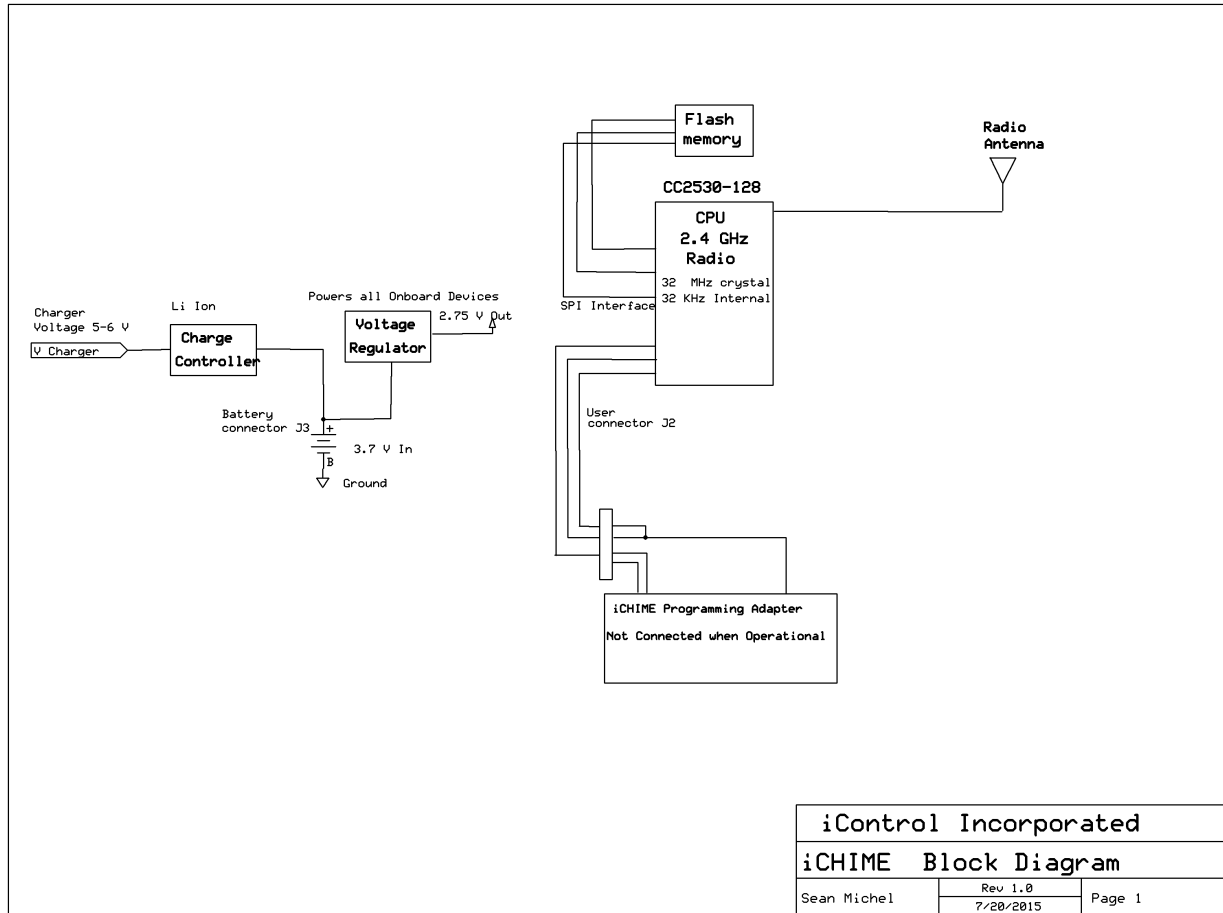

Absolute Maximum Ratings.

Under no circumstances must the absolute maximum ratings giving in this table be violated. Stress exceeding one or more of the limiting values may cause permanent damage to the device.

Parameter	Min	Max	Units	Condition
Charger Supply Voltage	4.75	6.5	V	Users must utilize an iControl providing charging station for the iCHIME™
Voltage on any digital pin	-0.3	3.6	V	N/A
Input RF level		10	dBm	
Storage temperature range	-50	150	C	
Operating ambient temperature	-40	85	C	

Figure 3 Maximum Ratings



Caution! ESD sensitive device.
Precaution should be used when handling
the device in order to prevent permanent
damage.

General Characteristics.

Parameter	Min	Typ	Max	Unit	Condition/Note
Wake-Up and Timing					
Power mode 1 → power mode 0		2		μs	Digital regulator on, High Speed RCOSC and crystal oscillator off. Start-up of High Speed RCOSC.
Power mode 2 or 3 → power mode 0		54		μs	Digital regulator off, High Speed RCOSC and crystal oscillator off. Start-up of regulator and High Speed RCOSC.
Active → RX 32MHz XOSC initially OFF. Voltage regulator initially OFF		450		μs	Time from enabling radio part in power mode 0, until RX starts. Includes start-up of voltage regulator and crystal oscillator. Crystal ESR=16Ω.
Active → TX 32MHz XOSC initially OFF. Voltage regulator initially OFF		I 525		μs	Time from enabling radio part in power mode 0, until TX starts. Includes start-up of voltage regulator and crystal oscillator. Crystal ESR=16Ω.
Active → RX Voltage regulator initially OFF		250		μs	Time from enabling radio part in power mode 0, until RX starts. Includes start-up of voltage regulator.
Active → TX Voltage regulator initially OFF		320		μs	Time from enabling radio part in power mode 0, until TX starts. Includes start-up of voltage regulator.
Active → RX or TX			192	μs	Radio part already enabled. Time until RX or TX starts.
RX/TX turnaround			192	μs	
Radio part					
RF Frequency Range	2400		2483.5	MHz	Programmable in 5MHz steps starting at 2405MHz per IEEE 802.15.4
Radio bit rate		250		kbps	As defined by [1]
Radio chip rate		2.0		MChip/s	As defined by [1]

iCHIME Radio Specification (Transmit).

Parameter	Min.	Typ.	Max.	Unit	Condition / Note
Overall					
RF Frequency Range	2400		2483.5	MHz	Programmable in 1 MHz steps, 5 MHz steps for compliance with [1]
Transmit Section					
Transmit bit rate	250		250	kbps	As defined by [1]
Transmit chip rate	2000		2000	kChips/s	As defined by [1]
Nominal output power	3	5		dBm	Delivered to a single ended 50 Ω load through a balun. [1] requires minimum -3 dBm
Programmable output power range		0		dB	Output power is not user programmable
Harmonics 2 nd harmonic 3 rd harmonic		-37 -51		dBm dBm	At max output power delivered to a single ended 50 Ω load through a balun. See page 53.
Spurious emission 30 - 1000 MHz 1 - 12.75 GHz 1.8 - 1.9 GHz 5.15 - 5.3 GHz			-36 -30 -47 -47	dBm dBm dBm dBm	Maximum output power. Complies with EN 300 328, EN 300 440, CFR47 Part 15 and ARIB STD-T-66
Error Vector Magnitude (EVM)			20	%	Measured as defined by [1] [1] requires max. 35 %
Optimum load Impedance		115 + j180		Ω	Differential impedance as seen from the RF-port (RF_P and RF_N) towards the antenna. For matching details see the Input / Output Matching section on page 53.
Receive Section					
Receiver Sensitivity	-90	-94		dBm	PER = 1%, as specified by [1] Measured in 50 Ω single ended through a balun. [1] requires -85 dBm

iCHIME Radio Specification (Receive).

Parameter	Min.	Typ.	Max.	Unit	Condition / Note
Saturation (maximum input level)	0	10		dBm	PER = 1%, as specified by [1] Measured in 50 Ω single endedly through a balun. [1] requires -20 dBm
Adjacent channel rejection + 5 MHz channel spacing		46		dB	Wanted signal @ -82 dBm, adjacent modulated channel at +5 MHz, PER = 1 %, as specified by [1]. [1] requires 0 dB
Adjacent channel rejection - 5 MHz channel spacing		39		dB	Wanted signal @ -82 dBm, adjacent modulated channel at -5 MHz, PER = 1 %, as specified by [1]. [1] requires 0 dB
Alternate channel rejection + 10 MHz channel spacing		58		dB	Wanted signal @ -82 dBm, adjacent modulated channel at +10 MHz, PER = 1 %, as specified by [1] [1] requires 30 dB
Alternate channel rejection - 10 MHz channel spacing		55		dB	Wanted signal @ -82 dBm, adjacent modulated channel at -10 MHz, PER = 1 %, as specified by [1] [1] requires 30 dB
Channel rejection $\geq + 15$ MHz $\leq - 15$ MHz	39			dB	Wanted signal @ -82 dBm. Undesired signal is a 802.15.4 modulated channel, stepped through all channels from 2405 to 2480 MHz. Signal level for PER = 1%.
Blocking / Desensitisation +/- 5 MHz from channel centre +/- 10 MHz from channel centre +/- 20 MHz from channel centre +/- 50 MHz from channel centre		-24 -24 -24 -23	-50 -45 -40 -30	dBm dBm dBm dBm	Wanted signal 3 dB above the sensitivity level, CW jammer, PER = 1%. Maximum values according to EN 300 440 class 2.
Spurious emission 30 – 1000 MHz 1 – 12.75 GHz			-57 -47	dBm dBm	Complies with EN 300 328, EN 300 440 class 2, CFR47, Part 15 and ARIB STD-T-66
Frequency error tolerance	-300		300	kHz	Difference between centre frequency of the received RF signal and local oscillator frequency [1] requires 200 kHz
Symbol rate error tolerance			120	ppm	Difference between incoming symbol rate and the internally generated symbol rate [1] requires 80 ppm

Module Unique Address Identification.

Each iCHIME™ module is assigned a unique 8 byte MAC address by iControl Incorporated. The MAC address is used for radio network address identification. The MAC address can not be modified by the User and is located in protected flash memory. Figure 5 depicts the communication protocol between iControl iCHIME™ and the iGATE™ reader. The communication protocol utilizes a unique 8 byte MAC address defined by the IEEE 802.15.4 standard.

In Figure 5,

The iCHIME™ address is (0x0035A923000000002).

The iGATE™ address is (0x0035A9230A010203)

Time (us)	Length	Frame control field	Sequence number	Dest. PAN	Dest. Address	Source PAN	Source Address	Other Fields	LOI	FCS
+14059534 =1623495352	10	Type Sec Pnd Ack req Intra PAN CMD 0 0 0 0 0	0x00	0x0A01	0xFFFF			Beacon request	76	OK
+865690 =1624361042	22	Type Sec Pnd Ack req Intra PAN BCN 0 0 0 0 0	0x12	0x0203	0x0A01			Superframe specification BO SO F.CAP BLE Coord Assoc 15 15 00 0 1 1		
+50141 =1624411183	21	Type Sec Pnd Ack req Intra PAN CMD 0 0 1 0 0	0x01	0x0203	0x0A01	0x0002	0x0035A92300000002	Association request Alt.coord FFD Power Idle RX Sec Assoc addr 0 0 1 0 0 1	76	OK
+51111 =1624462294	29	Type Sec Pnd Ack req Intra PAN CMD 0 0 1 0 0	0x13	0x0203	0x0035A92300000002	0x0203	0x0035A9230A010203	Association response Short addr Assoc. status 0x0002 Successful	112	OK
+965869 =1625428163	60	Type Sec Pnd Ack req Intra PAN DATA 0 0 0 0 0	0x02	0x0203	0x0A01	0x0203	0x0035A92300000002	MAC payload 70 0C 01 08 06 00 00 09 00 02 01 48 09 3A 09 49 09 72 09 CB 09 68 09 AE 09 6E 09 28 03 09 05 29 06 FF 07 06 6E 00 00 00 00	76	
+4062306 =1629490469	60	Type Sec Pnd Ack req Intra PAN DATA 0 0 0 0 0	0x03	0x0203	0x0A01	0x0203	0x0035A92300000002	MAC payload 70 0C 01 08 06 00 00 09 04 03 05 92 01 0F 04 86 05 52 06 7C 07 3D 08 B6 08 F1 08 25 03 0A 05 1D 06 FF 07 06 6A 00 00 00 00	76	

Figure 5

FCC Compliance:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

Troubleshooting:

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician.

Conditions:

Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation.

Markings:

To satisfy FCC exterior labeling requirements the following text must be placed on the exterior of the product. FCC ID: **FCC ID: W2E-ICHIME33**



Return Postage Guaranteed at:
iControl Incorporated
1885 De La Cruz Boulevard, Suite 203
Santa Clara, CA 95050



FCC ID: W2E-ICHIME33

iCHIME™
IDC-ICH-V3.3

! Warning: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) This device may not cause harmful interference and 2) This device must accept any interference received.

FCC Warnings:

Modifications: Modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment under FCC Rules.

Radio Frequency Exposure:

Notes:

- 1) For mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculators indicate the MPE distance is less.
- 2) This equipment has been evaluated in accordance with the FCC bulletin 56 "Hazards of radio frequency and electromagnetic fields" and bulletin 65 " Human exposure to radio frequency and electromagnetic fields.