Easy Use   Quick   Innovative

SunVote®

M52Li-2.4G
Keypad User Manual

2016/04/20

Content

SunVote®

SunVote®

Model	M52Li
Power On	Press any key to power on
Power Off	Long press 【C】 till "Bye Bye" appears on the screen, then release your hand to turn it off
Sign In	Press 【OK】 to sign in, LCD will show "SignIn OK " after successful registration
Vote	Press 【√】【X】【?】 for yes/no/abstain, and LCD will show "Received" if successfully submit.
Candidate Election	Press 【√】 to tick the candidate, double click 【√】 or click 【X】 for recall, and press 【OK】 to submit
Single Choice	Press alphanumeric keys to submit your answer directly
Multiple Choice Sequence	Press alphanumeric keys to select your answer and press 【OK】 to submit
Scoring Numeric	Press alphanumeric keys to input the numbers including decimal point and press 【OK】 to submit

LCD Display

Channel

Online
CH:01 ID:0001

Keypad ID

Submit

Cancel

No

Yes

Abstain

Alphanumeric Keys

Abstain

UP/Decimal Point

Down/Channel

SunVote®
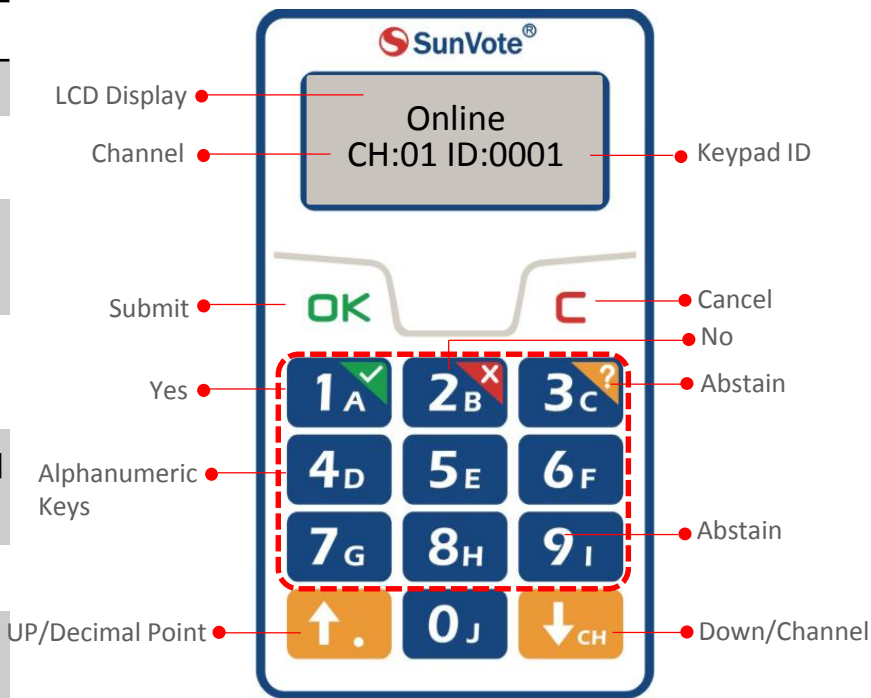
Please check the keypad batteries before use. If battery is low (e.g. it prompts in red to indicate weak battery by keypad test in the software), please plug the keypads into the charging box for around 2-3 hours till fully charged.
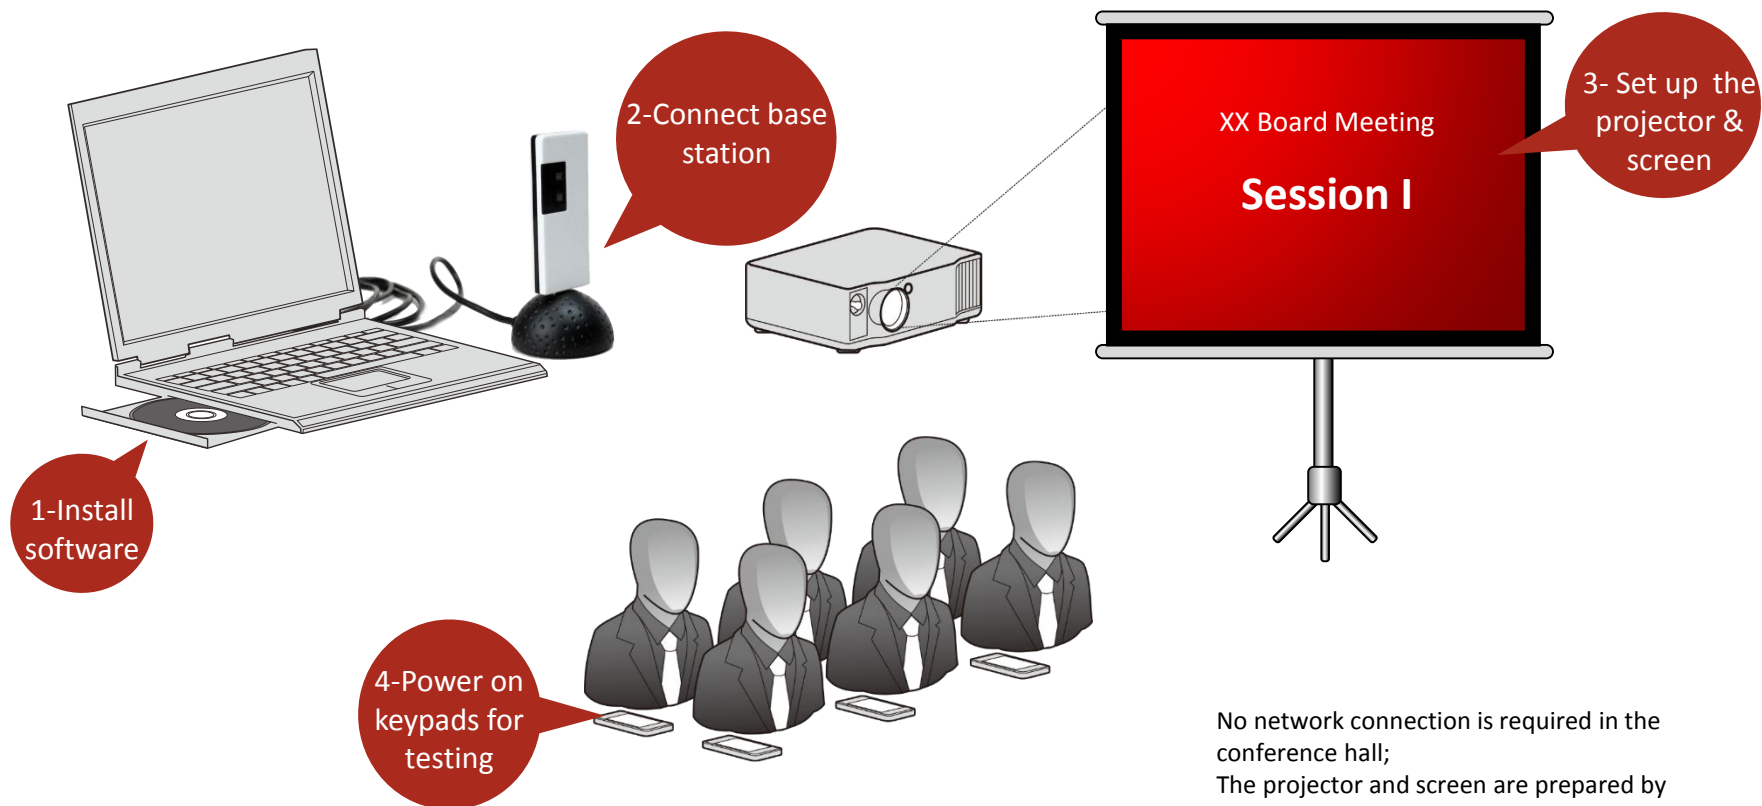

300mAh Rechargeable Lithium Battery

Indication light of the charging box turns red when keypad is charging;
The light turns off after full charge

Plug the Mini USB into the charging slot

3-System Connection

2-Connect base station

3- Set up the projector & screen

XX Board Meeting

Session I

1-Install software

4-Power on keypads for testing

No network connection is required in the conference hall;
The projector and screen are prepared by users.

【**Why to Match**】 Keypad match is to create communication between keypads and base station, and make sure your system is isolated from other similar systems. Match mode is set by default from factory.

【**How to Match**】 Please run **SunVote ARS Tool Kit**，go to **Keypad Match** and click "**Start**" after the base is connected.
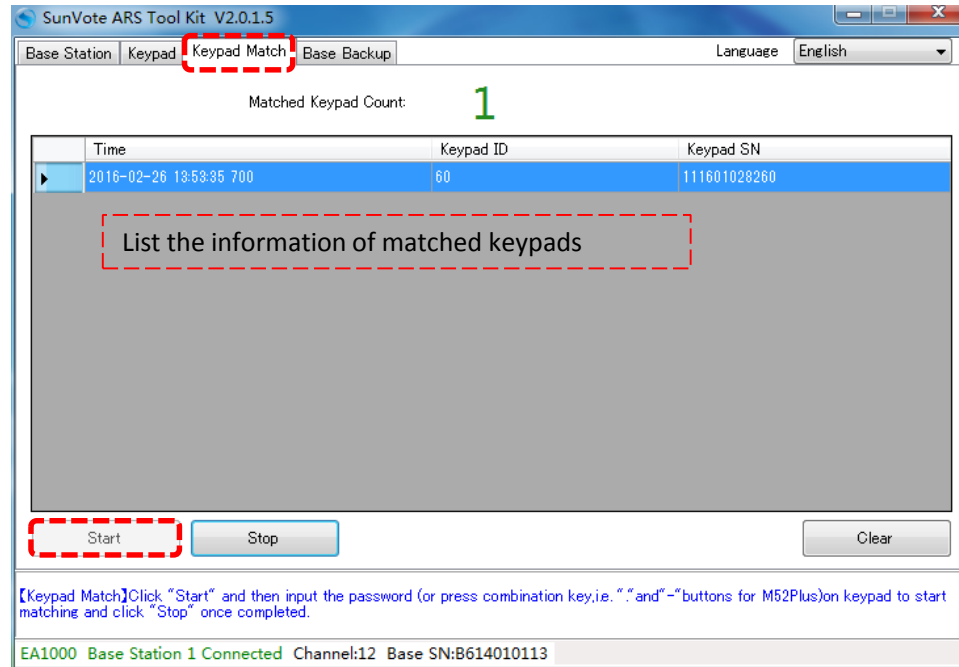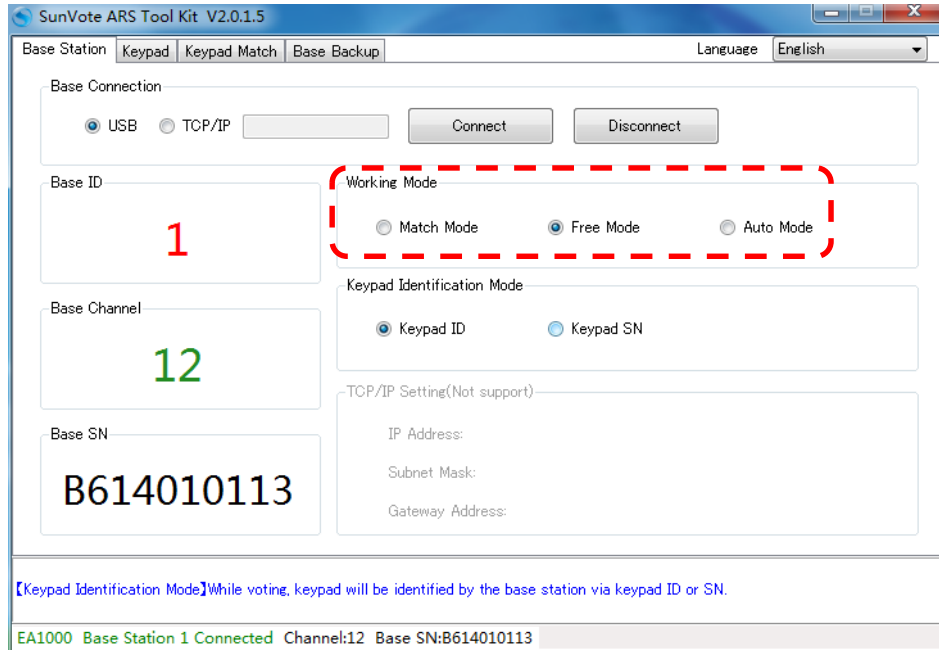

Press 【↑】and 【↓】at the same time for 3 seconds

If failed, keypad will return to the last matched channel. For end-user, the keypads and base station are matched before delivery.

SunVote®

【**Free Mode**】 Keypad is able to communicate with any base station freely by inputting the appropriate channel of the base.
【**How to Set**】 Free mode is controlled by base station. However the base is set as **match mode** from factory, we may change it to **free mode** in SunVote ARS Tool Kit as shown on the bottom left.

When the free mode base is connected, follow the steps as below :

Long press 【CH】 for 3 seconds, input the correct channel when "Channel" appears on the screen, and press OK to connect .

It shows "Online" on screen after successful match.

If failed, keypad will return to the last matched channel.
For end-user, the keypads and base station are matched before delivery.

【 **Why to Set ID**】 Keypad ID is convenient for device management, test and troubleshooting. ID should be unique.

【 **How to Set ID** 】 Run **SunVote ARS Tool Kit** , go to **Keypad** and click **Start Setting. Now** press and hold 【OK】 button on keypad, and release your hand after a new ID showing on keypad and toolkit. **New ID** in **ARS Tool kit** will add 1 automatically, so please press another keypad to set its ID in ascending order.
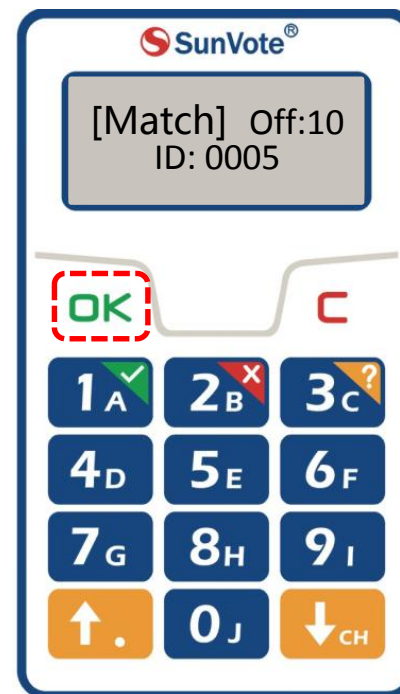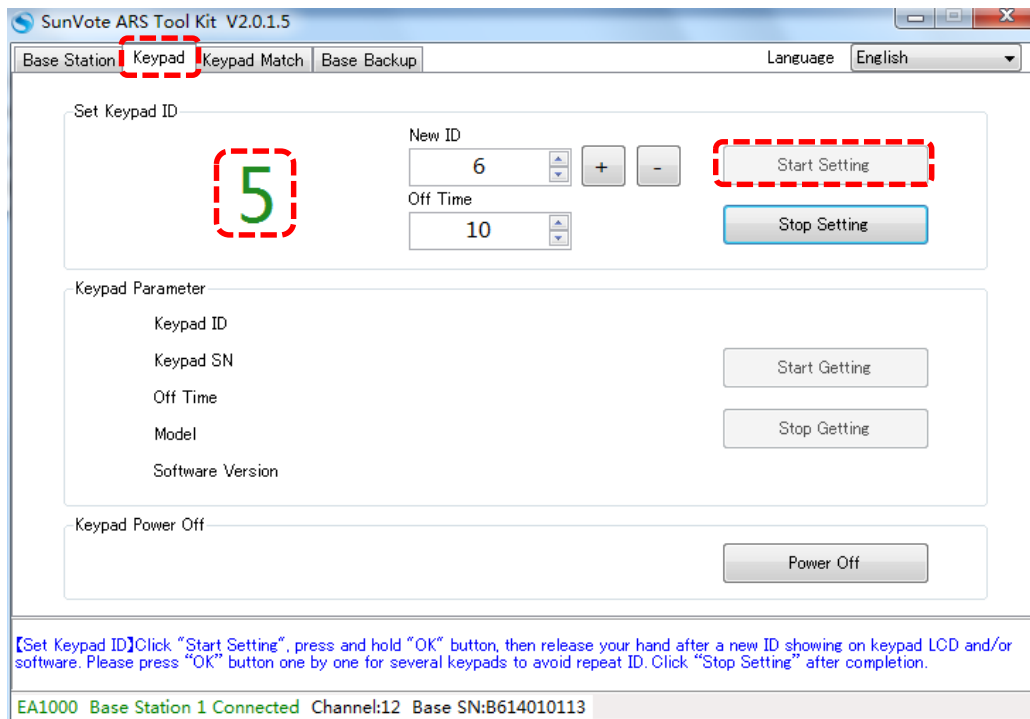

For end-user, ID is set before delivery.

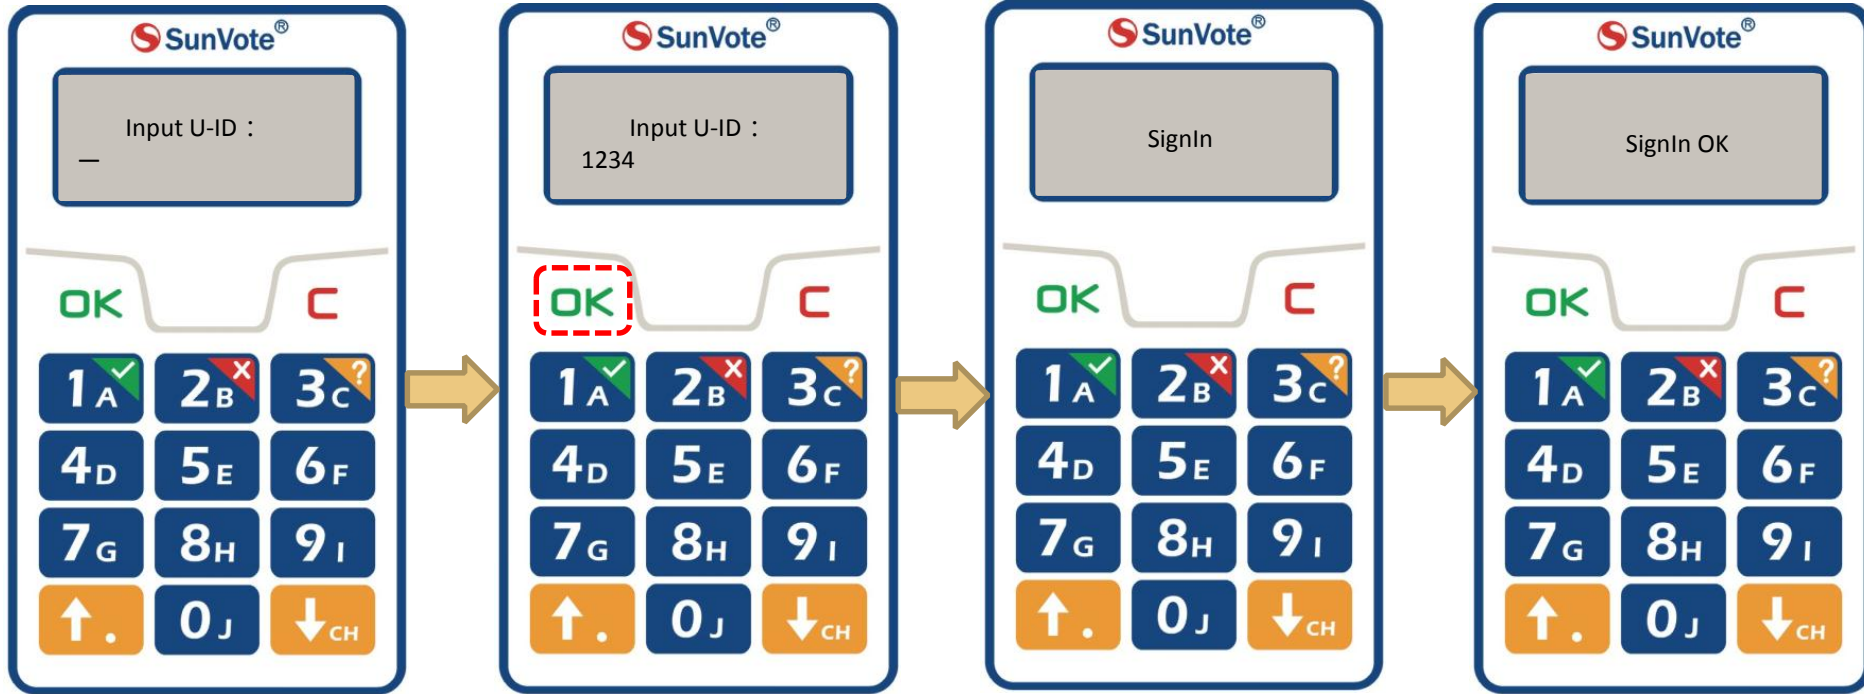**Note: "Match" means match mode;**
"Free" means free mode

1. **Language**：Set English or Chinese by base station;

2. **Modification Mode**： Use software to allow or not allow to modify the answer. Press 【C】 to modify after submitting under modifiable mode. Press the appropriate functional buttons to resubmit directly for single choice/judge and vote;

3. **Confidential Mode**： Use software to enable or disable the confidential mode . Once enabled, LCD will only show "Received" without the exact voting value (i.e.. Yes/No/Abstain) for confidence.

4. **Submitting Mode**： Use software to allow or not allow to submit less than the selectable options. Eg.: if the selectable is set as 3 options, you may submit AC if it's allowed; otherwise, only the answer with 3 options like BCD is acceptable.

5. **Identification Mode:** Each keypad has a unique and inalterable 12-digit serial number. Set it in software or SunVote ARS Tool Kit to identify keypad by SN/ID. If set as SN mode, the keypad SN will show in software when polling. **Note: You may have to press "OK" button to refresh the display on keypad while change from SN to ID mode.**
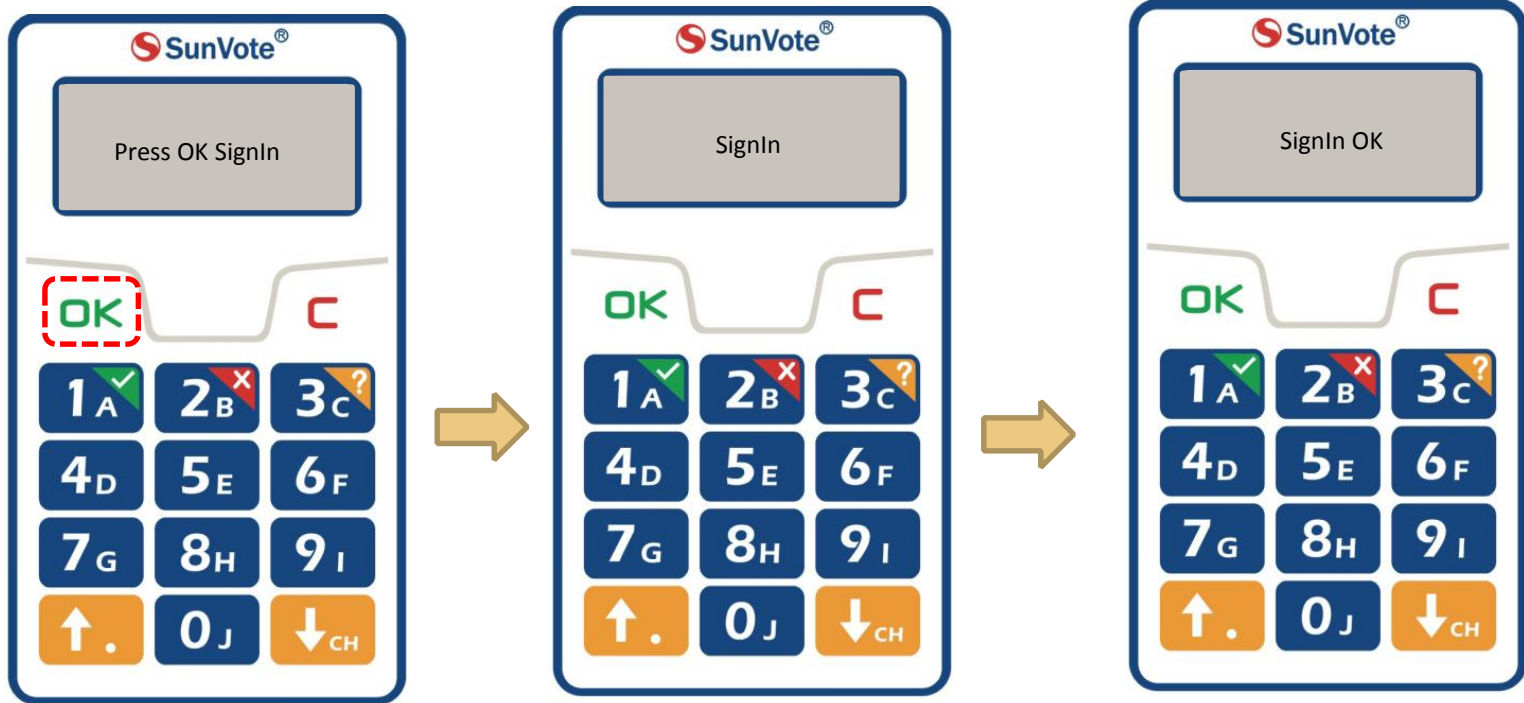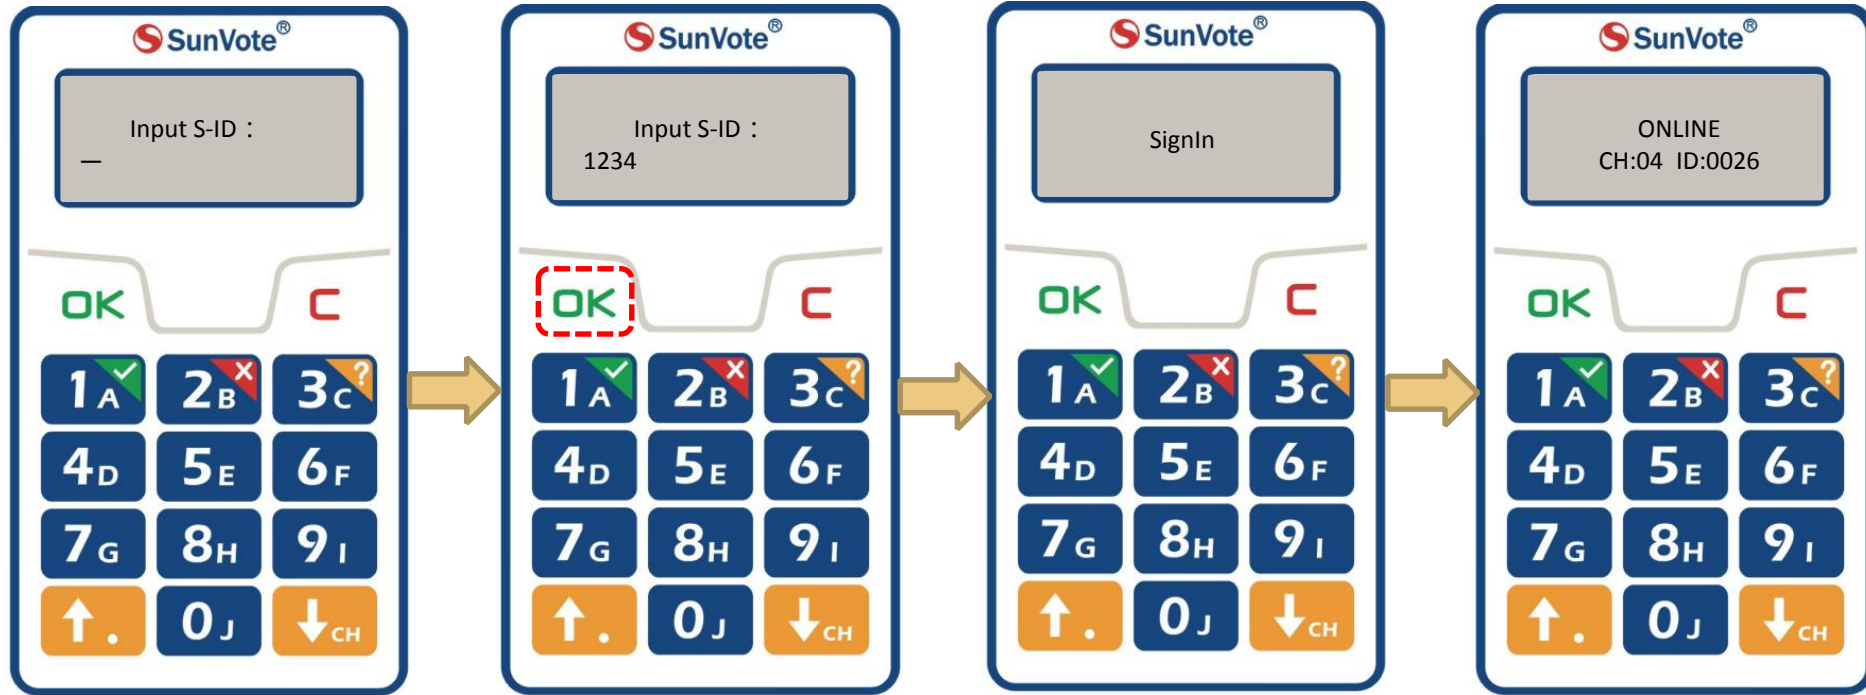
When start **Sign in**, press 【OK】 to sign in according to the indication on keypad and "signIn OK" will be displayed after successfully submitting.

SunVote®

|			
SunVote®	**SunVote®**	**SunVote®**	**SunVote®**
Input U-ID： —	Input U-ID： 1234	SignIn	SignIn OK
OK C	OK C	OK C	OK C

When start **Sign in**, input numbers according to the indication on keypad and press 【OK】 to sign in. "Received" will be displayed after successfully submitting. Max support 16 numerical numbers;
User-ID is a group of specific numbers to bond the randomly distributed keypad with the user, such as student ID or Staff ID.

Start **Signin** by software, then input numbers while keypad shows "**Input S-ID** "and press 【OK】 to sign in. Keypad goes to response interface after successfully submitting. Max support 16 numbers for ID mode and 12 numbers for SN mode; Back-Stage Signin means "Signin" mode is on during response, and latecomer may join the response and bond the randomly distributed keypad with him/her by inputting a group of specific numbers , such as student ID or Staff ID.
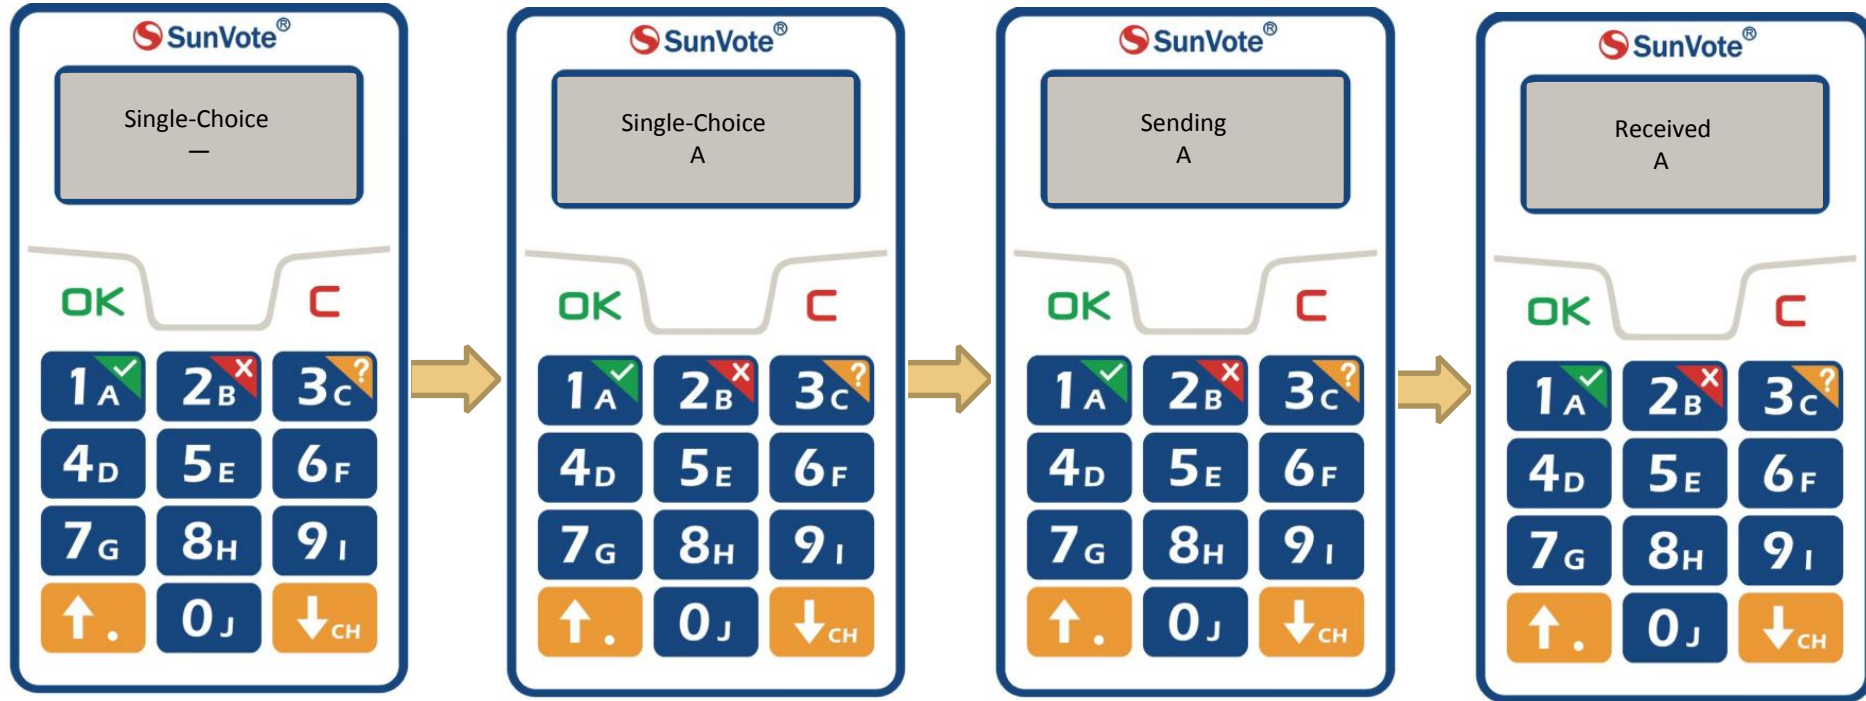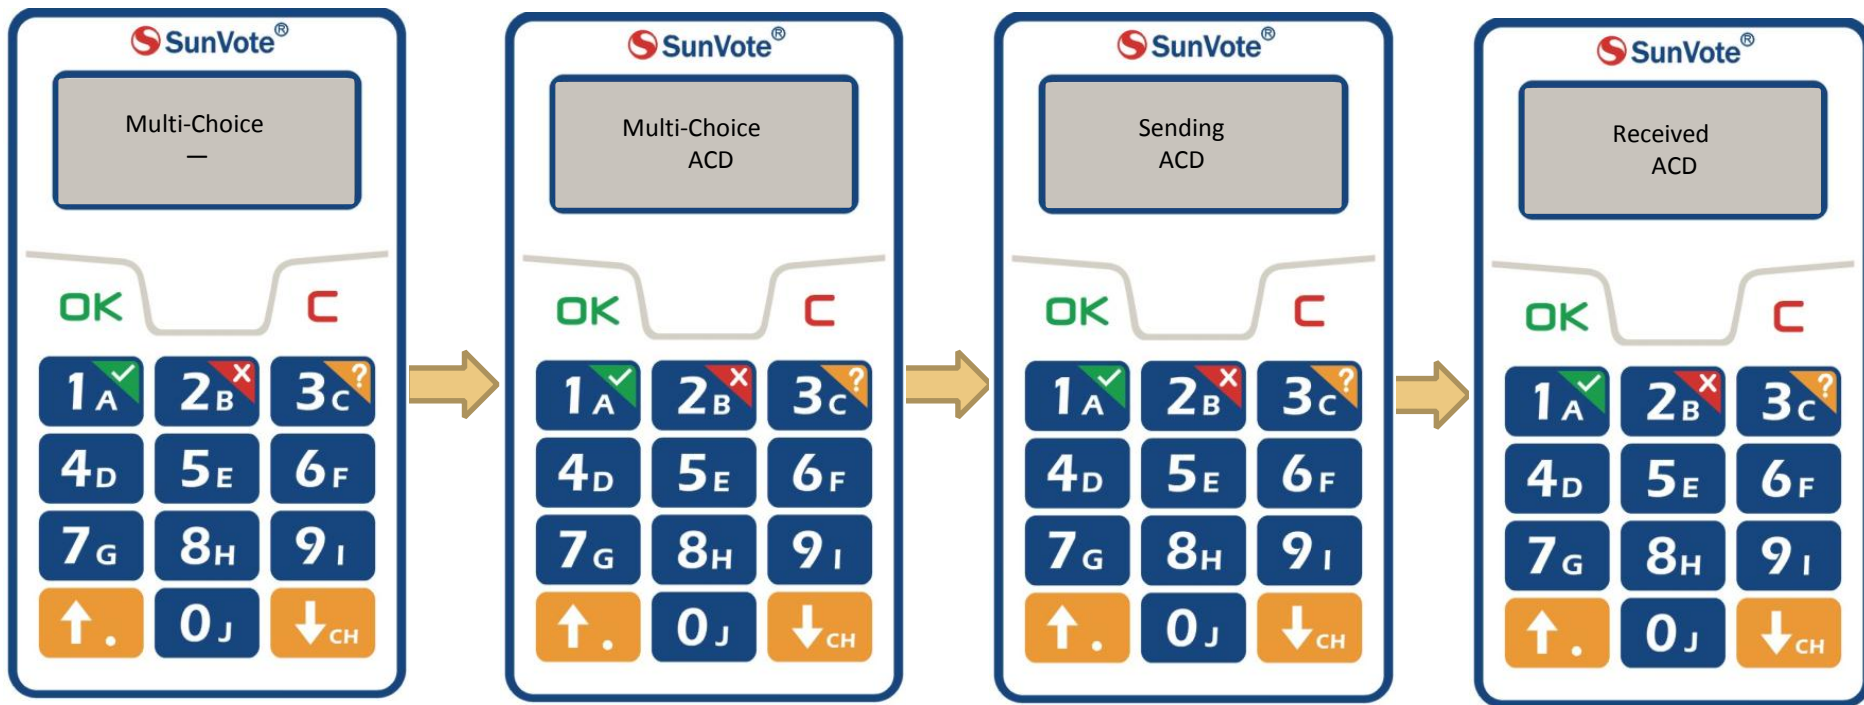
When start **response**, press alphanumeric keys to submit according to the indication on keypad, and **"Received"** will be displayed after successfully submitting.
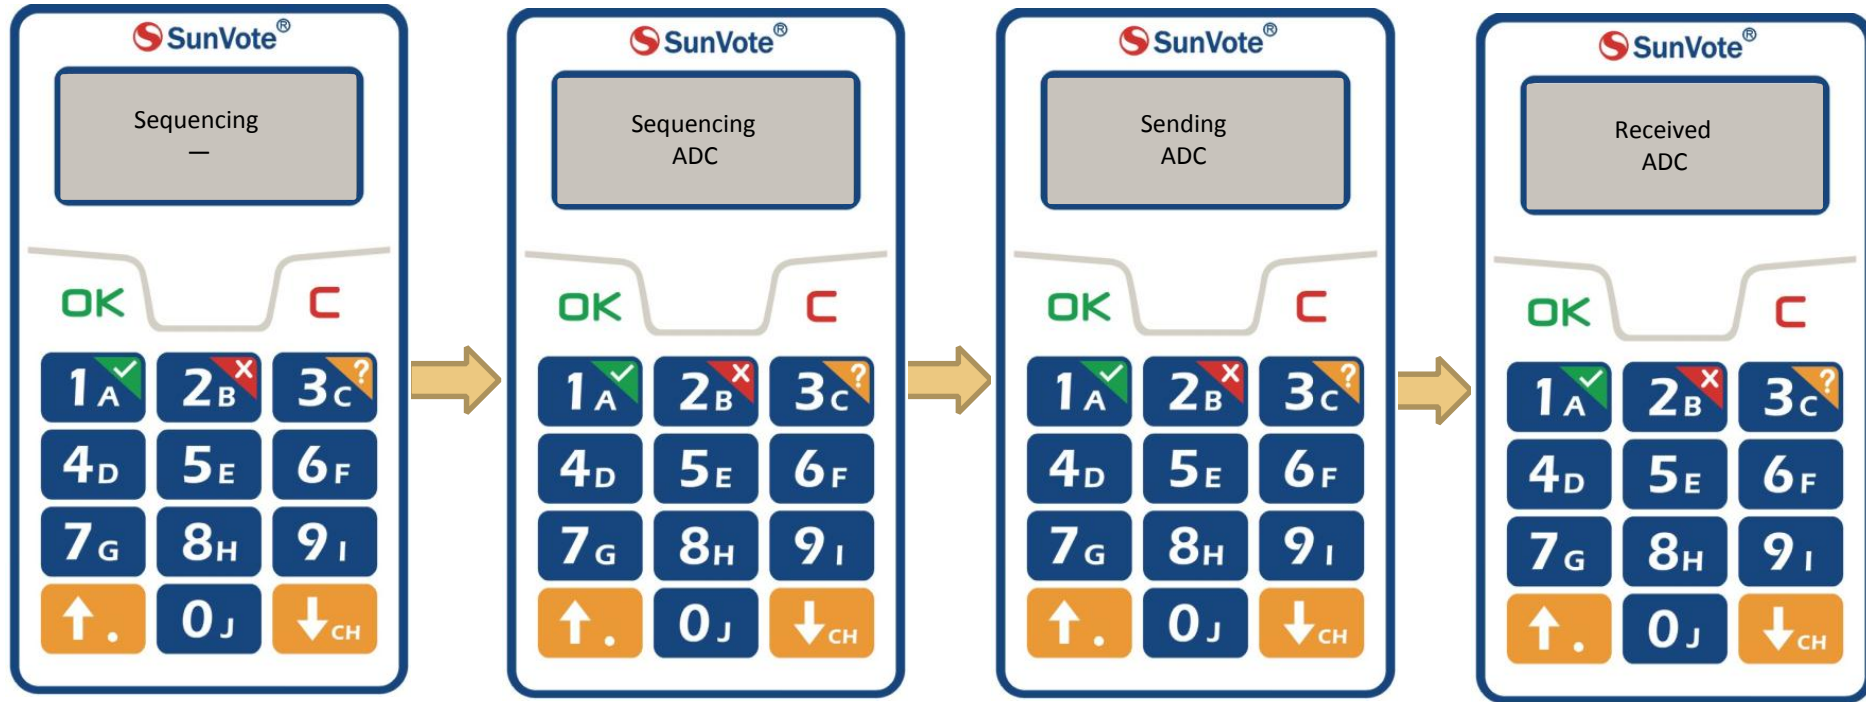Set the confidential mode in software, and support maximum 1 out of 10 options.

When start **response**, press alphanumeric keys to input your answer and press 【OK】 to submit according to the indication on keypad, and **"Received"** will be displayed after successfully submitting.
Set the confidential mode in software, and support maximum 10 out of 10 options.
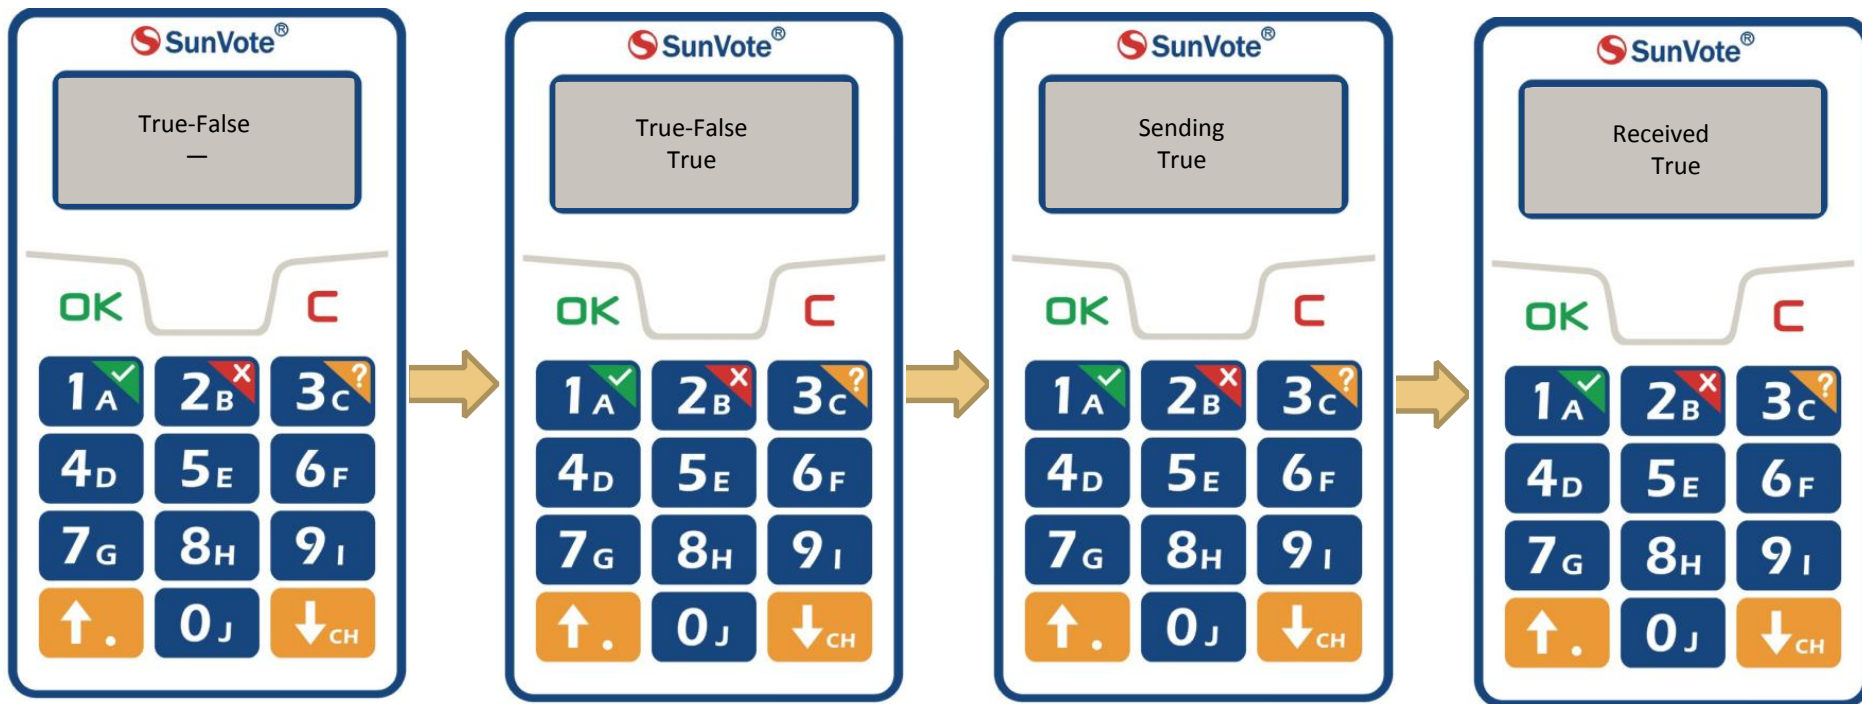
5.6- Voting functions: Sequence

When start **response**, press alphanumeric keys to input your answer and press 【OK】 to submit according to the indication on keypad, and **"Received"** will be displayed after successfully submitting.
Set the confidential mode in software, and support maximum 10 out of 10 ranking options.
Set the submitting mode in software , such as repeated selection (i.e. AABC).
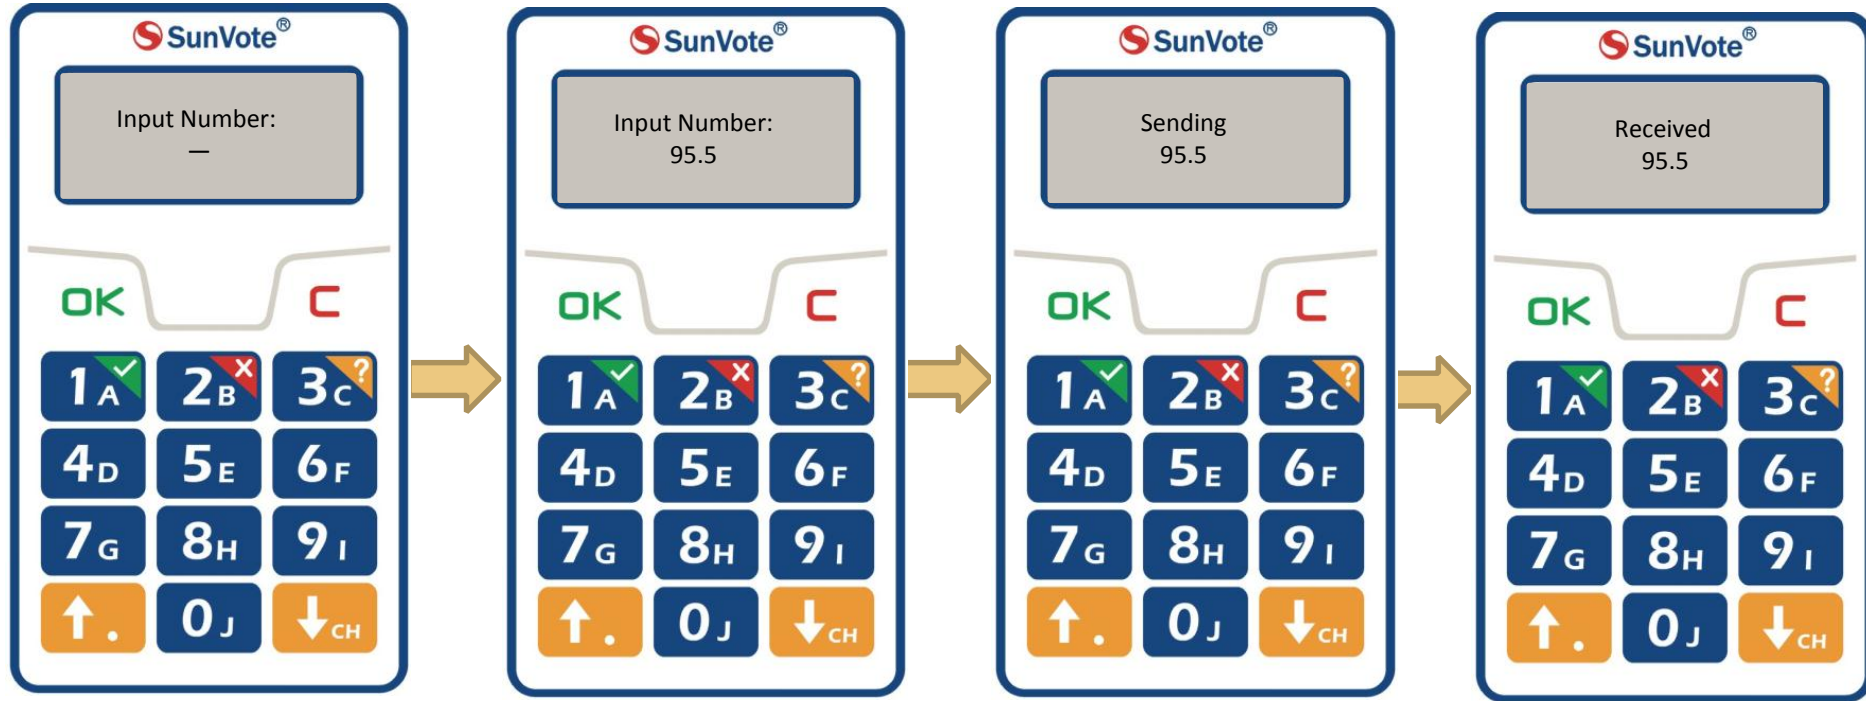
When start **Judge**, press √/X to submit according to the indication on keypad, and **"Received"** will be displayed after successfully submitting.

Set the confidential mode in software, and support two modes: True/False & Yes/No.
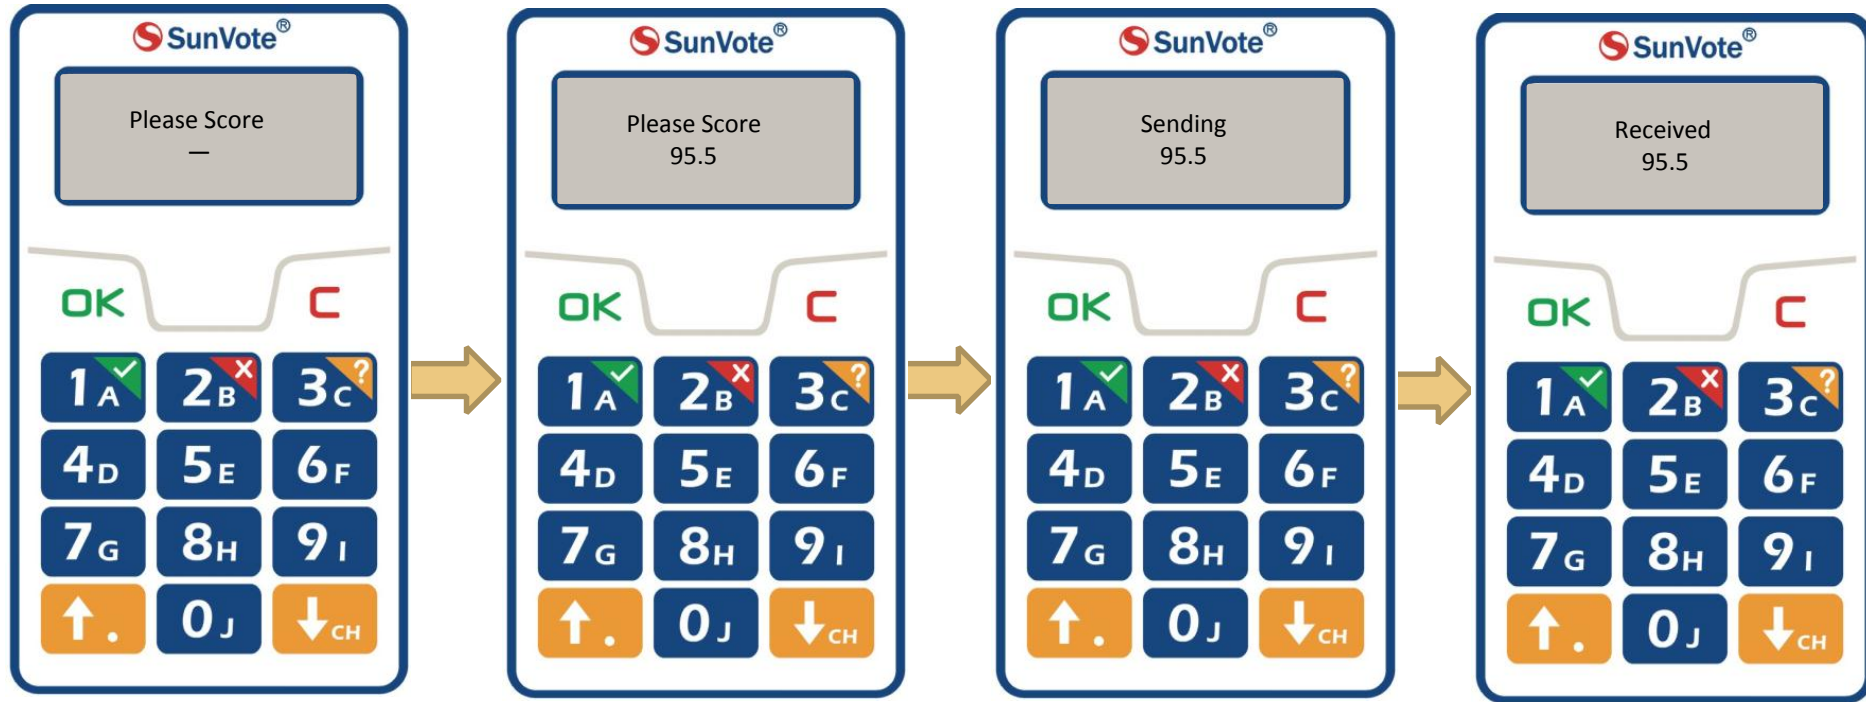
When start **response**, press alphanumeric keys to input your answer and press 【OK】 to submit according to the indication on keypad, and **"Received"** will be displayed after successfully submitting.
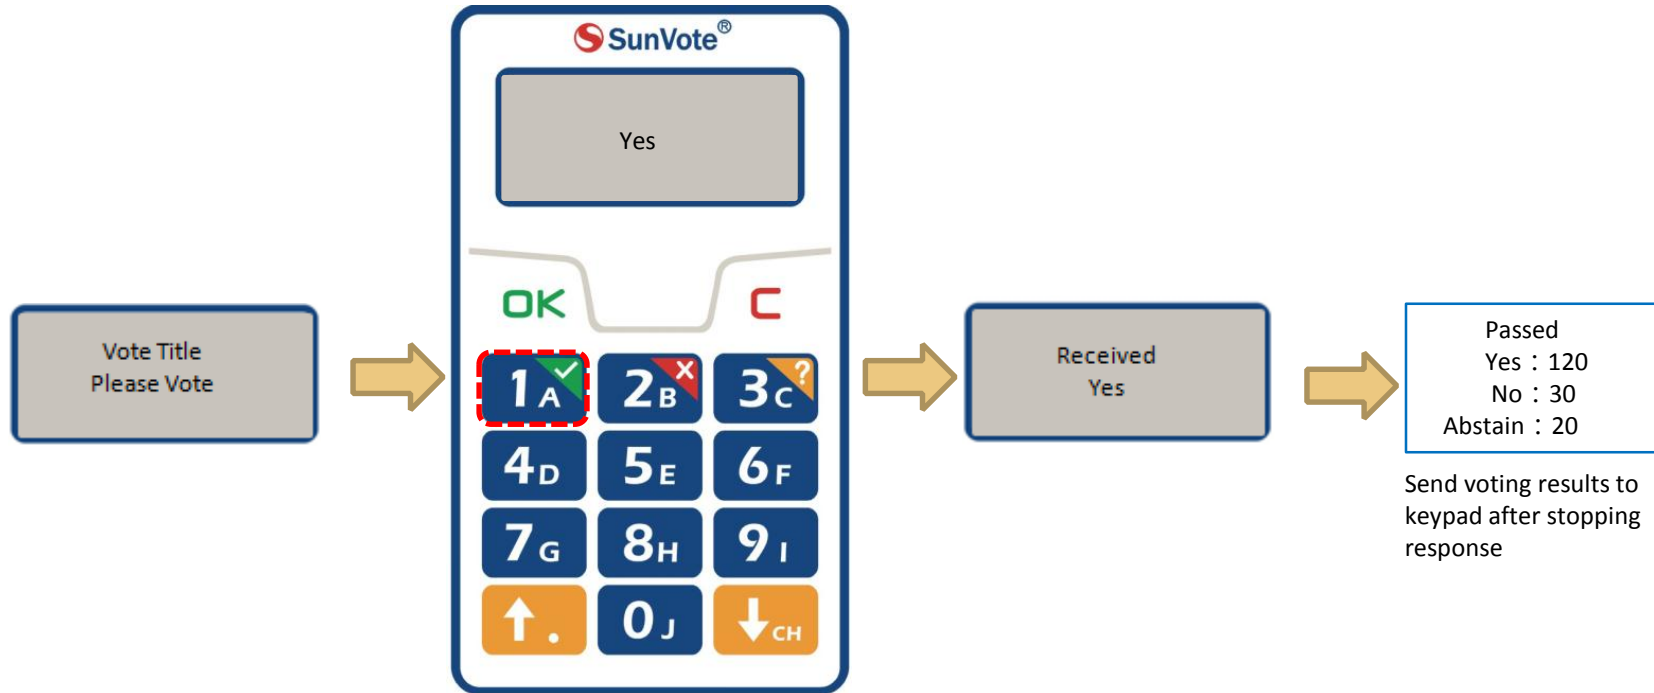
Set the confidential mode in software, and support maximum 16 characters including decimal point.

When start **response**, press alphanumeric keys to input scores and press 【OK】 to submit according to the indication on keypad, and **"Received"** will be displayed after successfully submitting.
Set the confidential mode and scoring rules in software , i.e. upper and lower limit or number of digits stay after decimal point.

Vote Title
Please Vote

Yes

OK   C

1A ✓   2B ✗   3C ?
4D   5E   6F
7G   8H   9I
↑.   0J   ↓CH

Received
Yes

Passed
Yes：120
No：30
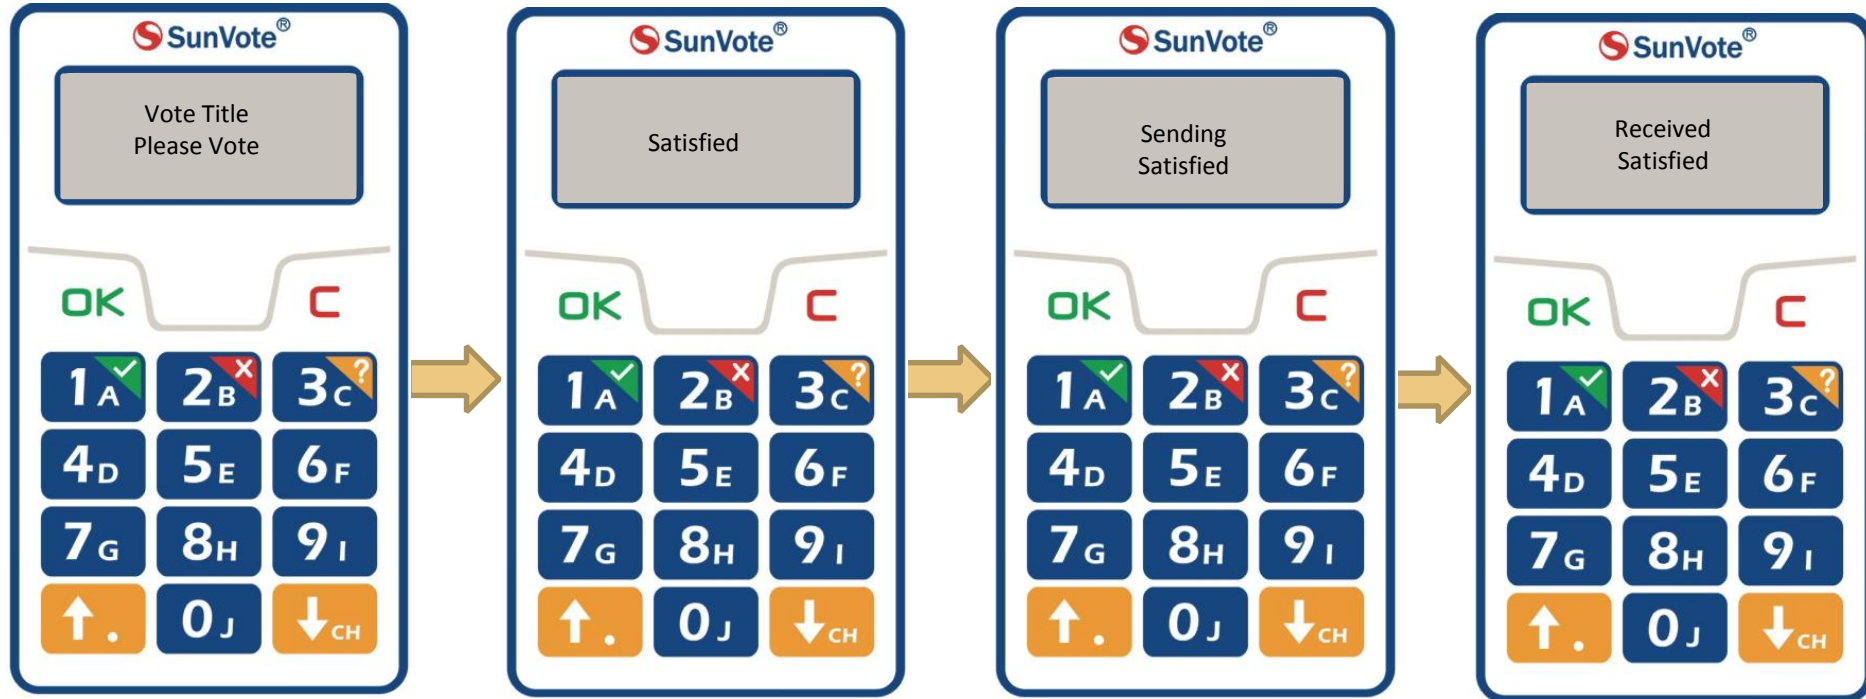Abstain：20

Send voting results to keypad after stopping response

When start **Vote**, press 【√】【X】【?】(**Yes/No/Abstain)** to poll according to the indication on keypad, and **"Received"** will be displayed after successfully submitting.
Set the confidential mode and resolution title of up to 7 Chinese characters or 14 letters in software.
Support to send voting results to keypads.

When start response, follow the tips on the keypad, press alphanumeric keys 1/A-5/E to select the evaluation levels (8 default Chinese/English rating scales respectively) and press **OK** to submit, screen will show "Received" when successfully submitted. Set the confidential mode and resolution title of up to 7 Chinese characters or 14 letters in software.
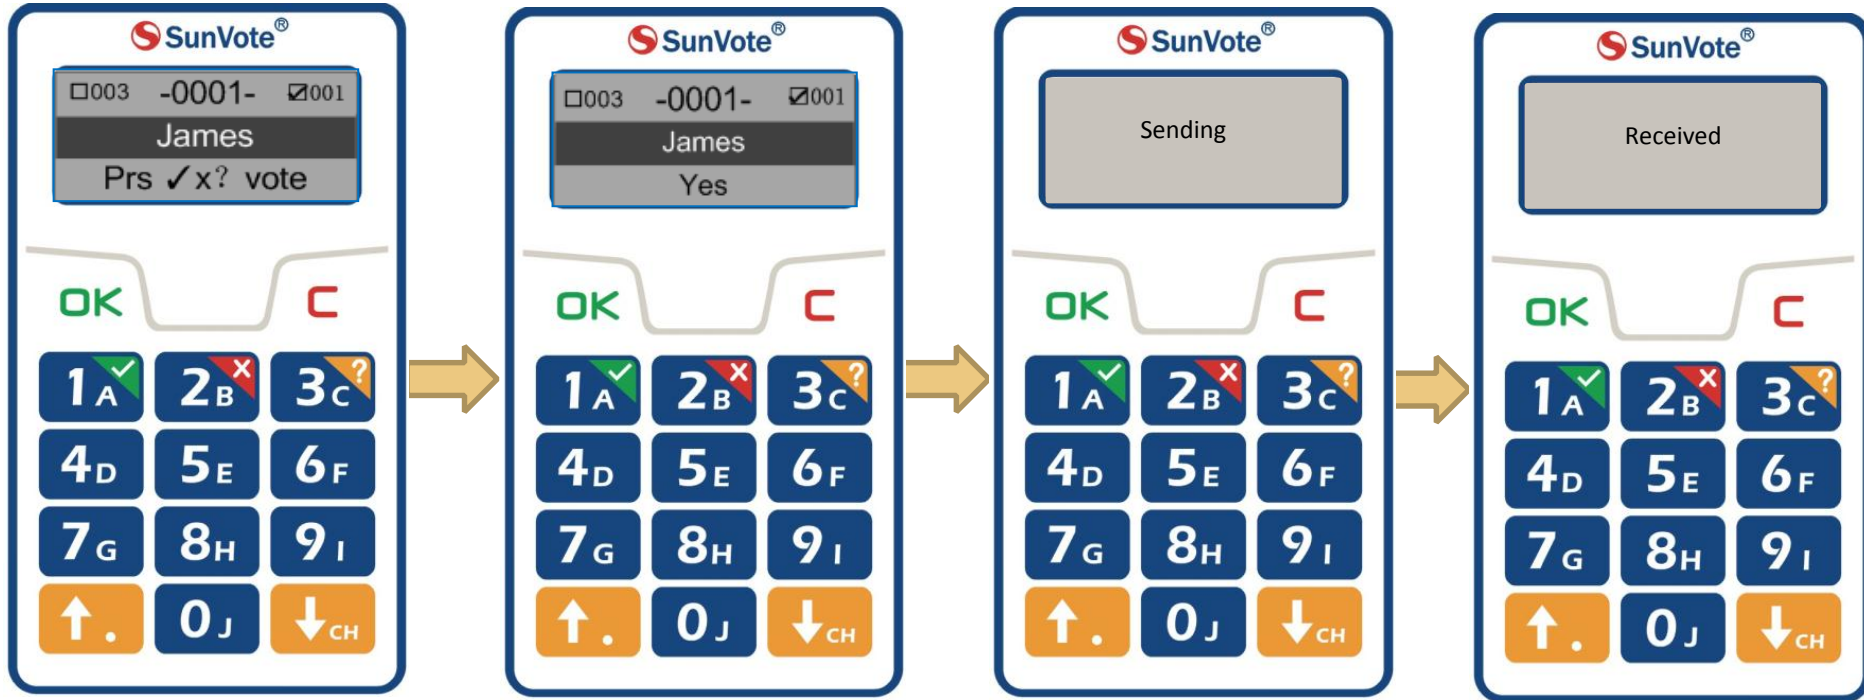
When a ballot has several resolutions to be passed at one time (Batch vote)or casts by one person on behalf of others (Proxy vote), we can open **Batch Vote/Proxy Vote** function. Follow the tips on keypad, press **√/×/? (Yes/No/Abstain)** to vote for a resolution or one person, and press **Up/Down** to vote for other resolutions or persons, press **OK** to submit the final votes, and screen will show **"Received"** when successfully submitted.

Support to download and vote 80 resolutions or persons at most.
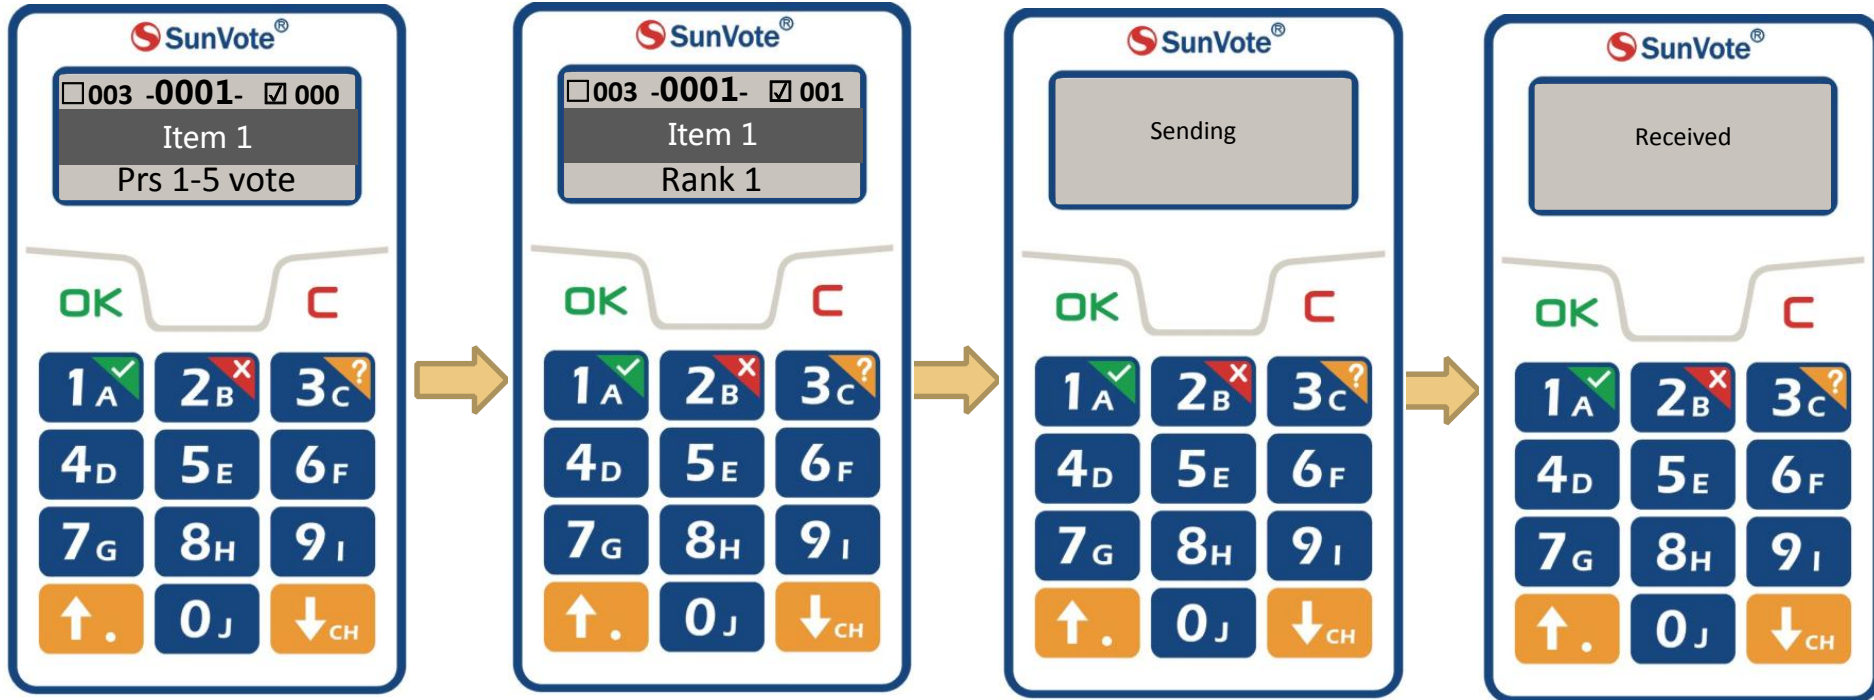
When a ballot has several items to be evaluated at one time , we can open **Batch Evaluation function**. Follow the tips on keypad, press **1-8 (5 levels by default and customized 8 levels, i.e. rank 1-8)** to vote, and press **Up/Down** to go through the items, press **OK** to submit the final votes, and screen will show **"Received"** when successfully submitted.
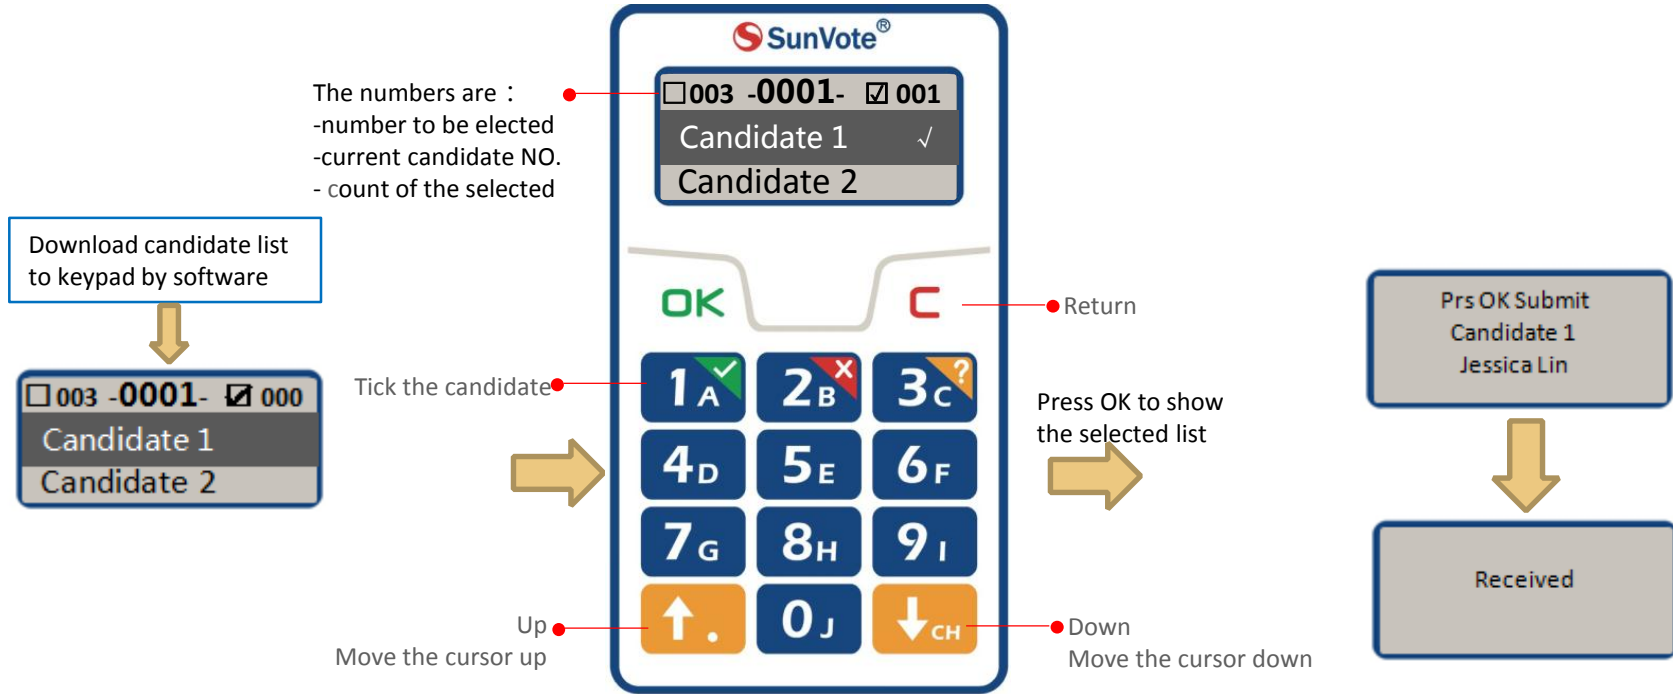
Support to download and vote 80 out of 200 items at most.

SunVote®

The numbers are：
-number to be elected
-current candidate NO.
- count of the selected

Download candidate list
to keypad by software

□003 -**0001**- ☑ 000
Candidate 1
Candidate 2

Tick the candidate

Press OK to show
the selected list

Prs OK Submit
Candidate 1
Jessica Lin

Received

SunVote®

□003 -**0001**- ☑ 001
Candidate 1   √
Candidate 2

OK   C

Return

Up
Move the cursor up

Down
Move the cursor down

When start Election , follow the guide on keypad and press **√** to check the candidate； press **√ again** or press **× to** uncheck this candidate； Press

Up/Down to view all the candidates. Press **OK** to confirm and submit ,and screen will show **"Received"** when successfully submitted.

Support to download and vote 80 out of 200 candidates at most.
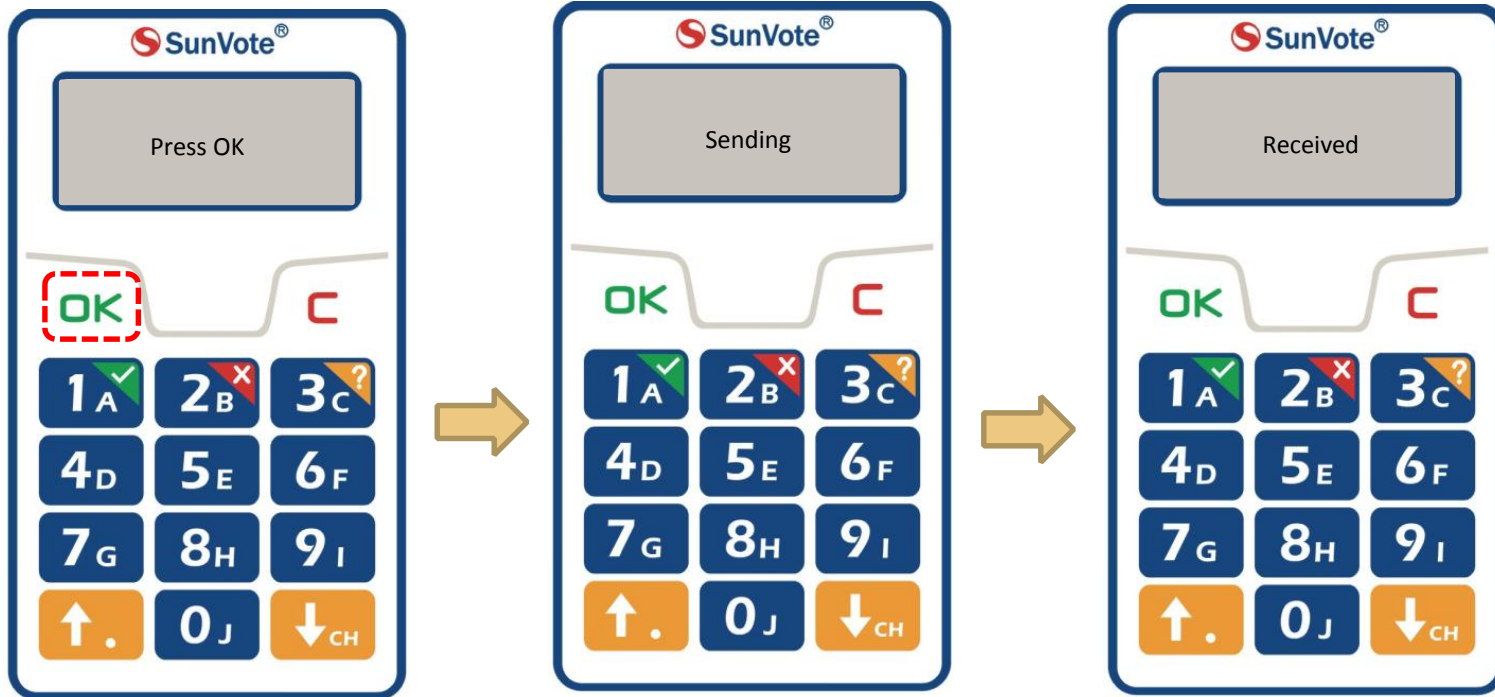
When start **response**, press 【OK】 for fastest response, and **"Received"** will be displayed after successfully submitting.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.