

IP Walkie Talkie C200

Quick Start Guide

User Interface

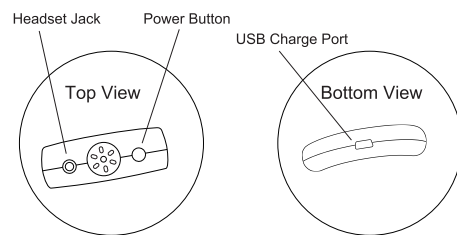
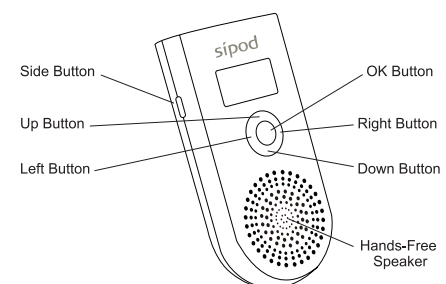


Figure 1: User Interface Chart

Note: C200 can be charged using the USB cable and AC adaptor. Please do NOT use other USB cables to charge the unit.

Headset

C200 is compatible with most 2.5 mm microphone headsets.

Setup Procedure

1. Power on the unit
2. Connect to your wireless network
3. Setup SIP account and register to SIP server
4. Create contact list
5. Ready to make or receive calls

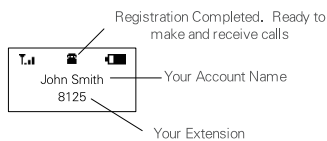



Figure 2: Idle Screen

- Registration successful. Ready to make and receive calls.
- Registration failed.

Note: You may need to charge the unit for 2 hours when you use the phone for the first time.

Connect to Network

Select "Find AP" menu item




From the idle screen, press the Ok button to enter the main menu. Use the up/down arrow button to select "Find AP", then press Ok button.

Searching a wireless network




The spinning icon indicates that the unit is scanning and trying to find a nearby wireless access point.

Select a AP from the list




The phone gives a list of found wireless networks. Select the network that you want to connect to.

Enter a network key



Use the navigation button to enter the network key string. If you do not know the key, please contact your network administrator.

You are now connected to the network




The phone will acquire IP address from DHCP server via the selected wireless network.

Note: If "Could not connect to the network" error message appears, make sure you entered a correct network key. You may also navigate to [Setting -> AP Setting -> Select Network](#) and press "Set Active". This will scan for wireless networks and re-initialize to establish a connection.


Manage Contact List

Add a new Contact

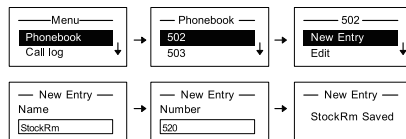


From the main menu, select "Phonebook". Press **Ok** button to display the existing contact list. Press **right** button and select "New Entry" item. You can enter a name and number. Press **Ok** button to save.

Edit a Contact

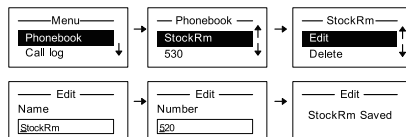

Select a contact you want to edit. Press **right** button and select "Edit" item. You can enter a new name and/or new number. Press **Ok** button to save.

Delete a contact



Select a contact you want to delete. Press **right** button and select "Delete". Press **Ok** button to confirm. Press side button if you do not want to delete the contact.

Make or Receive Calls

Make a call

Use the up/down button to select a contact or conference you want to call, then press **Ok** button



Receive a call

When you receive an incoming call, you will hear the ringtone and the screen will show the caller's number.




Hang-up

Press **ok** button to end a call.

Turn On / Off Auto Answer Mode

In the idle state, press the side button to turn on/off auto-answer mode. See the screen with the auto-answer icon below.




Mute

When you are in a call, you can turn mute on/off by pressing the side button. See the screen with the mute icon below.




Setup SIP Account

Select "SIP Profile" under "Setting" menu item






From the main menu, use up/down arrow button to select "Setting". Press Ok button, then select "SIP Profile". Press Ok button.




Edit SIP account



Use "Edit SIP" to enter SIP user name, password and display name.





Edit SIP domain





Use "Edit Domain" to enter SIP domain address and port.

Edit other SIP parameters



You can edit other SIP parameters such as Outbound Proxy or STUN Server if necessary.

Save Setting



If the unit has successfully registered to the SIP server, you should see the icon in the idle screen.

Note: If "Could not connect to the network" error message appears, make sure you entered the correct SIP account and network key.

Charge Battery and Power On/Off

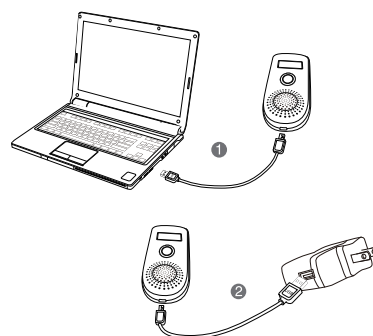


Figure 3: Power Charge

1. Plug the USB cable into the charge port at the bottom of the unit. When unit is turned off during the charging, the LCD screen blinks to indicate that the battery is charging. When unit is turned on, the battery charging icon shows the charging progress and how full the battery is. It takes about 2 hours to fully charge the battery.
2. After the battery charge is complete, disconnect the charge cable.

Note: The unit may not be able to start during the first few minutes after charging starts because the battery has very low voltage. After about 5 minutes of continuous charging, you can press the power button to turn on the unit.



Power On

Press and hold the power button for 2 seconds. A welcome screen will appear. The system will start scanning for a wireless network.

Power Off

Press and hold the power button for 2 seconds.

Frequent Operation List

Function	Button Operation	Icon
Power On	Press power button for 2 seconds	
Power Off	Press power button for 2 seconds	
Main Menu	Press Ok button from idle widow	
Idle Screen	Press side or left button until it reaches the idle screen	
Make A Call	Select contact from phonebook, then press Ok button	
Answer a Call	Press Ok button when an incoming arrives	
Reject a Call	Press side button	
Hang up	Press Ok button during a call	
Adjust Volume	Go to Setting-->Ring Setting-->Volume, press up/down button to adjust the volume, then press Ok button	
Mute	Press side button during a call	
Auto Answer	Press side button during idle state	
Call Log	From main menu, select Call Log menu item	
Add A New Contact	From main menu, go to Phonebook-->Contact List-->New Entry, then enter username and number	
Add AP	From main menu, go to Setting-->AP-->New Entry, then enter AP name and key	
Find AP Network	From main menu, select Find AP menu item	
Add SIP Account	Go to Setting-->SIP-->New Entry, then enter number, password, username, domain, port, etc.	
Roaming On/Off	Go to Setting-->AP Setting-->AP-->Roaming, then select On or Off options.	
Factory Default	Go to Setting-->Factory Default, then press OK button to continue.	



FCC Notice

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the device and receiver
- Connect the device into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/television technician for help

Conditions of Use

This device complies with Part15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Note

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Caution

The Equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

TEL. +1 408 899 5930 Email: support@sipod.com Web: www.sipod.com