Analysis of the Chaotic Regime in the Filtered Hénon Map: Effect of FIR Filter Type and Design Window

Kauê de Souza Silva, Roger Freitas Pereira, Marcos Felipe Correa Soares, Guilherme Rodrigues dos Santos, and Vinícius da Silva Borges

***Abstract*—The insertion of finite impulse response (FIR) filters in the feedback loop of chaotic generators is a known strategy for bandwidth limitation in chaos-based communication systems (CBCS). Although the filter does not prevent master–slave synchronization, its interaction with the nonlinearity of the generating map may destroy the chaotic behavior, so the presence of chaos must be verified for each design. This work investigates, by means of numerical simulations, the conditions under which chaos is preserved in the two-dimensional Hénon map with internal FIR filters, considering four filter types (lowpass, highpass, bandpass, and bandstop) and seven design windows, including a sweep of the Kaiser shape parameter. Points of the order-cutoff plane whose orbits become unbounded are classified as divergent. The remaining points are classified as chaotic when the largest Lyapunov exponent, which measures the average exponential rate at which nearby orbits separate, is positive, and as periodic otherwise. The results show that filtering does not eliminate the chaotic regime but reorganizes it in the parameter space in a way that depends on both the filter type and the design window. Therefore, the spectral specification of the filter alone does not ensure a chaotic generator, and the dynamics must be verified for each design.**

***Index Terms*—Chaos-based communication systems, chaotic synchronization, Hénon map, FIR filters, window design, Lyapunov exponent.**

I. Introduction

DETERMINISTIC discrete-time chaotic signals are bounded in amplitude, aperiodic, and exhibit sensitive dependence on initial conditions (SDIC), so that orbits starting arbitrarily close separate, on average exponentially fast [1]. They also have a broadband spectrum and a noise-like appearance, which motivates their use as carriers in communication systems [2]. Among the advantages usually attributed to such carriers are the difficulty of interception by unauthorized receivers, which places them among the physical-layer security approaches [3], the spreading of the transmitted spectrum, and, for some modulation schemes such as differential chaos shift keying (DCSK), robustness to multipath fading [4]. This interest grew after Pecora and Carroll [5] showed that two identical chaotic systems can be synchronized despite SDIC, when the receiver is driven by state variables of the transmitter.

In chaos-based communication systems (CBCS), the message is embedded in a chaotic carrier at the transmitter and recovered at the receiver. In coherent CBCS, the receiver synchronizes a replica of the transmitter generator with the received signal and uses it to extract the message. Noncoherent architectures, in contrast, recover the information from statistical or structural properties of the received signal without a synchronized replica [4]. Examples of CBCS include chaotic modulation schemes [2], image coding and encryption [6], systems based on three-dimensional attractors [7], and phase-locked loops for systems based on chaotic attractors [8].

The broadband spectrum of chaotic signals, however, conflicts with the fact that practical channels are band-limited. If the spectrum of the transmitted signal is not confined to the channel passband, the distortion introduced by the channel prevents the receiver from synchronizing, and the message is lost [9]. To overcome this limitation, Eisencraft *et al.* [10] proposed inserting a discrete-time linear filter in the feedback loop of the chaotic generator, and Fontes and Eisencraft [11] showed that the filter does not prevent synchronization, a result already indicated in [10]. Further practical limitations, such as finite-precision digital implementation, were investigated by Borges and Eisencraft [12]. The lowpass case corresponds to a baseband channel, but other spectral masks arise in practice. Highpass filtering removes the DC component of the chaotic signal, which carries no information and is blocked by AC-coupled channels. Bandpass filtering confines the signal to an allocated band, and bandstop filtering creates a spectral notch to avoid narrowband interference or to coexist with other systems [13]. From a dynamical standpoint, these four types also have different gains at zero frequency, which determine the fixed point of the filtered map [14].

Inserting a filter in the feedback loop, however, changes the dynamics of the generator, and nothing guarantees that the transmitted signal remains chaotic. Once the unfiltered pair synchronizes, the filter preserves synchronization for any choice of coefficients [15], but it may destroy the chaotic

K. de S. Silva is an undergraduate student in Computer Engineering at the Faculdade Engenheiro Salvador Arena (FESA), Centro Educacional da Fundação Salvador Arena, Estrada dos Alvarengas, 4001, São Bernardo do Campo, SP, Brazil. ORCID: 0009-0009-1283-0996 (e-mail: kaue.moelas.com@gmail.com).

R. F. Pereira is an undergraduate student in Computer Engineering at FESA, São Bernardo do Campo, SP, Brazil. ORCID: 0009-0000-5624-7422 (e-mail: roger_freitas@live.com).

M. F. C. Soares is an undergraduate student in Computer Engineering at FESA, São Bernardo do Campo, SP, Brazil. ORCID: 0009-0009-9968-2227 (e-mail: marcosfelipe.soares2014@gmail.com).

G. R. dos Santos is an undergraduate student in Computer Engineering at FESA, São Bernardo do Campo, SP, Brazil. ORCID: 0009-0004-0281-8663 (e-mail: guilhermerodriguess130@gmail.com).

V. da S. Borges is with the Computer Engineering Department, FESA, São Bernardo do Campo, SP, Brazil. He is the academic advisor of this work. ORCID: 0000-0001-5546-6842 (e-mail: viniciussbrg@gmail.com).

behavior of the generator. Borges and Eisencraft showed numerically that the coefficients determine whether the generated signals are chaotic, periodic, or divergent, for a two-coefficient filter [16] and for lowpass filters of increasing order [17], with bifurcation cascades, coexisting attractors, crises, and shrimp-shaped periodic islands [18]. Borges *et al.* extended this analysis to finite impulse response (FIR) filters with more coefficients and different zero placements [14] and to second-order all-pole filters [19]. The preservation of chaos must therefore be verified for each filter design. It remains open which combinations of filter type, design window, order, and cutoff frequency keep the generator chaotic, and this is the question addressed here.

Previous studies varied the coefficients of a two-coefficient filter [16], the zero placement of the FIR filter [14], and the order and cutoff frequency of lowpass filters designed with the Hamming and Blackman windows [14], [17]. In practice, however, an FIR filter is specified by its frequency response and designed by a method such as windowing, so the filter type and the design window are natural design choices. This work investigates how these two choices affect the preservation of chaos in the Hénon map with an internal FIR filter. Lowpass, highpass, bandpass, and bandstop filters are designed with seven windows, including a sweep of the Kaiser shape parameter [20], and for each configuration the filter order and the cutoff frequency are varied to build maps that classify the generated signals as chaotic, periodic, or divergent. The parameters of the Hénon map and the bandwidth of the bandpass and bandstop filters are kept fixed.

The remainder of this paper is organized as follows. Section II presents the preliminary concepts: the Hénon map, the Hénon map with an FIR filter in the feedback loop, the largest Lyapunov exponent, the FIR design windows, and the synchronization argument that motivates the study. Section III describes the methodology, Section IV presents and discusses the results, and Section V summarizes the conclusions, the contributions of the work, and future directions.

II. Preliminary Concepts

This section introduces the concepts needed to follow the rest of the paper. The Hénon map is presented first and then extended with an FIR filter in the feedback loop. The largest Lyapunov exponent, used to classify the signals generated by both systems, comes next, followed by the windows used to design the filter and by the synchronization argument that motivates the study.

A. Hénon Map

Consider the Hénon map [21]

$$\begin{cases} x_1(n+1) = \alpha - x_1^2(n) + \beta\, x_2(n), \\ x_2(n+1) = x_1(n), \end{cases} \tag{1}$$

where $n \in \{0, 1, 2, \ldots\}$ is the discrete time, $x_1(n)$ and $x_2(n)$ are the state variables, and α and β are real parameters. Grouping the state variables in the vector $\mathbf{x}(n) = [x_1(n)\ \ x_2(n)]^T$, where $(\cdot)^T$ denotes transposition, (1) can be written compactly as $\mathbf{x}(n+1) = \mathbf{F}(\mathbf{x}(n))$. The sequence of states $\{\mathbf{x}(n)\}_{n\geq 0}$ obtained by iterating $\mathbf{F}$ from an initial condition $\mathbf{x}(0)$ is called an *orbit* [1].

Depending on the parameters and on the initial condition, an orbit may converge to a fixed point, converge to a periodic orbit, behave chaotically, or diverge [1]. A *fixed point* is a state $\mathbf{x}^\star$ left unchanged by one iteration, $\mathbf{x}^\star = \mathbf{F}(\mathbf{x}^\star)$, so that an orbit started at $\mathbf{x}^\star$ stays there for all n. An orbit is *bounded* when there is a finite M such that $\|\mathbf{x}(n)\| \leq M$ for all n, and *divergent* otherwise [1]. For (1), the condition $\mathbf{x}^\star = \mathbf{F}(\mathbf{x}^\star)$ gives two fixed points, of which the positive one is used as the reference state in this work.

Fig. 1 illustrates the chaotic and the periodic behaviors with segments of $x_1(n)$ generated from two initial conditions that differ by 10^{-3} in $x_2(0)$, as in [17]. In Fig. 1(a), with $\alpha = 1.4$ and $\beta = 0.3$, the signal is aperiodic and, although the two initial conditions are nearly indistinguishable, the distance between them first exceeds 0.1 at $n = 11$ and reaches order one at $n = 18$; this is the SDIC of chaotic signals. In Fig. 1(b), with $\alpha = 0.9$ and $\beta = 0.3$, both orbits converge to the same period-2 orbit, which alternates between $x_1 \approx 1.08$ and $x_1 \approx -0.38$, and the difference between the initial conditions is lost. Throughout this work, $\alpha = 1.4$ and $\beta = 0.3$ are adopted; for these classical values, (1) has a strange attractor of fractal dimension ≈ 1.26 [22].

B. Hénon Map With an FIR Filter in the Feedback Loop

This subsection defines the filter, the expanded system obtained when the filter is inserted in the map, and the quantities of that system used in the rest of the paper. To limit the bandwidth of the generated signal, Eisencraft *et al.* [10] and Fontes and Eisencraft [11] proposed filtering $x_1(n)$ with an FIR filter and feeding the filter output back into the map. Fig. 2 shows this filter in a coherent CBCS, in the transmitter and in the receiver; Fig. 3 isolates the generator studied in this work. The output of the filter is

$$x_3(n) = \sum_{j=0}^{N_s-1} c_j\, x_1(n-j), \tag{2}$$

where c_j, $0 \leq j \leq N_s - 1$, are the N_s filter coefficients. The filter order is $N_z = N_s - 1$, equal to the number of zeros of the transfer function obtained by taking the z-transform of (2) with zero initial conditions [23],

$$H(z) = \frac{X_3(z)}{X_1(z)} = \sum_{j=0}^{N_s-1} c_j\, z^{-j}. \tag{3}$$

Evaluating $H(z)$ on the unit circle, $z = e^{j\omega}$, gives the frequency response $H(e^{j\omega})$, where $\omega \in [0, \pi]$ is the normalized angular frequency in rad/sample. The frequency response fixes the passband, the transition width, and the stopband attenuation delivered by a given set of coefficients [23]. In this work, it is specified by the filter type (lowpass, highpass, bandpass, or bandstop) and by a cutoff frequency ω_c. Its value at $\omega = 0$ is the DC gain of the filter, $G = H(e^{j0}) = \sum_j c_j$ [23].

The filtered signal $x_3(n)$ replaces $x_1(n)$ in the nonlinear term of (1). Because (2) depends on the past samples $x_1(n-1), \ldots, x_1(n-N_s+1)$, the pair (x_1, x_2) is no longer

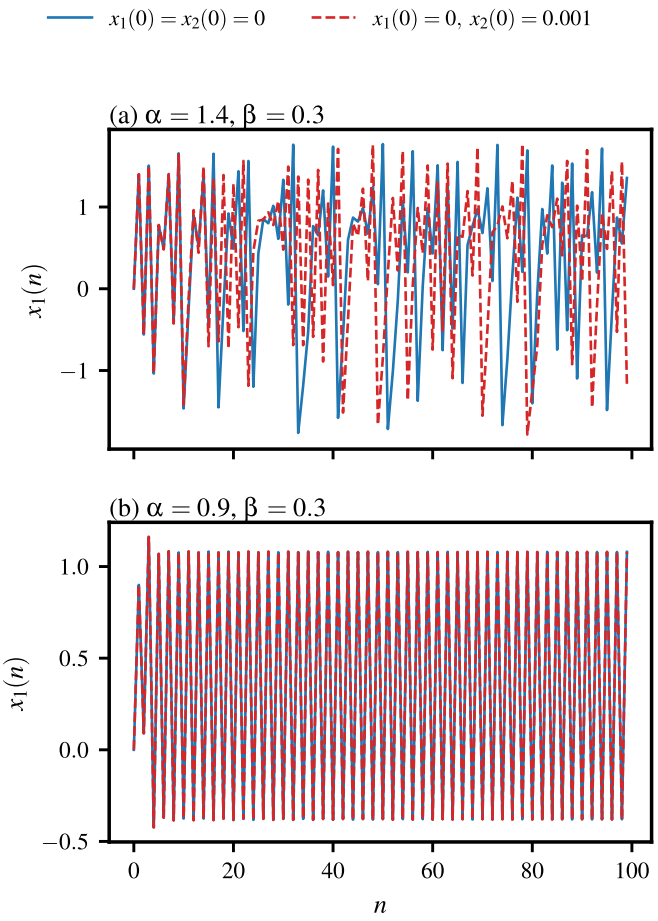


Fig. 1: Segments of $x_1(n)$ obtained from (1) with $x_1(0) = x_2(0) = 0$ (solid blue) and $x_1(0) = 0$, $x_2(0) = 0.001$ (dashed red). (a) $\alpha = 1.4$, $\beta = 0.3$: chaotic signal. (b) $\alpha = 0.9$, $\beta = 0.3$: periodic signal (period 2).

a complete state of the system. These samples are therefore stored as auxiliary state variables $x_4, \ldots, x_{N_s}$, each holding a one-step delay of the preceding one. For $N_s \geq 3$, the resulting expanded system is [14], [17]

$$\begin{cases} x_1(n+1) = \alpha - x_3^2(n) + \beta\, x_2(n), \\ x_2(n+1) = x_1(n), \\ x_3(n+1) = c_0\big(\alpha - x_3^2(n) + \beta\, x_2(n)\big) + c_1\, x_1(n) \\ \qquad\qquad + c_2\, x_2(n) + c_3\, x_4(n) + \cdots + c_{N_s-1}\, x_{N_s}(n), \\ x_4(n+1) = x_2(n), \\ x_j(n+1) = x_{j-1}(n), \quad j = 5, \ldots, N_s, \end{cases} \tag{4}$$

whose dimension is $K = N_s$; for $N_s = 3$, the terms in $x_4, \ldots, x_{N_s}$ are absent. For $N_s \leq 2$, the filter output $x_3(n) = c_0 x_1(n) + c_1 x_2(n)$ (with $c_1 = 0$ for $N_s = 1$) is a function of the current state, so no auxiliary variable is needed and the system keeps dimension $K = 2$:

$$\begin{cases} x_1(n+1) = \alpha - \big(c_0 x_1(n) + c_1 x_2(n)\big)^2 + \beta\, x_2(n), \\ x_2(n+1) = x_1(n). \end{cases} \tag{5}$$

For $N_s = 1$ and $c_0 = 1$, the filter is the identity and the original map (1) is recovered. Equations (4) and (5) are the forms implemented in the package [24].

As for (1), the fixed points of (4) are the solutions of $\mathbf{x}^\star = \mathbf{F}(\mathbf{x}^\star)$, where $\mathbf{F}$ now denotes the right-hand side of (4). At a fixed point all delayed samples are equal, $x_1 = x_2 = x_4 = \cdots = x_{N_s} = p$, and $x_3 = Gp$, which gives $G^2 p^2 + (1-\beta)p - \alpha = 0$ [14], [15]. Its positive root is written here as

$$p^+ = \frac{2\alpha}{(1-\beta) + \sqrt{(1-\beta)^2 + 4\alpha G^2}}, \tag{6}$$

which is algebraically equal to the usual form $\big[-(1-\beta) + \sqrt{(1-\beta)^2 + 4\alpha G^2}\big]/(2G^2)$ but avoids the cancellation of that form when $G \to 0$, as in highpass and bandpass filters, for which (6) tends to $\alpha/(1-\beta)$. The positive fixed point is $\mathbf{p}^+ = [p^+ \;\; p^+ \;\; Gp^+ \;\; p^+ \cdots p^+]^T$ (or $[p^+ \;\; p^+]^T$ for $N_s \leq 2$); it depends on the filter only through its DC gain G and is used to initialize the simulations (Section III-B).

C. Largest Lyapunov Exponent

The sensitivity of a system to its initial conditions can be quantified by how fast two very close states move apart as they evolve. Lyapunov proposed measuring this separation under the assumption that it grows exponentially, so that the Lyapunov exponent is the natural logarithm of the average rate at which two nearby orbits separate [1], [17]. An exponent equal to $\ln 2$ along a given direction, for instance, means that the distance between the orbits doubles, on average, at each iteration in that direction, whereas a negative exponent means that the orbits approach each other. The SDIC of a chaotic signal is therefore measured by the Lyapunov exponent: a computationally generated signal that is bounded, aperiodic, and has at least one positive Lyapunov exponent is chaotic [1].

A map of dimension K has K Lyapunov exponents, one for each direction of the state space, denoted in decreasing order by $\lambda_1 \geq \lambda_2 \geq \cdots \geq \lambda_K$. They are computed from the *Jacobian matrix* $\mathbf{J}(n)$, the $K \times K$ matrix of partial derivatives $[\mathbf{J}(n)]_{ik} = \partial F_i / \partial x_k$ evaluated at $\mathbf{x}(n)$, which describes how a small perturbation of the state is transformed in one iteration [1]. For the expanded system (4), it is [14], [17]

$$\mathbf{J}(n) = \begin{pmatrix} 0 & \beta & -2x_3(n) & 0 & \cdots & 0 \\ 1 & 0 & 0 & 0 & \cdots & 0 \\ c_1 & c_0\beta + c_2 & -2c_0 x_3(n) & c_3 & \cdots & c_{N_s-1} \\ 0 & 1 & 0 & 0 & \cdots & 0 \\ \vdots & & & \ddots & & \vdots \\ 0 & \cdots & 0 & 0 & 1 & 0 \end{pmatrix}, \tag{7}$$

in which only the third row depends on the filter coefficients; for $N_s \leq 2$, $\mathbf{J}(n)$ is the 2×2 Jacobian of (5). For the map (1), $\det \mathbf{J}(n) = -\beta$ for every n, so its two exponents satisfy $\lambda_1 + \lambda_2 = \ln|\beta|$ [1], an identity used in Section IV-A to validate the implementation.

The exponents are computed by the tangent-map method [1], [17]. A hypersphere of unit radius centered at $\mathbf{x}(0)$ is represented by a matrix $\mathbf{U}$ whose columns are its orthogonal axes. Each iteration of the map turns the

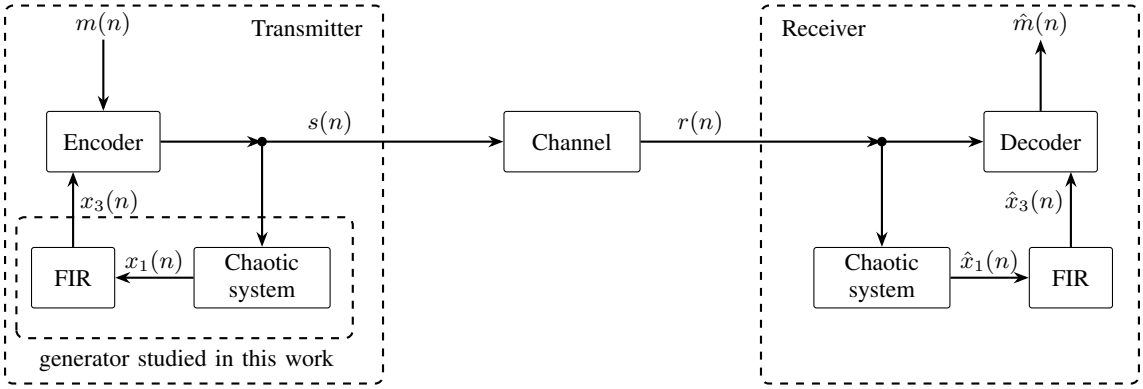


Fig. 2: Chaos-based communication system with the same FIR filter in the feedback loop of the transmitter and of the receiver. The encoder computes $s(n) = x_3(n) + \mu m(n)$, which also drives the chaotic system; the decoder computes $\hat{m}(n) = (r(n) - \hat{x}_3(n))/\mu$. The dashed block is the generator studied in this work (Fig. 3).

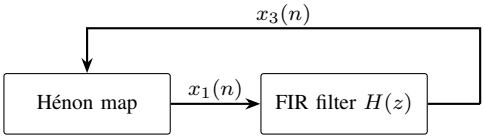


Fig. 3: Generator studied in this work: the dashed block of Fig. 2 without message ($\mu = 0$), described by (4).

hypersphere into an ellipsoid, and after n iterations the axes of the ellipsoid are the columns of $\mathbf{J}(n-1)\cdots\mathbf{J}(1)\mathbf{J}(0)\mathbf{U}$. Computing the lengths of these axes directly is numerically inadequate, because directions that are stretched and directions that are compressed produce very large and very small numbers. Instead, the growth of each axis is computed at every iteration, and the axes are orthonormalized again before the next one, in the following steps [1]:

1) Choose an orthonormal basis $\{\mathbf{w}_1(0), \ldots, \mathbf{w}_K(0)\}$ and compute $\mathbf{z}_k(0) = \mathbf{J}(0)\mathbf{w}_k(0)$, $1 \le k \le K$. These vectors are axes of the new ellipsoid, but they are not necessarily orthogonal.
2) Orthogonalize them by the Gram–Schmidt process,
$$\mathbf{y}_k(1) = \mathbf{z}_k(0) - \sum_{i=1}^{k-1} \frac{\mathbf{z}_k(0)\cdot\mathbf{y}_i(1)}{\|\mathbf{y}_i(1)\|^2}\,\mathbf{y}_i(1), \qquad (8)$$
where "$\cdot$" denotes the scalar product.
3) Normalize the vectors, $\mathbf{w}_k(1) = \mathbf{y}_k(1)/\|\mathbf{y}_k(1)\|$, which gives the orthonormal basis for the next iteration.
4) Apply the Jacobian at the next point of the orbit, $\mathbf{z}_k(1) = \mathbf{J}(1)\mathbf{w}_k(1)$, and repeat steps 2 and 3. After n repetitions, the vectors $\mathbf{y}_k(1), \ldots, \mathbf{y}_k(n)$ are available.

The Lyapunov exponent in the k-th direction is then
$$\lambda_k = \lim_{n\to\infty} \frac{\ln\|\mathbf{y}_k(1)\| + \cdots + \ln\|\mathbf{y}_k(n)\|}{n}. \qquad (9)$$

Only the largest exponent, λ_1, is used in this work. For $\alpha = 1.4$ and $\beta = 0.3$, the map (1) has $\lambda_1 \approx 0.42$ [22].

Based on these concepts, each orbit is classified as
$$\begin{cases} \text{divergent}, & \text{if the orbit is unbounded,} \\ \text{chaotic}, & \text{if it is bounded and } \lambda_1 > 0, \\ \text{periodic}, & \text{if it is bounded and } \lambda_1 \le 0, \end{cases} \qquad (10)$$
where the periodic class also includes convergence to a fixed point, because the criterion distinguishes only the presence or absence of chaos and not the period of the limit orbit. The numerical detection of unbounded orbits is described in Section III-C.

TABLE I: FIR Windows Evaluated and Their Peak Side-Lobe Levels

Window	Side lobe (dB)	Characteristic
Rectangular (boxcar)	-13	Minimum reference
Bartlett	-27	Triangular
Hann	-32	Raised cosine
Hamming	-43	Standard reference
Blackman	-58	High attenuation
Blackman–Harris	-92	Maximum attenuation
Kaiser (β_K variable)	variable	Parametric

Source: adapted from [25].

D. FIR Design Windows

This subsection describes how the coefficients c_j are obtained and which design windows are compared. The coefficients are obtained by the window method [23], [25]: the impulse response of the ideal filter, which is infinitely long, is conveniently delayed and truncated by a window of N_s samples. The shape of the window sets a trade-off between the stopband attenuation and the width of the transition band of the resulting filter: windows with lower side lobes give higher attenuation at the cost of a wider transition band [25].

Seven windows are considered (Table I). The values listed are the peak side-lobe levels of the discrete-time Fourier transform of each window, relative to the main-lobe peak [25]; in the window method, lower side lobes give higher stopband attenuation of the designed filter [23]. The values range from -13 dB for the rectangular window, whose abrupt truncation produces strong side lobes, to -92 dB for the four-term Blackman–Harris window, whose cosine-sum coefficients are chosen to cancel side lobes [25].

The seven windows cover a broad range of this trade-off: the rectangular window as the worst case; the Bartlett and Hann windows as classical intermediate cases; the Hamming

window, adopted as a reference because it was used in the previous works on the filtered Hénon map [11], [17]; and the Blackman and Blackman–Harris windows as high-attenuation cases. They were chosen under the hypothesis that greater spectral attenuation favors the preservation of chaos by reducing side-lobe leakage into the rejected band. The Kaiser window [20] has a shape parameter $\beta_K \geq 0$ that varies the trade-off continuously without changing the filter order: for $\beta_K = 0$ it is the rectangular window, and for $\beta_K \in [2, 14]$ its peak side-lobe level, computed here for a window of 101 samples, goes from about -19 dB to -106 dB, a range that contains the side-lobe levels of the Bartlett, Hann, Hamming, Blackman, and Blackman–Harris windows in Table I. The sweep of β_K therefore provides a continuous path between the fixed windows.

E. Synchronization Versus Chaos: Motivation

This subsection explains why a filter in the feedback loop is needed in coherent CBCS and why its presence makes the verification of chaos necessary. It is a motivation for the study: the sweeps of Sections III and IV do not transmit any message.

In a coherent CBCS of the master–slave type [5] (Fig. 2), let $\mathbf{x}(n)$ denote the state of the transmitter (master) and $\hat{\mathbf{x}}(n)$ that of the receiver (slave), and let $\mathbf{e}(n) \triangleq \hat{\mathbf{x}}(n) - \mathbf{x}(n)$ be the synchronization error. When the nonlinearity acts on a single scalar signal extracted from the state, as $x_1(n)$ in (1), the error obeys the linear recursion

$$\mathbf{e}(n+1) = \mathbf{A}\,\mathbf{e}(n), \tag{11}$$

where $\mathbf{A}$ is the synchronization matrix. Synchronization is attained when every eigenvalue γ_k of $\mathbf{A}$ lies strictly inside the unit circle, $|\gamma_k| < 1$ [15]. Over an ideal, distortion-free channel, this condition is enough for the receiver to track the transmitter and for the message to be recovered after an initial transient.

Real channels, however, have a finite passband and act as filters that reshape the spectrum of the transmitted signal [9]. Because chaotic carriers spread their energy continuously over a wide band [2], even a moderate truncation of the spectrum makes the slave evolve under a different effective nonlinearity, so the synchronization error no longer vanishes and the recovered message no longer follows the original one [15]. Confining the transmitted spectrum to the channel passband before transmission is therefore a precondition for coherent detection over band-limited channels [10], [11].

Figs. 4 and 5 illustrate this argument. In both, the message encodes the ASCII text "hello" (8 bits per character, $+1$ for bit 1 and -1 for bit 0), each bit is held for 20 samples, and the block is repeated to fill $N = 10^6$ samples. The mean squared error between $m[n]$ and $\hat{m}[n]$ excludes the first 200 samples, which contain the synchronization transient, and the bit error rate (BER) decides each bit by the sign of the mean of $\hat{m}[n]$ over its 20 samples. Over the ideal channel (Fig. 4), the received signal is a copy of the transmitted one, the recovered spectrum $\hat{\mathcal{M}}(\omega)$ follows the message spectrum $\mathcal{M}(\omega)$, and the mean squared error is 8.7×10^{-31}, that is, machine precision.

In Fig. 5, the channel is a 201-tap linear-phase lowpass FIR filter designed with the Hamming window and cutoff $0.99\,\pi$, whose group delay of 100 samples is compensated in the metrics. Even this channel, which removes only the highest frequencies, prevents synchronization when the generator is the map (1) without a filter in the loop (Fig. 5(a)): the BER is 0.4324. When the generator has an FIR filter in the loop (9 coefficients, $N_z = 8$, $\omega_c = 0.52\,\pi$, Hamming window), a chaotic generator with $\lambda_1 \approx 0.079$, and the transmitted carrier is the filtered variable x_3, the same channel gives a BER of 0 and a mean squared error of 1.9×10^{-5} (Fig. 5(b)). These numbers refer only to this configuration and are reported as motivation.

When the same FIR filter is inserted in the feedback loop of the master and of the slave, the synchronization condition remains valid for any choice of coefficients [11], [15]. This result concerns only the linear stability of the error recursion (11), however, and says nothing about whether the master's own orbit remains chaotic once the same coefficients enter the nonlinear dynamics (4) and its Jacobian (7). Synchronization and chaotic behavior are thus independent requirements: the former is guaranteed by construction, whereas the latter is not, as shown numerically in [14], [16], [17]. A frequency response $H(e^{j\omega})$ that fits the channel passband does not ensure, by itself, that the filtered generator remains chaotic. The dynamics of each design must be verified, which is the purpose of the methodology described next.

III. METHODOLOGY

The research adopts a quantitative-experimental approach: for each filter design, the expanded system (4) is simulated, λ_1 is estimated, and each grid point is classified by (10). All the tools were implemented in the open-source Python package `chaotic_pfc` (BSD-3-Clause license) [24].

A. Filter Types and Parameter Grid

Four filter types are designed with the seven windows of Table I by the routine `firwin` of the SciPy library [26]. For lowpass and highpass filters, ω_c is the cutoff frequency; for bandpass and bandstop filters, it is the center of a band of fixed total width $\Delta\omega = 0.05\,\pi$, placed symmetrically around ω_c. Near the ends of the grid, the band edges are clipped to the interval $(0, 1)$ of ω/π, so the band is narrower and asymmetric for the cutoff values closest to 0 and to 1. On the normalized axis $\omega/\pi \in (0, 1)$, this width is 5% of the range and spans about five steps of the cutoff grid, so the band is narrow enough to keep the filter frequency-selective and wide enough to be resolved by the sweep at every ω_c. Fixing $\Delta\omega$ also isolates the effect of ω_c; the width is left as a variable for future work (Section V).

Because it is the frequency response, and not the individual coefficients, that must be matched to the channel (Section II-E), the sweep variables are the filter order N_z and the cutoff frequency ω_c. For lowpass and bandpass filters, $N_z \in \{1, 2, \ldots, 40\}$ and 100 values of ω_c/π linearly spaced in the open interval $(0, 1)$ are swept, giving $4{,}000$ grid points per window–filter configuration. For highpass and bandstop filters, the parity restriction of the window method requires even N_z [23], because a filter with an odd order has a forced

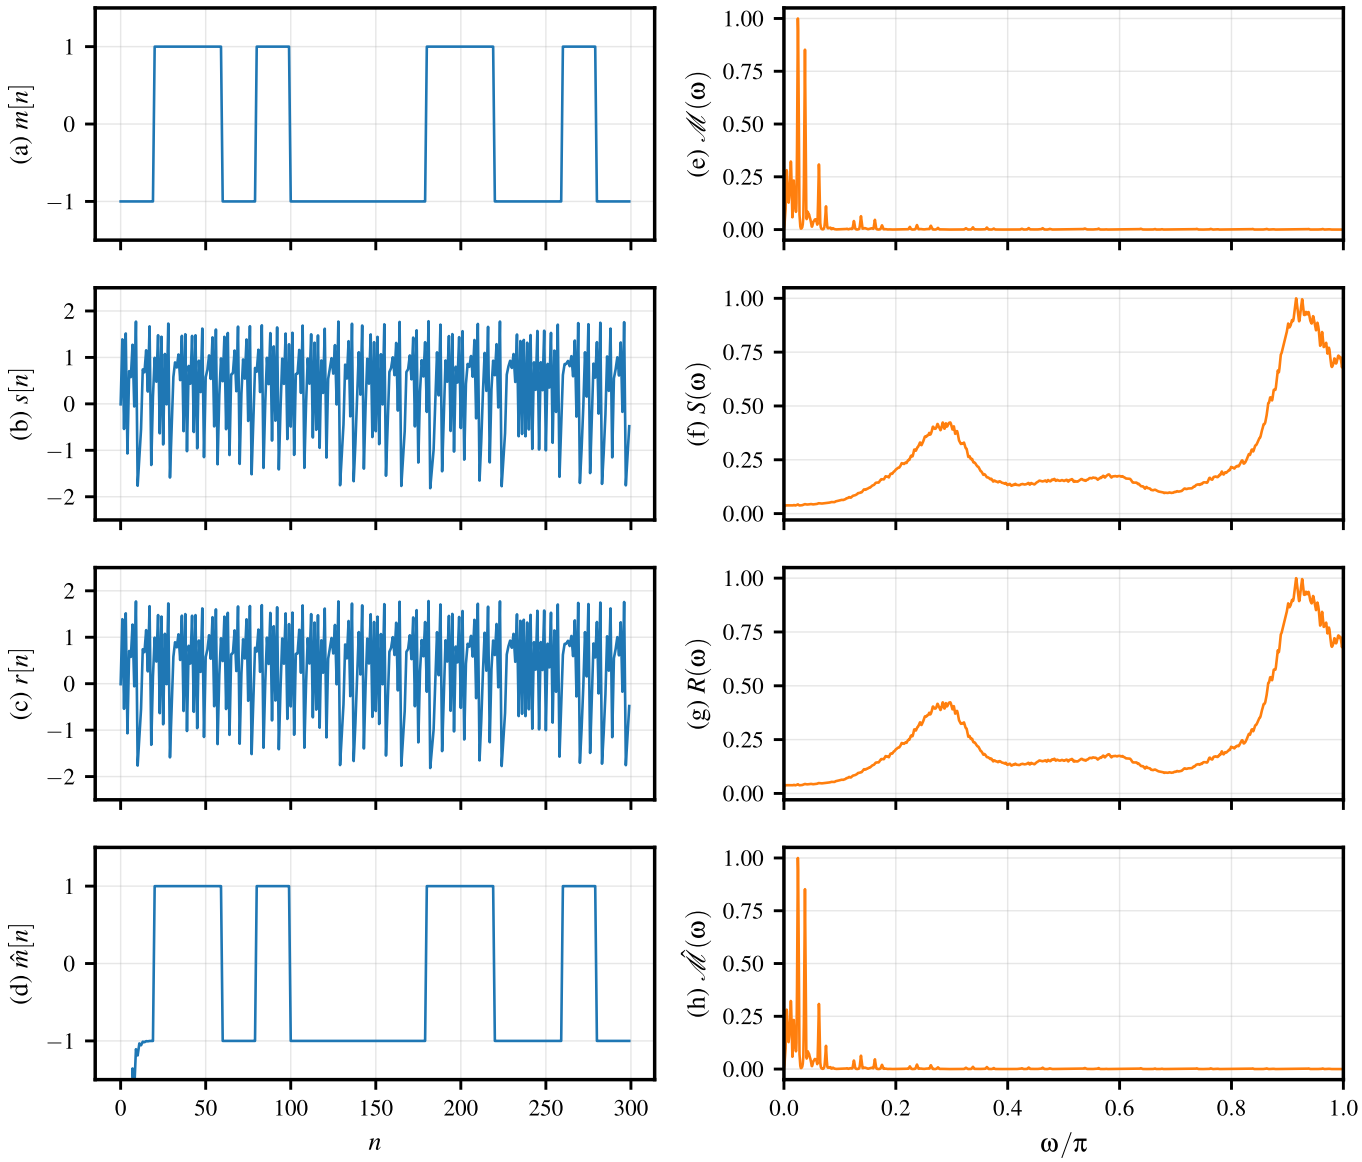


Fig. 4: Illustration used as motivation: ideal-channel communication over $N = 10^6$ samples with the generator (1), a ± 1 non-return-to-zero (NRZ) binary phase-shift keying (BPSK) message (ASCII text "hello", bit period of 20 samples), and transmitted signal $s[n] = x_1[n] + \mu\, m[n]$ with modulation depth $\mu = 0.01$: message $m[n]$, transmitted $s[n]$, received $r[n]$, and recovered $\hat{m}[n]$ (left, time domain) with their normalized Welch power spectral densities (PSDs) (right). The channel is ideal (identity, zero delay); the initial transient of $\hat{m}[n]$ is the synchronization of the slave.

zero at $\omega = \pi$, which a passband that includes $\omega = \pi$ does not allow; thus $N_z \in \{2, 4, \ldots, 40\}$, with 2,000 points per configuration. The six fixed windows give $4 \times 6 = 24$ configurations, and the Kaiser window is swept over 25 values of $\beta_K \in [2.0, 14.0]$, with step 0.5, for the four filter types, adding 100 configurations, for a total of 124 sweeps and 372,000 grid points. For the Hann and Bartlett windows with lowpass and bandpass filters, `firwin` returns non-finite coefficients for $N_z = 1$, because the symmetric two-sample windows are zero; these 100 points per configuration are classified as divergent because of the filter design, not of the map dynamics.

B. Lyapunov Estimator and Initial Conditions

Computing all K exponents by the method of Section II-C costs $\mathcal{O}(K^3)$ operations per iteration, dominated by the Gram–Schmidt orthogonalization. As in [14], λ_1 is taken as the largest of the K finite-time exponents. To reduce the cost, the sweeps first propagate a single tangent vector, multiplied by $\mathbf{J}(n)$ at each iteration and renormalized once every ten iterations, which costs $\mathcal{O}(K)$ per iteration (Algorithm 1); the formulation follows Wolf *et al.* [27], and the renormalization period follows Benettin *et al.* [28], [29]. Grid points whose mean estimate satisfies $|\lambda_1| < 5 \times 10^{-3}$ are recomputed with the full spectrum, using the modified Gram–Schmidt algorithm; 34,141 of the 372,000 grid points (9.18%) were

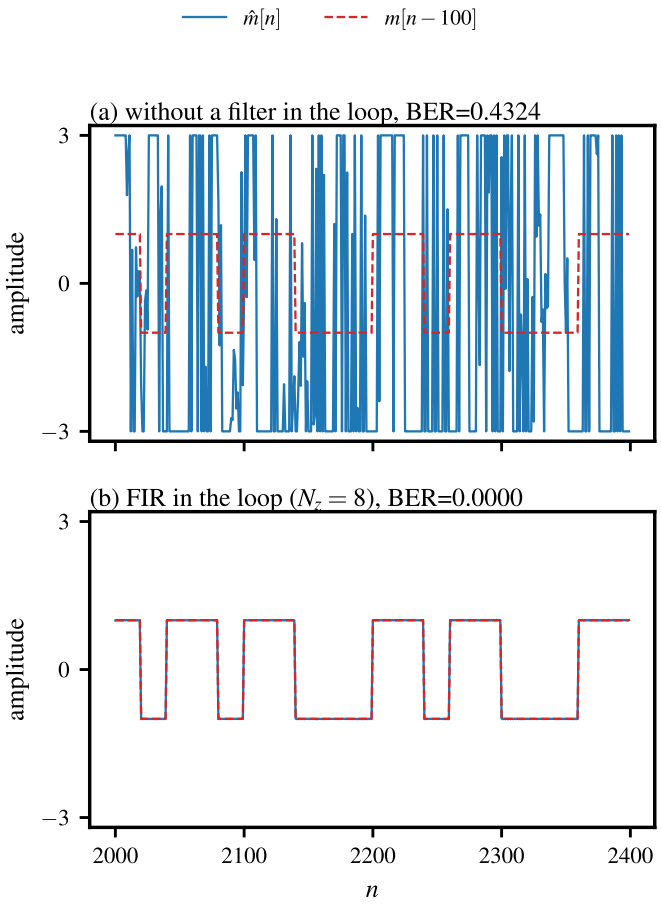


Fig. 5: Illustration used as motivation: recovered message $\hat{m}[n]$ (clipped to ± 3) and delayed message $m[n-100]$ over a lowpass FIR channel (201 taps, Hamming window, cutoff $0.99\,\pi$). (a) Generator (1) without a filter in the loop, BER $= 0.4324$. (b) Generator with an FIR filter in the loop ($N_z = 8$, $\omega_c = 0.52\,\pi$, Hamming window), BER $= 0$.

recomputed.

Accumulation stops early when the estimate of λ_1 varies less than the tolerance $\varepsilon = 10^{-3}$ in two consecutive checks, made every 100 iterations after the 500th. Requiring two checks avoids premature stops in windows of chaotic intermittency, in which λ_1 oscillates for hundreds of iterations before stabilizing.

For each grid point (N_z, ω_c), $N_{\text{IC}} = 25$ initial conditions are drawn near the positive fixed point $\mathbf{p}^+$ of the expanded system (Section II-B): each component is $p_k^+ + 0.1\,U$, with U uniformly distributed in $[0, 1)$. For each initial condition, $N_{\text{burn}} = 500$ iterations are discarded as transient, and λ_1 is accumulated for at most $N_{\text{map}} = 3{,}000$ iterations. The value assigned to the grid point is the mean of λ_1 over the initial conditions.

The value $N_{\text{burn}} = 500$ is much longer than the transients of the unfiltered map and accommodates longer transients near bifurcation boundaries. The value N_{map} acts as a cap: with early stopping, the median number of accumulated iterations per configuration lies between about 700 and 1,200, with a floor of 700, and the mean horizon reaches the cap at only 2 of the 372,000 grid points. In all experiments, $\alpha = 1.4$, $\beta = 0.3$, and the seed of the pseudo-random generator is 42.

Algorithm 1 Single-vector estimation of λ_1 with periodic renormalization.

Input: initial condition $\mathbf{x}_0$; burn-in iterations N_{burn}; accumulation cap N_{map}; tolerance ε.
$\mathbf{w} \leftarrow [1\ 0\ \cdots\ 0]^T$; $s \leftarrow 0$; $\mathbf{x} \leftarrow \mathbf{x}_0$.
for $i = 1$ **to** N_{burn} **do**
  $\mathbf{x} \leftarrow \mathbf{F}(\mathbf{x})$ (discard transient)
  if $\mathbf{x}$ is non-finite **then**
    return DIVERGENT (grid point)
  end if
end for
for $i = 1$ **to** N_{map} **do**
  $\mathbf{w} \leftarrow \mathbf{J}(\mathbf{x})\,\mathbf{w}$ (tangent-vector evolution at the current state)
  $\mathbf{x} \leftarrow \mathbf{F}(\mathbf{x})$ (orbit evolution)
  if $\mathbf{x}$ is non-finite **then**
    return NaN (divergent orbit)
  end if
  if i is a multiple of 10 **then**
    $r \leftarrow \|\mathbf{w}\|$; $s \leftarrow s + \ln\max(r, 10^{-300})$; if $r > 10^{-300}$ then $\mathbf{w} \leftarrow \mathbf{w}/r$
    every 100 iterations with $i \geq 500$: stop if s/i varied less than ε in two consecutive checks
  end if
end for
return $\lambda_1 = s/i$

C. Classification and Chaotic-Coverage Metrics

Each grid point is classified by (10). Numerically, an orbit is taken as unbounded when its state becomes non-finite (NaN or infinity); from that iteration on, every term of (9) is non-finite, so the simulation can be stopped. The divergence rule has three steps. First, the estimator returns a non-finite value for an initial condition as soon as its state becomes non-finite. Second, a grid point is divergent when at least one of its 25 initial conditions becomes non-finite during the burn-in. Third, an initial condition that becomes non-finite only after the burn-in is discarded, and the value of the grid point is the mean of λ_1 over the remaining initial conditions. This step differs from [14], in which a grid point is divergent when any of its initial conditions becomes non-finite. Points with non-finite filter coefficients (Section III-A) are also divergent.

Let N_{grid} be the number of grid points of a configuration, N_b the number of bounded (chaotic or periodic) points, and N_c the number of chaotic points. The *conditional* fraction $\rho_c^{\text{fin}} = N_c/N_b$ is the share of chaotic points among the bounded ones; it measures the tendency to chaos once divergence is excluded and is relevant when N_z and ω_c can be adjusted to reach a non-divergent operating point. The *absolute* fraction $\rho_c^{\text{abs}} = N_c/N_{\text{grid}}$ is the share of the whole design space that yields a chaotic generator and is relevant when a broad operating range is sought. Using fractions also makes the comparison

TABLE II: Configurations of Largest N_c per Filter Type, With Mean, Standard Deviation, and Confidence Interval of λ_1 Over the Chaotic Points

Filter	**Window**	N_c	ρ_c^{fin}	ρ_c^{abs}	$\bar{\lambda}_1$	σ_{λ_1}	95% CI of $\bar{\lambda}_1$
Lowpass	Kaiser (β_K=13.5)	980	77.6%	24.5%	0.0239	0.0231	[0.0223, 0.0254]
	Blackman–Harris	961	74.8%	24.0%	0.0211	0.0232	[0.0197, 0.0227]
Highpass	Kaiser (β_K=11.5)	149	8.1%	7.5%	0.0177	0.0262	[0.0137, 0.0219]
	Blackman–Harris	144	7.9%	7.2%	0.0190	0.0270	[0.0151, 0.0237]
Bandpass	Kaiser (β_K=13.5)	434	13.0%	10.9%	0.0286	0.0298	[0.0257, 0.0315]
	Blackman–Harris	416	12.2%	10.4%	0.0257	0.0297	[0.0232, 0.0289]
Bandstop	Rectangular	118	65.2%	5.9%	0.0707	0.0492	[0.0624, 0.0798]
	Kaiser (β_K=4.0)	60	40.0%	3.0%	0.0725	0.0329	[0.0624, 0.0797]

95% confidence intervals obtained by bootstrap [30]. Full per-configuration tables are regenerated from the versioned sweep files by the released package [24].

between filter types independent of their different grid sizes (Section III-A).

D. Statistical Treatment

Two levels are kept separate. At the *point* level, the value of λ_1 of each grid point is the mean over its N_{IC} initial conditions, and the dispersion over the ensemble is stored as metadata. At the *regional* level, the chaotic region of each configuration is summarized by the mean $\bar{\lambda}_1$ and the standard deviation σ_{λ_1} of λ_1 over its N_c chaotic points; thus σ_{λ_1} measures how homogeneous λ_1 is across the chaotic region, not the estimation noise at one point. A 95% confidence interval (CI) for $\bar{\lambda}_1$ is obtained by nonparametric bootstrap [30] with $1{,}000$ resamples and seed 42. These regional statistics are the ones reported in Tables II and III. Because the chaotic points are selected by $\lambda_1 > 0$, this interval is positive by construction, and because neighboring grid points are correlated, the i.i.d. bootstrap underestimates the uncertainty; the interval is therefore used only to describe dispersion. The robustness of the classification is assessed by three other checks: the fraction of chaotic points whose ensemble mean of λ_1 exceeds two standard errors, $2\sigma_{\text{IC}}/\sqrt{N_{\text{IC}}}$, where σ_{IC} is the standard deviation of λ_1 over the initial conditions of the point; the sensitivity of N_c to the classification threshold (0, 10^{-3}, and 5×10^{-3}); and the repetition of the configurations of Table II with ten seeds of the initial-condition generator (1 to 9 and 42).

E. Computational Architecture and Reproducibility

Reliable estimates of λ_1 require long simulations and an ensemble of initial conditions [27], and each sweep has thousands of grid points: a 40×100 grid with 25 initial conditions requires 10^5 runs of the estimator. For the full-spectrum recomputation, the cost per grid point is $\mathcal{O}(N_{\text{IC}}\cdot N_{\text{map}}\cdot K^3)$, which for $N_z = 40$ ($K = 41$) approaches 5×10^9 floating-point operations. Three decisions make the study tractable. First, the numerical cores are compiled just in time by Numba [31], which translates Python functions into machine code through LLVM and reduced the execution time by one to two orders of magnitude relative to pure Python in the package benchmarks [24]. Second, the grid points are processed in parallel on all processor cores with `prange` loops. Third, each sweep is stored as a compressed NumPy (`.npz`) file, so that figures and tables can be regenerated without repeating the sweeps.

The sweep files, the scripts that generate every figure and table, and the automated tests (including the identity $\lambda_1+\lambda_2 = \ln|\beta|$ and the published values of λ_1 [22], [27]) are versioned in the package repository [24].

IV. Results and Discussion

This section presents the results of the 124 sweeps.

A. Validation of the Estimator

The estimator was first validated on the map (1) without filter ($N_s = 1$, $c_0 = 1$), with $\alpha = 1.4$ and $\beta = 0.3$, for which $\lambda_1 \approx 0.42$ [22], [27]. With the ensemble of Section III-B and early stopping disabled, it gave $\bar{\lambda}_1 = 0.4185$, with a relative error below 10^{-2}, which is enough to separate the classes of (10). The identity $\lambda_1 + \lambda_2 = \ln|\beta|$ (Section II-C) was satisfied within 5.4×10^{-9} (maximum over the 25 initial conditions of the unfiltered map), which confirms the correctness of the estimator independently of the reference value. This validation used the full-spectrum estimator; the sweeps use the single-vector path of Algorithm 1, with early stopping.

B. Configurations With Largest Chaotic Coverage

Table II shows, for each filter type, the configuration that maximizes N_c, considering both the fixed windows and the Kaiser window with the β_K that maximizes N_c. The second configuration in decreasing order of N_c is also shown: a fixed window for lowpass, highpass, and bandpass filters, and the Kaiser window for the bandstop filter, whose first position is the rectangular window.

The Kaiser window has the largest N_c in three of the four filter types, in both ρ_c^{fin} and ρ_c^{abs}. For the highpass filter, however, this difference is small and is not robust to the classification threshold (Section IV-F). Repeating the configurations of Table II with ten seeds gives, as mean $\pm$ standard deviation of N_c, 975.8 ± 2.5 (Kaiser) and 957.6 ± 4.0 (Blackman–Harris) for lowpass, 147.7 ± 1.3 and 142.9 ± 2.1 for highpass, and 435.9 ± 3.5 and 418.7 ± 3.6 for bandpass; the Kaiser configuration has the larger N_c for every seed. For bandstop, the values are 116.6 ± 2.0 (rectangular) and

57.4 ± 2.2 (Kaiser). The ordering in Table II is therefore not a seed effect. The comparison must still be read with caution, because each fixed window is a single configuration, whereas the Kaiser window was evaluated at 25 values of β_K and the best one was selected (Section IV-E). Among the fixed windows, Blackman–Harris is the best for lowpass, highpass, and bandpass filters, which is consistent with its lowest side lobes (-92 dB). Over the six fixed windows ($n = 6$), the Spearman correlation coefficient r_s between the side-lobe attenuation of Table I and N_c, with its exact two-sided permutation p-value over the 720 permutations, is $r_s = +0.83$ ($p = 0.0583$) for lowpass, $+0.77$ ($p = 0.1028$) for highpass, $+1.00$ ($p = 0.0028$) for bandpass, and -0.37 ($p = 0.4972$) for bandstop. The correlation is computed on N_c, not on ρ_c^{fin}, and no correction is applied for the four tests with $n = 6$. It is significant at the 5% level only for the bandpass filter, which remains significant with a Bonferroni correction ($0.05/4 = 0.0125$). With the thresholds of 10^{-3} and 5×10^{-3} of Section IV-F, the coefficient of the lowpass filter rises to $+0.94$ ($p = 0.0167$), significant at the 5% level but not after the Bonferroni correction. For lowpass filters designed with the Hamming and Blackman windows, Borges and Eisencraft [17] observed similar curves of λ_1 versus cutoff frequency and concluded that the window seemed to have little influence on the generation of chaos. In the present sweep, in contrast, the Blackman window gives 801 chaotic points and the Hamming window 451 (Table III). The two studies differ in the grid of orders and cutoff frequencies, in the ensemble of initial conditions (10 drawn in $[0, 1]$ in [17], 25 drawn near $\mathbf{p}^+$ here), and in the comparison criterion (curves of λ_1 there, counts of chaotic points here).

The bandstop filter behaves differently: with the rectangular window it reaches $\rho_c^{\text{fin}} = 65.2\%$, the highest conditional fraction among the four filter types for this window (19.5% lowpass, 3.7% bandpass, 1.3% highpass), but its absolute coverage is only $\rho_c^{\text{abs}} = 5.9\%$, because a large share of its grid is divergent at higher orders (Section IV-C). The lowpass filter with the Kaiser window ($\beta_K = 13.5$) reaches the highest absolute coverage among the 124 configurations, $\rho_c^{\text{abs}} = 24.5\%$, about 4.2 times that of the rectangular bandstop filter, or 8.3 times in number of chaotic points (980 against 118).

C. Classification Maps

Fig. 6 shows the classification maps in the $(N_z, \omega_c/\pi)$ plane for the configuration of largest N_c of each filter type, with chaotic points in red, periodic points in blue, and divergent points in gray. In the lowpass map (Fig. 6(a)), chaos lies below a boundary in ω_c/π that decreases with N_z, and the orbits diverge above it. For $N_z = 3$, 5, 6, and 7, chaotic points reach $\omega_c/\pi \geq 0.97$, and for $N_z = 4$, up to 0.78, whereas the largest chaotic cutoff is 0.44 for $N_z = 10$, 0.14 for $N_z = 20$, and 0.06 for $N_z = 40$; for $N_z = 1$ and 2 no point is chaotic. In the highpass map (Fig. 6(b)), chaos concentrates at $\omega_c/\pi \leq 0.26$ for $N_z \geq 6$ and spans $0.38 \leq \omega_c/\pi \leq 1$ only for $N_z = 4$; the largest λ_1, 0.105, occurs at $N_z = 4$ and $\omega_c/\pi \approx 0.38$. At high orders, both the lowpass and the highpass filters have chaos only at low cutoff frequencies; they differ mainly at low orders, where the lowpass filter is chaotic up to $\omega_c/\pi \sim 1$ and the highpass filter spans a wide cutoff range only for $N_z = 4$. The bandpass map (Fig. 6(c)) shows a fragmented chaotic region, more sensitive to ω_c, which is consistent with the narrow band imposed by the filter. In the bandstop map (Fig. 6(d)), chaos appears in isolated bands and divergence dominates the grid: only $N_z = 2$ has no divergent points, and for $N_z = 4$, 8, 12, and 16 the whole row diverges.

The filter types also differ in how the grid is divided among the three classes. Pooling the 124 sweeps, the numbers of chaotic, periodic, and divergent points are: lowpass, 20,916, 17,701, and 85,383 out of 124,000 (68.86% divergent); highpass, 2,900, 54,902, and 4,198 out of 62,000 (6.77%); bandpass, 10,215, 100,990, and 12,795 out of 124,000 (10.32%); and bandstop, 1,601, 3,035, and 57,364 out of 62,000 (92.52%). Chaos is therefore limited mainly by divergence in lowpass and bandstop filters and mainly by periodic orbits in highpass and bandpass filters.


This grouping follows the DC gain G of the filters, which sets the positive fixed point (6). Lowpass and bandstop filters have $G = 1$ at every grid point, whereas highpass and bandpass filters have $G \approx 0$ except at low orders and at cutoffs close to $\omega = 0$, where the designed filter does not remove the DC component. Over the 124 sweeps, 99.9% of the 128,755 grid points with $|G| < 0.1$ are periodic and only 27 are chaotic, and all 2,900 chaotic points of the highpass filter have $|G| \geq 0.1$: a filter that removes the DC component of the fed-back signal almost never sustains chaos. A unit DC gain, in contrast, does not determine the class: the lowpass filter, with $G = 1$ at every point with finite coefficients, has 16.9% chaotic, 14.3% periodic, and 68.8% divergent points, so the order, the cutoff, and the window decide the class once the DC component is preserved.

Aggregated over all its configurations, the bandstop filter has $\rho_c^{\text{fin}} = 34.5\%$ (1,601 of 4,636 bounded points), below the lowpass filter (54.2%) and above the bandpass (9.2%) and highpass (5.0%) filters; the value of 65.2% is specific to the rectangular window. The divergent fraction of 92.52% of the bandstop filter is a result of this study and does not constitute a recommendation for the use of this filter type.


D. Aggregate Chaotic Density

To identify the regions of the $(N_z, \omega_c/\pi)$ plane that are chaotic regardless of the design, the chaotic points of the 124 sweeps were aggregated. Because highpass and bandstop filters have only even N_z, a grid point with even N_z belongs to 124 configurations and one with odd N_z to 62 (lowpass and bandpass only). Fig. 7 therefore shows, at each grid point, the percentage of the configurations containing it in which it is chaotic.


For $N_z \geq 8$, chaos is most frequent at low cutoff frequencies: on average, a grid point is chaotic in 31.3% of the configurations for $\omega_c/\pi \leq 0.1$, in 16.8% for $0.1 < \omega_c/\pi \leq 0.2$, in 5.9% for $0.2 < \omega_c/\pi \leq 0.4$, and in 0.6% above $\omega_c/\pi = 0.4$. For $N_z \leq 7$, the fraction varies less with the cutoff, from 19.8% to 26.8%. The maximum, 80.6%, occurs at $N_z = 3$ and

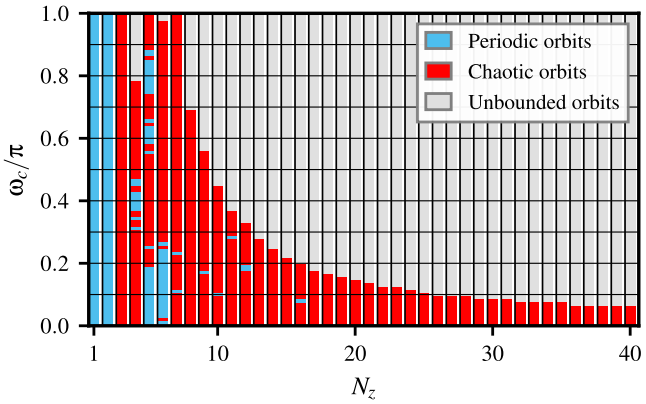


(a) Lowpass filter, Kaiser window ($\beta_K = 13.5$). Chaos lies below a cutoff boundary that decreases with N_z, with divergence above it; periodic islands appear at low orders.

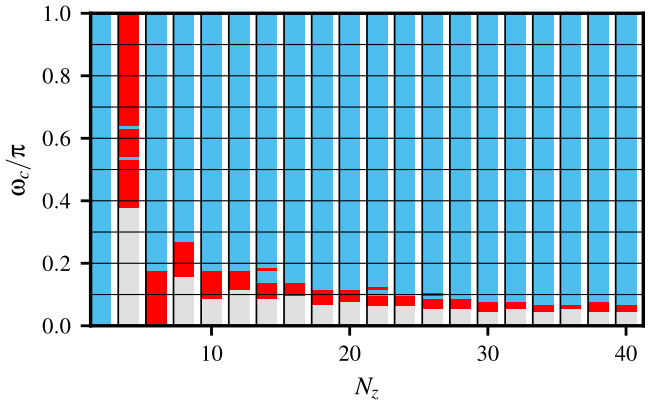

(b) Highpass filter, Kaiser window ($\beta_K = 11.5$). Chaos concentrates at $\omega_c/\pi \leq 0.26$ for $N_z \geq 6$ and spans $0.38 \leq \omega_c/\pi \leq 1$ only for $N_z = 4$ ($\rho_c^{\text{abs}} = 7.5\%$).

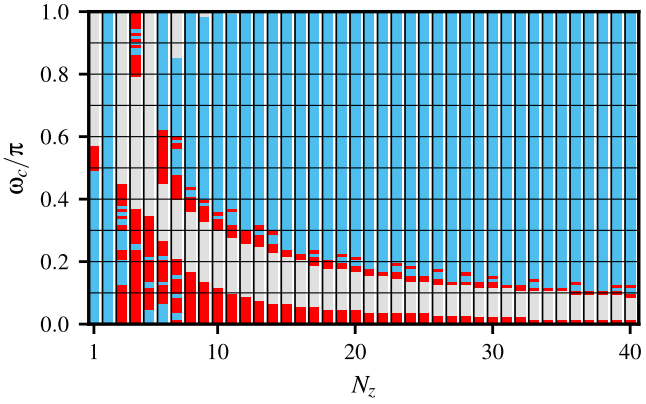

(c) Bandpass filter, Kaiser window ($\beta_K = 13.5$), $\Delta\omega = 0.05\,\pi$. Fragmented chaotic region, more sensitive to ω_c; maximum λ_1 equal to 0.198.

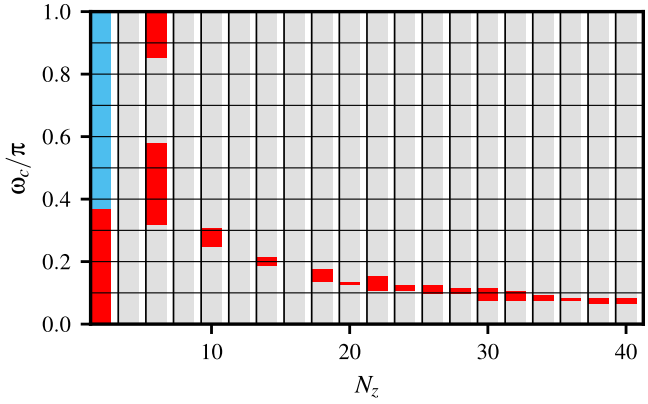

(d) Bandstop filter, rectangular window, $\Delta\omega = 0.05\,\pi$ ($\rho_c^{\text{fin}} = 65.2\%$, $\rho_c^{\text{abs}} = 5.9\%$). Only $N_z = 2$ has no divergent points.

Fig. 6: Classification maps in the $(N_z, \omega_c/\pi)$ plane for the configuration of largest N_c of each filter type: chaotic points in red, periodic in blue, divergent in gray.

$\omega_c/\pi \approx 0.34$ (50 of 62 configurations); among even orders, it occurs at $N_z = 10$ and $\omega_c/\pi \approx 0.11$ (71 of 124, 57.3%). Odd and even orders are not directly comparable, because the odd ones include only the lowpass and bandpass filters, which have more chaotic points; this explains the alternation between neighboring columns in Fig. 7.

The choice of window matters mainly at low and moderate orders. The six fixed windows give the same class (chaotic, periodic, or divergent) at 26.9% of the lowpass grid points with $N_z \leq 10$ and at 89.4% of those with $N_z > 20$; the corresponding values are 48.6% and 87.8% for bandpass, 72.8% and 93.8% for highpass, and 79.4% and 97.4% for bandstop (points with non-finite coefficients count as divergent). This convergence is expected, because the designed filters approach the ideal one as N_z grows [23].

Because the regime boundaries are finely interleaved (Fig. 6), a small change of N_z or ω_c can move a design across a boundary. We therefore suggest, without having measured it here, that the distance from an operating point to the nearest boundary be considered in the design.

E. Effect of the Kaiser Parameter β_K

The values of β_K that maximize N_c (Table II) are 13.5 for lowpass and bandpass filters, 11.5 for highpass, and 4.0 for bandstop. For the first three types, the maximum lies at high β_K, where the side lobes of the window are strongly attenuated [23], which is consistent with the advantage of the Blackman–Harris window among the fixed windows (Section IV-B). Fig. 8 shows ρ_c^{abs} versus β_K. For the lowpass filter, ρ_c^{abs} grows from 7.2% at $\beta_K = 2$ to 23.0% at $\beta_K = 10$ and stays between 23.0% and 24.5% up to $\beta_K = 14$. For the bandpass filter, it grows from 4.0% to values between 10.0% and 10.9% for $\beta_K \geq 10$, and for the highpass filter, from 2.0% to a maximum of 7.5% at $\beta_K = 11.5$, followed by values between 6.4% and 7.0%. For β_K between 12 and 14, N_c of the lowpass filter varies between 957 and 980, and the ten seeds at $\beta_K = 13.5$ alone give values from 973 to 980 (Section IV-B); the β_K of largest N_c in Table II is therefore one value inside a plateau rather than a sharp optimum.

For the bandstop filter, the largest N_c occurs with the rectangular window and, among the Kaiser configurations, at

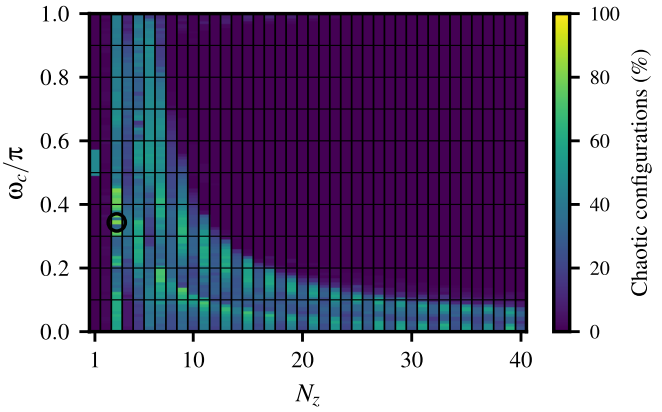


Fig. 7: Aggregate chaotic density over the 124 sweeps: percentage of the configurations containing each grid point in which it is chaotic (124 configurations for even N_z, 62 for odd N_z, which have only lowpass and bandpass filters). The marker (○) indicates the maximum, 80.6% at $N_z = 3$ and $\omega_c/\pi \approx 0.34$.

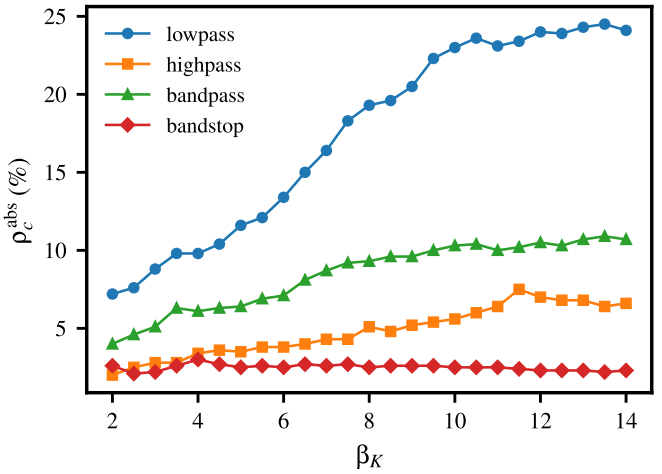


Fig. 8: Absolute chaotic coverage ρ_c^{abs} versus the Kaiser shape parameter β_K for the four filter types.

$\beta_K = 4.0$, but its curve in Fig. 8 is nearly flat, between 2.1% and 3.0%. One hypothesis, not tested here, is that, when the filter removes only a narrow band of the spectrum, preserving most of the spectral energy in the feedback loop matters more than the depth of the stopband attenuation, which would agree with the result of the rectangular window, of lowest attenuation, for this filter type. The effect of β_K is therefore not the same for the four filter types; it depends on the spectral mask imposed.

F. Statistical Confidence and Ranking

The 95% intervals of $\bar{\lambda}_1$ in Tables II and III describe the dispersion of λ_1 over each chaotic region and are positive by construction (Section III-D). The classification itself is supported by two checks. First, 91.8% of the 35,632 chaotic points of the 124 sweeps have an ensemble mean of λ_1 above two standard errors (from 87.9% to 98.3% in the configurations of Table II). Second, N_c depends on the threshold: raising it from 0 to 10^{-3} and to 5×10^{-3} keeps 73.1% and 56.9% of the chaotic points, respectively, so many chaotic points have small positive λ_1 and lie near the chaotic–periodic boundary. The main comparisons are robust to this threshold, but not all of them. With thresholds of 10^{-3} and 5×10^{-3}, the three largest values of N_c remain those of the lowpass filter with the Kaiser window ($\beta_K = 13.5$), Blackman–Harris, and Blackman windows; the Kaiser window keeps the largest N_c for the lowpass and bandpass filters, with $\beta_K = 14.0$ for the bandpass filter at 5×10^{-3}; the rectangular window keeps the largest N_c for the bandstop filter, whose 118 chaotic points all have $\lambda_1 > 5 \times 10^{-3}$; and the Spearman coefficient of the bandpass filter remains +1.00. For the highpass filter, in contrast, the order of the Kaiser and Blackman–Harris windows (149 against 144) is reversed at 10^{-3}, and the β_K of largest N_c moves from 11.5 to 13.0 and 14.0, so their order for this filter type depends on the threshold. Below the first three positions, the ranking of Table III also changes: at 10^{-3}, the bandpass filter with the Kaiser window moves to the fourth position. The dispersion σ_{λ_1} is highest for the rectangular bandstop filter (0.0492), whose fragmented chaotic region mixes low and high values of λ_1, and smaller for the lowpass filter with the Kaiser window (0.0231), whose chaotic region is more homogeneous. Table III ranks the six fixed windows and the best Kaiser window of each filter type by N_c.

The first six positions of Table III are lowpass filters (the first three for all thresholds tested), which confirms this type as the one of largest absolute chaotic coverage, and highpass and bandstop filters occupy mostly the lower half of the table. The bandstop configurations, although low in N_c, have the highest $\bar{\lambda}_1$ (up to 0.0933): when chaotic, their orbits separate faster than those of the lowpass filters. Whether this brings any benefit for communication was not evaluated here.

G. Computational Cost

The 124 sweeps comprise 372,000 grid points. The effective accumulation horizons recorded per grid point add up to about 2×10^8 iterations, that is, about 5×10^9 iterations of the expanded map once the 25 initial conditions of each point are counted. On an 8th-generation Intel Core i7-8550U processor (4 physical cores, 8 threads, 32 GB of RAM), the complete set of sweeps took 498 s, about 8 min, measured end to end.

V. Final Remarks

This work investigated numerically how the filter type and the design window affect the preservation of chaos in the Hénon map with an FIR filter in the feedback loop. Four filter types (lowpass, highpass, bandpass, and bandstop) and seven windows (rectangular, Bartlett, Hamming, Hann, Blackman, Blackman–Harris, and Kaiser, with a sweep of its shape parameter β_K) were combined in 124 sweeps of the order–cutoff plane.

The insertion of the filter can change the generated signals from chaotic to periodic or divergent, depending on the pair (N_z, ω_c). The chaotic regime is not eliminated by filtering,

TABLE III: Ranking of the Window–Filter Combinations (Fixed Windows and Best Kaiser per Filter Type), by N_c

#	Filter	Window	N_c	ρ_c^{fin}	$\bar{\lambda}_1$	95% CI
1	Lowpass	Kaiser (β_K=13.5)	980	77.6%	0.0239	[0.0223, 0.0254]
2	Lowpass	Blackman–Harris	961	74.8%	0.0211	[0.0197, 0.0227]
3	Lowpass	Blackman	801	61.8%	0.0176	[0.0161, 0.0193]
4	Lowpass	Hann	606	51.2%	0.0190	[0.0170, 0.0208]
5	Lowpass	Bartlett	458	41.3%	0.0198	[0.0174, 0.0226]
6	Lowpass	Hamming	451	35.9%	0.0265	[0.0241, 0.0291]
7	Bandpass	Kaiser (β_K=13.5)	434	13.0%	0.0286	[0.0257, 0.0315]
8	Bandpass	Blackman–Harris	416	12.2%	0.0257	[0.0232, 0.0289]
9	Bandpass	Blackman	394	11.1%	0.0253	[0.0220, 0.0291]
10	Bandpass	Hamming	295	7.9%	0.0276	[0.0239, 0.0318]
11	Bandpass	Hann	288	8.0%	0.0266	[0.0230, 0.0309]
12	Bandpass	Bartlett	249	6.9%	0.0293	[0.0254, 0.0338]
13	Lowpass	Rectangular	204	19.5%	0.0354	[0.0314, 0.0396]
14	Highpass	Kaiser (β_K=11.5)	149	8.1%	0.0177	[0.0137, 0.0219]
15	Highpass	Blackman–Harris	144	7.9%	0.0190	[0.0151, 0.0237]
16	Bandpass	Rectangular	141	3.7%	0.0153	[0.0113, 0.0211]
17	Bandstop	Rectangular	118	65.2%	0.0707	[0.0624, 0.0798]
18	Highpass	Blackman	97	5.2%	0.0215	[0.0169, 0.0277]
19	Highpass	Bartlett	86	4.6%	0.0236	[0.0185, 0.0300]
20	Highpass	Hann	79	4.2%	0.0233	[0.0173, 0.0310]
21	Highpass	Hamming	72	3.8%	0.0233	[0.0174, 0.0299]
22	Bandstop	Kaiser (β_K=4.0)	60	40.0%	0.0725	[0.0624, 0.0797]
23	Bandstop	Hamming	55	35.5%	0.0870	[0.0850, 0.0888]
24	Bandstop	Hann	51	33.8%	0.0879	[0.0861, 0.0897]
25	Bandstop	Blackman	50	33.3%	0.0888	[0.0865, 0.0911]
26	Bandstop	Blackman–Harris	48	32.4%	0.0933	[0.0914, 0.0949]
27	Bandstop	Bartlett	42	29.6%	0.0890	[0.0872, 0.0906]
28	Highpass	Rectangular	25	1.3%	0.0268	[0.0170, 0.0396]

95% intervals obtained by bootstrap [30]. Full per-configuration tables are regenerated from the versioned sweep files by the released package [24].

but reorganized into regions of the parameter space whose shape depends on the filter type and the window. For lowpass and bandpass filters, windows of high attenuation (Kaiser with high β_K and Blackman–Harris) give the largest chaotic coverage, with $\rho_c^{\text{abs}} = 24.5\%$ for the lowpass filter with the Kaiser window, the highest among all configurations. For the bandstop filter, the rectangular window gives the highest conditional coverage among its configurations ($\rho_c^{\text{fin}} = 65.2\%$), although its absolute coverage is only 5.9%. The divergent fraction of the grid ranges from 6.77% (highpass) and 10.32% (bandpass) to 68.86% (lowpass) and 92.52% (bandstop). For $N_z \geq 8$, chaos is most frequent at low cutoff frequencies ($\omega_c/\pi \leq 0.1$), and the choice of window matters mainly at low and moderate orders.

The work makes three contributions. First, it extends the previous studies of the filtered Hénon map [14], [16], [17], in which the filters designed by windowing were lowpass filters with the Hamming or the Blackman window, to four filter types and seven design windows, with classification maps that show where chaos is preserved in each case. Second, it assesses the robustness of the classification with the ensemble standard error of λ_1, the sensitivity of N_c to the classification threshold, and repeated runs with ten seeds, which extend the point estimates reported in those studies. Third, it releases an open-source package [24] with which all the maps and tables can be reproduced and the study extended.

Taken together, the results show that the joint choice of filter type and design window is an important design factor of the filtered Hénon generator, especially at low and moderate orders, where the six fixed windows disagree on the class of 73.1% of the lowpass grid points with $N_z \leq 10$. Because of the finely interleaved regime boundaries, the design of a filtered generator for CBCS cannot start from the spectral specification of the filter alone: the dynamics of the resulting generator must be verified explicitly, for example with classification maps such as the ones presented here.

The study has limitations. It covers the filter order, the cutoff frequency, the filter type, and the design window; other dimensions of the parameter space were not swept. The sweeps are limited to $N_z \leq 40$ and $N_{\text{map}} \leq 3{,}000$ iterations, and higher orders or longer horizons could reveal other structures. The band width $\Delta\omega = 0.05\,\pi$ of the bandpass and bandstop filters was fixed, and its variation may change the conclusions for these two types. The map parameters $(\alpha, \beta) = (1.4, 0.3)$ were not swept, and other pairs of the parameter space of the Hénon map [18] may behave differently under filtering. The value of a grid point is the mean of λ_1 over its initial conditions, so coexisting attractors, some chaotic and some periodic, are merged into a single class. Finally, initial conditions that diverge after the burn-in are excluded from the mean of λ_1, which is therefore estimated over the surviving initial conditions.

Three directions are proposed for future work: (a) sweeping the band width $\Delta\omega$ as an independent variable for bandpass and bandstop filters, to identify transitions not captured in this study; (b) extending the methodology to infinite impulse response (IIR) filters, whose dynamic behavior is still little explored in the literature [19], with explicit treatment of the stability of the filter itself; and (c) measuring the occupied bandwidth, the spectral leakage, and the in-band power of the chaotic configurations identified, as metrics complementary to λ_1 for the choice of operating points in CBCS.

REFERENCES

[1] K. T. Alligood, T. D. Sauer, and J. A. Yorke, *Chaos: An Introduction to Dynamical Systems*, ser. Textbooks in Mathematical Sciences. New York, NY, USA: Springer-Verlag New York, 1996.

[2] M. S. Baptista, "Chaos for communication," *Nonlinear Dynamics*, vol. 105, no. 2, pp. 1821–1841, 2021.

[3] A. Mukherjee, S. A. A. Fakoorian, J. Huang, and A. L. Swindlehurst, "Principles of physical layer security in multiuser wireless networks: A survey," *IEEE Communications Surveys & Tutorials*, vol. 16, no. 3, pp. 1550–1573, 2014.

[4] G. Kaddoum, "Wireless chaos-based communication systems: A comprehensive survey," *IEEE Access*, vol. 4, pp. 2621–2648, 2016.

[5] L. M. Pecora and T. L. Carroll, "Synchronization in chaotic systems," *Physical Review Letters*, vol. 64, no. 8, pp. 821–824, 1990.

[6] E. G. Sabatini, M. T. M. Silva, and M. Eisencraft, "Codificação de imagens usando sinais caóticos," in *Anais do XXXVIII Simpósio Brasileiro de Telecomunicações e Processamento de Sinais (SBrT)*, 2020.

[7] C. E. C. Souza, D. P. B. Chaves, and C. Pimentel, "Digital communication systems based on three-dimensional chaotic attractors," *IEEE Access*, vol. 7, pp. 10 523–10 532, 2019.

[8] R. V. Silva, D. P. B. Chaves, C. Pimentel, and M. S. Baptista, "Uma nova malha de travamento de fase aplicada a sistemas de comunicação baseados em atratores caóticos," in *Anais do XLIII Simpósio Brasileiro de Telecomunicações e Processamento de Sinais (SBrT)*, Natal, RN, Brazil, 2025.

[9] M. Eisencraft, R. D. Fanganiello, and L. H. A. Monteiro, "Chaotic synchronization in discrete-time systems connected by bandlimited channels," *IEEE Communications Letters*, vol. 15, no. 6, pp. 671–673, 2011.

[10] M. Eisencraft, R. D. Fanganiello, and L. A. Baccalá, "Synchronization of discrete-time chaotic systems in bandlimited channels," *Mathematical Problems in Engineering*, vol. 2009, pp. 1–12, 2009.

[11] R. T. Fontes and M. Eisencraft, "A digital bandlimited chaos-based communication system," *Communications in Nonlinear Science and Numerical Simulation*, vol. 37, pp. 374–385, 2016.

[12] V. S. Borges and M. Eisencraft, "O efeito da digitalização num sistema de comunicação baseado em sincronismo caótico," in *Anais do XXXIX Simpósio Brasileiro de Telecomunicações e Processamento de Sinais (SBrT)*, Virtual, 2021.

[13] H.-B. Li, K. Yata, K. Takizawa, N. Miyazaki, T. Okada, K. Ohno, T. Mochizuki, E. Nakagawa, and T. Kobayashi, "Examination of effective UWB avoidance based on experiments for coexistence with other wireless systems," *IEICE Transactions on Fundamentals of Electronics, Communications and Computer Sciences*, vol. E96-A, no. 1, pp. 274–284, 2013.

[14] V. S. Borges, M. T. M. Silva, and M. Eisencraft, "Chaotic properties of an FIR filtered Hénon map," *Communications in Nonlinear Science and Numerical Simulation*, vol. 131, p. 107845, 2024.

[15] V. S. Borges, "Dinâmica de sistemas de tempo discreto compostos por mapas não lineares e filtros lineares," Ph.D. dissertation, Escola Politécnica, Universidade de São Paulo, São Paulo, Brazil, 2026.

[16] V. S. Borges and M. Eisencraft, "A filtered Hénon map," *Chaos, Solitons & Fractals*, vol. 165, p. 112865, 2022.

[17] ——, "Um estudo numérico do expoente de Lyapunov do mapa de Hénon com filtro FIR," in *Anais do XL Simpósio Brasileiro de Telecomunicações e Processamento de Sinais (SBrT)*, Sta. Rita do Sapucaí, MG, Brazil, 2022.

[18] J. A. C. Gallas, "Structure of the parameter space of the Hénon map," *Physical Review Letters*, vol. 70, no. 18, pp. 2714–2717, 1993.

[19] V. S. Borges, M. T. M. Silva, and M. Eisencraft, "Um estudo numérico da dinâmica do mapa de Hénon com filtros só-polos de segunda ordem," in *Anais do XLII Simpósio Brasileiro de Telecomunicações e Processamento de Sinais (SBrT)*, Belém, PA, Brazil, 2024.

[20] J. F. Kaiser and R. W. Schafer, "On the use of the I_0-sinh window for spectrum analysis," *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 28, no. 1, pp. 105–107, 1980.

[21] M. Hénon, "A two-dimensional mapping with a strange attractor," *Communications in Mathematical Physics*, vol. 50, no. 1, pp. 69–77, 1976.

[22] J. C. Sprott, *Chaos and Time-Series Analysis*. Oxford, UK: Oxford University Press, 2003. [Online]. Available: https://academic.oup.com/book/52822

[23] A. V. Oppenheim and R. W. Schafer, *Discrete-Time Signal Processing*, 3rd ed. Upper Saddle River, NJ, USA: Prentice Hall, 2009. [Online]. Available: https://www.pearson.com/en-us/subject-catalog/p/discrete-time-signal-processing/P200000003226/9780131988422

[24] K. de S. Silva, R. F. Pereira, M. F. C. Soares, G. R. dos Santos, and V. S. Borges, "chaotic-pfc: Parametric characterization of the filtered Hénon map," Software, BSD-3-Clause license, 2026. [Online]. Available: https://doi.org/10.5281/zenodo.22740317

[25] F. J. Harris, "On the use of windows for harmonic analysis with the discrete Fourier transform," *Proceedings of the IEEE*, vol. 66, no. 1, pp. 51–83, 1978.

[26] P. Virtanen *et al.*, "SciPy 1.0: Fundamental algorithms for scientific computing in Python," *Nature Methods*, vol. 17, pp. 261–272, 2020.

[27] A. Wolf, J. B. Swift, H. L. Swinney, and J. A. Vastano, "Determining Lyapunov exponents from a time series," *Physica D: Nonlinear Phenomena*, vol. 16, no. 3, pp. 285–317, 1985.

[28] G. Benettin, L. Galgani, A. Giorgilli, and J.-M. Strelcyn, "Lyapunov characteristic exponents for smooth dynamical systems and for Hamiltonian systems; a method for computing all of them. part 1: Theory," *Meccanica*, vol. 15, pp. 9–20, 1980.

[29] ——, "Lyapunov characteristic exponents for smooth dynamical systems and for Hamiltonian systems; a method for computing all of them. part 2: Numerical application," *Meccanica*, vol. 15, pp. 21–30, 1980.

[30] B. Efron and R. J. Tibshirani, *An Introduction to the Bootstrap*. Boca Raton, FL, USA: Chapman and Hall/CRC, 1994.

[31] S. K. Lam, A. Pitrou, and S. Seibert, "Numba: A LLVM-based Python JIT compiler," in *Proc. 2nd Workshop on the LLVM Compiler Infrastructure in HPC (LLVM '15)*, 2015, pp. 1–6.