STM32F746G-DISCO

MB1191

Table of contents

Sheet 1: Project overview (this page)

Sheet 2: Top

Sheet 3: STM32F746NGH6 Connexion

Sheet 4: ST-LINK/V2-1 with support of SWD only

Sheet 5: Joystick, ACP, LEDs and Push Button

Sheet 6: Audio Codec WOLFSON and connectors

Sheet 7: Quad SPI Flash Memory (MICRON)

Sheet 8: Arduino UNO connectors

Sheet 10: USB OTG FS with Micro A-B connector

Sheet 9: SDRAM (MICRON)

Sheet 11: USB OTG HS PHY with Micro A-B connector

Sheet 12: Ethernet PHY with RJ45 connector

Sheet 13: External Camera connector

Sheet 14: LCD 4.3" with Capacitive Touch

Legend

General comment such as function title, configuration, ...

Text to be added to silkscreen.

Warning text.

Notes to generate the board layout.


Open Platform License Agreement

The Open Platform License Agreement (“Agreement”) is a binding legal contract between you ("You") and STMicroelectronics International N.V. (“ST”), a company incorporated under the laws of the Netherlands acting for the purpose of this Agreement through its Swiss branch 39, Chemin du Champ des Filles, 1228 Plan-les-Ouates, Geneva, Switzerland.

By using the enclosed reference designs, schematics, PC board layouts, and documentation, in hardcopy or CAD tool file format (collectively, the “Reference Material”), You are agreeing to be bound by the terms and conditions of this Agreement. Do not use the Reference Material until You have read and agreed to this Agreement terms and conditions. The use of the Reference Material automatically implies the acceptance of the Agreement terms and conditions.


The complete Open Platform License Agreement can be found on www.st.com/opla.

U_Top
Top.SchDoc



Title: **Project overview**			
Project: **STM32F746G-DISCO**			
Variant: F746NGH6			
Revision: B-04		Reference: MB1191	
Size: A4	Date: 15/07/2019	Sheet: 1 of 14	

life.augmented

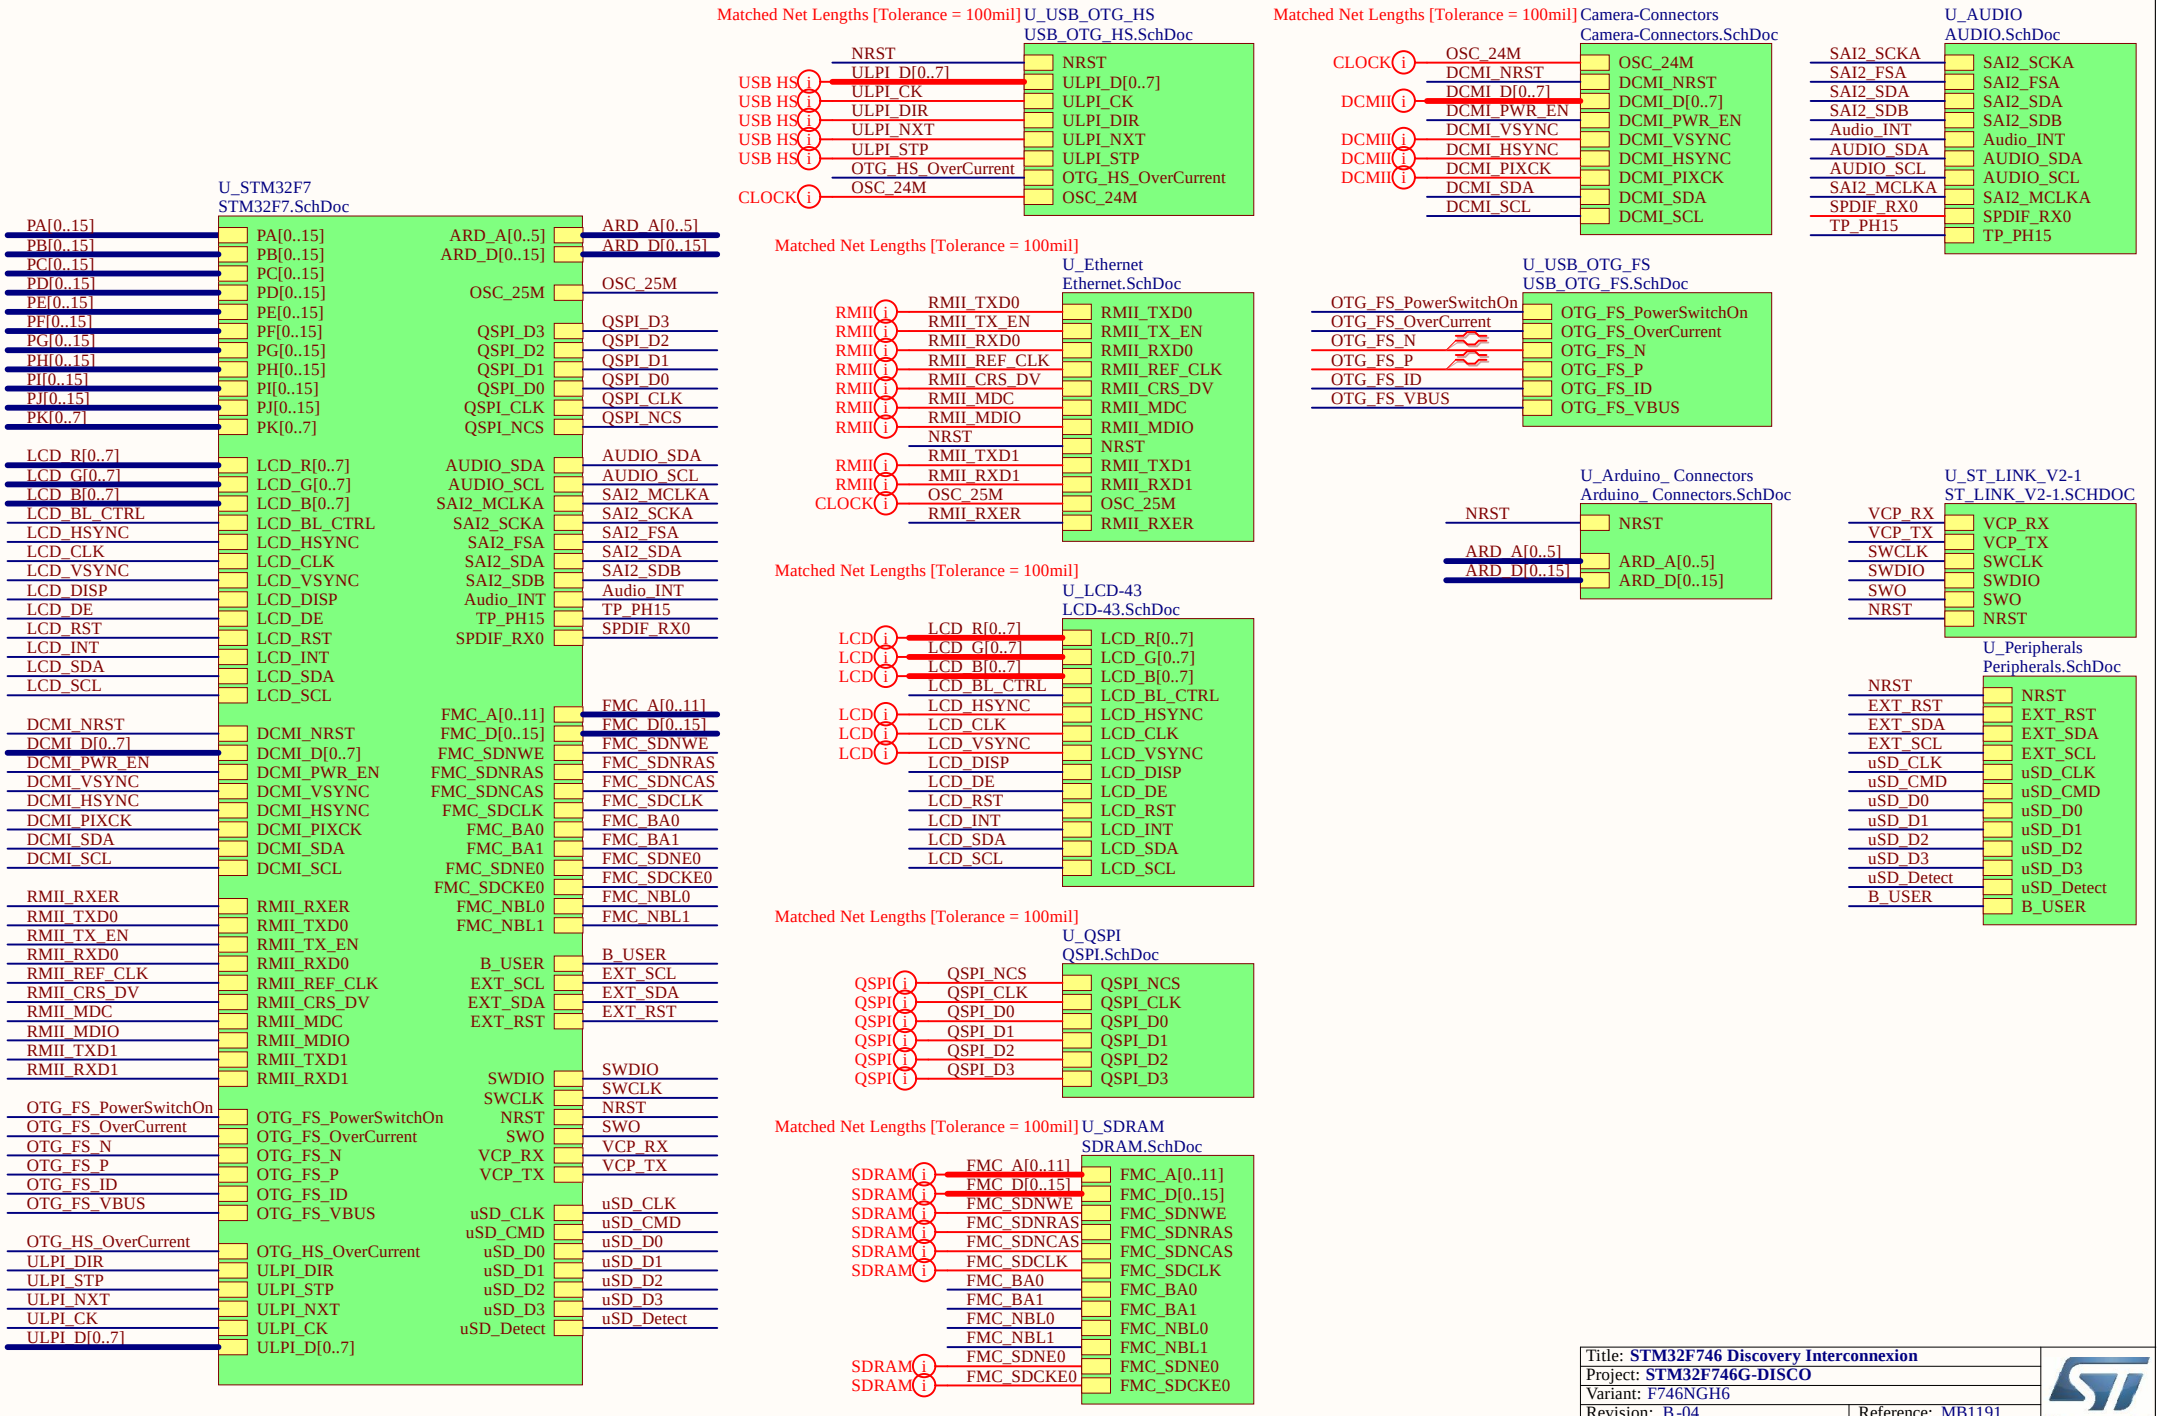
Matched Net Lengths [Tolerance = 100mil]
U_USB_OTG_HS
USB_OTG_HS.SchDoc
NRST
ULPI_D[0..7]
ULPI_CK
ULPI_DIR
ULPI_NXT
ULPI_STP
OTG_HS_OverCurrent
OSC_24M
USB HS
CLOCK
Matched Net Lengths [Tolerance = 100mil]
Camera-Connectors
Camera-Connectors.SchDoc
OSC_24M
DCMI_NRST
DCMI_D[0..7]
DCMI_PWR_EN
DCMI_VSYNC
DCMI_HSYNC
DCMI_PIXCK
DCMI_SDA
DCMI_SCL
CLOCK
DCMII
U_AUDIO
AUDIO.SchDoc
SAI2_SCKA
SAI2_FSA
SAI2_SDA
SAI2_SDB
Audio_INT
AUDIO_SDA
AUDIO_SCL
SAI2_MCLKA
SPDIF_RX0
TP_PH15
Matched Net Lengths [Tolerance = 100mil]
U_Ethernet
Ethernet.SchDoc
RMII_TXD0
RMII_TX_EN
RMII_RXD0
RMII_REF_CLK
RMII_CRS_DV
RMII_MDC
RMII_MDIO
NRST
RMII_TXD1
RMII_RXD1
OSC_25M
RMII_RXER
RMII
CLOCK
U_USB_OTG_FS
USB_OTG_FS.SchDoc
OTG_FS_PowerSwitchOn
OTG_FS_OverCurrent
OTG_FS_N
OTG_FS_P
OTG_FS_ID
OTG_FS_VBUS
U_Arduino_ Connectors
Arduino_ Connectors.SchDoc
NRST
ARD_A[0..5]
ARD_D[0..15]
U_ST_LINK_V2-1
ST_LINK_V2-1.SCHDOC
VCP_RX
VCP_TX
SWCLK
SWDIO
SWO
NRST
Matched Net Lengths [Tolerance = 100mil]
U_LCD-43
LCD-43.SchDoc
LCD_R[0..7]
LCD_G[0..7]
LCD_B[0..7]
LCD_BL_CTRL
LCD_HSYNC
LCD_CLK
LCD_VSYNC
LCD_DISP
LCD_DE
LCD_RST
LCD_INT
LCD_SDA
LCD_SCL
LCD
U_Peripherals
Peripherals.SchDoc
NRST
EXT_RST
EXT_SDA
EXT_SCL
uSD_CLK
uSD_CMD
uSD_D0
uSD_D1
uSD_D2
uSD_D3
uSD_Detect
B_USER
Matched Net Lengths [Tolerance = 100mil]
U_QSPI
QSPI.SchDoc
QSPI_NCS
QSPI_CLK
QSPI_D0
QSPI_D1
QSPI_D2
QSPI_D3
QSPI
U_STM32F7
STM32F7.SchDoc
PA[0..15]
PB[0..15]
PC[0..15]
PD[0..15]
PE[0..15]
PF[0..15]
PG[0..15]
PH[0..15]
PI[0..15]
PJ[0..15]
PK[0..7]
LCD_R[0..7]
LCD_G[0..7]
LCD_B[0..7]
LCD_BL_CTRL
LCD_HSYNC
LCD_CLK
LCD_VSYNC
LCD_DISP
LCD_DE
LCD_RST
LCD_INT
LCD_SDA
LCD_SCL
DCMI_NRST
DCMI_D[0..7]
DCMI_PWR_EN
DCMI_VSYNC
DCMI_HSYNC
DCMI_PIXCK
DCMI_SDA
DCMI_SCL
RMII_RXER
RMII_TXD0
RMII_TX_EN
RMII_RXD0
RMII_REF_CLK
RMII_CRS_DV
RMII_MDC
RMII_MDIO
RMII_TXD1
RMII_RXD1
OTG_FS_PowerSwitchOn
OTG_FS_OverCurrent
OTG_FS_N
OTG_FS_P
OTG_FS_ID
OTG_FS_VBUS
OTG_HS_OverCurrent
ULPI_DIR
ULPI_STP
ULPI_NXT
ULPI_CK
ULPI_D[0..7]
ARD_A[0..5]
ARD_D[0..15]
OSC_25M
QSPI_D3
QSPI_D2
QSPI_D1
QSPI_D0
QSPI_CLK
QSPI_NCS
AUDIO_SDA
AUDIO_SCL
SAI2_MCLKA
SAI2_SCKA
SAI2_FSA
SAI2_SDA
SAI2_SDB
Audio_INT
TP_PH15
SPDIF_RX0
FMC_A[0..11]
FMC_D[0..15]
FMC_SDNWE
FMC_SDNRAS
FMC_SDNCAS
FMC_SDCLK
FMC_BA0
FMC_BA1
FMC_SDNE0
FMC_SDCKE0
FMC_NBL0
FMC_NBL1
B_USER
EXT_SCL
EXT_SDA
EXT_RST
SWDIO
SWCLK
NRST
SWO
VCP_RX
VCP_TX
uSD_CLK
uSD_CMD
uSD_D0
uSD_D1
uSD_D2
uSD_D3
uSD_Detect
Matched Net Lengths [Tolerance = 100mil]
U_SDRAM
SDRAM.SchDoc
FMC_A[0..11]
FMC_D[0..15]
FMC_SDNWE
FMC_SDNRAS
FMC_SDNCAS
FMC_SDCLK
FMC_BA0
FMC_BA1
FMC_NBL0
FMC_NBL1
FMC_SDNE0
FMC_SDCKE0
SDRAM
Title: STM32F746 Discovery Interconnexion
Project: STM32F746G-DISCO
Variant: F746NGH6
Revision: B-04
Reference: MB1191
Size: A4
Date: 15/07/2019
Sheet: 2 of 14
life.augmented

ARD_A[0..5]
ARD_D[0..15]
OSC_25M
AUDIO_SDA
AUDIO_SCL
SAI2_MCLKA
SAI2_SCKA
SAI2_FSA
SAI2_SDA
SAI2_SDB
TP_PH15
Audio_INT
SPDIF_RX0

QSPI_D3
QSPI_D2
QSPI_D1
QSPI_D0
QSPI_CLK
QSPI_NCS

uSD_CLK
uSD_CMD
uSD_D0
uSD_D1
uSD_D2
uSD_D3
uSD_Detect

FMC_A[0..11]
FMC_D[0..15]
FMC_SDNWE
FMC_SDNRAS
FMC_SDNCAS
FMC_SDCLK
FMC_BA0
FMC_BA1
FMC_SDNE0
FMC_SDCKE0
FMC_NBL0
FMC_NBL1

B_USER
EXT_SCL
EXT_SDA
EXT_RST

SWDIO
SWCLK
SWO
VCP_RX
VCP_TX

OTG_FS_PowerSwitchOn
OTG_FS_OverCurrent
OTG_FS_N
OTG_FS_P
OTG_FS_ID
OTG_FS_VBUS

OTG_HS_OverCurrent
ULPI_DIR
ULPI_STP
ULPI_NXT
ULPI_CK
ULPI_D[0..7]

RMII_RXER
RMII_TXD0
RMII_TX_EN
RMII_RXD0
RMII_REF_CLK
RMII_CRS_DV
RMII_MDC
RMII_MDIO
RMII_TXD1
RMII_RXD1

DCMI_NRST
DCMI_D[0..7]
DCMI_PWR_EN
DCMI_VSYNC
DCMI_HSYNC
DCMI_PIXCK
DCMI_SDA
DCMI_SCL

LCD_R[0..7]
LCD_G[0..7]
LCD_B[0..7]
LCD_BL_CTRL
LCD_HSYNC
LCD_CLK
LCD_VSYNC
LCD_DISP
LCD_DE
LCD_RST
LCD_INT
LCD_SDA
LCD_SCL

U5A
STM32F746NGH6

	ARD_A0	PA0	N3	PA0-WKUP	PC0	M2	ULPI_STP
	RMII_REF_CLK	PA1	N2	PA1	PC1	M3	RMII_MDC
	RMII_MDIO	PA2	P2	PA2	PC2	M4	ULPI_DIR
	ULPI_D0	PA3	R2	PA3	PC3	L4	FMC_SDCKE0
	DCMI_HSYNC	PA4	N4	PA4	PC4	N5	RMII_RXD0
	ULPI_CK	PA5	P4	PA5	PC5	P5	RMII_RXD1
	DCMI_PIXCK	PA6	P3	PA6	PC6	H15	ARD_D1
	RMII_CRS_DV	PA7	R3	PA7	PC7	G15	ARD_D0
	ARD_D10	PA8	F15	PA8	PC8	G14	uSD_D0
		PA9	E15	PA9	PC9	F14	uSD_D1
	OTG_FS_ID	PA10	D15	PA10	PC10	B14	uSD_D2
	OTG_FS_N	PA11	C15	PA11	PC11	B13	uSD_D3
	OTG_FS_P	PA12	B15	PA12	PC12	A12	uSD_CLK
	SWDIO	PA13	A15	PA13 PC13-ANTI_TAMP		D1	uSD_Detect
	SWCLK	PA14	A14	PA14			
	ARD_D9	PA15	A13	PA15			
	ULPI_D1	PB0	R5			R6	LCD_R1
	ULPI_D2	PB1	R4	PB0	PJ0	R7	LCD_R2
QSPI_CLK	PB2		M5	PB1	PJ1	P7	LCD_R3
	SWO	PB3	A10	PB2	PJ2	N8	LCD_R4
	ARD_D3	PB4	A9	PB3	PJ3	M9	LCD_R5
	ULPI_D7	PB5	A8	PB4	PJ4	M14	LCD_R6
	QSPI_NCS	PB6	B6	PB5	PJ5	K12	LCD_R7
	VCP_RX	PB7	B5	PB6	PJ6	J12	LCD_G0
EXT_SCL	ARD_D15	PB8	A7	PB7	PJ7	H12	LCD_G1
EXT_SDA	ARD_D14	PB9	B4	PB8	PJ8	J13	LCD_G2
	ULPI_D3	PB10	P12	PB9	PJ9	H13	LCD_G3
	ULPI_D4	PB11	R13	PB10	PJ10	G12	LCD_G4
	ULPI_D5	PB12	L13	PB11	PJ11	B10	PJ12 R58 100 OTG_FS_VBUS
	ULPI_D6	PB13	K14	PB12	PJ12	B9	PJ13 LCD_B1
	ARD_D12	PB14	R14	PB13	PJ13	C9	PJ14 LCD_B2
	ARD_D11	PB15	R15	PB14	PJ14	D10	PJ15 LCD_B3
		PC14	E1	PB15	PJ15		
		PC15	F1	PC14-OSC32_IN			
		PH0	G1	PC15-OSC32_OUT	PK0	G13	PK0 LCD_G5
		PH1	H1		PK1	F12	PK1 LCD_G6
			J1	PH0-OSC_IN	PK2	F13	PK2 LCD_G7
		BOOT0	E6	PH1-OSC_OUT	PK3	D8	PK3 LCD_BL_CTRL
					PK4	D7	PK4 LCD_B5
				NRST	PK5	C6	PK5 LCD_B6
				BOOT0	PK6	C5	PK6 LCD_B7
					PK7	C4	PK7 LCD_DE
			E5	PDR_ON			

U5B
STM32F746NGH6

FMC_D2	PD0	B12	PD0	PG0	N7	PG0	FMC_A10
FMC_D3	PD1	C12	PD1	PG1	M7	PG1	FMC_A11
uSD_CMD	PD2	D12	PD2	PG2	M13	PG2	RMII_RXER
DCMI_D5	PD3	C11	PD3	PG3	M12	PG3	EXT_RST
OTG_FS_OverCurrent	PD4	D11	PD4	PG4	N12	PG4	FMC_BA0
OTG_FS_PowerSwitchOn	PD5	C10	PD5	PG5	N11	PG5	FMC_BA1
Audio_INT	PD6	B11	PD6	PG6	J15	PG6	ARD_D2
SPDIF_RX0	PD7	A11	PD7	PG7	J14	PG7	ARD_D4
FMC_D13	PD8	L15	PD8	PG8	H14	PG8	FMC_SDCLK
FMC_D14	PD9	L14	PD9	PG9	D9	PG9	DCMI_VSYNC
FMC_D15	PD10	K15	PD10	PG10	C8	PG10	SAI2_SDB
QSPI_D0	PD11	N10	PD11	PG11	B8	PG11	RMII_TX_EN
QSPI_D1	PD12	M10	PD12	PG12	C7	PG12	LCD_B4
QSPI_D3	PD13	M11	PD13	PG13	B3	PG13	RMII_TXD0
FMC_D0	PD14	L12	PD14	PG14	A4	PG14	RMII_TXD1
FMC_D1	PD15	K13	PD15	PG15	B7	PG15	FMC_SDNCAS
FMC_NBL0	PE0	A6	PE0				
FMC_NBL1	PE1	A5	PE1				
QSPI_D2	PE2	A3	PE2	PH2	K4	PH2	NC2 R29 100 TP1 TP
OTG_HS_OverCurrent	PE3	A2	PE3	PH3	J4	PH3	FMC_SDNE0
LCD_B0	PE4	A1	PE4	PH4	H4	PH4	ULPI_NXT
DCMI_D6	PE5	B1	PE5	PH5	J3	PH5	FMC_SDNWE
DCMI_D7	PE6	B2	PE6	PH6	P13	PH6	ARD_D6
FMC_D4	PE7	R8	PE7	PH7	N13	PH7	LCD_SCL AUDIO_SCL
FMC_D5	PE8	N9	PE8	PH8	P14	PH8	LCD_SDA AUDIO_SDA
FMC_D6	PE9	P9	PE9	PH9	N14	PH9	DCMI_D0
FMC_D7	PE10	R9	PE10	PH10	P15	PH10	DCMI_D1
FMC_D8	PE11	P10	PE11	PH11	N15	PH11	DCMI_D2
FMC_D9	PE12	R10	PE12	PH12	M15	PH12	DCMI_D3
FMC_D10	PE13	R12	PE13	PH13	E12	PH13	DCMI_PWR_EN
FMC_D11	PE14	P11	PE14	PH14	E13	PH14	DCMI_D4
FMC_D12	PE15	R11	PE15	PH15	D13	PH15	TP_PH15
FMC_A0	PF0	D2					
FMC_A1	PF1	E2	PF0	PI0	E14	PI0	ARD_D5
FMC_A2	PF2	G2	PF1	PI1	D14	PI1	ARD_D13
FMC_A3	PF3	H2	PF2	PI2	C14	PI2	ARD_D8
FMC_A4	PF4	J2	PF3	PI3	C13	PI3	ARD_D7
FMC_A5	PF5	K3	PF4	PI4	C3	PI4	SAI2_MCLKA
ARD_A5	PF6	K2	PF5	PI5	D3	PI5	SAI2_SCKA
ARD_A4	PF7	K1	PF6	PI6	D6	PI6	SAI2_SDA
ARD_A3	PF8	L3	PF7	PI7	D4	PI7	SAI2_FSA
ARD_A2	PF9	L2	PF8	PI8-ANTI_TAMP2	C2	PI8	NC1 R33 100 TP2 TP
ARD_A1	PF10	L1	PF9	PI9	E4	PI9	LCD_VSYNC
FMC_SDNRAS	PF11	P8	PF10	PI10	D5	PI10	LCD_HSYNC
FMC_A6	PF12	M6	PF11	PI11	F3	PI11	B_USER
FMC_A7	PF13	N6	PF12	PI12	E3	PI12	LCD_DISP
FMC_A8	PF14	P6	PF13	PI13	G3	PI13	LCD_INT
FMC_A9	PF15	M8	PF14	PI14	H3	PI14	LCD_CLK
			PF15	PI15	G4	PI15	LCD_R0


U5C
STM32F746NGH6

VDD	L10	VDD1	VSS1	K9			
	F11	VDD2	VSS2	F10			
	E7	VDD3	VSS3	F6			
	K5	VDD4	VSS4	K6			
	H5	VDD5	VSS5	H6			
	L8	VDD6	VSS6	K7			
	L9	VDD7	VSS7	K8			
	J11	VDD8	VSS8	J10			
	G11	VDD_USB33	VSS9	G10			
	E9	VDD10	VSS10	F8			
	E8	VDD11	VSS11	F7			
	J5	VDD12	VSS12	J6			
	F4	VDD13	VSS13-VSS18	F2			
	K11	VDD14	VSS14	K10			
	E10	VDD15	VSS15	F9			
	F5	VDD17	VSS17	G6			
	G5	VDD18					
	L7	VDD19	VSS19	L6			
	H11	VDD20	VSS20	H10			
	R1	VDDA	VSSA	M1			
	P1	VREF+	VREF-	N1			
	C1	VBAT	VCAP1	L11			
	L5	BYPASS-REG	VCAP2	E11			

PA[0..15] PB[0..15] PC[0..15] PD[0..15] PE[0..15] PF[0..15]
PG[0..15] PH[0..15] PI[0..15] PJ[0..15] PK[0..7]

Ceramic capacitor (Low ESR)


Title: STM32F746NGH6 Connexion	
Project: STM32F746G-DISCO	
Variant: F746NGH6	
Revision: B-04	Reference: MB1191
Size: A3 Date: 15/07/2019	Sheet: 3 of 14

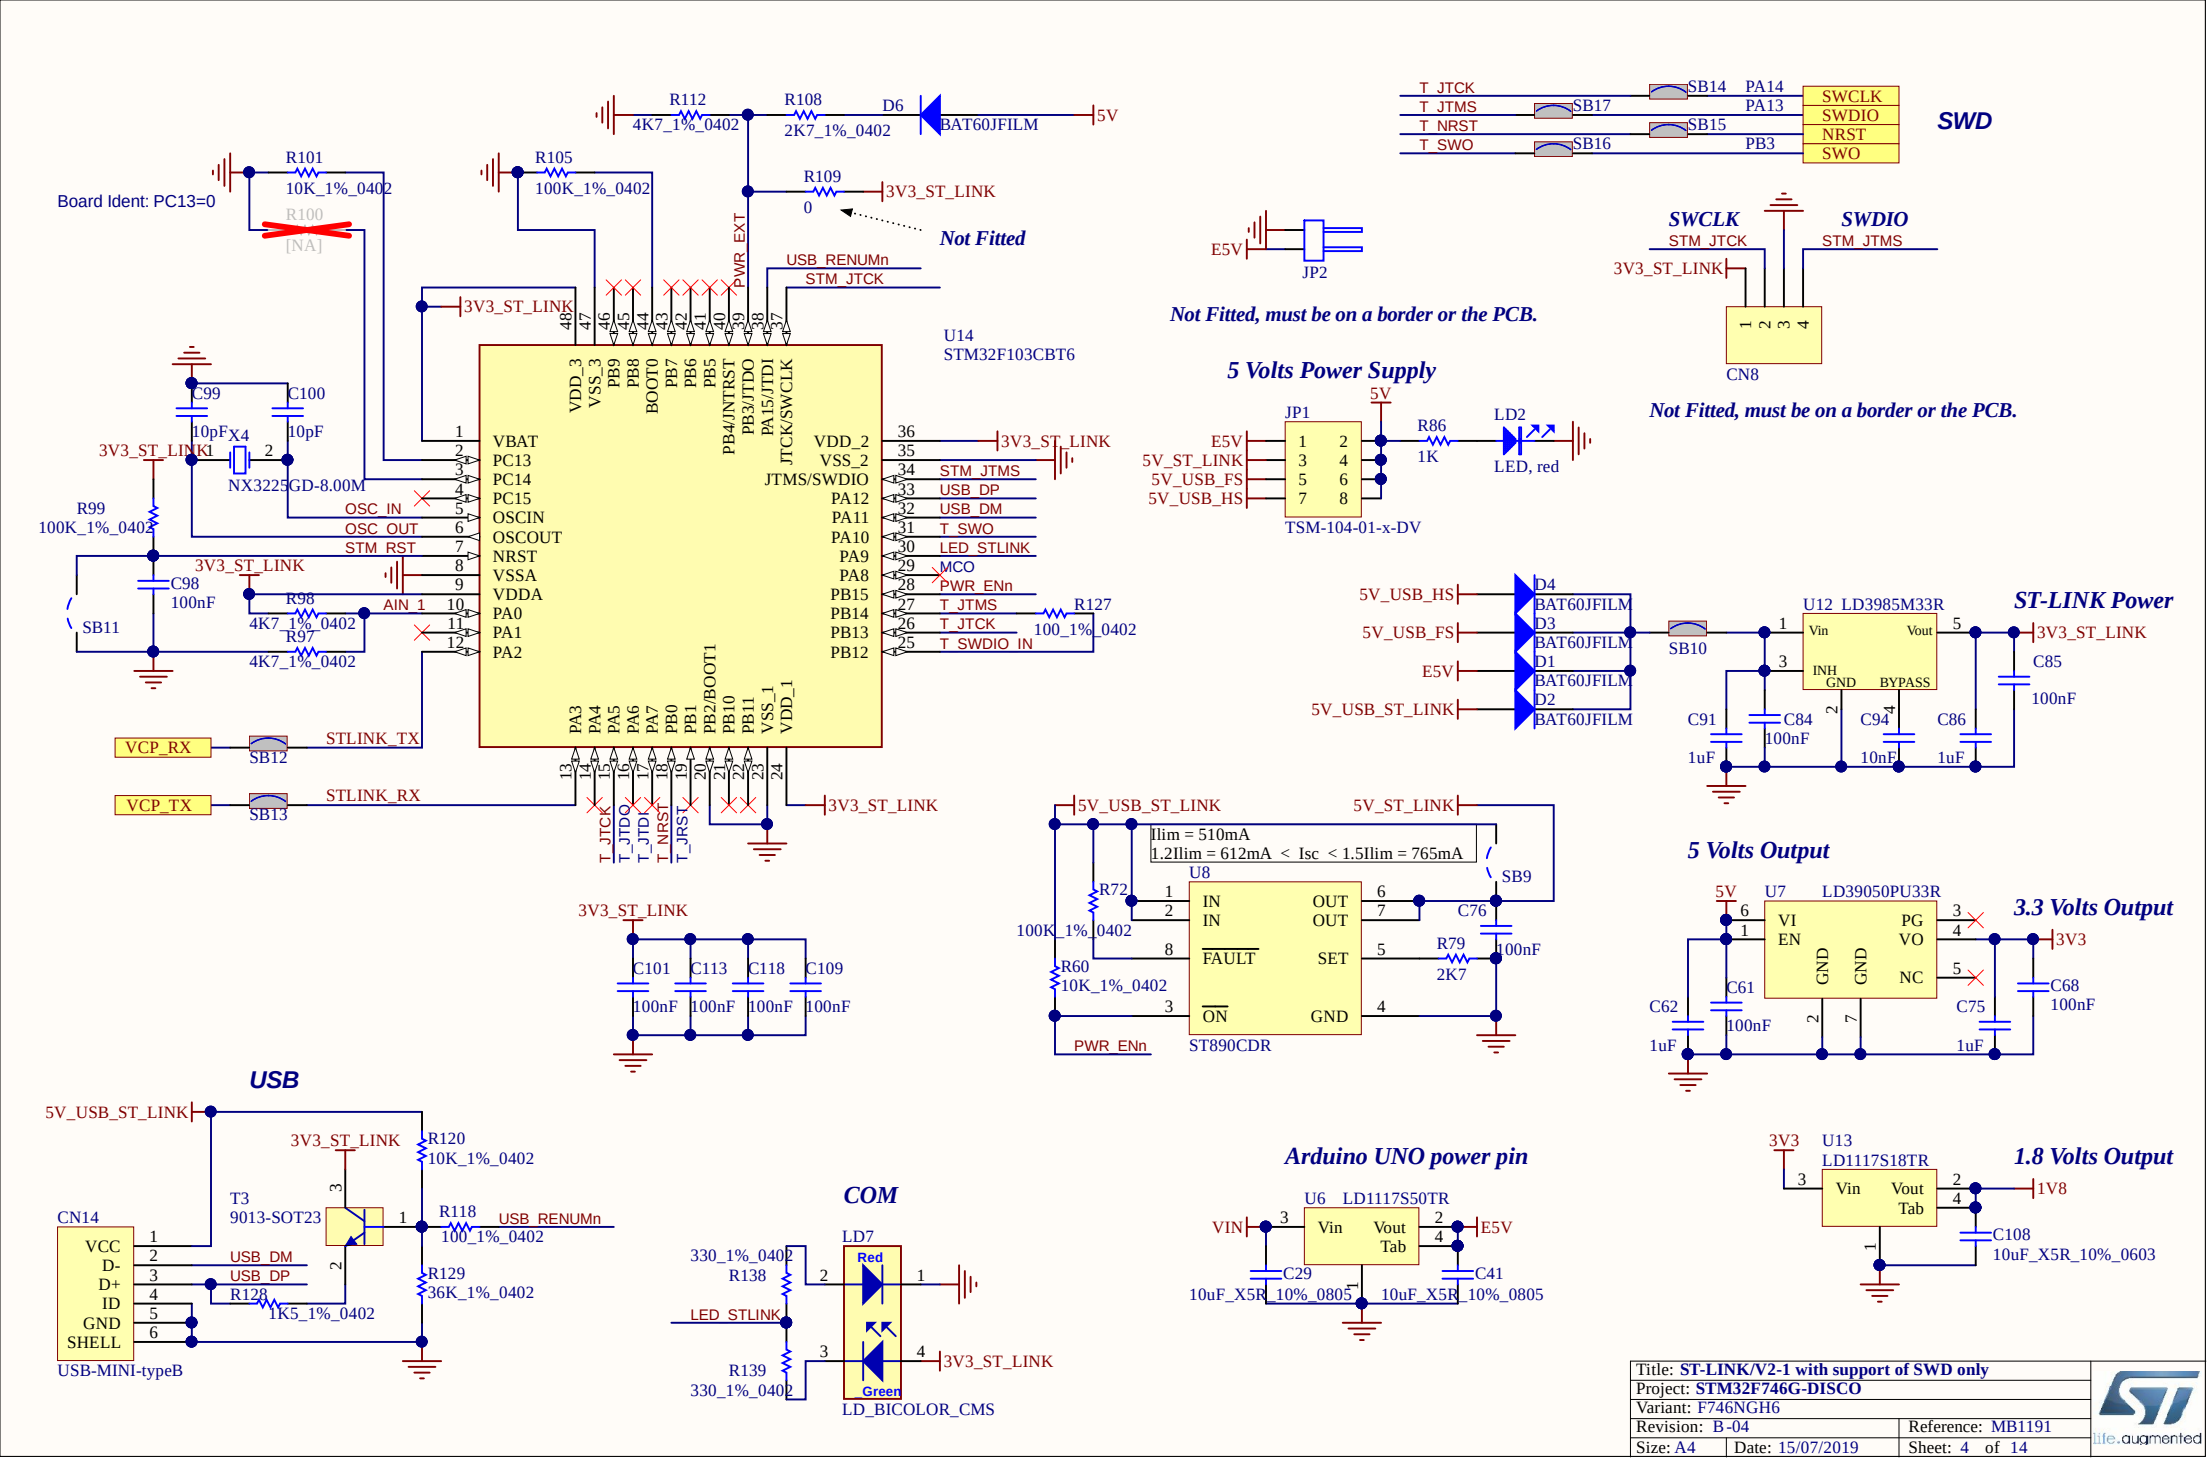


Title: **ST-LINK/V2-1 with support of SWD only**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 4 of 14


life.augmented


EXT/RF E2P Connector

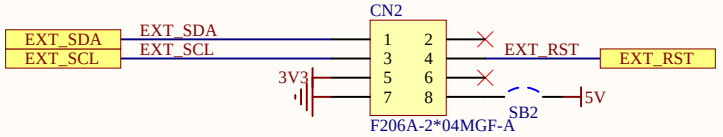

MICRO SD (TF) Card

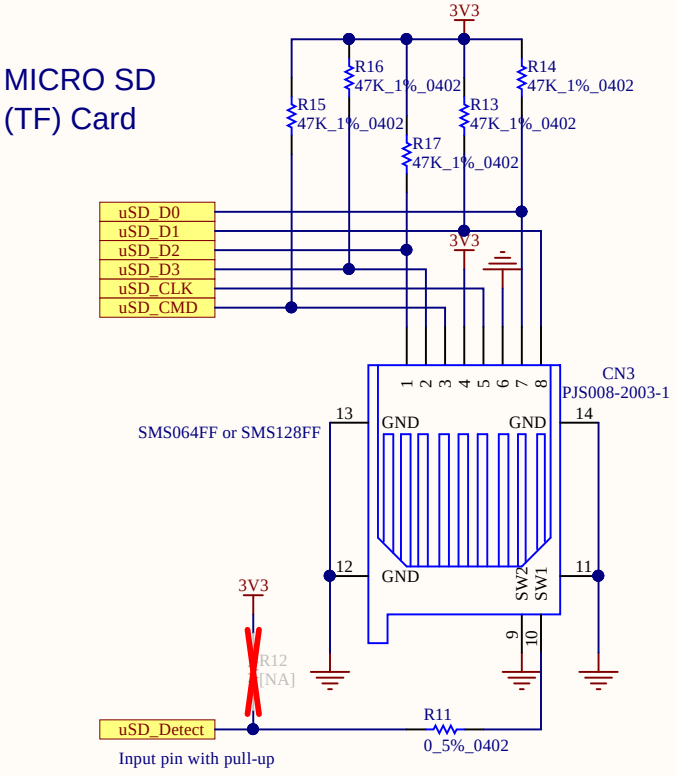


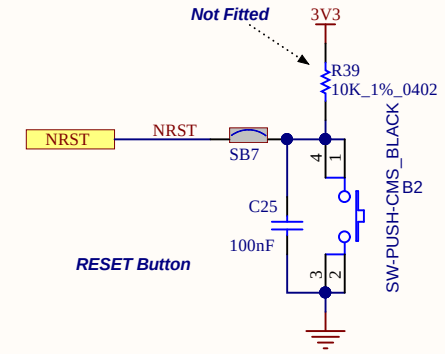

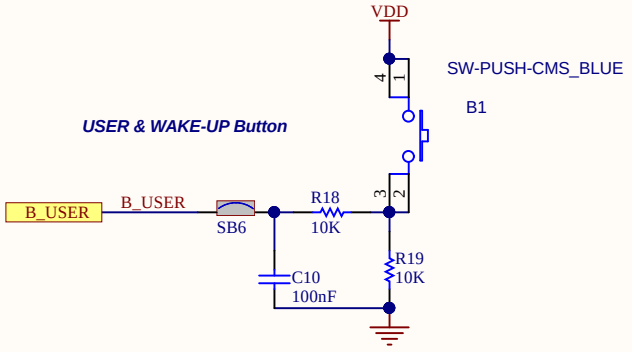


Title: **Joystick, ACP, LEDs and Push Button**			
Project: **STM32F746G-DISCO**			
Variant: F746NGH6			
Revision: B-04		Reference: MB1191	
Size: A4	Date: 15/07/2019	Sheet: 5 of 14	

life.augmented

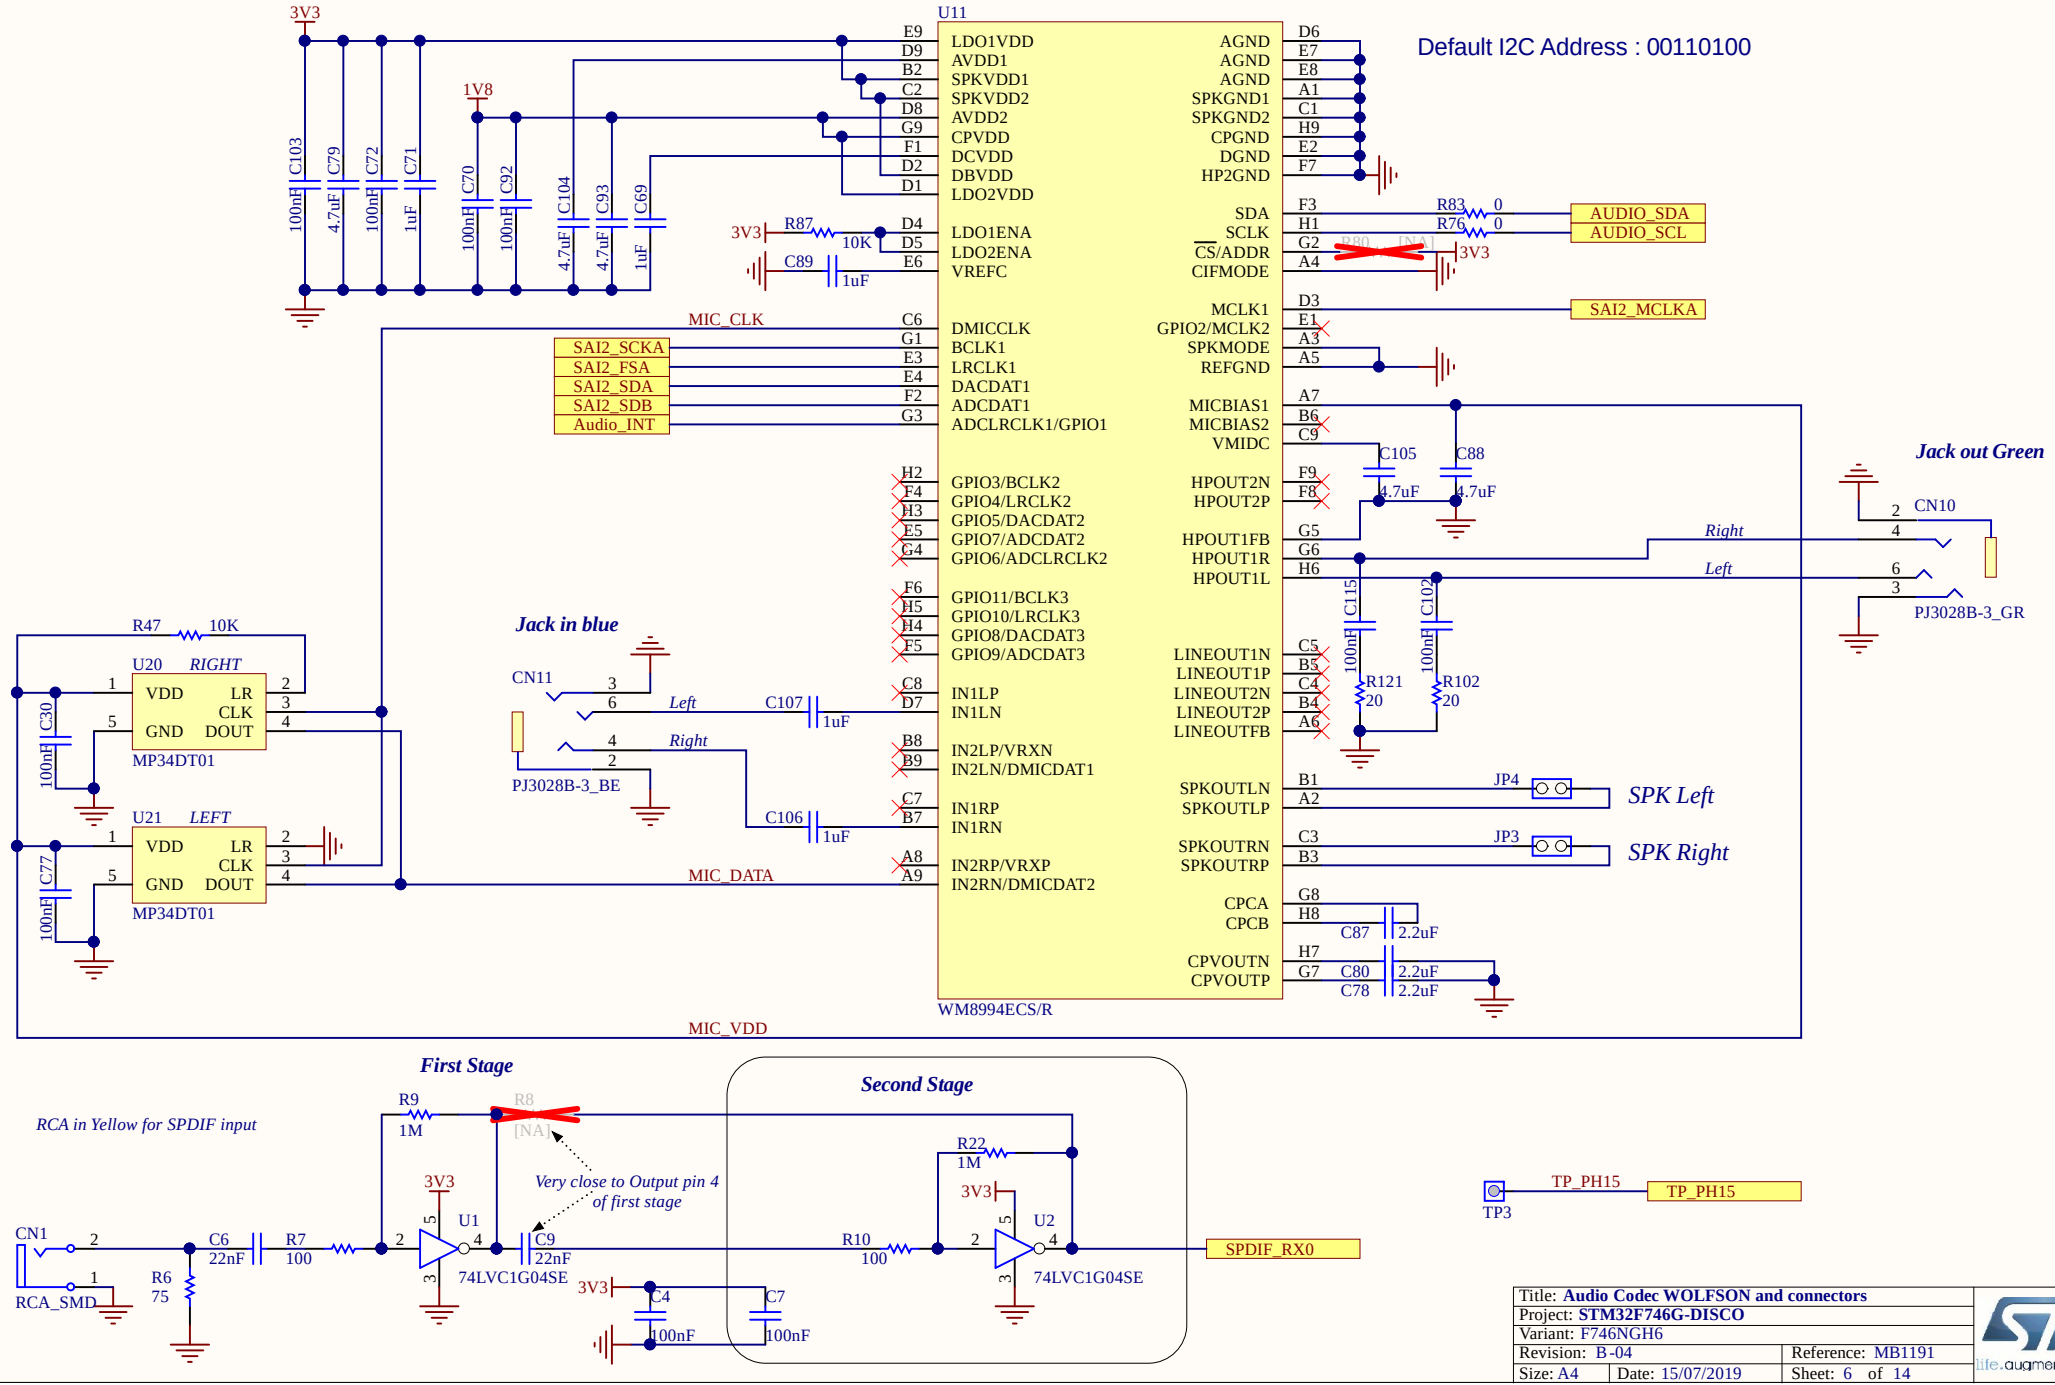
Default I2C Address : 00110100
U11
WM8994ECS/R
LDO1VDD
AVDD1
SPKVDD1
SPKVDD2
AVDD2
CPVDD
DCVDD
DBVDD
LDO2VDD
LDO1ENA
LDO2ENA
VREFC
DMICCLK
BCLK1
LRCLK1
DACDAT1
ADCDAT1
ADCLRCLK1/GPIO1
GPIO3/BCLK2
GPIO4/LRCLK2
GPIO5/DACDAT2
GPIO7/ADCDAT2
GPIO6/ADCLRCLK2
GPIO11/BCLK3
GPIO10/LRCLK3
GPIO8/DACDAT3
GPIO9/ADCDAT3
IN1LP
IN1LN
IN2LP/VRXN
IN2LN/DMICDAT1
IN1RP
IN1RN
IN2RP/VRXP
IN2RN/DMICDAT2
AGND
SPKGND1
SPKGND2
CPGND
DGND
HP2GND
SDA
SCLK
CS/ADDR
CIFMODE
MCLK1
GPIO2/MCLK2
SPKMODE
REFGND
MICBIAS1
MICBIAS2
VMIDC
HPOUT2N
HPOUT2P
HPOUT1FB
HPOUT1R
HPOUT1L
LINEOUT1N
LINEOUT1P
LINEOUT2N
LINEOUT2P
LINEOUTFB
SPKOUTLN
SPKOUTLP
SPKOUTRN
SPKOUTRP
CPCA
CPCB
CPVOUTN
CPVOUTP
3V3
1V8
C103 100nF
C79 4.7uF
C72 100nF
C71 1uF
C70 100nF
C92 100nF
C104 4.7uF
C93 4.7uF
C69 1uF
R87 10K
C89 1uF
MIC_CLK
SAI2_SCKA
SAI2_FSA
SAI2_SDA
SAI2_SDB
Audio_INT
R83 0
R76 0
AUDIO_SDA
AUDIO_SCL
R80 [NA]
SAI2_MCLKA
C105 4.7uF
C88 4.7uF
Jack out Green
CN10
Right
Left
PJ3028B-3_GR
C115 100nF
C102 100nF
R121 20
R102 20
JP4
SPK Left
JP3
SPK Right
C87 2.2uF
C80 2.2uF
C78 2.2uF
Jack in blue
CN11
C107 1uF
C106 1uF
PJ3028B-3_BE
R47 10K
U20 RIGHT
U21 LEFT
VDD
GND
LR
CLK
DOUT
MP34DT01
C30 100nF
C77 100nF
MIC_DATA
MIC_VDD
First Stage
Second Stage
RCA in Yellow for SPDIF input
R9 1M
R8 [NA]
Very close to Output pin 4 of first stage
R22 1M
CN1
RCA_SMD
C6 22nF
R7 100
R6 75
U1
U2
74LVC1G04SE
C9 22nF
R10 100
C4 100nF
C7 100nF
SPDIF_RX0
TP_PH15
TP3
Title: Audio Codec WOLFSON and connectors
Project: STM32F746G-DISCO
Variant: F746NGH6
Revision: B-04
Reference: MB1191
Size: A4
Date: 15/07/2019
Sheet: 6 of 14


Quad SPI Flash Memory

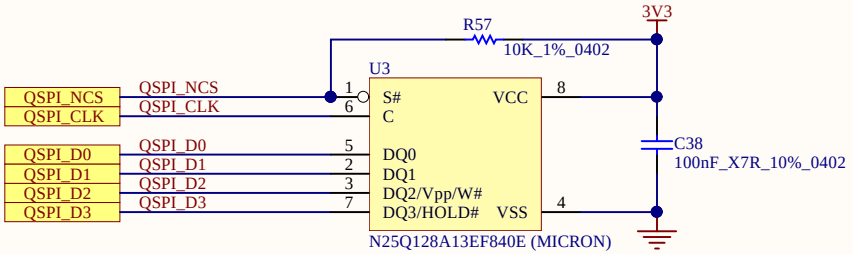


Title: **Quad SPI Flash Memory (MICRON)**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 7 of 14

life.augmented

Arduino UNO connector

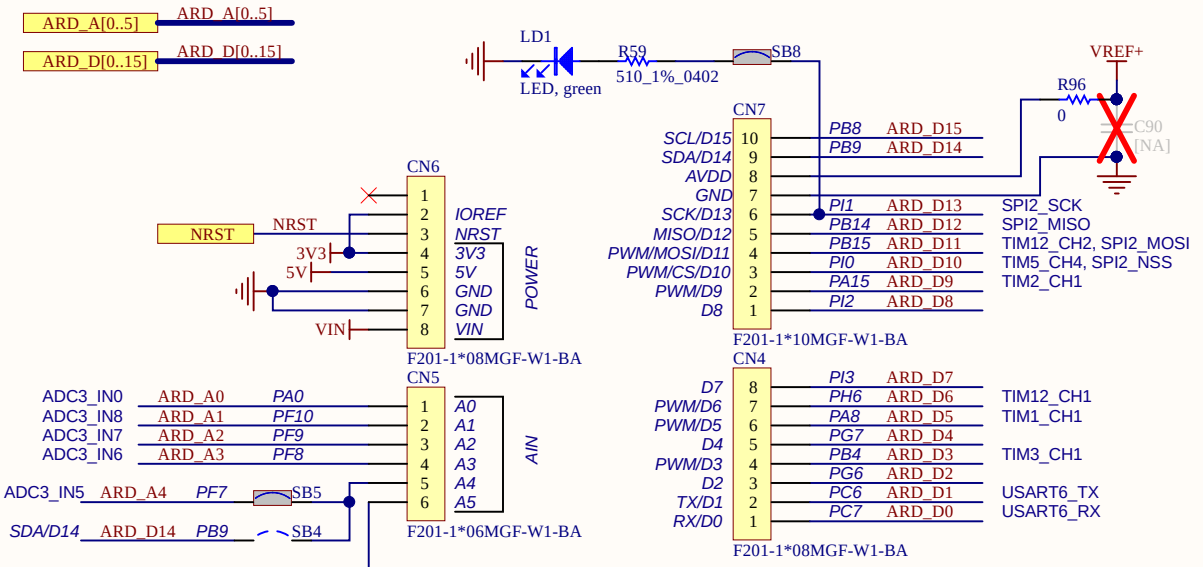


Title: **Arduino UNO connectors**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 8 of 14

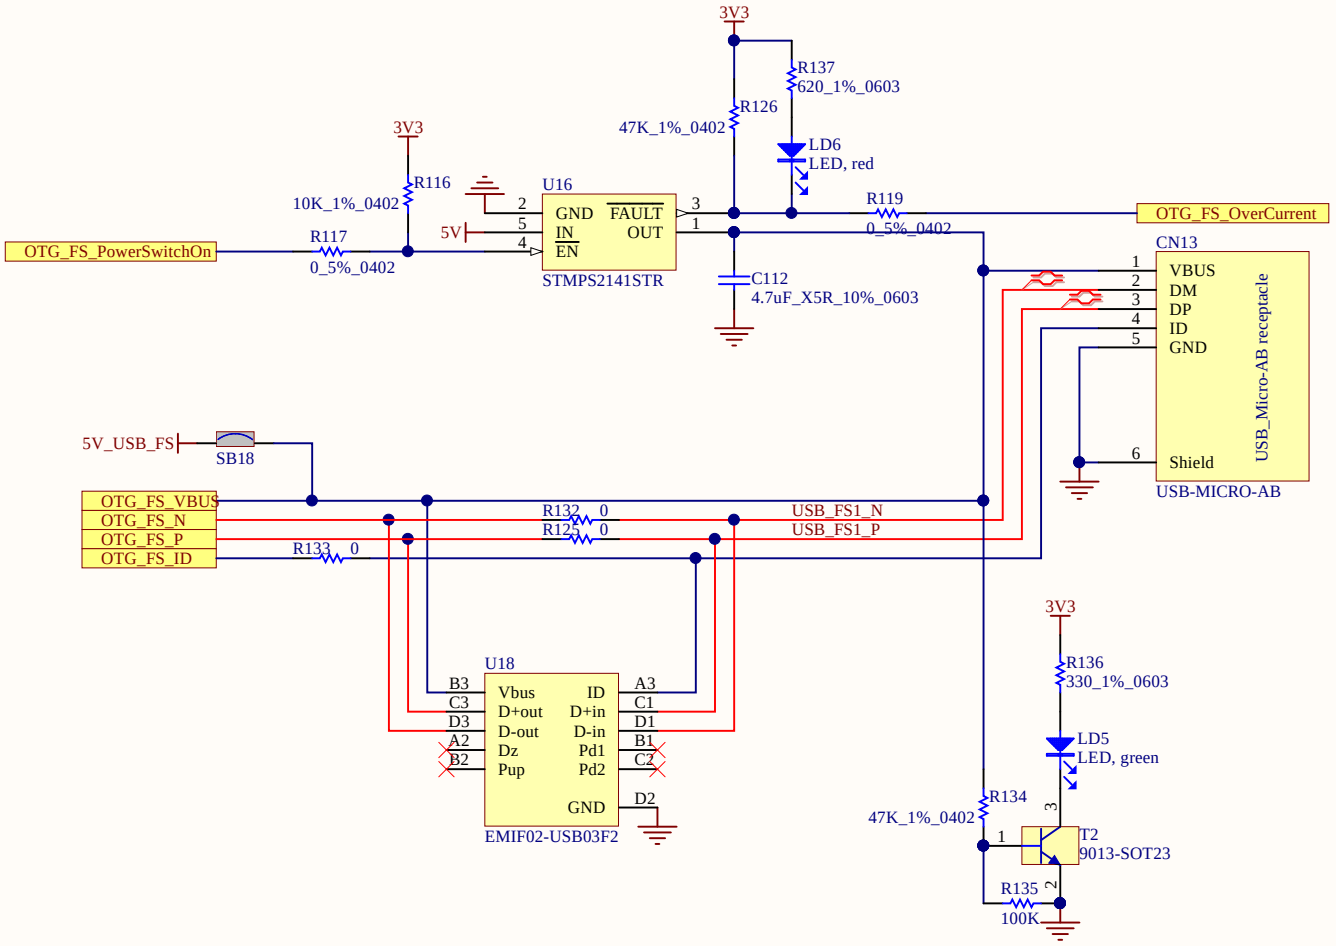


Title: **USB OTG FS with Micro A-B connector**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 9 of 14

life.augmented

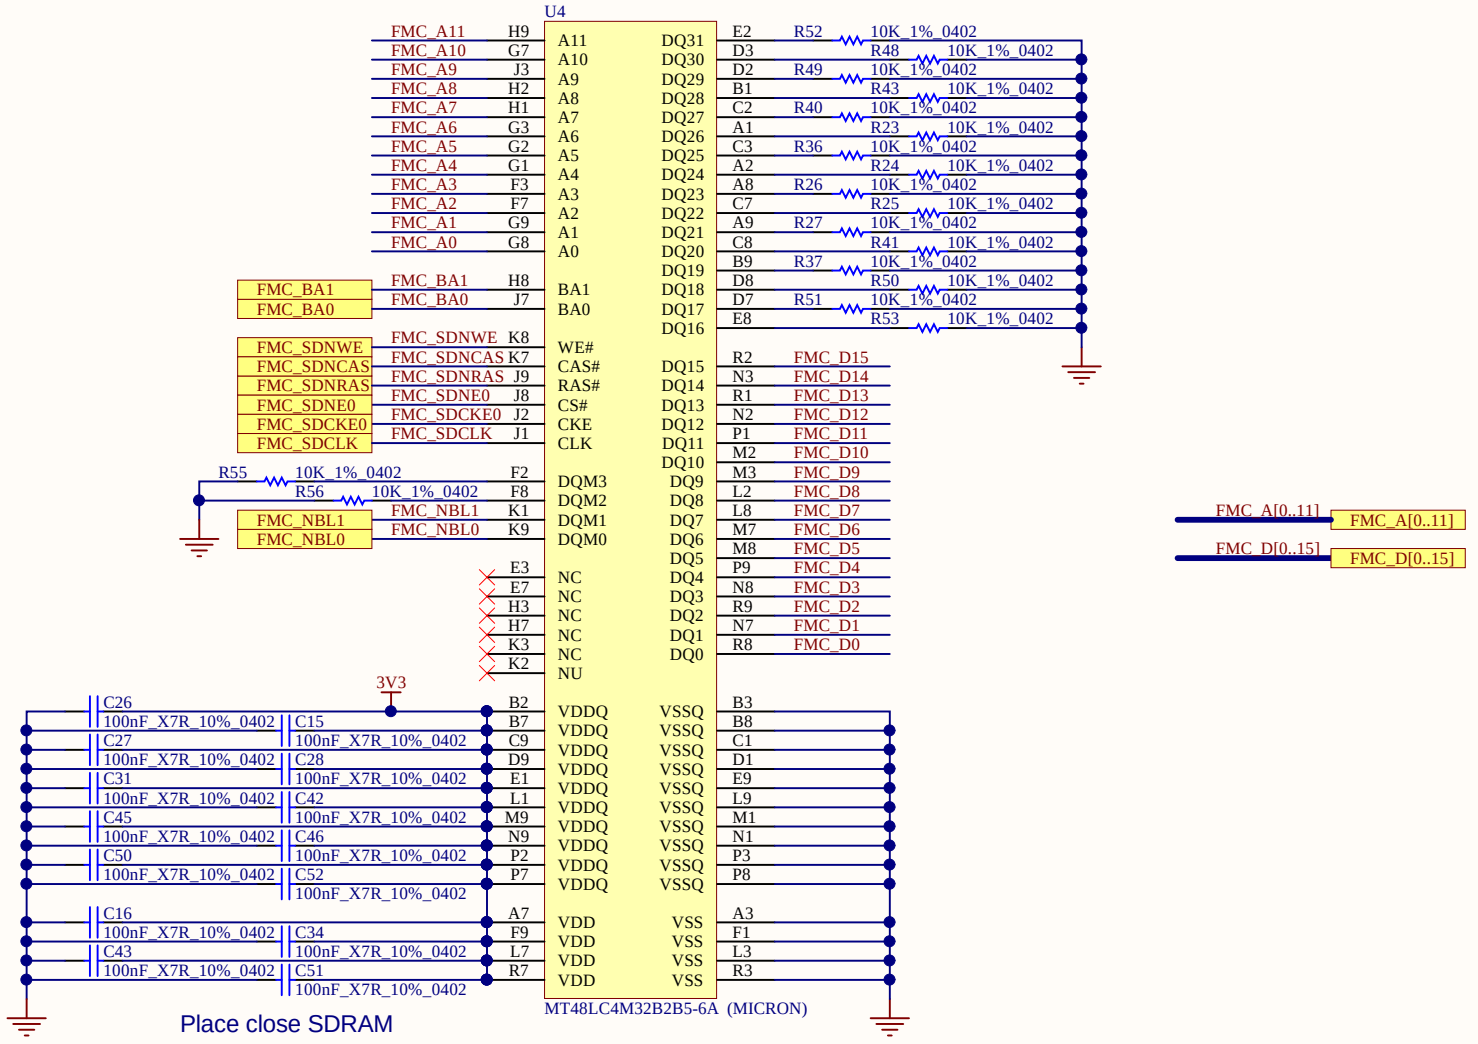


Title: **SDRAM (MICRON)**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 10 of 14

life.augmented

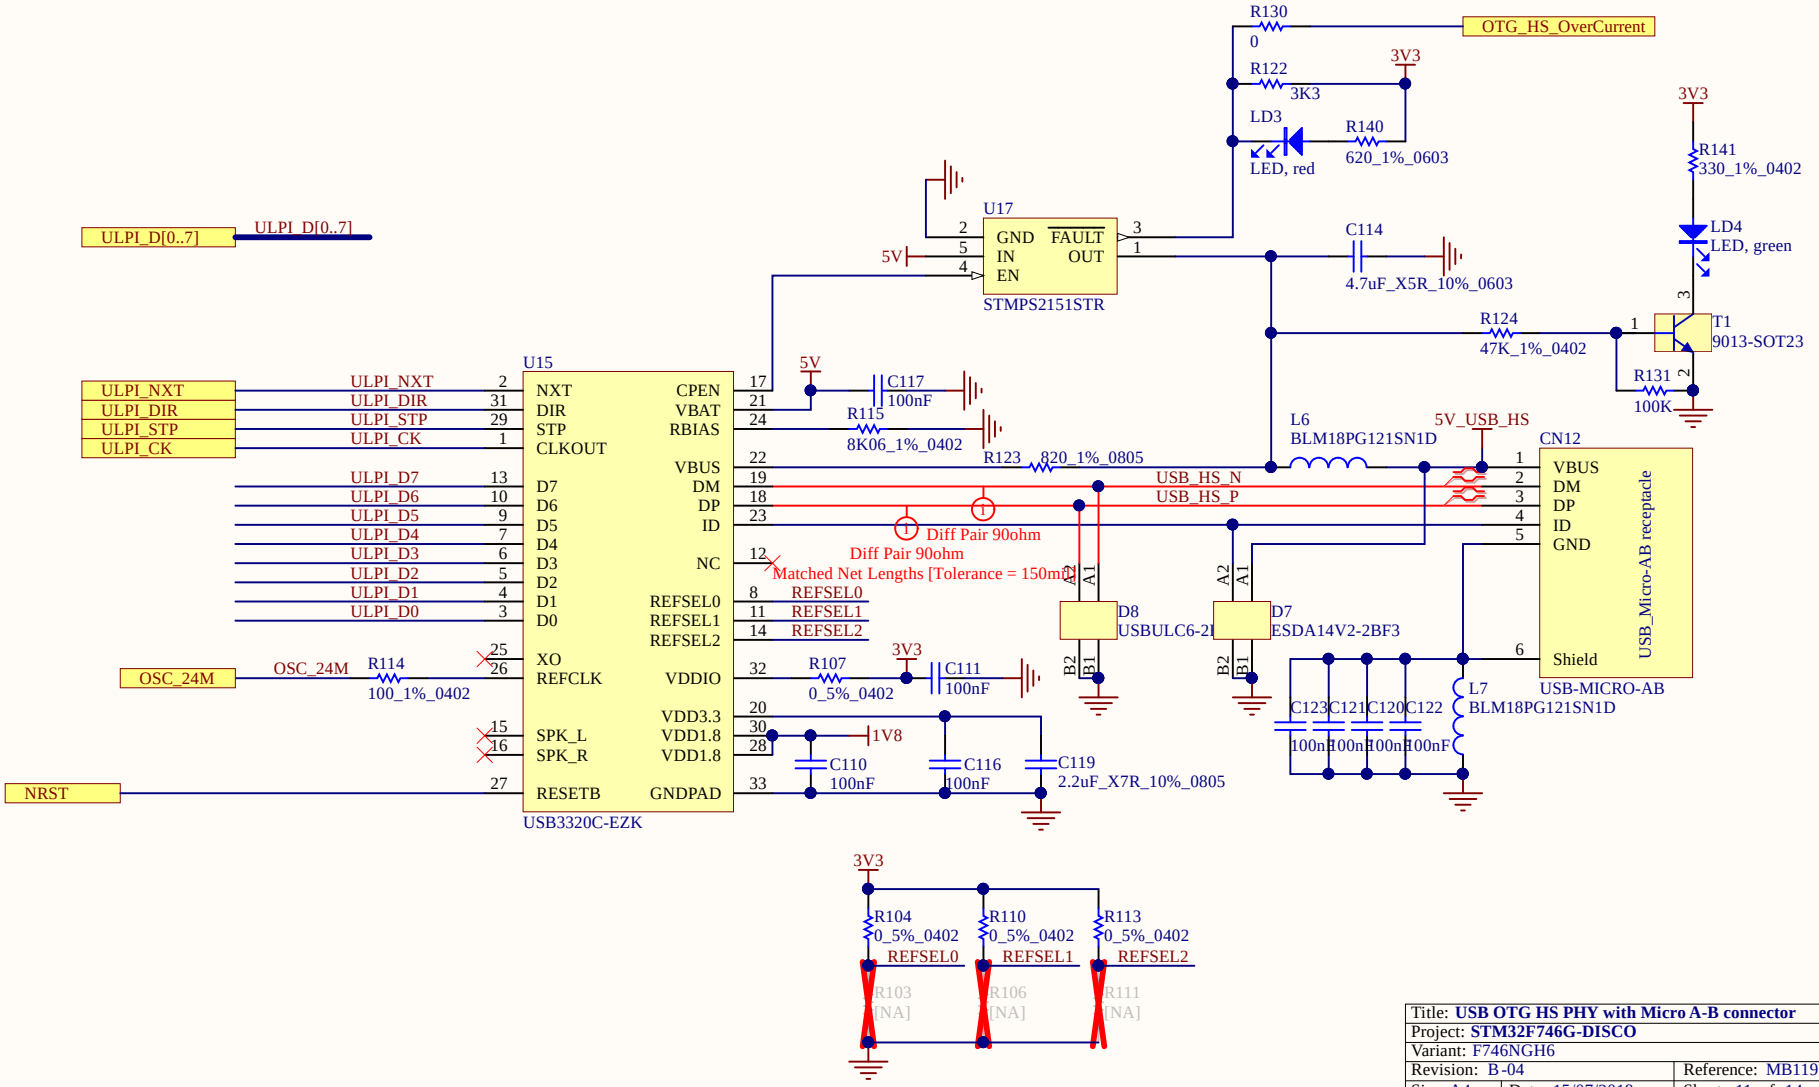


Title: **USB OTG HS PHY with Micro A-B connector**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 11 of 14

life.augmented

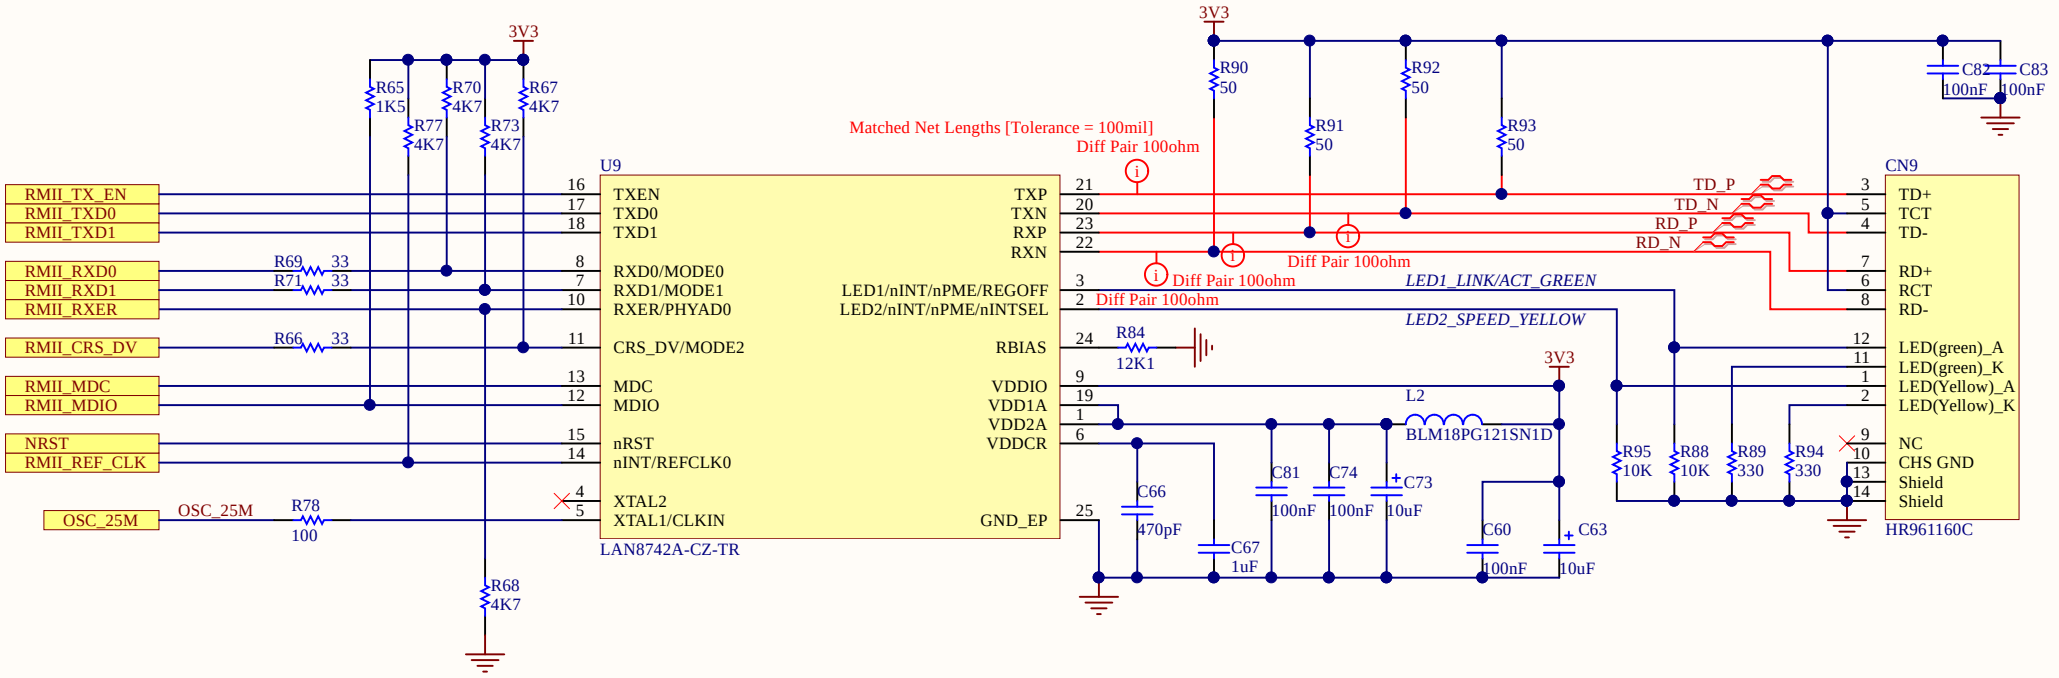


Title: **Ethernet PHY with RJ45 connector**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 12 of 14

life.augmented

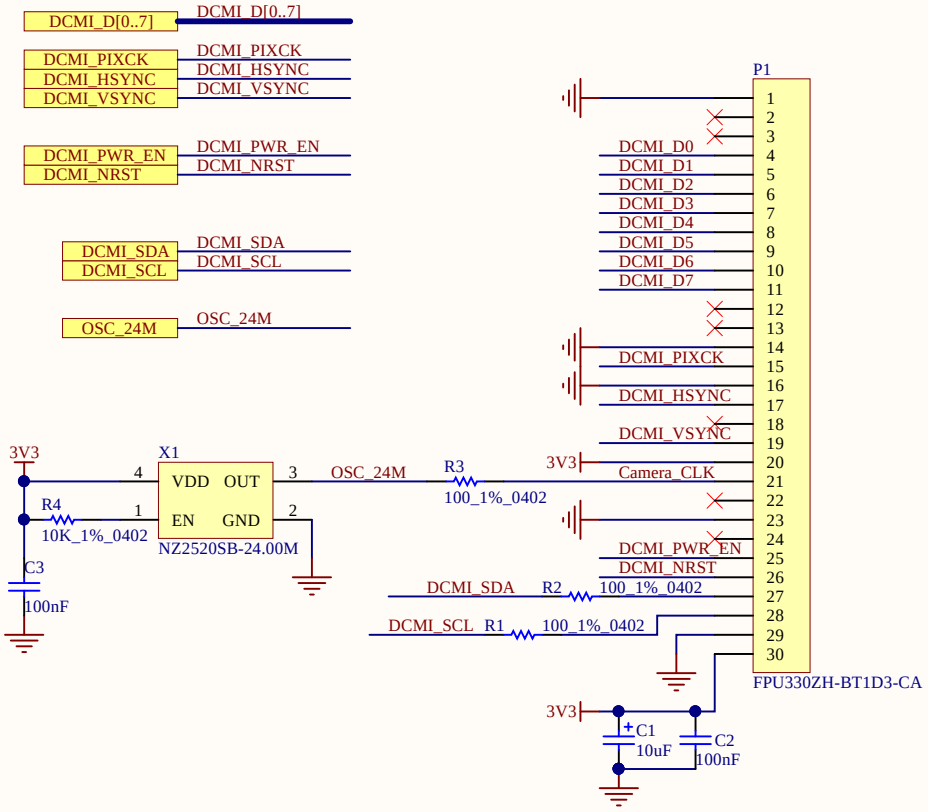


Title: **External Camera connector**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 13 of 14


life.augmented

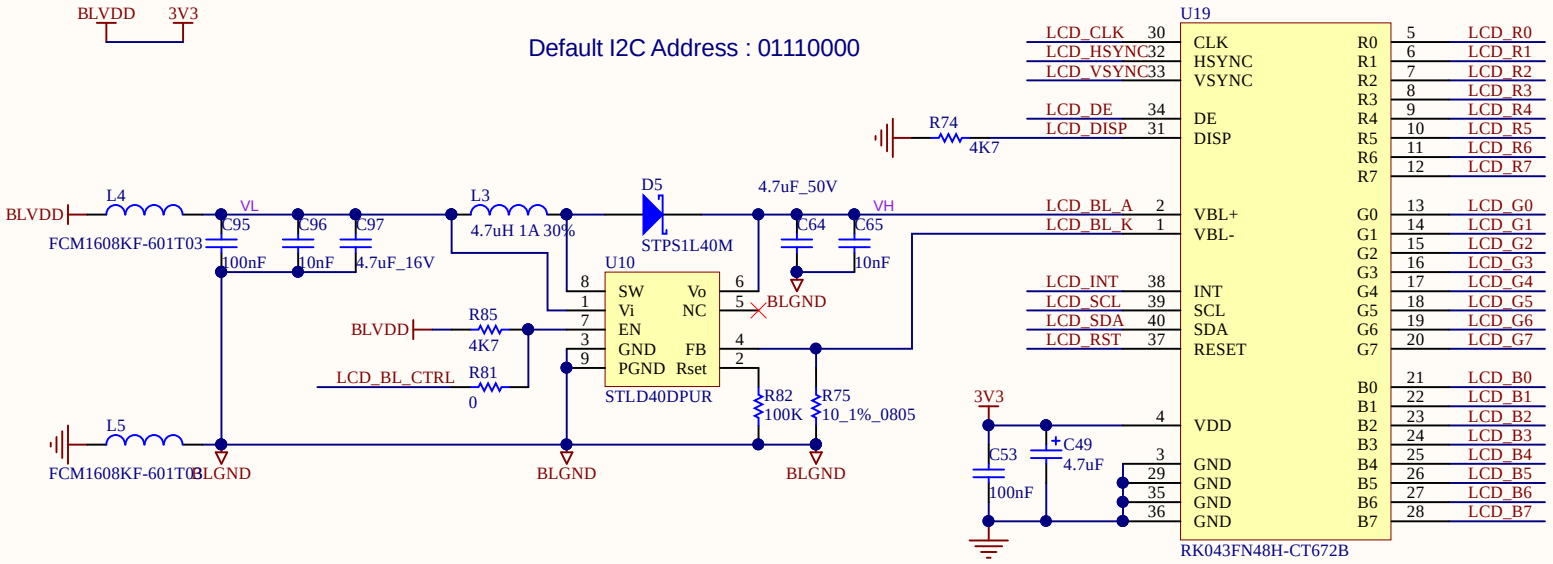


Backlight driver & PFC of LCD panel

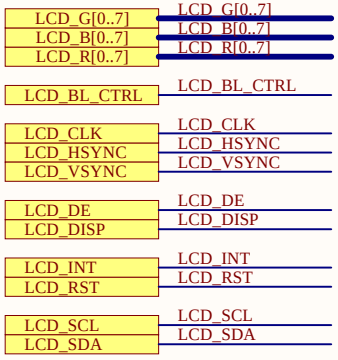

Title: **LCD 4.3" with Capacitive Touch**		
Project: **STM32F746G-DISCO**		
Variant: F746NGH6		
Revision: B-04		Reference: MB1191
Size: A4	Date: 15/07/2019	Sheet: 14 of 14

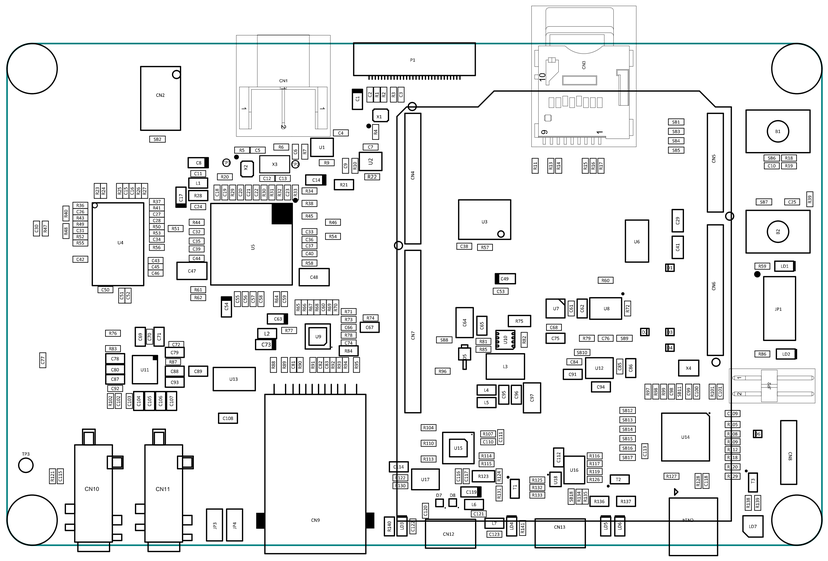
P1
CN1
CN2
CN3
CN4
CN5
CN6
CN7
CN8
CN9
CN10
CN11
CN12
CN13
U1
U3
U4
U5
U6
U7
U8
U9
U10
U11
U12
U13
U14
U15
U16
U17
U18
U19
U20
U21
U22
U23
U24
U25
U26
U27
U28
U29
U30
U31
U32
U33
U34
U35
U36
U37
U38
U39
U40
U41
U42

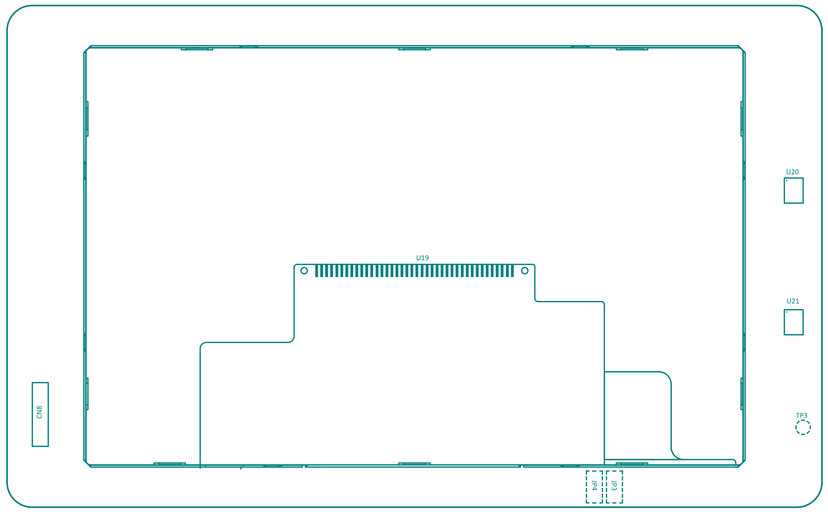

			16-04-2015	
Revision DESCRIPTION	COMPAGNY	PCB DESIGNER	DATE	CHECKED BY

TITLE: Carte STM32F746G-DISCOVERY

REF.	LAYER	
MB1191B	Assembly Bottom	GERBER

Ce document est la propriété de STMICROELECTRONICS et ne peut être reproduit ou transmis sans son autorisation écrite.
This document is the property of STMICROELECTRONICS and shall not be reproduced nor transmitted without written approval.

A4