


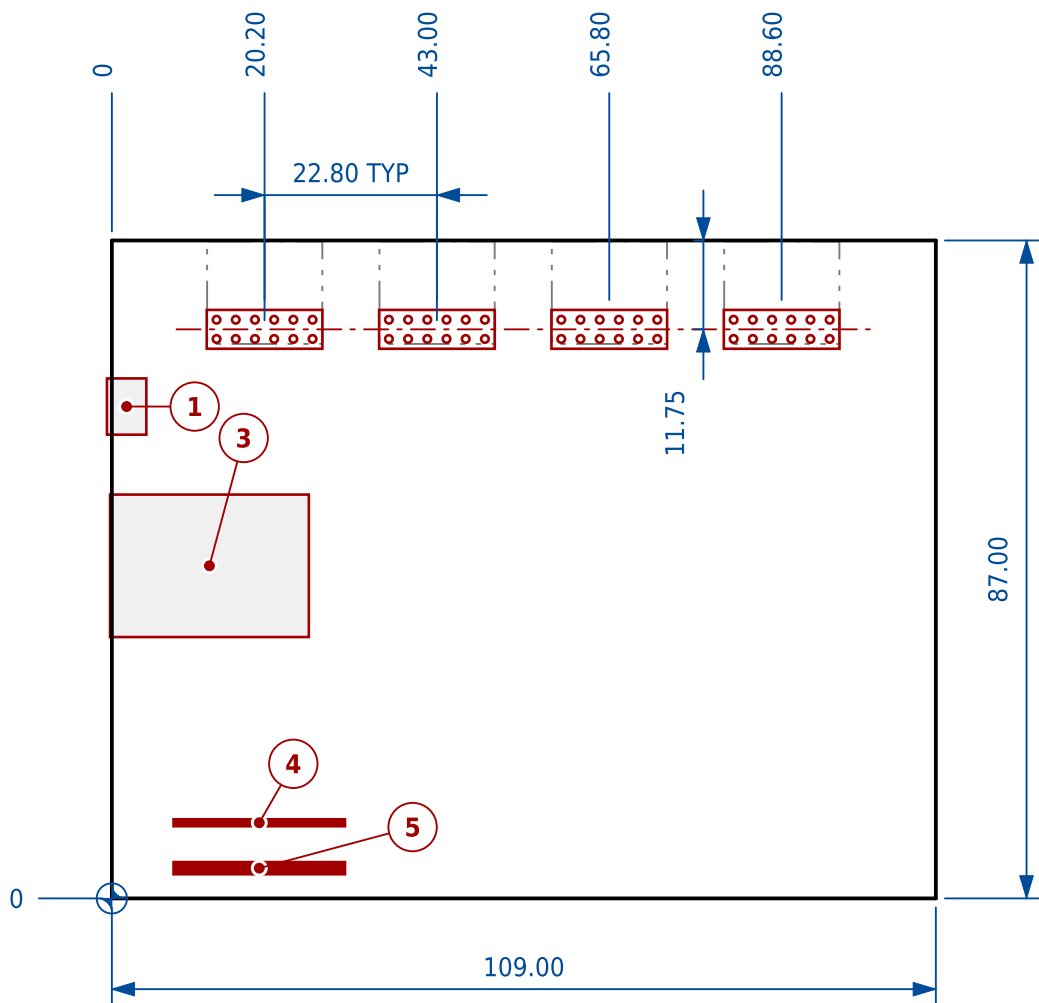

PMOD HOST HEADERS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	top	20.200	75.250	13.850	74.000
JB	top	43.000	75.250	36.650	74.000
JC	top	65.800	75.250	59.450	74.000
JD	top	88.600	75.250	82.250	74.000

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	micro-USB J10, programming and console	-0.65 to 4.56	61.32 to 68.76
2	Second USB port - not on this board	-	-
3	Ethernet RJ45 J9	-0.24 to 26.06	34.56 to 53.40
4	LEDs LD4-LD7, 4 on 7.00 mm pitch	8.16 to 30.84	9.54 to 10.46
5	Tri-colour LEDs LD0-LD3, 4 on 7.00 mm pitch	8.16 to 30.84	3.19 to 4.80
6	Expansion connector, first - not on this board	-	-
7	Expansion connector, second - not on this board	-	-
8	Expansion connector, third - not on this board	-	-
9	Third USB port - not on this board	-	-
10	Fourth USB port - not on this board	-	-
11	Status LEDs, debug controller - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body
- Dimension, extension and leader

NOTES

- Viewed from the component side.
- No mounting holes. The drawing shows four 10.0 mm rubber feet centred 5.0 mm from each corner; a plate has to carry the board on those or clamp its edges.
- The Pmod pin rows are 2.50 mm apart on the drawing, not 2.54, and the hosts are on a 22.80 mm pitch where the PDF's dimension reads 0.90 in; both within the general tolerance.
- JA is nearest the USB and Ethernet corner, per the reference manual's callout figure.
- The 1.6 x 1.6 mm LED row nearest the edge is taken as the tri-colour LD0-LD3 and the 0603 row behind it as LD4-LD7; no source names them.
- Bodies read from the PDF plot are good to about +/-0.3 mm; the DXF figures carry the general tolerance.
- Assembled envelope, connector overhang included: 109.65 x 87.00 mm.

SOURCES

- Mechanical drawing: https://digilent.com/reference/_media/reference/programmable-logic/arti-a7/arti_a7.zip - Digilent, Arty_A7_DXF.DXF and Mechanical_Arty_A7.pdf, dated 2020-09-02. Outline, pin fields, slots and pegs from the DXF; component bodies from the PDF, whose plot scale is recovered from the outline (axes agree to 0.20 %).
- 3D model: https://digilent.com/reference/_media/reference/programmable-logic/arti/arti_rev_cad.zip - Digilent, Arty Rev C: used only to identify which of the PDF's outlines are the eight user LEDs.
- Reference manual: <https://digilent.com/reference/programmable-logic/arti-a7/reference-manual> - Pmod JA, JB, JC, JD; four tri-colour and four single LEDs.
- Mounting: <https://forum.digilent.com/topic/4523-410-319-mounting/> - Digilent staff, 2017-07-19: "There are no thru holes or mounting provisions"; the board stands on rubber feet.

DIGILENT ARTY A7

A7-35T and A7-100T

DRAWN generated		VERSION v0.0-270-gc2d9e2f	UNITS mm	SCALE 1:1	
SIZE A3	SHEET 1 OF 1	DRAWING NO FPGA-ARTY-A7			REV A
MATERIAL PCB, thickness not stated		GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08			