


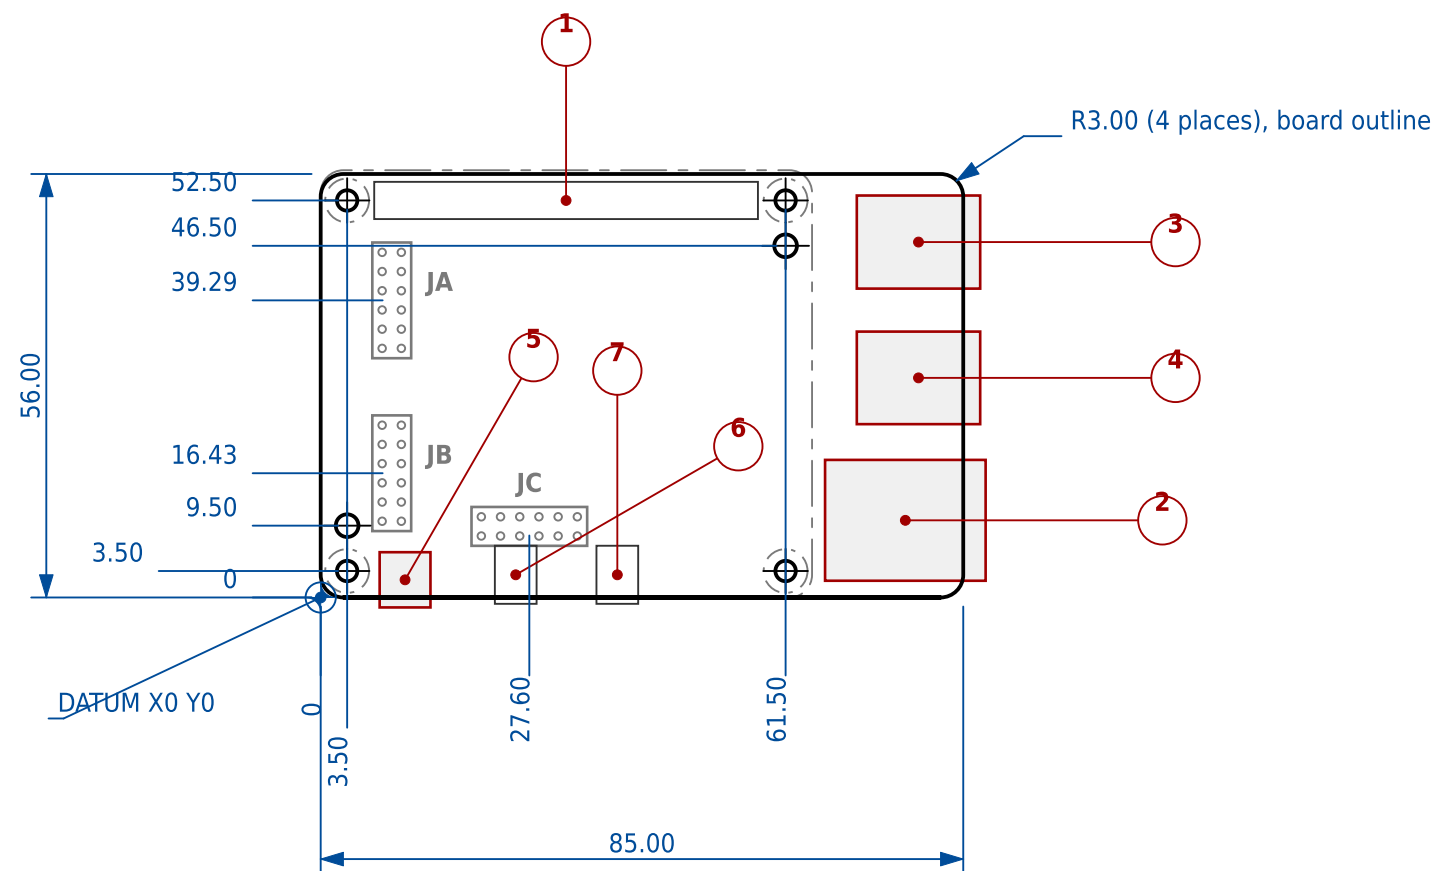

HOLE SCHEDULE

PMOD HAT ADAPTER HOSTS

SOURCES

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X right, Y up, viewed from the component side.
2. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header, drawn in this board's frame because its mounting holes coincide with this board's.
3. Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
4. Mounting hole diameter: Hole diameter dimensioned on the drawing as $\varnothing 2.7$; the keep-out circle is drawn and measures 5.80.
5. Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.

6. AUX1 and AUX2 are 3.0 mm holes additional to the four M2.5 mounting holes. Each sits 6.0 mm inboard of the mounting hole it shares an X coordinate with, and the pair are diagonally opposite each other.
7. Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's drawing.
8. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
9. Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about +/-0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.

RASPBERRY PI 5

6. AUX1 and AUX2 are 3.0 mm holes additional to the four M2.5 mounting holes. Each sits 6.0 mm inboard of the mounting hole it shares an X coordinate with, and the pair are diagonally opposite each other.
7. Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's drawing.
8. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
9. Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about +/-0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.