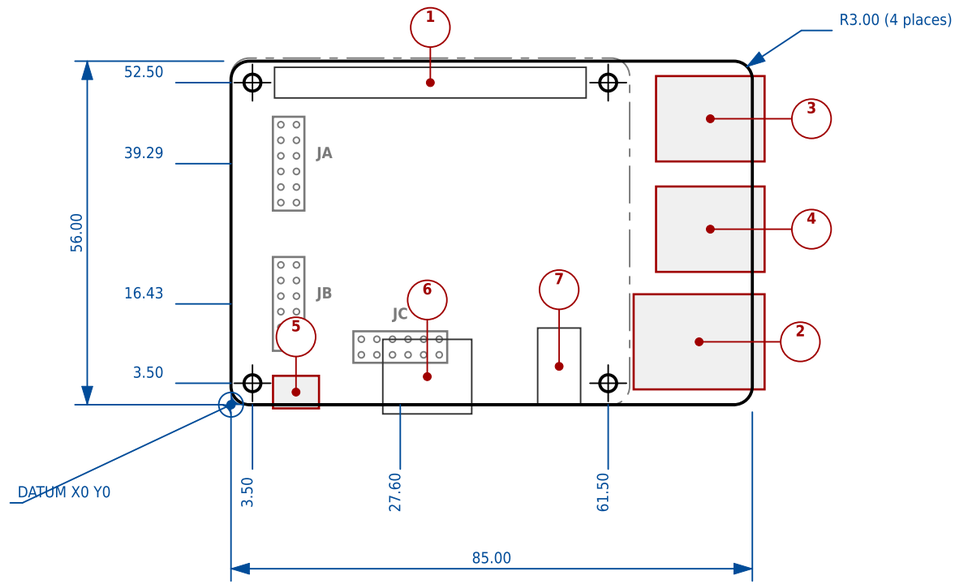



## HOLE SCHEDULE

| ID | X | Y | DIA | KEEPOUT |
|---|---|---|---|---|
| H1 | 3.50 | 3.50 | 2.75 +/-0.05 | not given |
| H2 | 61.50 | 3.50 | 2.75 +/-0.05 | not given |
| H3 | 3.50 | 52.50 | 2.75 +/-0.05 | not given |
| H4 | 61.50 | 52.50 | 2.75 +/-0.05 | not given |

## FEATURE SCHEDULE

| # | FEATURE | X EXTENT | Y EXTENT |
|---|---|---|---|
| 1 | 40-pin GPIO header | 7.10 to 57.90 | 50.00 to 55.00 |
| 2 | Ethernet RJ45 | 65.65 to 87.00 | 2.50 to 18.00 |
| 3 | USB 2.0 type A (upper pair) | 69.30 to 87.00 | 39.65 to 53.57 |
| 4 | USB 2.0 type A (lower pair) | 69.30 to 87.00 | 21.65 to 35.57 |
| 5 | micro-USB power input | 6.85 to 14.35 | -0.60 to 4.71 |
| 6 | HDMI type A | 24.75 to 39.25 | -1.50 to 10.65 |
| 7 | 3.5 mm A/V jack | 50.00 to 57.00 | 0.00 to 12.50 |

## PMOD HAT ADAPTER HOSTS

| PORT | EDGE | CX | CY |
|---|---|---|---|
| JA | left edge | 9.40 | 39.29 |
| JB | left edge | 9.40 | 16.43 |
| JC | bottom edge | 27.60 | 9.40 |

## NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
2. Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
3. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header. Its Pmod host positions are given in this board's coordinate frame, since the adapter's mounting holes coincide with this board's.
4. Connector outlines are the component body as drawn by Raspberry Pi Ltd, including any overhang past the board edge.
5. Mounting hole diameter: Drawing note, quoted: 4x M2.5 MOUNTING HOLES DRILLED TO 2.75 +/- 0.05mm.
6. No keep-out around the mounting holes is dimensioned on this model's own drawing. The Raspberry Pi HAT mechanical specification (github.com/raspberrypi/hats, hat-board-mechanical.pdf) requires a 6.2 mm keep-out around each mounting hole on a board fitted to a Pi; design to that.
7. Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's own drawing.
8. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
9. Digilent Pmod HAT Adapter positions are DERIVED, not published, and are good to about +/-0.75 mm. JA and JB face out of the left edge, JC out of the lower edge; all three are right-angle hosts whose bodies overhang the edge. See the Pmod HAT Adapter sheet for the full derivation.
10. Tolerance, unless a dimension says otherwise: +/-0.20 on the routed board edge, +/-0.10 on hole position, +/-0.08 on hole diameter.

## SOURCES

1. Mechanical drawing: https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-b-mechanical-drawing.dxf - Raspberry Pi Ltd
2. Mounting holes: https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-b-mechanical-drawing.pdf - Drawing note, quoted: 4x M2.5 MOUNTING HOLES DRILLED TO 2.75 +/- 0.05mm.

# RASPBERRY PI 3 MODEL B

85 x 56 mm

| DRAWN | DATE | UNITS | SCALE |
|---|---|---|---|
| **generated** | **2026-09-10** | **mm** | **1:1** |
| SIZE | SHEET | DRAWING NO | REV |
| **A3** | **1 OF 1** | **RPI-02** | **A** |