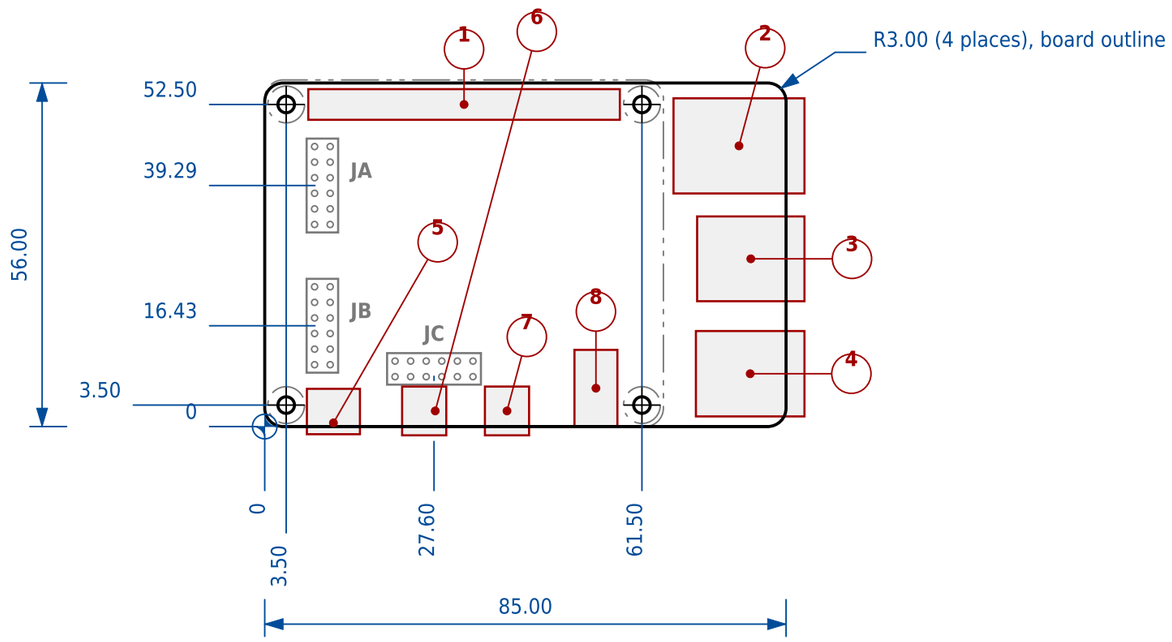


HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.70	6.00
MT2	61.50	3.50	2.70	6.00
MT3	3.50	52.50	2.70	6.00
MT4	61.50	52.50	2.70	6.00

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.10 to 57.90	50.00 to 55.00
2	Ethernet RJ45	66.65 to 88.00	37.99 to 53.51
3	USB 3.0 type A (upper pair)	70.50 to 88.00	20.43 to 34.25
4	USB 2.0 type A (lower pair)	70.30 to 88.00	1.65 to 15.57
5	USB-C power input	6.88 to 15.53	-1.25 to 6.15
6	micro-HDMI 0	22.40 to 29.60	-1.43 to 6.52
7	micro-HDMI 1	35.90 to 43.10	-1.43 to 6.52
8	3.5 mm A/V jack	50.50 to 57.50	0.00 to 12.50

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.400	39.290	8.130	45.640
JB	left edge	9.400	16.430	8.130	22.780
JC	bottom edge	27.600	9.400	21.250	8.130

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header, drawn in this board's frame because its mounting holes coincide with this board's.
3. Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
4. Mounting hole diameter: Read from the DXF: hole and keep-out circles on layer 0.
5. Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.
6. Design mounting hole keep-outs to 6.2 mm diameter on every model. That is what the Raspberry Pi HAT mechanical specification (github.com/raspberrypi/hats) requires around each hole, and it is the largest of the figures the individual models publish. The KEEPOUT column gives what this model's own drawing shows, which is not always anything.

NOTES (continued)

7. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
8. Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about +/-0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.
9. Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
10. Port names differ by family: JA, JB, JC after Digilent on the adapter and Raspberry Pi sheets; by signal direction on the demo boards, after the silkscreen; PMOD 1 to 3 on the plate sheets, which number plate positions. TT-MP-02 maps them.

SOURCES

1. Mechanical drawing: https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf - Raspberry Pi Ltd
2. Mounting holes: https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.dxf - Read from the DXF: hole and keep-out circles on layer 0.

LEGEND

- Board outline
- Component body, scheduled
- Adjacent part, hole keep-out
- Dimension, extension and leader

RASPBERRY PI 4 MODEL B

85 x 56 mm

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**RPI-04**	**A**
MATERIAL	GENERAL TOLERANCE		
PCB, thickness not stated	**edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08**		