

Mobile Double Data Rate (DDR) SDRAM

MT46H16M16LF - 4 Meg x 16 x 4 banks

MT46H8M32LF - 2 Meg x 32 x 4 banks

For the latest data sheet, refer to Micron's Web site: <http://www.micron.com/mobile>


Features

- Endure-IC™ technology
- $V_{DD} = +1.8V \pm 0.1V$, $V_{DDQ} = +1.8V \pm 0.1V$
- Bidirectional data strobe per byte of data (DQS)
- Internal, pipelined double-data-rate (DDR) architecture; two data accesses per clock cycle
- Differential clock inputs (CK and CK#)
- Commands entered on each positive CK edge
- DQS edge-aligned with data for READs; center-aligned with data for WRITEs
- Four internal banks for concurrent operation
- Data masks (DM) for masking write data—one mask per byte
- Programmable burst lengths: 2, 4, 8, 16, or continuous page
- Concurrent auto precharge option is supported
- Auto refresh and self refresh modes
- 1.8V LVCMOS compatible inputs
- On-Chip temperature sensor to control refresh rate
- Partial array self refresh (PASR)
- Deep power-down (DPD)
- Selectable output drive (DS)
- Clock stop capability
- 64ms refresh

Table 1: Key Timing Parameters

Speed Grade	Data Rate (MHz)		Data Out Window	Access Time	DQS-DQ Skew
	CL = 2	CL = 3			
-6	–	166 MHz	1.5ns	5.5ns	+0.45ns
-75	83.3 MHz	133 MHz	2.2ns	6.0ns	+0.6ns
-10	66.7 MHz	104 MHz	2.6ns	7.0ns	+0.7ns

Figure 1: 60-Ball VFBGA

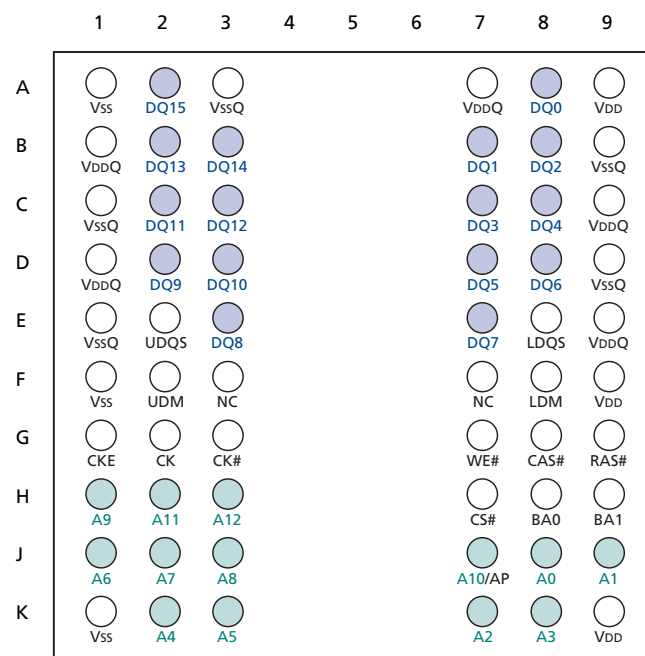

Options

- VDD/VDDQ
 - 1.8V/1.8V
- Configuration
 - 16 Meg x 16 (4 Meg x 16 x 4 banks)
 - 8 Meg x 32 (2 Meg x 32 x 4 banks)
- Plastic package
 - 60-Ball VFBGA (8mm x 9mm)¹
 - 90-Ball VFBGA (8mm x 13mm)²
- Timing – cycle time
 - 6ns @ CL = 3
 - 7.5ns @ CL = 3
 - 10ns @ CL = 3
- Operating temperature range
 - Commercial (0° to +70°C)
 - Industrial (-40°C to +85°C)

Marking

H

16M16

8M32

BF

B5

-6

-75

-10

None

IT

Notes: 1. Only available for x16 configuration

2. Only available for x32 configuration



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Table of Contents

Table of Contents

Features	1
Table of Contents	2
List of Figures	3
List of Tables	4
FBGA Part Marking Decoder	5
General Description	6
Ball Assignment	9
Ball Description	10
Functional Description	13
Initialization	13
Register Definition	14
Mode Registers	14
Extended Mode Register	19
Commands	22
DESELECT	23
Deep Power-Down	23
NO OPERATION (NOP)	23
LOAD MODE REGISTER	23
ACTIVE	23
READ	23
WRITE	23
PRECHARGE	24
Auto Precharge	24
BURST TERMINATE	24
AUTO REFRESH	24
SELF REFRESH	25
Operations	26
Bank/Row Activation	26
READs	27
READs (continued)	33
WRITEs	36
PRECHARGE	46
Power-Down (CKE Not Active)	46
Power-Down (in Active or Precharge Modes)	47
Deep Power-Down (DPD)	48
Electrical Specifications	55
Notes	62
Timing Diagrams	67
Package Dimensions	80



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM

List of Figures

List of Figures

Figure 1:	60-Ball VFBGA	1
Figure 2:	256Mb Mobile DDR Part Numbering	5
Figure 3:	Functional Block Diagram: 16 Meg x 16 Mobile DDR SDRAM	7
Figure 4:	Functional Block Diagram: 8 Meg x 32 Mobile DDR SDRAM	8
Figure 5:	90-Ball VFBGA (Top View) – 8mm x 13mm	9
Figure 6:	Standard Mode Register Definition	16
Figure 7:	CAS Latency	18
Figure 8:	Extended Mode Register	20
Figure 9:	Clock Stop Mode	21
Figure 10:	Activating a Specific Row in a Specific Bank	26
Figure 11:	Example: Meeting t_{RCD} (t_{RRD}) MIN When $2 < t_{RCD}$ (t_{RRD}) MIN / $t_{CK} \leq 3$	27
Figure 12:	READ Command	28
Figure 13:	READ Burst	29
Figure 14:	Consecutive READ Burst	30
Figure 15:	Nonconsecutive READ Bursts	31
Figure 16:	Random READ Accesses	32
Figure 17:	Terminating a READ Burst	33
Figure 18:	READ-to-WRITE	34
Figure 19:	READ-to-PRECHARGE	35
Figure 20:	WRITE Command	37
Figure 21:	WRITE Burst	38
Figure 22:	Consecutive WRITE-to-WRITE	38
Figure 23:	Nonconsecutive WRITE-to-WRITE	39
Figure 24:	Random WRITE Cycles	39
Figure 25:	WRITE-to-READ – Uninterrupting	40
Figure 26:	WRITE-to-READ – Interrupting	41
Figure 27:	WRITE-to-READ – Odd Number of Data, Interrupting	42
Figure 28:	WRITE-to-PRECHARGE – Uninterrupting	43
Figure 29:	WRITE-to-PRECHARGE – Interrupting	44
Figure 30:	WRITE-to-PRECHARGE – Odd Number of Data, Interrupting	45
Figure 31:	PRECHARGE Command	46
Figure 32:	Power-Down Command in ACTIVE or Precharge Modes	47
Figure 33:	Power-Down in ACTIVE or Precharge Modes	48
Figure 34:	Deep Power-Down Command	49
Figure 35:	Deep Power-Down	49
Figure 36:	Data Output Timing – t_{DQSQ} , t_{QH} , and Data Valid Window (x16)	67
Figure 37:	Data Output Timing – t_{DQSQ} , t_{QH} , and Data Valid Window (x32)	68
Figure 38:	Data Output Timing – t_{AC} and t_{DQCK}	69
Figure 39:	Data Input Timing	70
Figure 40:	Initialize and Load Mode Registers	71
Figure 41:	Power Down Mode (Active or Precharge)	72
Figure 42:	Auto Refresh Mode	73
Figure 43:	Self Refresh Mode	74
Figure 44:	Bank Read – Without Auto Precharge	75
Figure 45:	Bank Read – With Auto Precharge	76
Figure 46:	Bank Write – Without Auto Precharge	77
Figure 47:	Bank Write – With Auto Precharge	78
Figure 48:	Write – DM Operation	79
Figure 49:	60-Ball VFBGA Package	80
Figure 50:	90-Ball VFBGA Package	81



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM List of Tables

List of Tables

Table 1:	Key Timing Parameters	1
Table 2:	Configuration Addressing	5
Table 3:	60-Ball VFBGA Ball Description	10
Table 4:	90-Ball VFBGA Ball Description	11
Table 5:	Burst Definition	17
Table 6:	CAS Latency	18
Table 7:	Truth Table - Commands	22
Table 8:	DM Operation Truth Table	22
Table 9:	Truth Table – CKE	50
Table 10:	Truth Table – Current State Bank n - Command to Bank n	51
Table 11:	Truth Table – Current State Bank n - Command to Bank m	53
Table 12:	READ or WRITE w/Auto Precharge Enabled to a Command to a Different Bank	54
Table 13:	Operating Conditions	55
Table 14:	AC/DC Electrical Characteristics and Operating Conditions	55
Table 15:	Capacitance (x16, x32)	55
Table 16:	IDD Specifications and Conditions (x16)	56
Table 17:	IDD Specifications and Conditions (x32)	58
Table 18:	Electrical Characteristics and Recommended AC Operating Conditions	60
Table 19:	Target Normal Output Drive Characteristics (Full-Drive Strength)	65
Table 20:	Target Reduced Output Drive Characteristics (Half Strength)	66




256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM
FBGA Part Marking Decoder

Table 2: Configuration Addressing

Architecture	16 Meg x 16	8 Meg x 32	8 Meg x 32
Configuration	4 Meg x 16 x 4	2 Meg x 32 x 4	2 Meg x 32 x 4
Refresh Count	8K	4K	8K
Row Addr.	8K (A0-A12)	4K (A0-A11)	8K (A0-A12)
Bank Addr.	4 (BA0, BA1)	4 (BA0, BA1)	4 (BA0, BA1)
Column Addr.	512 (A0-A8)	512 (A0-A8)	256 (A0-A7)

Figure 2: 256Mb Mobile DDR Part Numbering

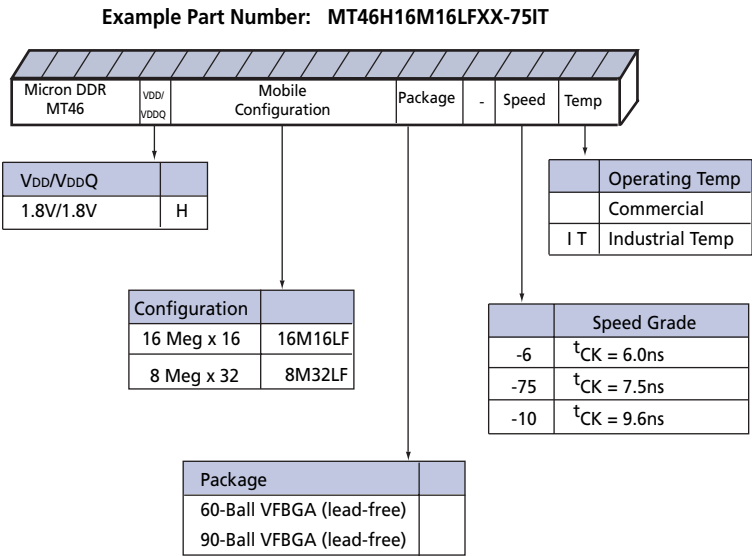

FBGA Part Marking Decoder

Due to space limitations, FBGA-packaged components have an abbreviated part marking that is different from the part number. Micron's new FBGA Part Marking Decoder makes it easier to understand this part marking. Visit the Web site at www.micron.com/decoder.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM General Description

General Description

The Micron® 256Mb Mobile DDR SDRAM is a high-speed CMOS, dynamic random-access memory containing 268,435,456-bits. It is internally configured as a quad-bank DRAM. Each of the x16's 67,108,864-bit banks is organized as 8,192 rows by 512 columns by 16 bits. Each of the x32's 67,108,864-bit banks are organized as 8,192 rows by 256K columns by 32 bits.

The 256Mb Mobile DDR SDRAM uses a double data rate architecture to achieve high-speed operation. The double data rate architecture is essentially a $2n$ -prefetch architecture with an interface designed to transfer two data words per clock cycle at the I/O balls. A single read or write access for the 256Mb Mobile DDR SDRAM effectively consists of a single $2n$ -bit wide, one-clock-cycle data transfer at the internal DRAM core and two corresponding n -bit wide, one-half-clock-cycle data transfers at the I/O balls.

A bidirectional data strobe (DQS) is transmitted externally, along with data, for use in data capture at the receiver. DQS is a strobe transmitted by the Mobile DDR SDRAM during READs and by the memory controller during WRITEs. DQS is edge-aligned with data for READs and center-aligned with data for WRITEs. The x16 offering has two data strobes, one for the lower byte and one for the upper byte and the x32 offering has four data strobes, one per byte.

The 256Mb Mobile DDR SDRAM operates from a differential clock (CK and CK#); the crossing of CK going HIGH and CK# going LOW will be referred to as the positive edge of CK. Commands (address and control signals) are registered at every positive edge of CK. Input data is registered on both edges of DQS, and output data is referenced to both edges of DQS, as well as to both edges of CK.

Read and write accesses to the Mobile DDR SDRAM are burst oriented; accesses start at a selected location and continue for a programmed number of locations in a programmed sequence. Accesses begin with the registration of an ACTIVE command, which is then followed by a READ or WRITE command. The address bits registered coincident with the ACTIVE command are used to select the bank and row to be accessed. The address bits registered coincident with the READ or WRITE command are used to select the bank and the starting column location for the burst access.

The Mobile DDR SDRAM provides for programmable READ or WRITE burst lengths of 2, 4, 8, 16, or continuous page. An auto precharge function may be enabled to provide a self-timed row precharge that is initiated at the end of the burst access.

As with standard SDR SDRAMs, the pipelined, multibank architecture of Mobile DDR SDRAMs allows for concurrent operation, thereby providing high, effective bandwidth by hiding row precharge and activation time.

An auto refresh mode is provided, along with a power saving power down mode. Deep power-down mode is offered to achieve maximum power reduction by eliminating the power of the memory array. Data will not be retained once the device enters deep power-down mode.


Micron's 256Mb Mobile DDR SDRAM device features Endur-IC technology. Pairing Micron's advanced memory architecture with innovative Endur-IC technology results in Mobile DDR devices that exceed current JEDEC standards, including lower power specifications that dramatically reduce overall power consumption.

Self refresh mode offers temperature compensation through an on-chip temperature sensor and partial array self refresh, which allow users to achieve additional power saving. The temperature sensor is enabled by default and the partial array self refresh can be programmed through the extended mode register.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM General Description

Figure 4: Functional Block Diagram: 8 Meg x 32 Mobile DDR SDRAM

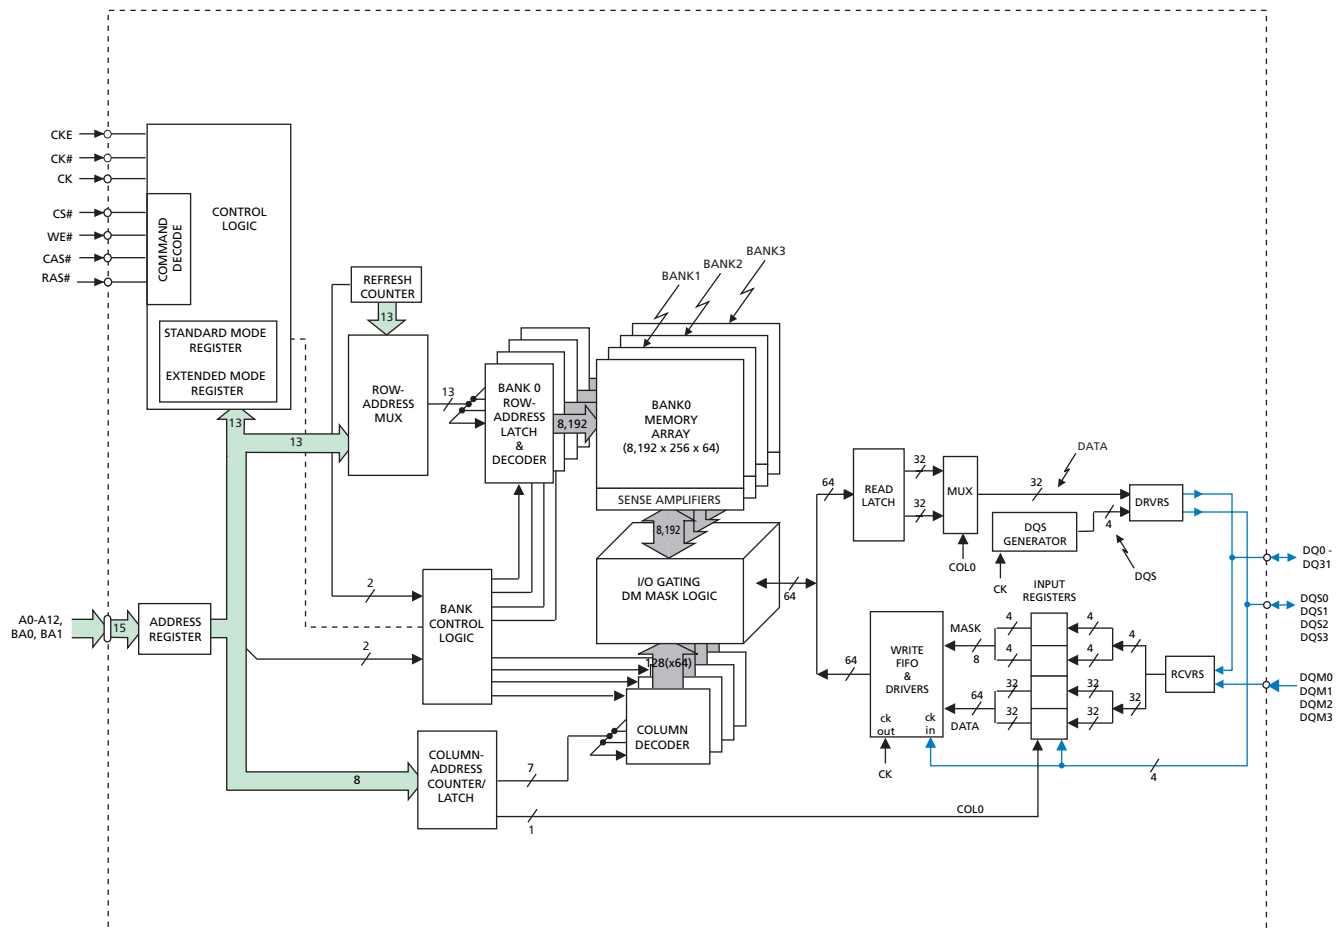




256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM
Ball Assignment

Ball Assignment

Figure 5: 90-Ball VFBGA (Top View) – 8mm x 13mm

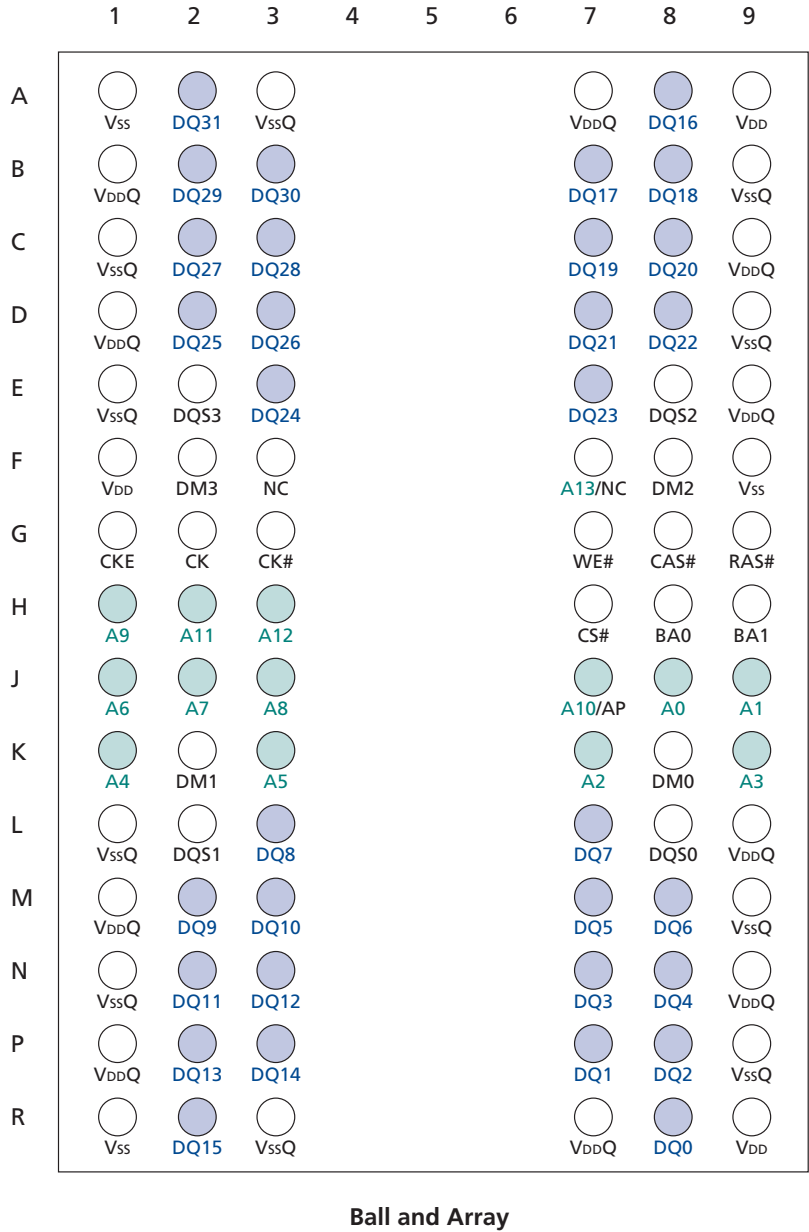



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Ball Description

Ball Description

Table 3: 60-Ball VFBGA Ball Description

Ball Numbers	Symbol	Type	Description
G2, G3	CK, CK#	Input	Clock: CK is the system clock input. CK and CK# are differential clock inputs. All address and control input signals are sampled on the crossing of the positive edge of CK and negative edge of CK#. Input and output data is referenced to the crossing of CK and CK# (both directions of the crossing).
G1	CKE	Input	Clock enable: CKE HIGH activates and CKE LOW deactivates the internal clock signals, input buffers and output drivers. Taking CKE LOW allows PRECHARGE POWER-DOWN and SELF REFRESH operations (all banks idle), or ACTIVE POWER-DOWN (row active in any bank). CKE is synchronous for all functions except SELF REFRESH exit. All input buffers (except CKE) are disabled during power down and self refresh modes.
H7	CS#	Input	Chip select: CS# enables (registered LOW) and disables (registered HIGH) the command decoder. All commands are masked when CS# is registered HIGH. CS# provides for external bank selection on systems with multiple banks. CS# is considered part of the command code.
G9, G8, G7	RAS#, CAS#, WE#	Input	Command inputs: RAS#, CAS#, and WE# (along with CS#) define the command being entered.
F2, F8	UDM, LDM	Input	Input data mask: DM is an input mask signal for write data. Input data is masked when DM is sampled HIGH along with that input data during a WRITE access. DM is sampled on both edges of DQS. Although DM balls are input-only, the DM loading is designed to match that of DQ and DQS balls. For the x16, LDM is DM for DQ0–DQ7 and UDM is DM for DQ8–DQ15.
H8, H9	BA0, BA1	Input	Bank address inputs: BA0 and BA1 define to which bank an ACTIVE, READ, WRITE, or PRECHARGE command is being applied. BA0 and BA1 also determine which mode register (standard mode register or extended mode register) is loaded during a LOAD MODE REGISTER command.
J8, J9, K7, K8, K2, K3, J1, J2, J3, H1, H2, H3	A0–A12	Input	Address inputs: Provide the row address for ACTIVE commands, and the column address and AUTO-PRECHARGE bit (A10) for READ or WRITE commands, to select one location out of the memory array in the respective bank. During a PRECHARGE command, A10 determines whether the PRECHARGE applies to one bank (A10 LOW, bank selected by BA0, BA1) or all banks (A10 HIGH). The address inputs also provide the op-code during a LOAD MODE REGISTER command. BA0 and BA1 define which mode register (mode register or extended mode register) is loaded during the LOAD MODE REGISTER command.
A8, B7, B8, C7, C8, D7, D8, E7, E3, D2, D3, C2, C3, B2, B3, A2	DQ0–DQ15	I/O	Data input/output: Data bus for x16.
E2, E8	UDQS, LDQS	I/O	Data strobe: Output with read data, input with write data. DQS is edge-aligned with read data, centered in write data. It is used to capture data.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Ball Description

Table 3: 60-Ball VFBGA Ball Description (continued)

Ball Numbers	Symbol	Type	Description
A7, B1, C9, D1, E9	VDDQ	Supply	DQ power supply: +1.8V $\pm$ 0.1V. Isolated on the die for improved noise immunity.
A3, B9, C1, D9, E1	VSSQ	Supply	DQ ground. Isolated on the die for improved noise immunity.
A9, F9, K9	VDD	Supply	Power supply: +1.8V $\pm$ 0.1V.
A1, F1, K1	VSS	Supply	Ground.
F3, F7	NC	Input	F7 is the upgrade address input for 1Gb devices.

Table 4: 90-Ball VFBGA Ball Description

Ball Numbers	Symbol	Type	Description
G2, G3	CK, CK#	Input	Clock: CK is the system clock input. CK and CK# are differential clock inputs. All address and control input signals are sampled on the crossing of the positive edge of CK and negative edge of CK#. Input and output data is referenced to the crossing of CK and CK# (both directions of the crossing).
G1	CKE	Input	Clock enable: CKE HIGH activates and CKE LOW deactivates the internal clock signals, input buffers and output drivers. Taking CKE LOW allows PRECHARGE POWER-DOWN and SELF REFRESH operations (all banks idle), or ACTIVE POWER-DOWN (row active in any bank). CKE is synchronous for all functions except SELF REFRESH exit. All input buffers (except CKE) are disabled during power down and self refresh modes.
H7	CS#	Input	Chip select: CS# enables (registered LOW) and disables (registered HIGH) the command decoder. All commands are masked when CS# is registered HIGH. CS# provides for external bank selection on systems with multiple banks. CS# is considered part of the command code.
G9, G8, G7	RAS#, CAS#, WE#	Input	Command inputs: RAS#, CAS#, and WE# (along with CS#) define the command being entered.
K8, K2, F8, F2	DM0–DM3	Input	Input data mask: DM is an input mask signal for write data. Input data is masked when DM is sampled HIGH along with that input data during a WRITE access. DM is sampled on both edges of DQS. Although DM balls are input-only, the DM loading is designed to match that of DQ and DQS balls. For the x32, DM0 is DM for DQ0–DQ7, DM1 is DM for DQ8–DQ15, DM2 is DM for DQ16–DQ23 and DM3 is DM for DQ24–DQ31.
H8, H9	BA0, BA1	Input	Bank address inputs: BA0 and BA1 define to which bank an ACTIVE, READ, WRITE, or PRECHARGE command is being applied. BA0 and BA1 also determine which mode register (standard mode register or extended mode register) is loaded during a LOAD MODE REGISTER command.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Ball Description

Table 4: 90-Ball VFBGA Ball Description (continued)

Ball Numbers	Symbol	Type	Description
J8, J9, K7, K9, K1, K3, J1, J2, J3, H1, J7, H2, H3	A0–A12	Input	Address inputs: Provide the row address for ACTIVE commands, and the column address and AUTO-PRECHARGE bit (A10) for READ or WRITE commands, to select one location out of the memory array in the respective bank. During a PRECHARGE command, A10 determines whether the PRECHARGE applies to one bank (A10 LOW, bank selected by BA0, BA1) or all banks (A10 HIGH). The address inputs also provide the op-code during a LOAD MODE REGISTER command. BA0 and BA1 define which mode register (mode register or extended mode register) is loaded during the LOAD MODE REGISTER command.
R8, P7, P8, N7, N8, M7, M8, L7 L3, M2, M3, N2, N3, P2, P3, R2, A8, B7, B8, C7, C8, D7, D8, E7, E3, D2, D3, C2, C3, B2, B3, A2	DQ0–DQ31	I/O	Data input/output: Data bus for x32.
L8, L2, E8, E2	DQS0–DQS3	I/O	Data strobe: Output with read data, input with write data. DQS is edge-aligned with read data, centered in write data. It is used to capture data.
A7, B1, C9, D1, E9, L9, M1, N9, P1, R7	V _{DDQ}	Supply	DQ power supply: +1.8V ±0.1V. Isolated on the die for improved noise immunity.
A3, B9, C1, D9, E1, L1, M9, N1, P9, R3	V _{SSQ}	Supply	DQ ground. Isolated on the die for improved noise immunity.
A9, F1, R9	V _{DD}	Supply	Power supply: +1.8V ±0.1V.
A1, F9, R1	V _{SS}	Supply	Ground.
F3, F7	NC	Input	F7 is the upgrade address input for 2Gb devices.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Functional Description

Functional Description

The 256Mb Mobile DDR SDRAM is a high-speed CMOS, dynamic random-access memory containing 268,435,456-bits. It is internally configured as a quad-bank DRAM. Each of the x16's 67,108,864-bit banks is organized as 8,192 rows by 512 columns by 16 bits. Each of the x32's 67,108,864-bit banks is organized as 8,192 rows by 256K columns by 32 bits.

The 256Mb Mobile DDR SDRAM uses a double data rate architecture to achieve high-speed operation. The double data rate architecture is essentially a $2n$ -prefetch architecture, with an interface designed to transfer two data words per clock cycle at the I/O balls. Single read or write access for the 256Mb Mobile DDR SDRAM consists of a single $2n$ -bit wide, one-clock-cycle data transfer at the internal DRAM core and two corresponding n -bit wide, one-half-clock-cycle data transfers at the I/O balls.

Read and write accesses to the Mobile DDR SDRAM are burst oriented; accesses start at a selected location and continue for a programmed number of locations in a programmed sequence. Accesses begin with the registration of an ACTIVE command, which is then followed by a READ or WRITE command. The address bits registered coincident with the ACTIVE command are used to select the bank and row to be accessed (BA0, BA1 select the bank; A0–A12 select the row). The address bits registered coincident with the READ or WRITE command are used to select the starting column location for the burst access.

It should be noted that the DLL signal that is typically used on standard DDR devices is not necessary on the Mobile DDR SDRAM. It has been omitted to save power.

Prior to normal operation, the Mobile DDR SDRAM must be initialized. The following sections provide detailed information covering device initialization, register definition, command descriptions, and device operation.

Initialization

Mobile DDR SDRAMs must be powered up and initialized in a predefined manner. Operational procedures other than those specified may result in undefined operation.

If there is an interruption to the device power, the initialization routine should be followed to ensure proper functionality of the Mobile DDR SDRAM. The clock stop feature is not available until the device has been properly initialized.

To properly initialize the Mobile DDR SDRAM, the following 11 steps must be followed:

1. To prevent device latch-up, the core power (VDD) and I/O power (VDDQ) must be brought up simultaneously. It is recommended that VDD and VDDQ be from the same power source. Assert and hold CKE HIGH.
2. Once power supply voltages are stable and the CKE has been driven HIGH, it is safe to apply the clock.
3. Once the clock is stable, a 200 μ s (minimum) delay is required by the Mobile DDR SDRAM prior to applying an executable command. During this time, NOP or DESELECT commands must be issued on the command bus.
4. Issue a PRECHARGE ALL command.
5. Issue NOP or DESELECT commands for at least t_{RP} time.
6. Issue an AUTO REFRESH command followed by NOP or DESELECT commands for at least t_{RFC} time. Issue a second AUTO REFRESH command followed by NOP or DESELECT commands for at least t_{RFC} time. As part of the initialization sequence, two



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

AUTO REFRESH commands must be issued. Typically, both of these commands are issued at this stage as described above. Alternately, the second AUTO REFRESH command and NOP or DESELECT sequence can be issued between steps 10 and 11.

7. Using the LOAD MODE REGISTER command, load the standard mode register as desired.
8. Issue NOP or DESELECT commands for at least t_{MRD} time.
9. Using the LOAD MODE REGISTER command, load the extended mode register to the desired operating modes. Note that the sequence in which the standard and extended mode registers are programmed is not critical.
10. Issue NOP or DESELECT commands for at least t_{MRD} time.
11. The Mobile DDR SDRAM has been properly initialized and is ready to receive any valid command.

Register Definition

Mode Registers

The mode registers are used to define the specific mode of operation of the Mobile DDR SDRAM. There are two mode registers used to specify the operational characteristics of the device. The standard mode register, which exists for all SDRAM devices, and the extended mode register, which exists on all Mobile SDRAM devices.

Standard Mode Register

The standard mode register bit definition allows the selection of burst length, burst type, CAS latency and operating mode, as shown in Figure 6, Standard Mode Register Definition, on page 16. Reserved states should not be used as it may result in setting the Mobile DDR SDRAM into an unknown state or cause incompatibility with future versions of Mobile DDR SDRAM. The standard mode register is programmed via the LOAD MODE REGISTER command (with BA0 = 0 and BA1 = 0) and will retain the stored information until it is programmed again, the device goes into deep power down mode or the device loses power.

Reprogramming the mode register will not alter the contents of the memory, provided it is performed correctly. The mode register must be loaded (reloaded) when all banks are idle and no bursts are in progress, and the controller must wait the specified time before initiating the subsequent operation. Violating either of these requirements will result in unspecified operation.

Burst Length

Read and write accesses to the Mobile DDR SDRAM are burst oriented, with the burst length being programmable. The burst length determines the maximum number of column locations that can be accessed for a given READ or WRITE command. Burst lengths of 2, 4, 8, 16 locations or continuous page are available for both sequential and interleaved burst types.

When a READ or WRITE command is issued, a block of columns equal to the burst length is effectively selected. All accesses for that burst take place within this block, meaning that the burst will wrap when a boundary is reached. The block is uniquely selected by A1–Ai when the burst length is set to two, by A2–Ai when the burst length is set to four, by A3–Ai when the burst length is set to eight and by A4–Ai when the burst length is set to sixteen, where Ai is the most significant column address bit for a given configuration. The remaining (least significant) address bits are used to specify the starting location within the block. For a continuous page burst, the full row is selected and



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

A0–Ai select the starting column. Continuous page bursts wrap within the page if the boundary is reached. The programmed burst length applies to both READ and WRITE bursts.

Burst Type

Accesses within a given burst may be programmed to be either sequential or interleaved via the standard mode register.

The ordering of accesses within a burst is determined by the burst length, the burst type and the starting column address. See Table 5 on page 17 for details.

CAS Latency


The CAS latency is the delay, in clock cycles, between the registration of a READ command and the availability of the first output data. The latency can be set to 2 or 3 clocks, as shown in Figure 7, CAS Latency, on page 18.

For CAS latency three (CL = 3), if the READ command is registered at clock edge n , then the data will nominally be available at $(n + 2 \text{ clocks} + t_{AC})$. For CAS latency two (CL = 2), if the READ command is registered at clock edge n , then the data will be nominally be available at $(n + 1 \text{ clock} + t_{AC})$.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

Figure 6: Standard Mode Register Definition

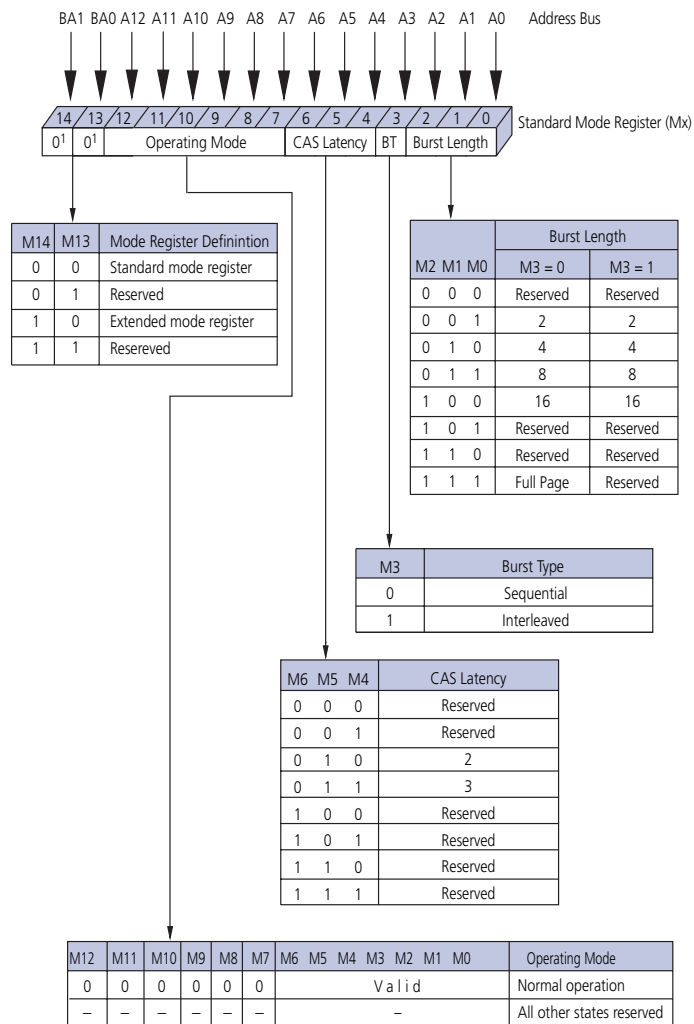



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

Table 5: Burst Definition
Notes on following page

Burst Length		Starting Column Address		Order of Accesses within a Burst							
				Type = Sequential		Type = Interleaved					
2		A0	A0								
			0	0-1	0-1						
			1	1-0	1-0						
4		A1	A0								
			0	0	0-1-2-3	0-1-2-3					
			0	1	1-2-3-0	1-0-3-2					
			1	0	2-3-0-1	2-3-0-1					
			1	1	3-0-1-2	3-2-1-0					
8		A2	A1	A0							
					0	0	0	0-1-2-3-4-5-6-7	0-1-2-3-4-5-6-7		
					0	0	1	1-2-3-4-5-6-7-0	1-0-3-2-5-4-7-6		
					0	1	0	2-3-4-5-6-7-0-1	2-3-0-1-6-7-4-5		
					0	1	1	3-4-5-6-7-0-1-2	3-2-1-0-7-6-5-4		
					1	0	0	4-5-6-7-0-1-2-3	4-5-6-7-0-1-2-3		
					1	0	1	5-6-7-0-1-2-3-4	5-4-7-6-1-0-3-2		
					1	1	0	6-7-0-1-2-3-4-5	6-7-4-5-2-3-0-1		
16		A3	A2	A1	A0						
						0	0	0	0	0-1-2-3-4-5-6-7-8-9-A-B-C-D-E-F	0-1-2-3-4-5-6-7-8-9-A-B-C-D-E-F
						0	0	0	1	1-2-3-4-5-6-7-8-9-A-B-C-D-E-F-0	1-0-3-2-5-4-7-6-9-8-B-A-D-C-F-E
						0	0	1	0	2-3-4-5-6-7-8-9-A-B-C-D-E-F-0-1	2-3-0-1-6-7-4-5-A-B-8-9-E-F-C-D
						0	0	1	1	3-4-5-6-7-8-9-A-B-C-D-E-F-0-1-2	3-2-1-0-7-6-5-4-B-A-9-8-F-E-D-C
						0	1	0	0	4-5-6-7-8-9-A-B-C-D-E-F-0-1-2-3	4-5-6-7-0-1-2-3-C-D-E-F-8-9-A-B
						0	1	0	1	5-6-7-8-9-A-B-C-D-E-F-0-1-2-3-4	5-4-7-6-1-0-3-2-D-C-F-E-9-8-B-A
						0	1	1	0	6-7-8-9-A-B-C-D-E-F-0-1-2-3-4-5	6-7-4-5-2-3-0-1-E-F-C-D-A-B-8-9
						0	1	1	1	7-8-9-A-B-C-D-E-F-0-1-2-3-4-5-6	7-6-5-4-3-2-1-0-F-E-D-C-B-A-9-8
						1	0	0	0	8-9-A-B-C-D-E-F-0-1-2-3-4-5-6-7	8-9-A-B-C-D-E-F-0-1-2-3-4-5-6-7
						1	0	0	1	9-A-B-C-D-E-F-0-1-2-3-4-5-6-7-8	9-8-B-A-D-C-F-E-1-0-3-2-5-4-7-6
						1	0	1	0	A-B-C-D-E-F-0-1-2-3-4-5-6-7-8-9	A-B-8-9-E-F-C-D-2-3-0-1-6-7-4-5
						1	0	1	1	B-C-D-E-F-0-1-2-3-4-5-6-7-8-9-A	B-A-9-8-F-E-D-C-3-2-1-0-7-6-5-4
						1	1	0	0	C-D-E-F-0-1-2-3-4-5-6-7-8-9-A-B	C-D-E-F-8-9-A-B-4-5-6-7-0-1-2-3
						1	1	0	1	D-E-F-0-1-2-3-4-5-6-7-8-9-A-B-C	D-C-F-E-9-8-B-A-5-4-7-6-1-0-3-2
						1	1	1	0	E-F-0-1-2-3-4-5-6-7-8-9-A-B-C-D	E-F-C-D-A-B-8-9-6-7-4-5-2-3-0-1
						1	1	1	1	F-0-1-2-3-4-5-6-7-8-9-A-B-C-D-E	F-E-D-C-B-A-9-8-7-6-5-4-3-2-1-0
Continuous page		n = A0 - A8/A9 (location 0 - y)			Cn, Cn + 1, Cn + 2, Cn + 3, Cn + 4... Cn - 1, Cn	Not supported					




256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

- Notes:
1. $y = 512K$ for the x16 variant and 256K for the x32 variant.
 2. For BL = 2, A1–Ai select the two-data-element block; A0 selects the first access within the block.
 3. For BL = 4, A2–Ai select the four-data-element block; A0–A1 select the first access within the block.
 4. For BL = 8, A3–Ai select the eight-data-element block; A0–A2 select the first access within the block.
 5. For BL = 16, A4–Ai select the eight-data-element block; A0–A3 select the first access within the block.
 6. For a continuous page burst, the full row is selected and A0–Ai select the starting column.
 7. Whenever a boundary of the block is reached within a given sequence above, the following access wraps within the block.
 8. Ai = the most significant column address bit for a given configuration.

Table 6: CAS Latency

Speed	Allowable Operating Clock Frequency	
	CL = 2	CL = 3
–6	—	$0 \leq f \leq 166$
–75	$0 \leq f \leq 83.3$	$0 \leq f \leq 133$
–10	$0 \leq f \leq 66.7$	$0 \leq f \leq 104$

Figure 7: CAS Latency

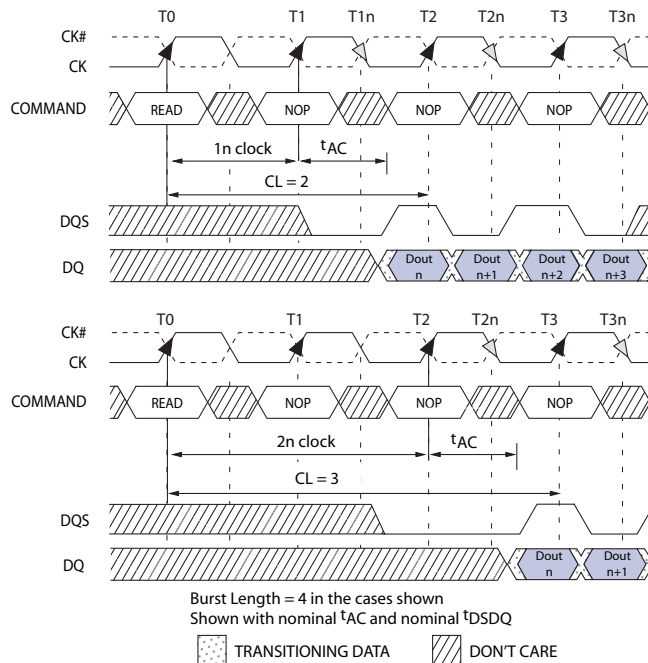

Operating Mode

The normal operating mode is selected by issuing a LOAD MODE REGISTER command with bits A7–A12 each set to zero, and bits A0–A6 set to the desired values.

All other combinations of values for A7–A12 are reserved for future use and/or test modes. Test modes and reserved states should not be used because unknown operation or incompatibility with future versions may result.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

Extended Mode Register

The extended mode register controls functions specific to Mobile SDRAM operation. These additional functions include drive strength, temperature compensated self refresh (TCSR), and partial array self refresh (PASR).

The extended mode register is programmed via the LOAD MODE REGISTER command (with BA0 = 0 and BA1 = 1) and will retain the stored information until it is programmed again, the device goes into deep power-down mode or the device loses power.

This device has default values for the extended mode register; if the device is not programmed, it operates with the default values—full array self refresh and full drive strength.

Temperature Compensated Self Refresh

On this version of the Mobile DDR SDRAM, a temperature sensor is implemented for automatic control of the self refresh oscillator on the device; therefore, programming or using the TCSR control bits in the extended mode register is not recommended.

Programming of the TCSR bits will have no effect on the device. The self refresh oscillator will continue refresh at the factory-programmed optimal rate for the device temperature.

Partial Array Self Refresh

For further power savings during SELF REFRESH, the PASR feature allows the controller to select the amount of memory that will be refreshed during SELF REFRESH. The refresh options are:

- Full Array; banks 0, 1, 2 and 3
- Half Array; banks 0 and 1
- Quarter Array; bank 0
- Eighth Array; bank 0 with row address MSB = 0
- Sixteenth Array; bank 0 with row address MSB = 0 and MSB-1 = 0

WRITE and READ commands can still occur during standard operation, but only the selected regions of the array will be refreshed during SELF REFRESH. Data in regions that are not selected will be lost.

Note: PASR defaults to full array if the extended mode register is not loaded.

Output Driver Strength


Because the Mobile DDR SDRAM is designed for use in smaller systems that are typically point-to-point connections, an option to control the drive strength of the output buffers is provided. Drive strength should be selected based on the expected memory bus loading. There are four allowable settings for the output drivers—25Ω, 55Ω, 80Ω, and 100Ω internal impedance. Target output drive characteristics can be found in Table 19 and Table 20 for full and half drive settings.

Note: The drive strength setting defaults to full drive if the extended mode register is not loaded.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

Figure 8: Extended Mode Register

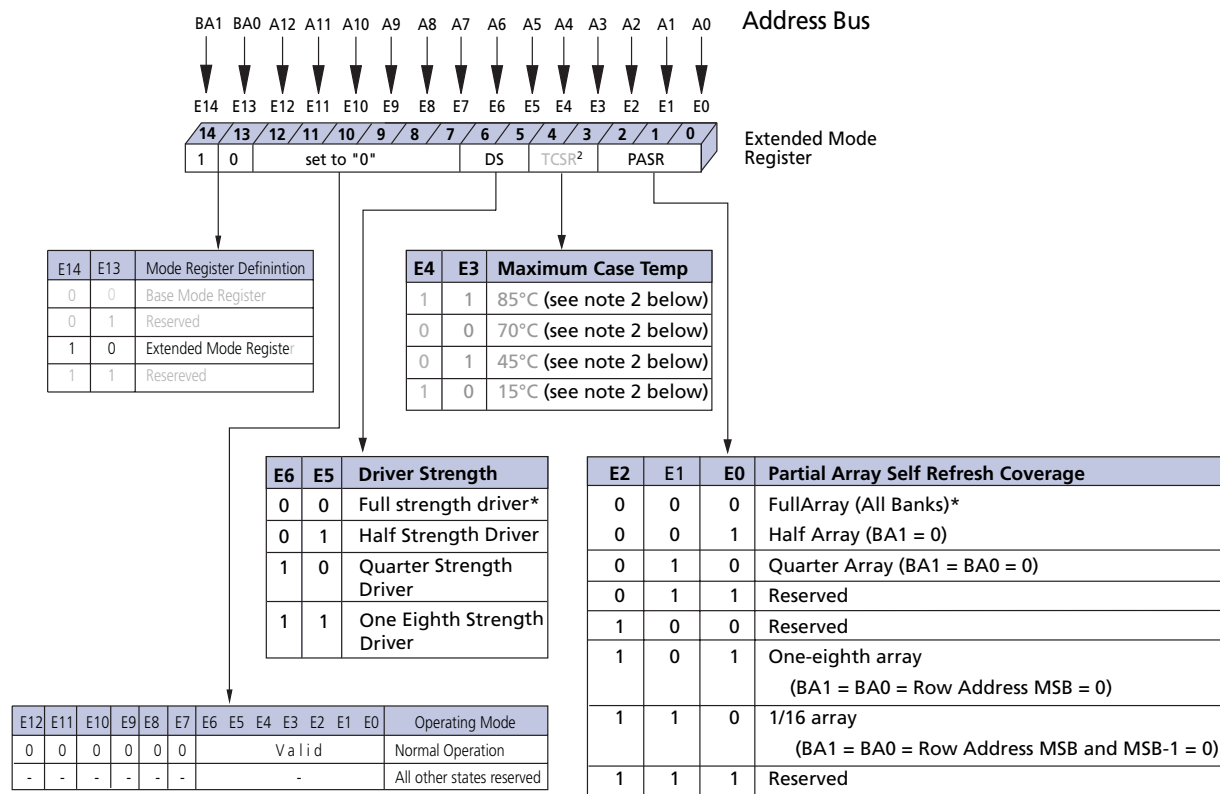

- Notes:
- * = default setting.
 - E14 and E13 (BA1 and BA0) must be "1, 0" to select the extended mode register (vs. the standard mode register).
 - On-Die temperature sensor is used in place of TCSR. Setting these bits will have no effect.

Stopping the External Clock

One method of controlling the power efficiency in applications is to throttle the clock that controls the SDRAM. There are two basic ways to control the clock:

1. Change the clock frequency, when the data transfers require a different rate of speed.
2. Stopping the clock altogether.

Both of these are specific to the application and its requirements and both allow power savings due to possible less transitions on the clock path.

The Mobile DDR SDRAM allows the clock to change frequency during operation, only if all the timing parameters are met and all refresh requirements are satisfied.


The clock can also be stopped altogether if there are no data accesses in progress, either WRITES or READs, that would be affected by this change; i.e., if a WRITE or a READ is in progress, the entire data burst must be through the pipeline prior to stopping the clock. CKE must be held HIGH with CK = LOW and CK# = HIGH for the full duration of the clock stop mode. One clock cycle and at least one NOP is required after the clock is restarted before a valid command can be issued. Figure 9 on page 21 illustrates the clock stop mode.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Register Definition

It is recommended that the Mobile DDR SDRAM be in a precharged state if any changes to the clock frequency are expected. This will eliminate timing violations that may otherwise occur during normal operations.

Figure 9: Clock Stop Mode

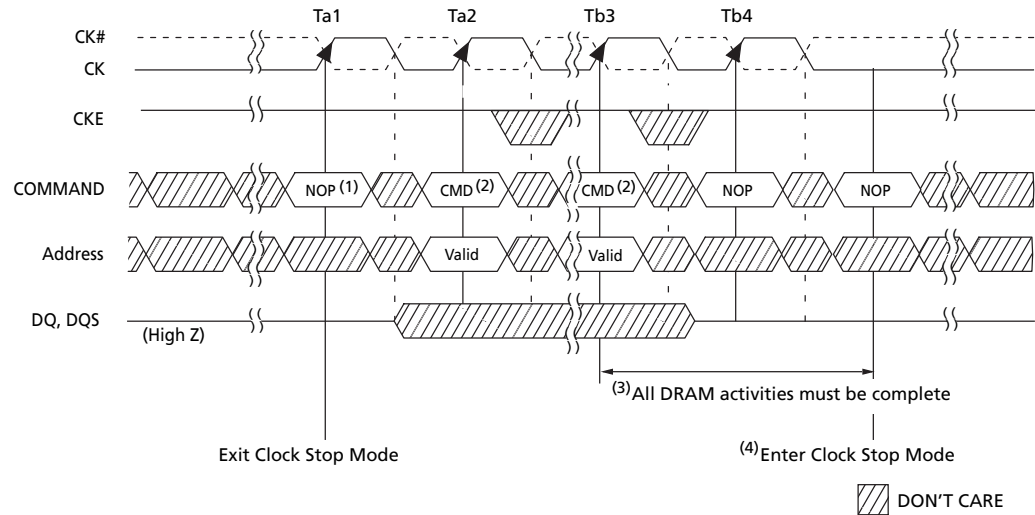

- Notes:
1. Prior to Ta1 the device is in clock stop mode. To exit, at least one NOP is required before any valid command.
 2. Any valid command is allowed, device is not in clock suspend mode.
 3. Any DRAM operation already in process must be completed before entering clock stop mode. This includes t_{RCD} , t_{RP} , t_{RFC} , t_{MRD} , t_{WR} , all data-out for READ bursts. This means the DRAM must be either in the idle or precharge state before clock suspend mode can be entered.
 4. To enter and maintain a clock stop mode: CK = LOW, CK# = HIGH, CKE = HIGH.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Commands

Commands

Table 7 and Table 8 provide a quick reference of available commands. This is followed by a written description of each command. Three additional Truth Tables (Table 9 on page 50, Table 10 on page 51, and Table 11 on page 53) provide CKE commands and current/next state information.

Table 7: Truth Table - Commands

Notes 1 and 12 apply to all commands

Name (Function)	CS#	RAS#	CAS#	WE#	Address	Notes
DESELECT (NOP)	H	X	X	X	X	9
NO OPERATION (NOP)	L	H	H	H	X	9
ACTIVE (select bank and activate row)	L	L	H	H	Bank/Row	3
READ (select bank and column, and start READ burst)	L	H	L	H	Bank/Col	4
WRITE (select bank and column, and start WRITE burst)	L	H	L	L	Bank/Col	4
BURST TERMINATE or deep power-down (enter deep power-down mode)	L	H	H	L	X	8, 10
PRECHARGE (deactivate row in bank or banks)	L	L	H	L	Code	5
AUTO-REFRESH (refresh all or single bank) or SELF REFRESH (enter self refresh mode)	L	L	L	H	X	6, 7
LOAD MODE REGISTER (standard or extended mode registers)	L	L	L	L	Op-Code	2

Table 8: DM Operation Truth Table

Notes 11 and 12 apply to all commands

Name (Function)	DM	DQ	Notes
Write Enable	L	Valid	11
Write Inhibit	H	X	11

- Notes:
1. CKE is HIGH for all commands shown except SELF REFRESH and deep power-down.
 2. BA0–BA1 select either the standard mode register or the extended mode register. (BA0 = 0, BA1 = 0 select the standard mode register; BA0 = 1, BA1 = 0 select extended mode register; other combinations of BA0–BA1 are reserved). A0–A12 provide the op-code to be written to the selected mode register.
 3. BA0–BA1 provide bank address and A0–A12 provide row address.
 4. BA0–BA1 provide bank address; A0–A9 provide column address; A10 HIGH enables the auto precharge feature (nonpersistent), and A10 LOW disables the auto precharge feature.
 5. A10 LOW: BA0–BA1 determine which bank is precharged. A10 HIGH: all banks are precharged and BA0–BA1 are “Don’t Care.”
 6. This command is AUTO REFRESH if CKE is HIGH, SELF REFRESH if CKE is LOW.
 7. Internal refresh counter controls row addressing; all inputs and I/Os are “Don’t Care” except for CKE.
 8. Applies only to READ bursts with auto precharge disabled. This command is undefined (and should not be used) for READ bursts with auto precharge enabled and for WRITE bursts.
 9. Deselect and NOP are functionally interchangeable.
 10. This command is a BURST TERMINATE if CKE is HIGH, deep power-down if CKE is LOW.
 11. Used to mask write data; provided coincident with the corresponding data.
 12. All states and sequences not shown are reserved and/or illegal.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Commands

DESELECT

The Deselect command prevents new commands from being executed by the Mobile DDR SDRAM. Operations already in progress are not affected.

Deep Power-Down

Deep power-down is an operating mode used to achieve maximum power reduction by eliminating the power of the memory array. Data will not be retained once the device enters deep power-down mode.

NO OPERATION (NOP)

The NO OPERATION (NOP) command is used to instruct the selected Mobile DDR SDRAM to perform a NOP. This prevents unwanted commands from being registered during idle or wait states. Operations already in progress are not affected.

LOAD MODE REGISTER

The standard mode register and extended mode register are loaded via inputs A0–A12. See mode register descriptions in “Register Definition” on page 14. The LOAD MODE REGISTER command can only be issued when all banks are idle, and a subsequent executable command cannot be issued until ^tMRD is met.

ACTIVE

The ACTIVE command is used to open (or activate) a row in a particular bank for a subsequent access. The value on the BA0, BA1 inputs selects the bank, and the address provided on inputs A0–A12 selects the row. This row remains active (or open) for accesses until a PRECHARGE command is issued to that bank. A PRECHARGE command must be issued before opening a different row in the same bank.

READ

The READ command is used to initiate a burst read access to an active row. The value on the BA0, BA1 inputs selects the bank, and the address provided on inputs A0–A8/A9 selects the starting column location. The value on input A10 determines whether or not auto precharge is used. If auto precharge is selected, the row being accessed will be precharged at the end of the READ burst; if auto precharge is not selected, the row will remain open for subsequent accesses.

WRITE

The WRITE command is used to initiate a burst write access to an active row. The value on the BA0, BA1 inputs selects the bank, and the address provided on inputs A0–A_i (where *i* = the most significant column address bit for each configuration) selects the starting column location. The value on input A10 determines whether or not auto precharge is used. If auto precharge is selected, the row being accessed will be precharged at the end of the WRITE burst; if auto precharge is not selected, the row will remain open for subsequent accesses. Input data appearing on the DQs is written to the memory array subject to the DM input logic level appearing coincident with the data. If a given DM signal is registered LOW, the corresponding data will be written to memory; if the DM signal is registered HIGH, the corresponding data inputs will be ignored, and a WRITE will not be executed to that byte/column location.



PRECHARGE

The PRECHARGE command is used to deactivate the open row in a particular bank or the open row in all banks. The bank(s) will be available for a subsequent row access a specified time (t_{RP}) after the precharge command is issued. Except in the case of concurrent auto precharge, where a READ or WRITE command to a different bank is allowed as long as it does not interrupt the data transfer in the current bank and does not violate any other timing parameters. Input A10 determines whether one or all banks are to be precharged, and in the case where only one bank is to be precharged, inputs BA0, BA1 select the bank. Otherwise BA0, BA1 are treated as “Don’t Care.” Once a bank has been precharged, it is in the idle state and must be activated prior to any READ or WRITE commands being issued to that bank. A PRECHARGE command will be treated as a NOP if there is no open row in that bank (idle state), or if the previously open row is already in the process of precharging.

Auto Precharge

Auto precharge performs the same individual bank precharge function described above, but without requiring an explicit command. This is accomplished by using A10 to enable auto precharge operation in conjunction with a specific READ or WRITE command. A precharge of the bank/row that is addressed with the READ or WRITE command is automatically performed upon completion of the READ or WRITE burst. The auto precharge command is nonpersistent in that it is either enabled or disabled for each individual READ or WRITE command. This device supports a concurrent auto precharge command if the command to the other bank does not interrupt the data transfer to the current bank.

Auto precharge ensures that the precharge is initiated at the earliest valid stage within a burst. This earliest valid stage is determined as if an explicit PRECHARGE command was issued at the earliest possible time, without violating $t_{RAS}(\text{MIN})$, as described for each burst type in “Operations” on page 26. The user must not issue another command to the same bank until the precharge time (t_{RP}) is completed.

BURST TERMINATE

The BURST TERMINATE command is used to truncate READ bursts (with auto precharge disabled). The most recently registered READ command prior to the BURST TERMINATE command will be truncated, as shown in “Operations” on page 26. The open page, from which the READ burst was terminated, remains open.

AUTO REFRESH

The AUTO REFRESH command is nonpersistent and must be issued each time a refresh is required.

The addressing is generated by the internal refresh controller. This makes the address bits a “Don’t Care” during an AUTO REFRESH command. The Mobile DDR SDRAM requires AUTO REFRESH cycles at an average interval of 7.8125 μ s (maximum).

To allow for improved efficiency in scheduling and switching between tasks, some flexibility in the absolute refresh interval is provided.

Although not a JEDEC requirement, CKE must be active (HIGH) during the auto refresh period to provide for future functionality features. The auto refresh period begins when the AUTO REFRESH command is registered, and ends t_{RFC} later.



SELF REFRESH

The SELF REFRESH command can be used to retain data in the Mobile DDR SDRAM, even if the rest of the system is powered down. When in the self refresh mode, the Mobile DDR SDRAM retains data without external clocking. The SELF REFRESH command is initiated like an AUTO REFRESH command, except that CKE is disabled (LOW). All command and address input signals except CKE are “Don't Care” during SELF REFRESH operation. See Figure 43, Self Refresh Mode, on page 74 for details on entering and exiting self refresh mode.

During SELF REFRESH operation, the device is refreshed as identified in the extended mode register (see PASR setting). For a the full array refresh, all four banks are refreshed simultaneously with the refresh frequency set by an internal self refresh oscillator. This oscillator changes due to the temperature sensors input. As the case temperature of the Mobile DDR SDRAM changes, the oscillation frequency will change to accommodate the change of temperature. This happens because the DRAM capacitors lose charge faster at higher temperatures. To ensure efficient power dissipation during self refresh, the oscillator will change to refresh at the slowest rate possible to maintain data integrity.

The procedure for exiting SELF REFRESH requires a sequence of commands. First, CK must be stable prior to CKE going back HIGH. Once CKE is HIGH, the Mobile DDR SDRAM must have NOP commands issued for t_{XSR} is required for the completion of any internal refresh in progress.



Operations

Bank/Row Activation


Before any READ or WRITE commands can be issued to a bank within the Mobile DDR SDRAM, a row in that bank must be “opened.” This is accomplished via the ACTIVE command, which selects both the bank and the row to be activated, as shown in Figure 10.

After a row is opened with an ACTIVE command, a READ or WRITE command may be issued to that row, subject to the t_{RCD} specification. $t_{RCD} (MIN)$ should be divided by the clock period and rounded up to the next whole number to determine the earliest clock edge after the ACTIVE command on which a READ or WRITE command can be entered. For example, a t_{RCD} specification of 20ns with a 133 MHz clock (7.5ns period) results in 2.7 clocks rounded to 3. This is reflected in Figure 11 on page 27, which covers any case where $2 < t_{RCD} (MIN) / t_{CK} \leq 3$. (Figure 11 on page 27 also shows the same case for t_{RCD} ; the same procedure is used to convert other specification limits from time units to clock cycles).

A subsequent ACTIVE command to a different row in the same bank can only be issued after the previous active row has been “closed” (precharged). The minimum time interval between successive ACTIVE commands to the same bank is defined by t_{RC} .

A subsequent ACTIVE command to another bank can be issued while the first bank is being accessed, which results in a reduction of total row-access overhead. The minimum time interval between successive ACTIVE commands to different banks is defined by t_{RRD} .

Figure 10: Activating a Specific Row in a Specific Bank

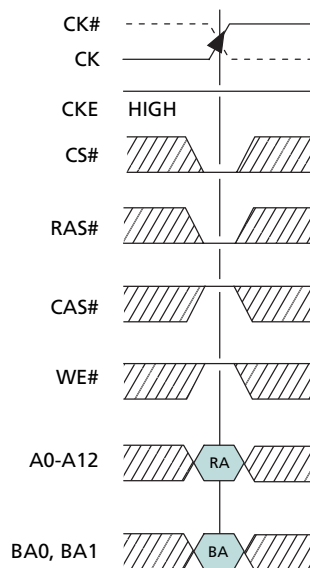


Note: RA = row address; BA = bank address.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 11: Example: Meeting t_{RCD} (t_{RRD}) MIN When $2 < t_{RCD} (t_{RRD}) \text{ MIN}/t_{CK} \leq 3$

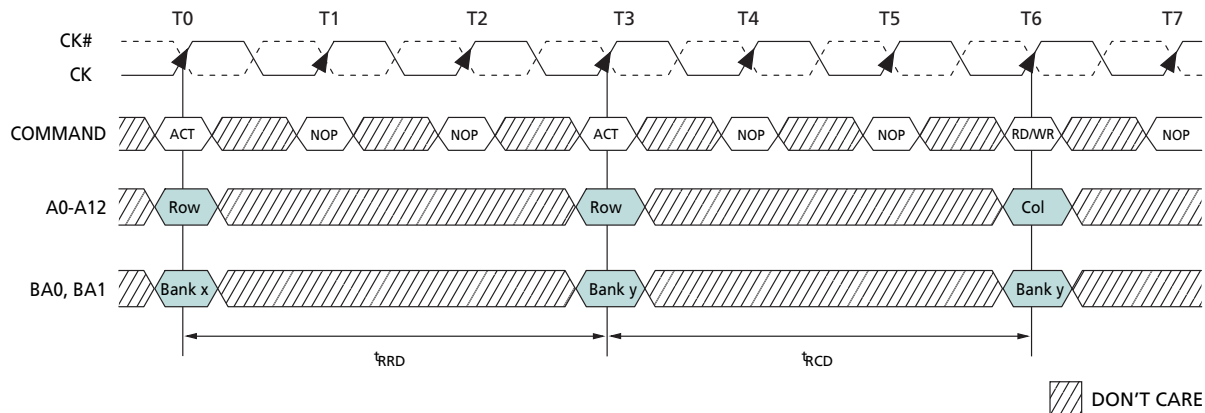

READs

READ burst operations are initiated with a READ command, as shown in Figure 13 on page 29.

The starting column and bank addresses are provided with the READ command and auto precharge is either enabled or disabled for that burst access. If auto precharge is enabled, the row being accessed is precharged at the completion of the burst. For the READ commands used in the following illustrations, auto precharge is disabled.

During READ bursts, the valid data-out element from the starting column address will be available following the CAS latency after the READ command. Each subsequent data-out element will be valid nominally at the next positive or negative clock edge (i.e., at the next crossing of CK and CK#). Figure 14 on page 30 shows general timing for different CAS latency settings. DQS is driven by the Mobile DDR SDRAM along with output data. The initial LOW state on DQS is known as the read preamble; the LOW state coincident with the last data-out element is known as the read postamble.


Upon completion of a burst, assuming no other commands have been initiated, the DQs will go High-Z. A detailed explanation of t_{DQSQ} (valid data-out skew), t_{QH} (data-out window hold), the valid data window are depicted in Figure 36 on page 67. A detailed explanation of t_{DQSCK} (DQS transition skew to CK) and t_{AC} (data-out transition skew to CK) is depicted in Figure 38 on page 69.

Data from any READ burst may be concatenated with or truncated with data from a subsequent READ command. In either case, a continuous flow of data can be maintained. The first data element from the new burst follows either the last element of a completed burst or the last desired data element of a longer burst which is being truncated. The new READ command should be issued x cycles after the first READ command, where x equals the number of desired data element pairs (pairs are required by the $2n$ -prefetch architecture). This is shown in Figure 15 on page 31. A READ command can be initiated on any clock cycle following a previous READ command. Nonconsecutive read data is shown for illustration in Figure 16 on page 32. Full-speed random read accesses within a page (or pages) can be performed, as shown in Figure 17 on page 33.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 12: READ Command

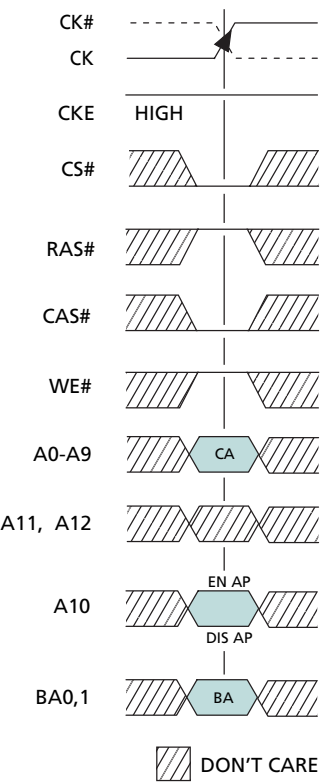


Note: CA = column address; BA = bank address; EN AP = enable auto precharge; DIS AP = disable auto precharge.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 13: READ Burst

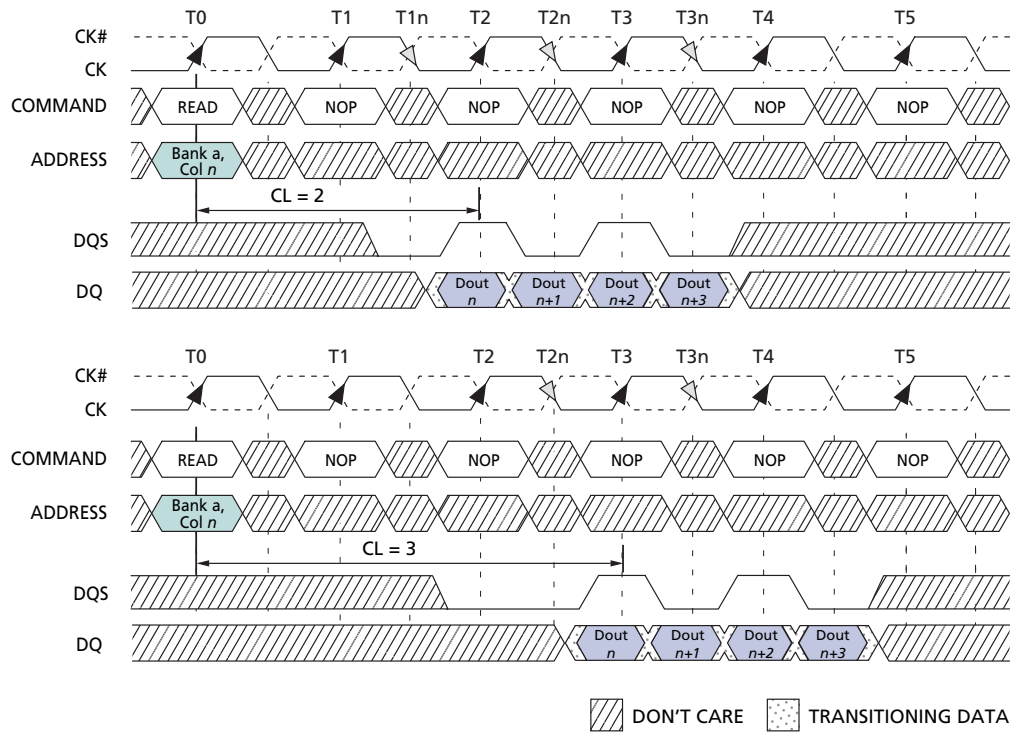


- Notes:
1. DOUT n = data-out from column n .
 2. BL = 4.
 3. Shown with nominal t_{AC} , t_{DQSCK} , and t_{DQSQ} .



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 14: Consecutive READ Burst

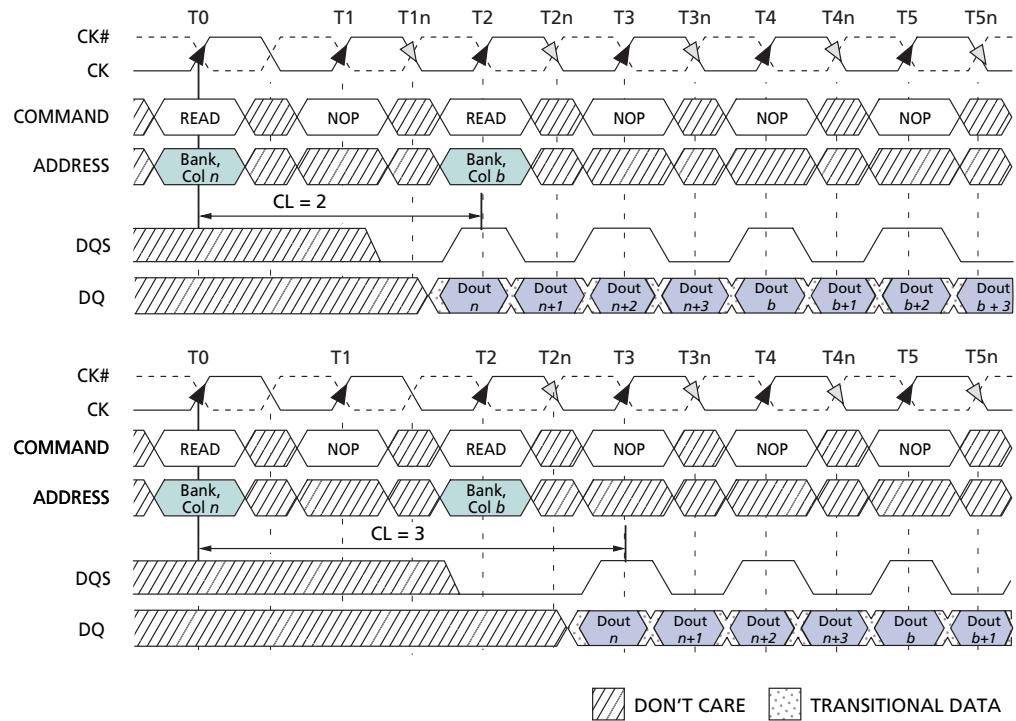


- Notes:
1. DOUT n (or b) = data-out from column n (or column b).
 2. BL = 4, 8, 16, or continuous page (if 4, the bursts are concatenated; if 8, 16, or continuous page, the second burst interrupts the first).
 3. Shown with nominal t_{AC} , t_{DQSK} , and t_{DQSQ} .
 4. Example applies only when READ commands are issued to same device.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 15: Nonconsecutive READ Bursts

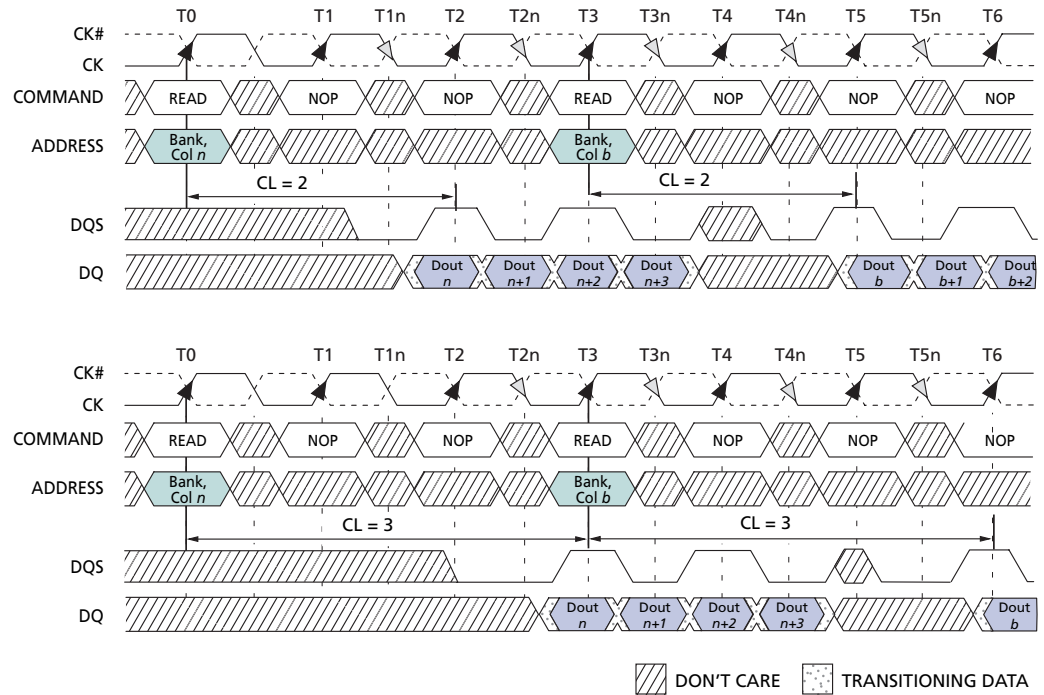


- Notes:
1. DOUT n (or b) = data-out from column n (or column b).
 2. BL = 4, 8, 16, or continuous page (if burst is 8, 16, or continuous page, the second burst interrupts the first).
 3. Shown with nominal t_{AC} , t_{DQSK} , and t_{DQSQ} .
 4. Example applies when READ commands are issued to different devices or nonconsecutive READs.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 16: Random READ Accesses

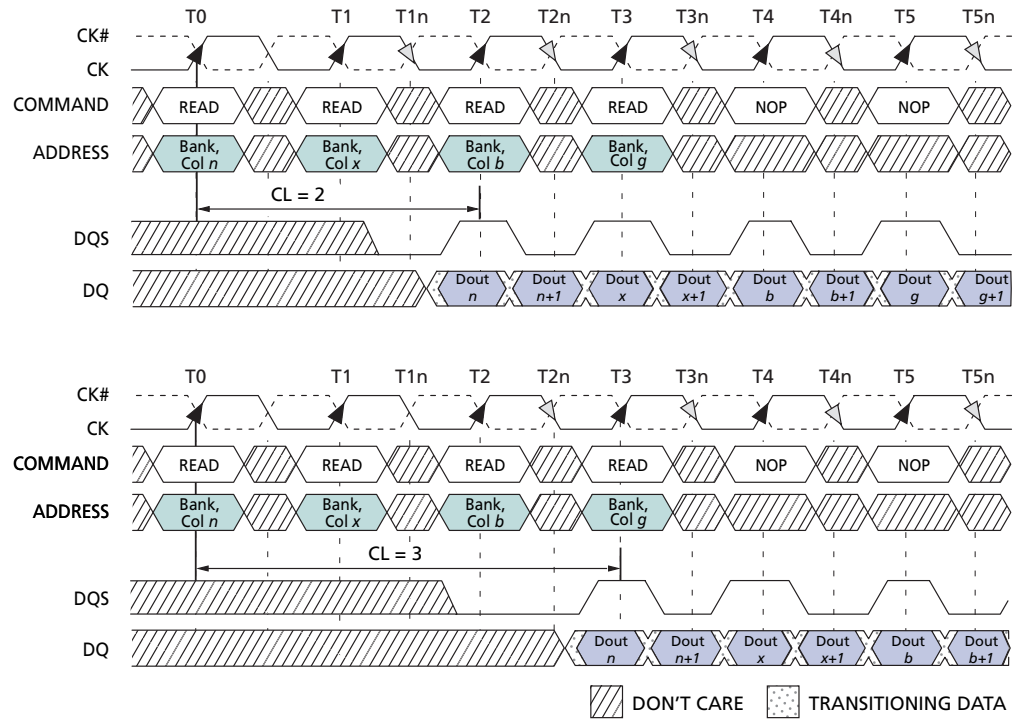

- Notes:
1. DOUT n (or x , b , g) = data-out from column n (or column x , column b , column g).
 2. BL = 2, 4, 8, 16, or continuous page (if 4, 8, 16, or continuous page, the following burst interrupts the previous).
 3. READs are to an active row in any bank.
 4. Shown with nominal t_{AC} , t_{DQSC} , and t_{DQSQ} .



READs (continued)


Data from any READ burst may be truncated with a BURST TERMINATE command, as shown in Figure 18 on page 34. The BURST TERMINATE latency is equal to the READ (CAS) latency, i.e., the BURST TERMINATE command should be issued x cycles after the READ command, where x equals the number of desired data element pairs (pairs are required by the $2n$ -prefetch architecture).

Data from any READ burst must be completed or truncated before a subsequent WRITE command can be issued. If truncation is necessary, the BURST TERMINATE command must be used, as shown in Figure 18 on page 34. The t_{DQSS} (MIN) case is shown; the t_{DQSS} (MAX) case has a longer bus idle time. (t_{DQSS} [MIN] and t_{DQSS} [MAX] are defined in the section on WRITES.)

A READ burst may be followed by, or truncated with, PRECHARGE command to the same bank provided that auto precharge was not activated. The PRECHARGE command should be issued x cycles after the READ command, where x equals the number of desired data element pairs (pairs are required by the n -prefetch architecture). This is shown in Figure 20 on page 37. Following the PRECHARGE command, a subsequent command to the same bank cannot be issued until t_{RP} met.

Note: Part of the row precharge time is hidden during the access of the last data elements.

Figure 17: Terminating a READ Burst

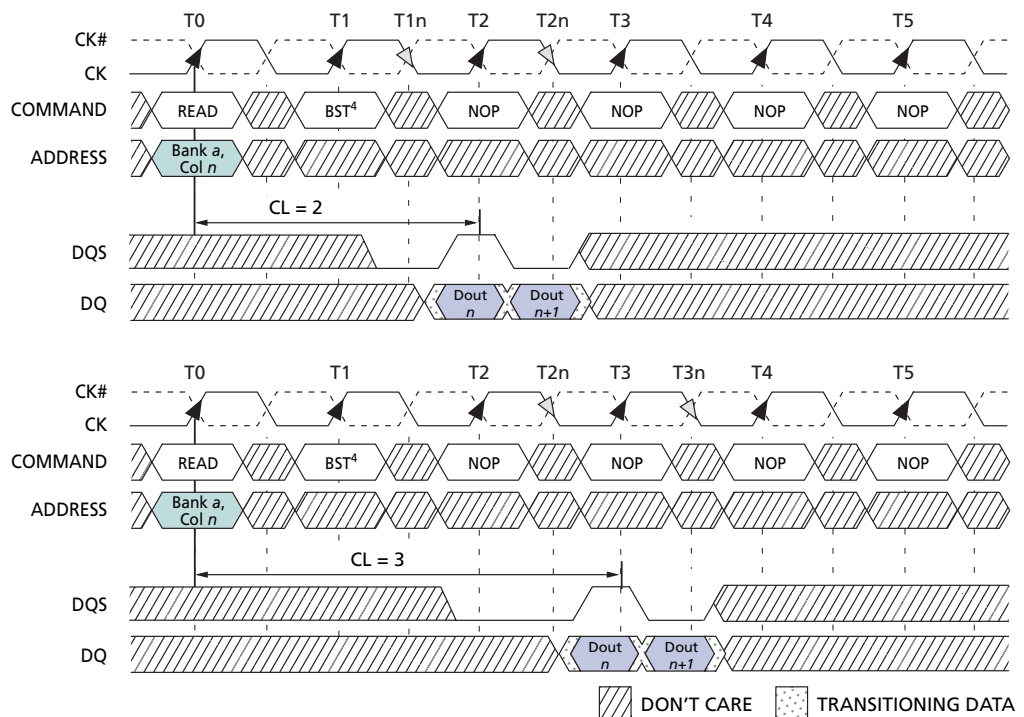


- Notes:
1. DOUT n = data-out from column n .
 2. BL = 4, 8, 16, or continuous page.
 3. Shown with nominal t_{AC} , t_{DQSK} , and t_{DQSQ} .
 4. BST = BURST TERMINATE command; page remains open.
 5. CKE = HIGH.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 18: READ-to-WRITE

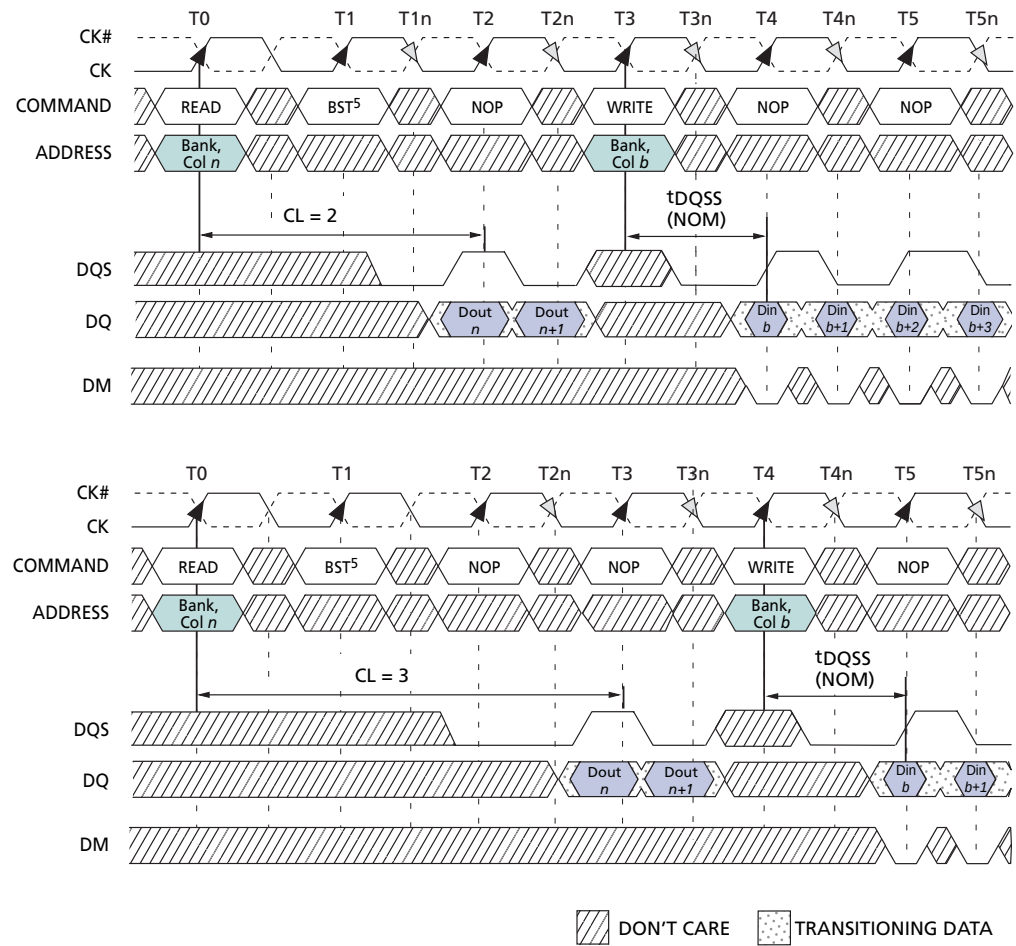


- Notes:
1. DOUT *n* = data-out from column *n*.
 2. DIN *b* = data-in from column *b*.
 3. BL = 4 in the cases shown (applies for bursts of 8, 16, or continuous page as well; if BL = 2, the BST command shown can be a NOP).
 4. Shown with nominal t_{AC} , t_{DQCK} , and t_{DQSQ} .
 5. BST = BURST TERMINATE command; page remains open.
 6. CKE = HIGH.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 19: READ-to-PRECHARGE

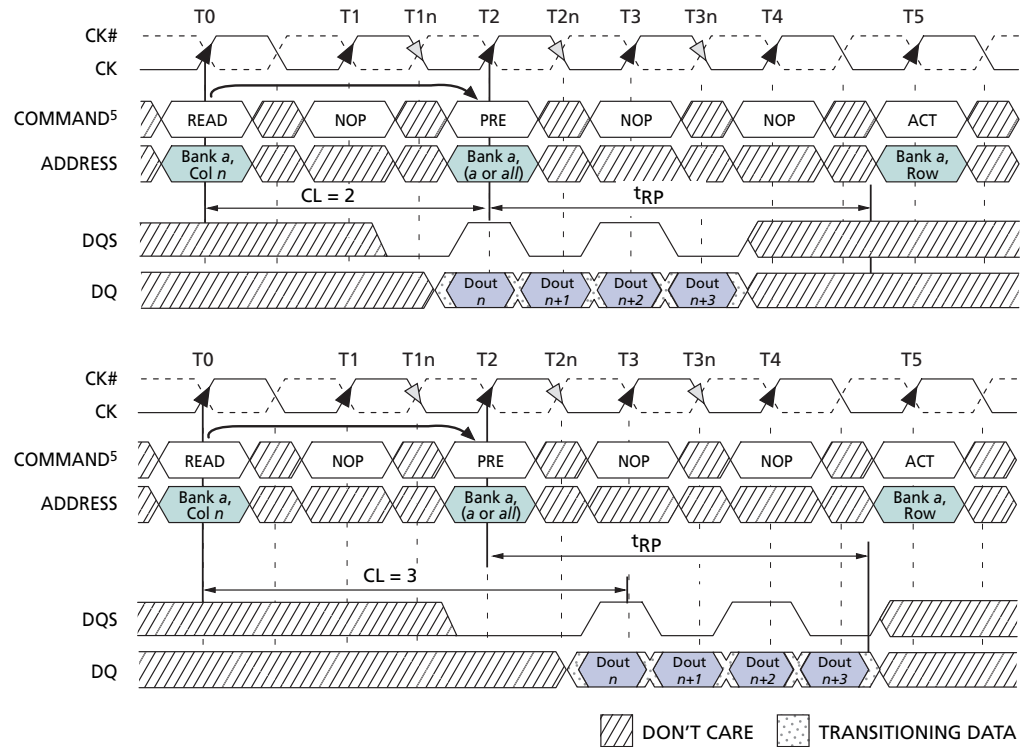

- Notes:
1. DOUT n = data-out from column n .
 2. BL = 4 or an uninterrupted burst of 8, 16, or continuous page.
 3. Shown with nominal t_{AC} , t_{DQSCK} , and t_{DQSQ} .
 4. READ-to-PRECHARGE equals 2 clocks, which allows 2 data pairs of data-out.
 5. A READ command with auto precharge enabled, provided t_{RAS} (MIN) is met, would cause a precharge to be performed at x number of clock cycles after the READ command, where $x = BL / 2$.
 6. PRE = PRECHARGE command; ACT = ACTIVE command.



WRITEs

WRITE bursts are initiated with a WRITE command, as shown in Figure 21 on page 38.

The starting column and bank addresses are provided with the WRITE command, and auto precharge is either enabled or disabled for that access. If auto precharge is enabled, the row being accessed is precharged at the completion of the burst. For the WRITE commands used in the following illustrations, auto precharge is disabled.

During WRITE bursts, the first valid data-in element will be registered on the first rising edge of DQS following the WRITE command, and subsequent data elements will be registered on successive edges of DQS. The LOW state on DQS between the WRITE command and the first rising edge is known as the write preamble; the LOW state on DQS following the last data-in element is known as the write postamble.

The time between the WRITE command and the first corresponding rising edge of DQS (t_{DQSS}) is specified with a relatively wide range (from 75 percent to 125 percent of one clock cycle). All of the WRITE diagrams show the nominal case, and where the two extreme cases (i.e., $t_{DQSS} [MIN]$ and $t_{DQSS} [MAX]$) might not be intuitive, they have also been included. Figure 22 on page 38 shows the nominal case and the extremes of t_{DQSS} for BL = 4. Upon completion of a burst, assuming no other commands have been initiated, the DQs will remain High-Z and any additional input data will be ignored.

Data for any WRITE burst may be concatenated with or truncated with a subsequent WRITE command. In either case, a continuous flow of input data can be maintained. The new WRITE command can be issued on any positive edge of clock following the previous WRITE command. The first data element from the new burst is applied after either the last element of a completed burst or the last desired data element of a longer burst which is being truncated. The new WRITE command should be issued x cycles after the first WRITE command, where x equals the number of desired data element pairs (pairs are required by the $2n$ -prefetch architecture).

Figure 23 on page 39 shows concatenated bursts of 4. An example of nonconsecutive WRITEs is shown in Figure 24 on page 39. Full-speed random write accesses within a page or pages can be performed, as shown in Figure 25 on page 40.

Data for any WRITE burst may be followed by a subsequent READ command. To follow a WRITE without truncating the WRITE burst, t_{WTR} should be met, as shown in Figure 26 on page 41.

Data for any WRITE burst may be truncated by a subsequent READ command, as shown in Figure 27 on page 42. Note that only the data-in pairs that are registered prior to the t_{WTR} period are written to the internal array, and any subsequent data-in should be masked with DM, as shown in Figure 28 on page 43.


Data for any WRITE burst may be followed by a subsequent PRECHARGE command. To follow a WRITE without truncating the WRITE burst, t_{WR} should be met, as shown in Figure 29 on page 44.

Data for any WRITE burst may be truncated by a subsequent PRECHARGE command, as shown in Figure 30 on page 45 and Figure 31 on page 46. Note that only the data-in pairs that are registered prior to the t_{WR} period are written to the internal array, and any subsequent data-in should be masked with DM, as shown in Figure 29 and Figure 30. After the PRECHARGE command, a subsequent command to the same bank cannot be issued until t_{RP} is met.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM
Operations

Figure 20: WRITE Command

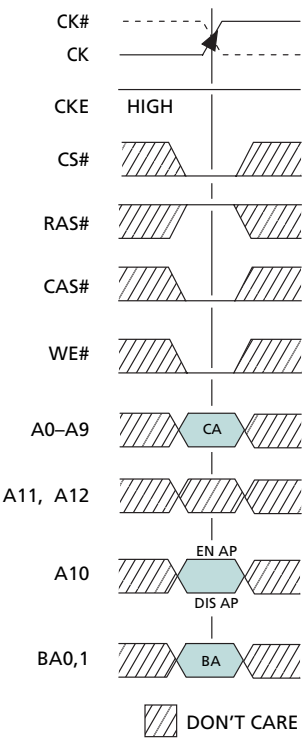


Note: CA = column address; BA = bank address; EN AP = enable auto precharge; DIS AP = disable auto precharge.




256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 21: WRITE Burst

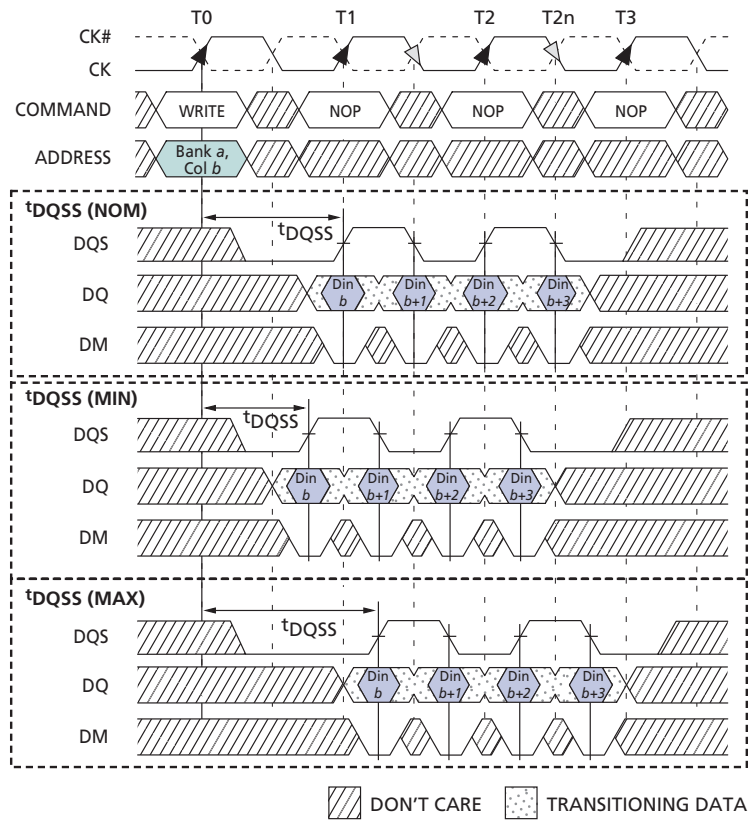

- Notes:
1. $DIN\ b$ = data-in for column b .
 2. An uninterrupted $BL = 4$ is shown.
 3. A10 is LOW with the WRITE command (auto precharge is disabled).

Figure 22: Consecutive WRITE-to-WRITE

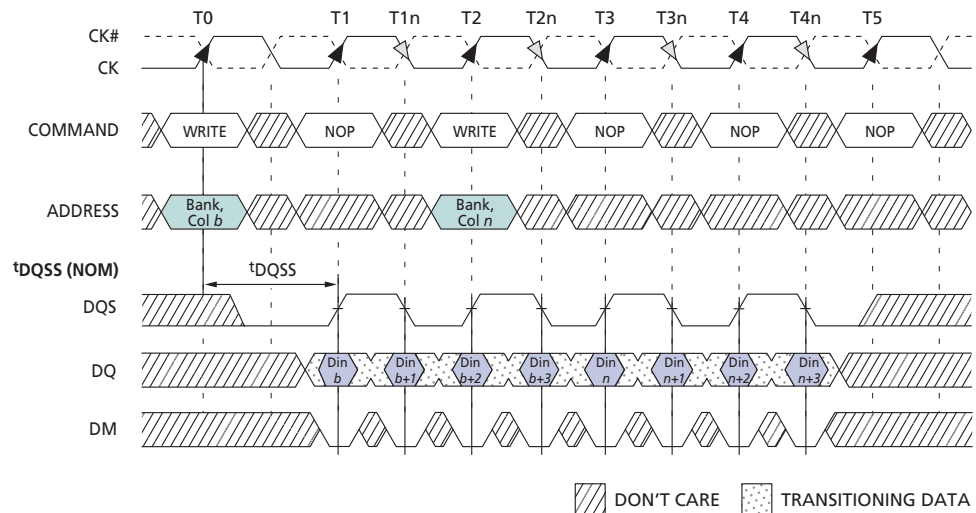


- Notes:
1. $DIN\ b\ (n)$ = data-in for column $b\ (n)$.
 2. An uninterrupted $BL = 4$ is shown.
 3. Each WRITE command may be to any bank.




256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 23: Nonconsecutive WRITE-to-WRITE

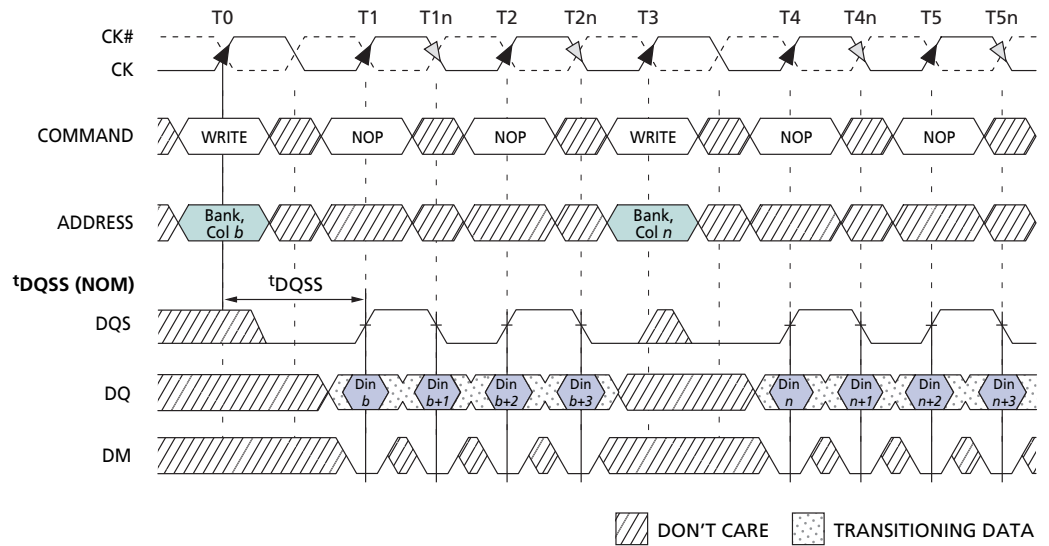

- Notes:
1. $DIN\ b\ (n)$ = data-in for column $b\ (n)$.
 2. An uninterrupted BL = 4 is shown.
 3. Each WRITE command may be to any bank.

Figure 24: Random WRITE Cycles

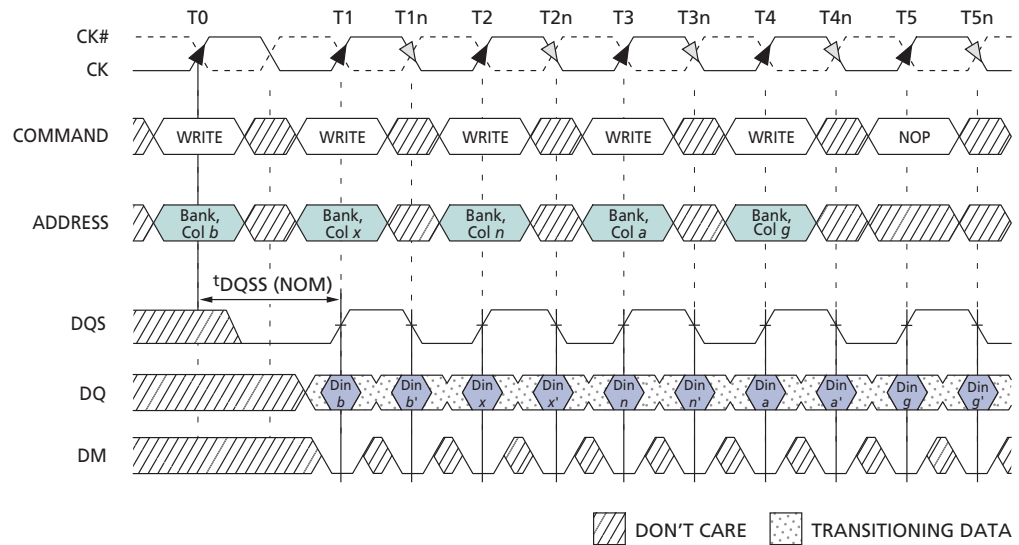


- Notes:
1. $DIN\ b\ (or\ x,\ n,\ a,\ g)$ = data-in for column $b\ (or\ x,\ n,\ a,\ g)$
 2. $b'\ (or\ x,\ n,\ a,\ g)$ = the next data-in following $DIN\ b\ (x,\ n,\ a,\ g)$, according to the programmed burst order.
 3. Programmed BL = 2, 4, 8, 16, or continuous page in cases shown.
 4. Each WRITE command may be to any bank.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 25: WRITE-to-READ – Uninterrupting

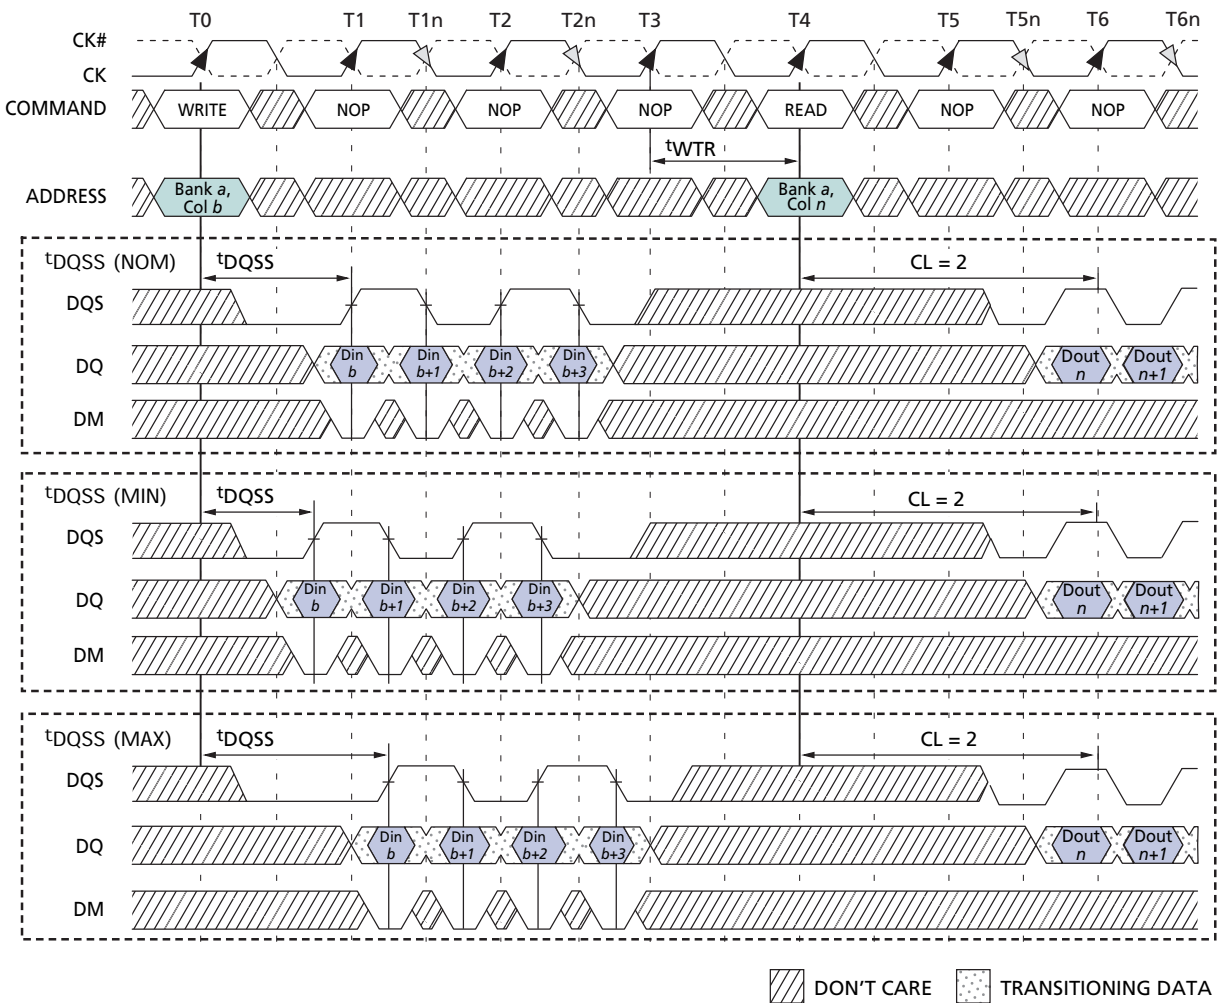


- Notes:
1. $DIN\ b$ = data-in for column b ; $DOUT\ n$ = data-out for column n .
 2. An uninterrupted $BL = 4$ is shown.
 3. t_{WTR} is referenced from the first positive CK edge after the last data-in pair.
 4. The READ and WRITE commands are to same device. However, the READ and WRITE commands may be to different devices, in which case t_{WTR} is not required and the READ command could be applied earlier.
 5. A10 is LOW with the WRITE command (auto precharge is disabled).



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 26: WRITE-to-READ – Interrupting

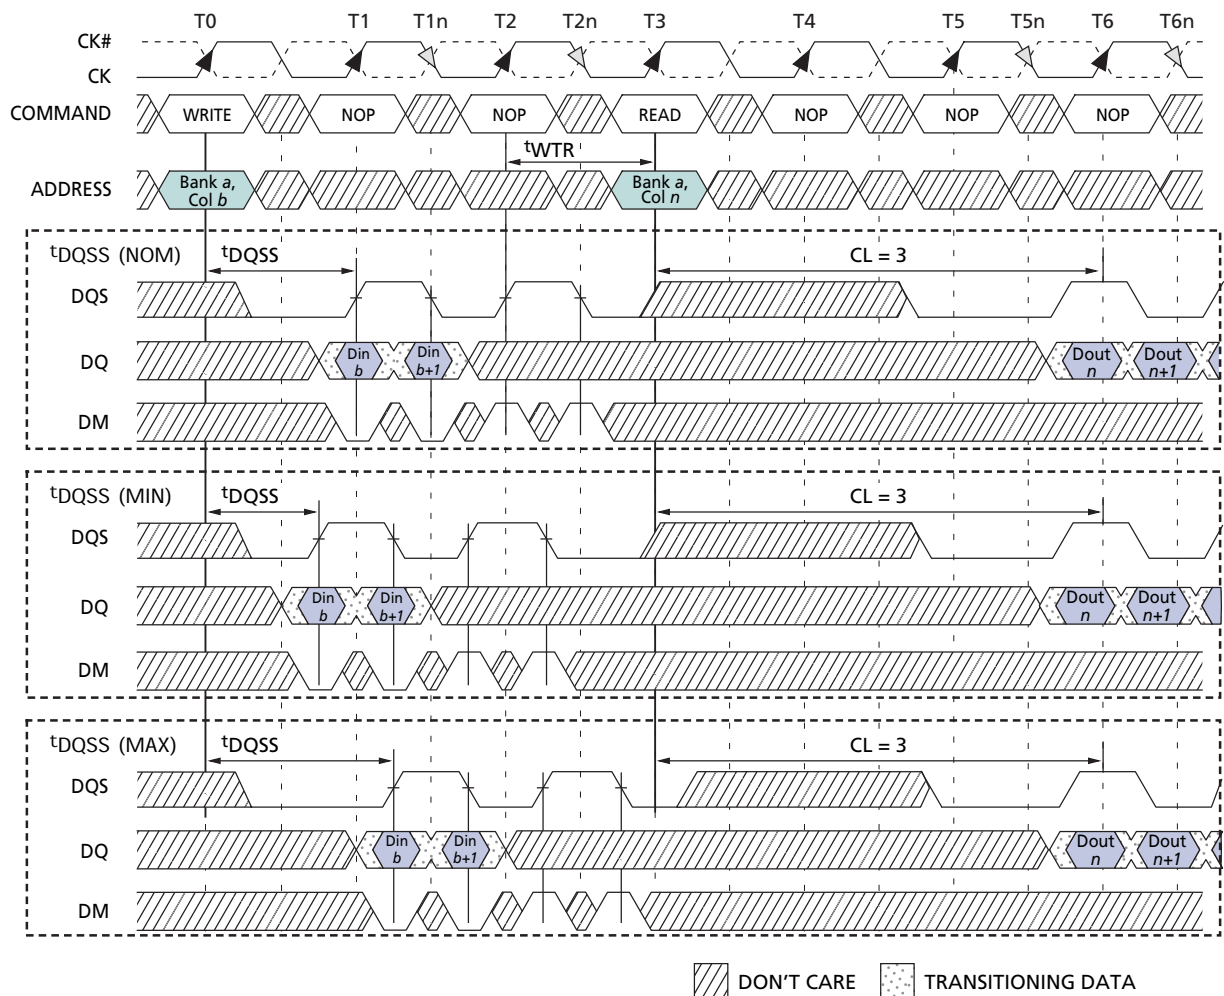


- Notes:
1. $DIN\ b$ = data-in for column b ; $DOUT\ n$ = data-out for column n .
 2. An interrupted BL = 4 is shown; two data elements are written.
 3. t_{WTR} is referenced from the first positive CK edge after the last data-in pair.
 4. A10 is LOW with the WRITE command (auto precharge is disabled).
 5. DQS is required at T2 and T2n (nominal case) to register DM.
 6. If the burst of 8 or 16 was used, DM and DQS would be required at T3 and T3n because the READ command would not mask these two data elements.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 27: WRITE-to-READ – Odd Number of Data, Interrupting

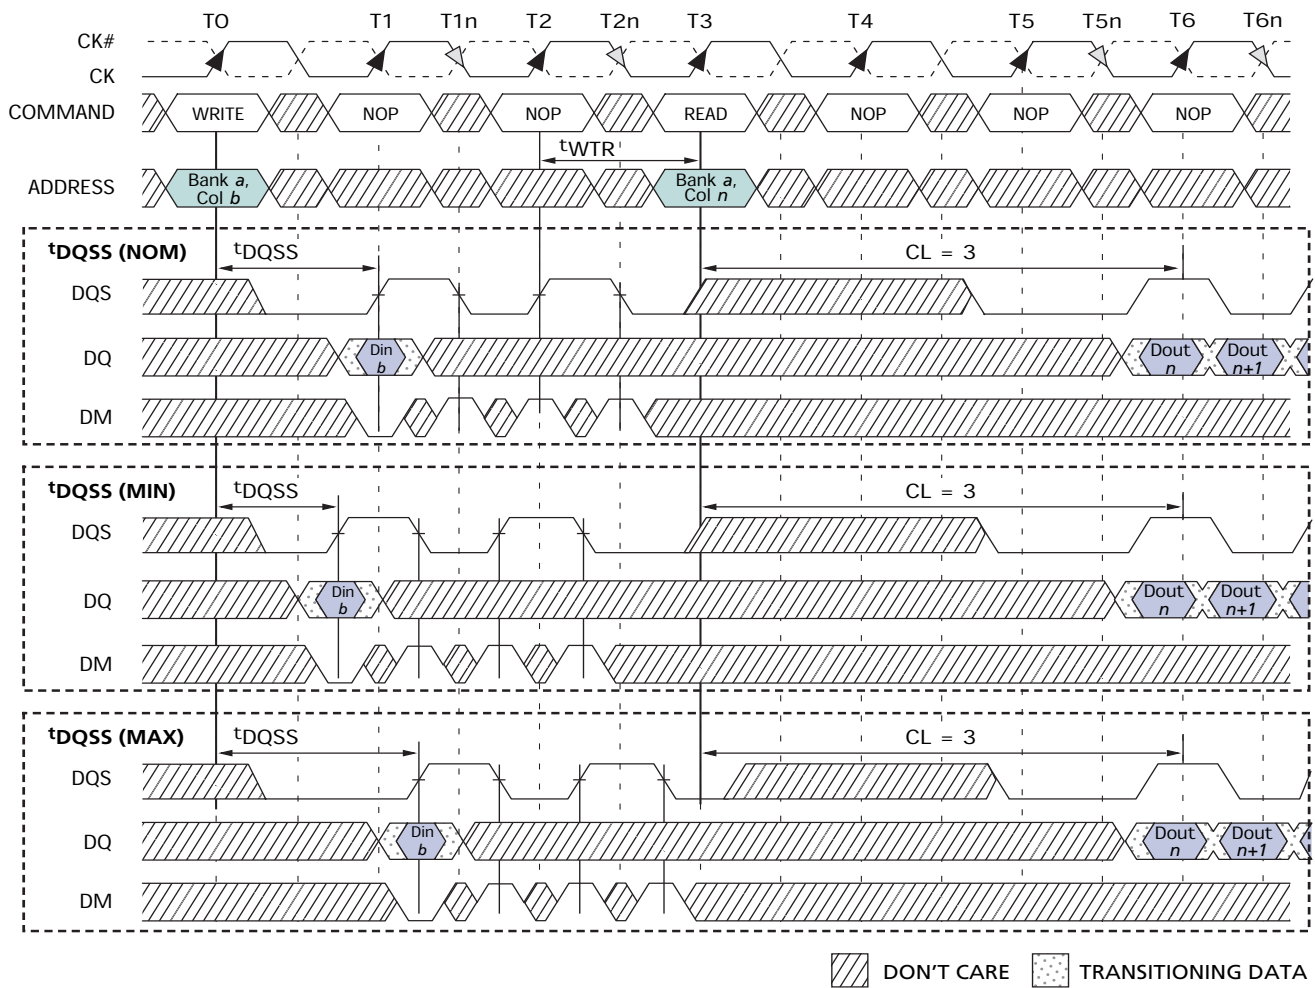


- Notes:
1. DIN b = data-in for column b ; DOUT n = data-out for column n .
 2. An interrupted BL = 4 is shown; two data elements are written, three are masked.
 3. t_{WTR} is referenced from the first positive CK edge after the last data-in pair.
 4. A10 is LOW with the WRITE command (auto precharge is disabled).
 5. DQS is required at T2 and T2n (nominal case) to register DM.
 6. If the burst of 8 or 16 was used, DM and DQS would be required at T3 and T3n because the READ command would not mask these two data elements.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 28: WRITE-to-PRECHARGE – Uninterrupting

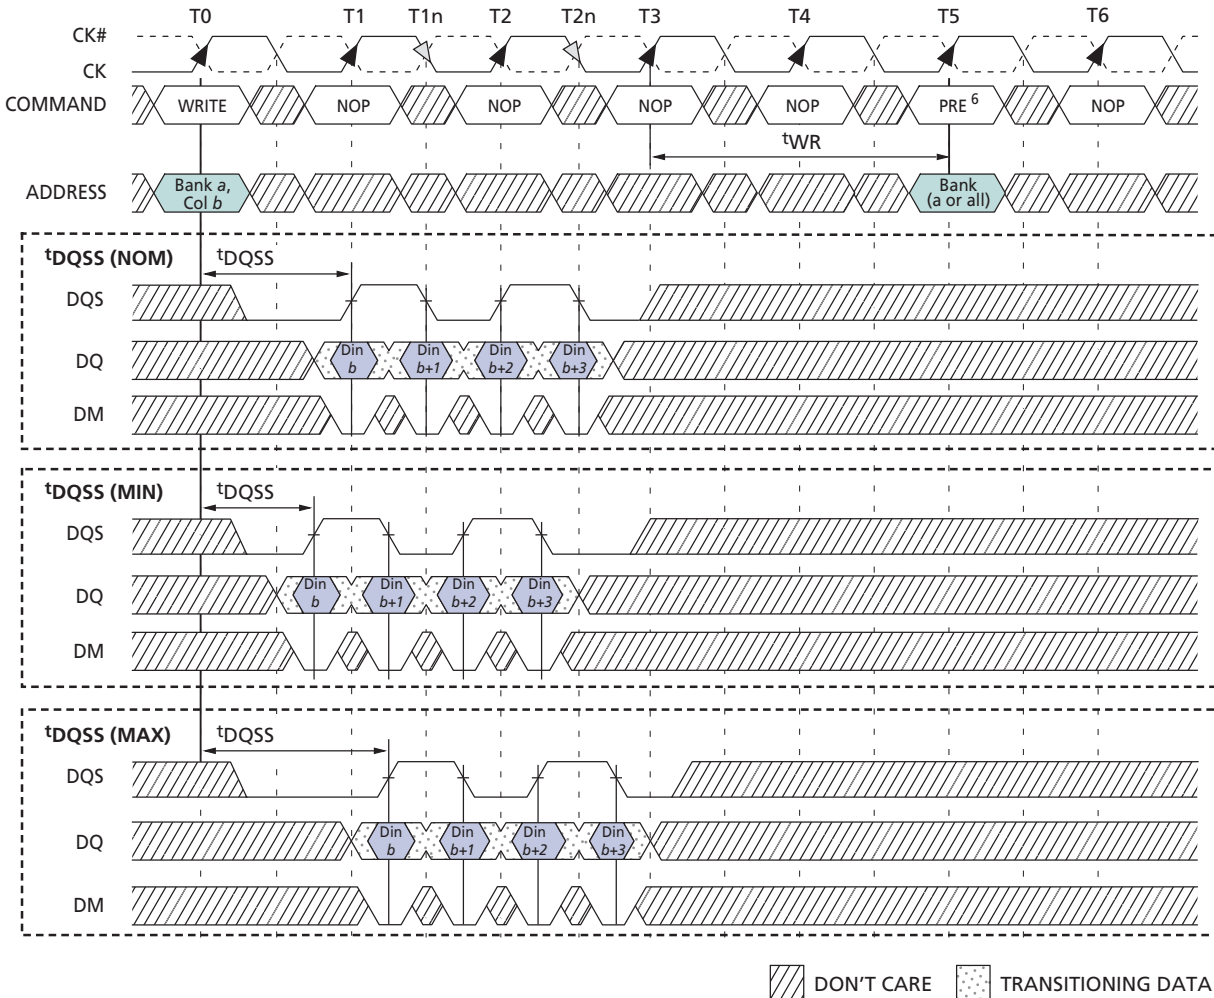


- Notes:
1. $DIN\ b$ = data-in for column b .
 2. An uninterrupted $BL = 4$ is shown.
 3. t_{WR} is referenced from the first positive CK edge after the last data-in pair.
 4. The READ and WRITE commands are to same device. However, the READ and WRITE commands may be to different devices, in which case t_{WTR} is not required and the READ command could be applied earlier.
 5. A10 is LOW with the WRITE command (auto precharge is disabled).
 6. PRE = PRECHARGE command.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 29: WRITE-to-PRECHARGE – Interrupting

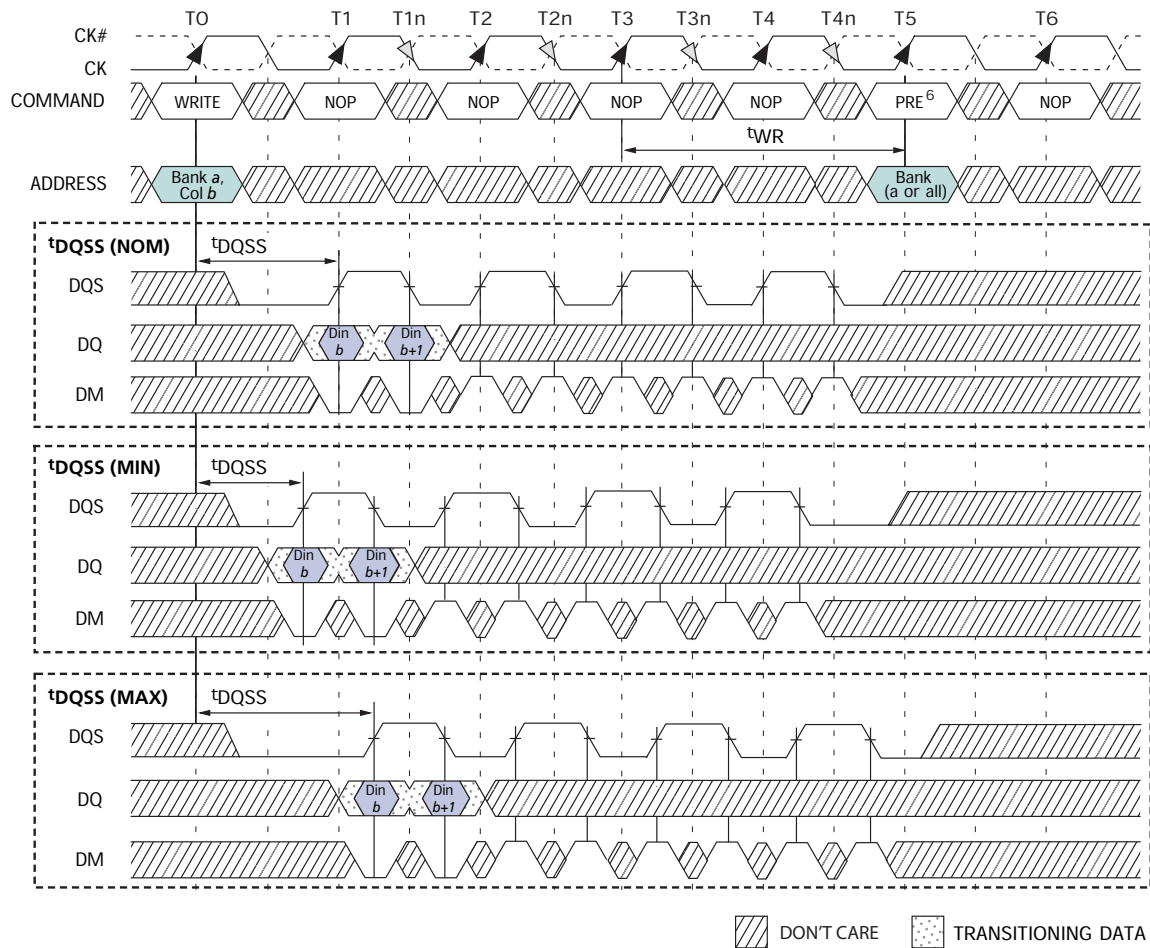


- Notes:
1. $DIN\ b$ = data-in for column b .
 2. An uninterrupted $BL = 4$ is shown.
 3. t_{WR} is referenced from the first positive CK edge after the last data-in pair.
 4. The READ and WRITE commands are to same device. However, the READ and WRITE commands may be to different devices, in which case t_{WTR} is not required and the READ command could be applied earlier.
 5. A10 is LOW with the WRITE command (auto precharge is disabled).
 6. PRE = PRECHARGE command.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Operations

Figure 30: WRITE-to-PRECHARGE – Odd Number of Data, Interrupting

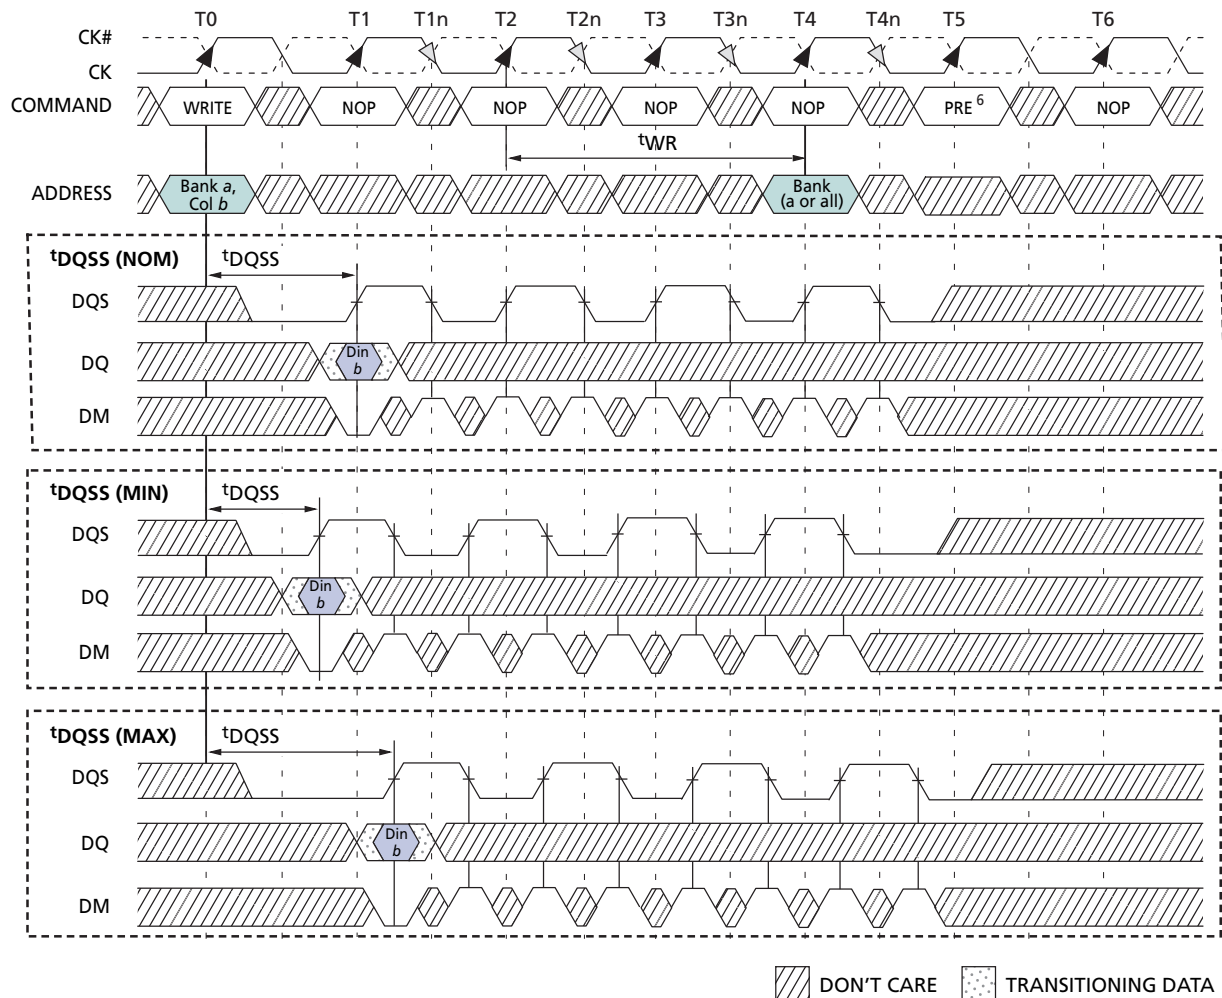

- Notes:
1. DIN b = data-in for column b .
 2. An interrupted BL = 8 is shown.
 3. t_{WR} is referenced from the first positive CK edge after the last data-in pair.
 4. The READ and WRITE commands are to same device. However, the READ and WRITE commands may be to different devices, in which case t_{WTR} is not required and the READ command could be applied earlier.
 5. A10 is LOW with the WRITE command (auto precharge is disabled).
 6. PRE = PRECHARGE command.




256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

PRECHARGE

The PRECHARGE command (Figure 31 on page 46) is used to deactivate the open row in a particular bank or the open row in all banks. The bank(s) will be available for a subsequent row access some specified time (t_{RP}) after the PRECHARGE command is issued.

Input A10 determines whether one or all banks are to be precharged. In the case where only one bank is to be precharged ($A10 = \text{LOW}$), inputs BA0, BA1 select the bank. When all banks are to be precharged ($A10 = \text{HIGH}$), inputs BA0, BA1 are treated as "Don't Care." Once a bank has been precharged, it is in the idle state and must be activated prior to any READ or WRITE commands being issued to that bank.

Figure 31: PRECHARGE Command

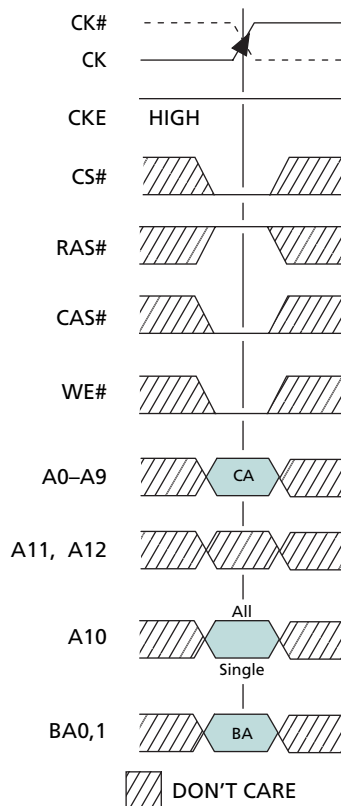

Note: CA = Column Address.
BA = Bank Address.
All = All banks to be precharged, BA1, BA0 are "Don't Care."
Single = Only bank selected by BA1 and BA0 will be precharged.

Power-Down (CKE Not Active)

Unlike SDR SDRAMs, Mobile DDR SDRAMs require CKE to be active at all times when an access is in progress: from issuing a READ or WRITE command until completion of the burst. Thus, a clock suspend is not supported. For READs, a burst completion is defined when the read postamble is satisfied; for WRITEs, a burst completion is defined when the write postamble is satisfied.




256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

Power-Down (in Active or Precharge Modes)

Power-down (Figure 32) is entered when CKE is registered LOW. If power-down occurs when all banks are idle, this mode is referred to as precharge power-down; if power-down occurs when there is a row active in any bank, this mode is referred to as active power-down. Entering power-down deactivates all input and output buffers (excluding CKE), including CK and CK#. Exiting power-down requires the device to be at the same voltage as when it entered power-down and receiving a stable clock.

Note: The power-down duration is limited by the refresh requirements of the device. While in power-down, CKE LOW must be maintained at the inputs of the Mobile DDR SDRAM, while all other input signals are “Don’t Care.” The power-down state is synchronously exited when CKE is registered HIGH (in conjunction with a NOP or DESELECT command). NOPs or DESELECT commands must be maintained on the command bus until t_{XP} is satisfied.


Figure 32: Power-Down Command in ACTIVE or Precharge Modes

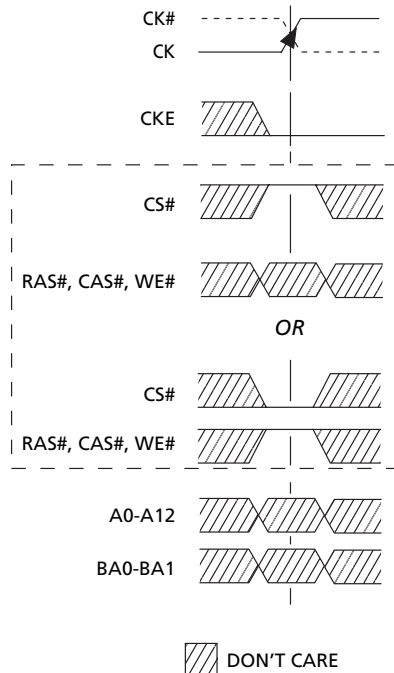



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

Figure 33: Power-Down in ACTIVE or Precharge Modes

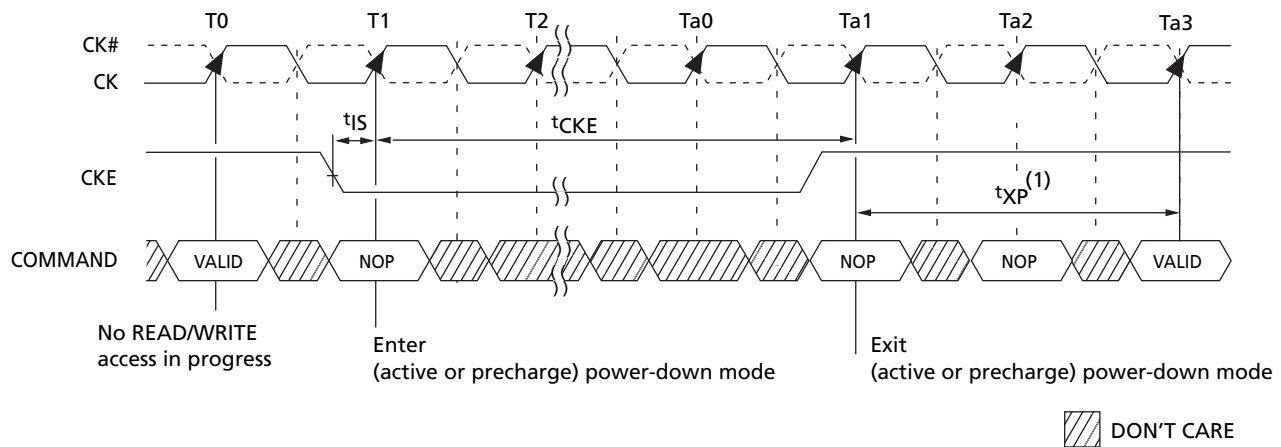

Notes: 1. Clock must toggle a minimum of one time during this time.

Deep Power-Down (DPD)

Deep power-down is an operating mode used to achieve maximum power reduction by eliminating the power of the memory array. Data will not be retained once the device enters deep power down mode.

Before entering DPD mode the mobile DDR SDRAM must be in all banks idle state with no activity on the data bus (t_{RP} time must be met). This mode is entered by holding CS# and WE# LOW with RAS# and CAS# HIGH at the rising edge of the clock, while CKE is LOW. CKE must be held LOW to maintain DPD mode. The clock must be stable prior to exiting DPD mode. This mode is exited by asserting CKE HIGH with either a NOP or DESELECT command present on the command bus.

Upon exiting DPD mode, 200 μ s of valid clocks with either NOP or DESELECT commands present on the command bus are required, and a PRECHARGE ALL command and a full DRAM initialization sequence is required.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

Figure 34: Deep Power-Down Command


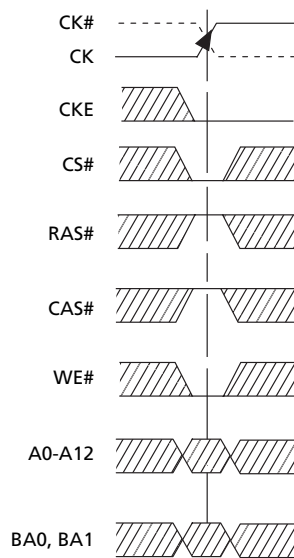


Figure 35: Deep Power-Down



- Notes:
1. Clock must be stable prior to CKE going HIGH.
 2. DPM = Deep power-down mode command; PRE ALL = Precharge all banks.
 3. Upon exit of deep power-down mode, a PRECHARGE ALL command must be issued followed by the initialization sequence (page 13).

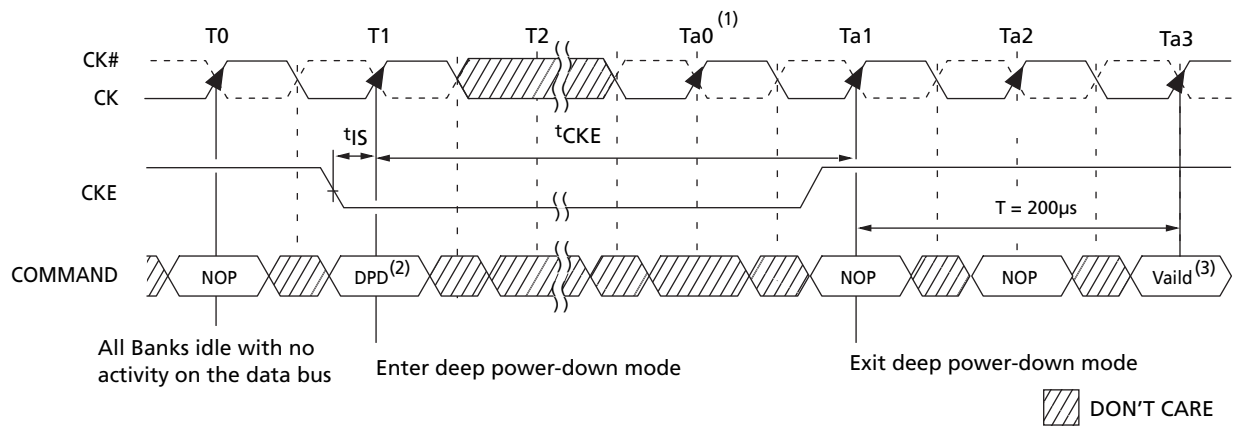

256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

Table 9: Truth Table – CKE

Notes: 1-5 apply to all commands

CKE _{n-1}	CKE _n	Current State	Command _n	Action _n	Notes
L	L	Active power-down	X	Maintain active power-down	
L	L	Deep power-down	X	Maintain deep power-down	
L	L	(Precharge) power-down	X	Maintain (precharge) power-down	
L	L	Self refresh	X	Maintain self refresh	
L	H	Active power-down	DESELECT or NOP	Exit active power-down	6,7
L	H	Deep power-down	DESELECT or NOP	Exit deep power-down	10, 11
L	H	(Precharge) Power-Down	DESELECT or NOP	Exit (precharge) power-down	6,7
L	H	Self refresh	DESELECT or NOP	Exit self refresh	8,9
H	L	Bank(s) active	DESELECT or NOP	Active power-down entry	
H	L	All banks idle	BURST TERMINATE	Deep power-down entry	
H	L	All banks idle	DESELECT or NOP	(Precharge) Power-Down entry	
H	L	All banks idle	AUTO-REFRESH	Self refresh entry	
H	H		See Table 11 on page 53		
H	H		See Table 11 on page 53		

- Notes: 1. CKE_n is the logic state of CKE at clock edge *n*; CKE_{n-1} was the state of CKE at the previous clock edge.
2. Current state is the state of the DDR SDRAM immediately prior to clock edge *n*.
3. COMMAND_n is the command registered at clock edge *n* and ACTION_n is a result of COMMAND_n.
4. All states and sequences not shown are illegal or reserved.
5. ^tCKE pertains.
6. DESELECT or NOP commands should be issued on any clock edges occurring during the ^tXP period.
7. The clock must toggle at least one time during the ^tXP period.
8. DESELECT or NOP commands should be issued on any clock edges occurring during the ^tXSR period.
9. The clock must toggle at least one time during the ^tXSR period.
10. 200μs of valid clocks and NOPs (or DESELECTs) commands are required before any other valid command is allowed.
11. Upon exiting deep power-down mode and after the 200μs, a PRECHARGE ALL command is required, followed by the standard initialization sequence.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

Table 10: Truth Table – Current State Bank *n* - Command to Bank *n*

Notes: 1–6; notes appear below and on next page

Current State	CS#	RAS#	CAS#	WE#	Command/Action	Notes
Any	H	X	X	X	DESELECT (NOP/continue previous operation)	
	L	H	H	H	NO OPERATION (NOP/continue previous operation)	
Idle	L	L	H	H	ACTIVE (select and activate row)	
	L	L	L	H	AUTO REFRESH	7
	L	L	L	L	LOAD MODE REGISTER	7
Row Active	L	H	L	H	READ (select column and start READ burst)	10
	L	H	L	L	WRITE (select column and start WRITE burst)	10
	L	L	H	L	PRECHARGE (deactivate row in bank or banks)	8
read (auto precharge disabled)	L	H	L	H	READ (select column and start new READ burst)	10
	L	H	L	L	WRITE (select column and start WRITE burst)	10, 12
	L	L	H	L	PRECHARGE (truncate READ burst, start PRECHARGE)	8
	L	H	H	L	BURST TERMINATE	9
write (auto precharge disabled)	L	H	L	H	READ (select column and start READ burst)	10, 11
	L	H	L	L	WRITE (select column and start new WRITE burst)	10
	L	L	H	L	PRECHARGE (truncate WRITE burst, start PRECHARGE)	8, 11

- Notes: 1. This table applies when CKE_{*n-1*} was HIGH and CKE_{*n*} is HIGH and after ^tXSR has been met (if the previous state was self refresh), after ^tXP has been met (if the previous state was power down), or 200μs if the previous state was deep power-down).
2. This table is bank-specific, except where noted (i.e., the current state is for a specific bank and the commands shown are those allowed to be issued to that bank when in that state). Exceptions are covered in the notes below.
3. Current state definitions:
- **Idle:** The bank has been precharged, and ^tRP has been met.
 - **Row Active:** A row in the bank has been activated, and ^tRCD has been met. No data bursts/accesses and no register accesses are in progress.
 - **Read:** A READ burst has been initiated, with auto precharge disabled, and has not yet terminated or been terminated.
 - **Write:** A WRITE burst has been initiated, with auto precharge disabled, and has not yet terminated or been terminated.
4. The following states must not be interrupted by a command issued to the same bank. COMMAND INHIBIT or NOP commands, or allowable commands to the other bank should be issued on any clock edge occurring during these states. Allowable commands to any other bank are determined by that bank's current state.
- **Precharging:** Starts with registration of a PRECHARGE command and ends when ^tRP is met. Once ^tRP is met, the bank will be in the idle state.
 - **Row Activating:** Starts with registration of an ACTIVE command and ends when ^tRCD is met. Once ^tRCD is met, the bank will be in the row active state.
 - **Read w/Auto-Precharge Enabled:** Starts with registration of a READ command with auto precharge enabled and ends when ^tRP has been met. Once ^tRP is met, the bank will be in the idle state.
 - **Write w/Auto-Precharge Enabled:** Starts with registration of a WRITE command with auto precharge enabled and ends when ^tRP has been met. Once ^tRP is met, the bank will be in the idle state.
5. The following states must not be interrupted by any executable command; DESELECT or NOP commands must be applied on each positive clock edge during these states.
- **Refreshing:** Starts with registration of an AUTO REFRESH command and ends when ^tRC is met. Once ^tRC is met, the DDR SDRAM will be in the all banks idle state.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

- **Accessing Mode Register:** Starts with registration of a LOAD MODE REGISTER command and ends when t_{MRD} has been met. Once t_{MRD} is met, the Mobile DDR SDRAM will be in the all banks idle state.
 - **Precharging All:** Starts with registration of a PRECHARGE ALL command and ends when t_{RP} is met. Once t_{RP} is met, all banks will be in the idle state.
6. All states and sequences not shown are illegal or reserved.
 7. Not bank-specific; requires that all banks are idle, and bursts are not in progress.
 8. May or may not be bank-specific; if multiple banks are to be precharged, each must be in a valid state for precharging.
 9. Not bank-specific; BURST TERMINATE affects the most recent READ burst, regardless of bank.
 10. READs or WRITEs listed in the Command/Action column include READs or WRITEs with auto precharge enabled and READs or WRITEs with auto precharge disabled.
 11. Requires appropriate DM masking.
 12. A WRITE command may be applied after the completion of the READ burst; otherwise, a BURST TERMINATE must be used to end the READ burst prior to asserting a WRITE command.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

Table 11: Truth Table – Current State Bank n - Command to Bank m

Notes: 1–6; notes appear below and on next page

Current State	CS#	RAS#	CAS#	WE#	Command/Action	Notes
Any	H	X	X	X	DESELECT (NOP/continue previous operation)	
	L	H	H	H	NO OPERATION (NOP/continue previous operation)	
Idle	X	X	X	X	Any command allowed to bank m	
Row activating, active, or precharging	L	L	H	H	ACTIVE (select and activate row)	
	L	H	L	H	READ (select column and start READ burst)	7
	L	H	L	L	WRITE (select column and start WRITE burst)	7
	L	L	H	L	PRECHARGE	
Read (auto precharge disabled)	L	L	H	H	ACTIVE (select and activate row)	
	L	H	L	H	READ (select column and start new READ burst)	7
	L	H	L	L	WRITE (select column and start WRITE burst)	7, 9
	L	L	H	L	PRECHARGE	
Write (auto precharge disabled)	L	L	H	H	ACTIVE (select and activate row)	
	L	H	L	H	READ (select column and start READ burst)	7, 8
	L	H	L	L	WRITE (select column and start new WRITE burst)	7
	L	L	H	L	PRECHARGE	
Read (with auto precharge)	L	L	H	H	ACTIVE (select and activate row)	
	L	H	L	H	READ (select column and start new READ burst)	7, 3a
	L	H	L	L	WRITE (select column and start WRITE burst)	7, 9, 3a
	L	L	H	L	PRECHARGE	
Write (with auto precharge)	L	L	H	H	ACTIVE (select and activate row)	
	L	H	L	H	READ (select column and start READ burst)	7, 3a
	L	H	L	L	WRITE (select column and start new WRITE burst)	7, 3a
	L	L	H	L	PRECHARGE	

- Notes: 1. This table applies when CKE_{n-1} was HIGH and CKE_n is HIGH and after t^{XSR} has been met (if the previous state was self refresh) or after t^{XP} has been met (if the previous state was power-down).
2. This table describes alternate bank operation, except where noted (i.e., the current state is for bank n and the commands shown are those allowed to be issued to bank m , assuming that bank m is in such a state that given command is allowable). Exceptions are covered in the notes below.
3. Current state definitions:
- **Idle:** The bank has been precharged, and t^{RP} has been met.
 - **Row Active:** A row in the bank has been activated, and t^{RCD} has been met. No data bursts/accesses and no register accesses are in progress.
 - **Read:** A READ burst has been initiated, with auto precharge disabled, and has not yet terminated or been terminated.
 - **Write:** A WRITE burst has been initiated, with auto precharge disabled, and has not yet terminated or been terminated.
- 3a. The read with auto precharge enabled or WRITE with auto precharge enabled states can each be broken into two parts: the access period and the precharge period. For read with auto precharge, the precharge period is defined as if the same burst was executed with auto precharge disabled and then followed with the earliest possible PRECHARGE command that still accesses all of the data in the burst. For write with auto precharge, the precharge period begins when t^{WR} ends, with t^{WR} measured as if auto precharge was disabled. The access period starts with registration of the command and ends where the precharge period (or t^{RP}) begins.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Power-Down (CKE Not Active)

This device supports concurrent auto precharge such that when a read with auto precharge enabled or a write with auto precharge is enabled any command to other banks is allowed, as long as that command does not interrupt the read or write data transfer already in process. In either case, all other related limitations apply (e.g., contention between read data and write data must be avoided).

3b. Table 12, below, shows the minimum delay between a READ or WRITE w/ Auto Precharge Enabled command and a command to a different bank

Table 12: READ or WRITE w/Auto Precharge Enabled to a Command to a Different Bank
CL_{RU} = CL rounded up to the next integer

From Command	To Command	Minimum Delay (with Concurrent Auto Precharge)
WRITE w/AP	READ or READ w/AP WRITE or WRITE w/AP PRECHARGE ACTIVE	$[1 + (BL/2)] \cdot t_{CK} + t_{WTR}$ $(BL/2) \cdot t_{CK}$ $1 \cdot t_{CK}$ $1 \cdot t_{CK}$
READ w/AP	READ or READ w/AP WRITE or WRITE w/AP PRECHARGE ACTIVE	$(BL/2) \cdot t_{CK}$ $[CL_{RU} + (BL/2)] \cdot t_{CK}$ $1 \cdot t_{CK}$ $1 \cdot t_{CK}$

- AUTO REFRESH and LOAD MODE REGISTER commands may only be issued when all banks are idle.
- A BURST TERMINATE command cannot be issued to another bank; it applies to the bank represented by the current state only.
- All states and sequences not shown are illegal or reserved.
- READs or WRITEs listed in the Command/Action column include READs or WRITEs with auto precharge enabled and READs or WRITEs with auto precharge disabled.
- Requires appropriate DM masking.
- A WRITE command may be applied after the completion of the READ burst; otherwise, a BURST TERMINATE must be used to end the READ burst prior to asserting a WRITE command.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Electrical Specifications

Electrical Specifications

Table 13: Operating Conditions

Symbol	Parameter	Min	Max	Unit	Notes
T_A	Operating Temperature - (commercial)	0	+70	°C	
T_A	Operating Temperature - (industrial)	-40	+85	°C	

Table 14: AC/DC Electrical Characteristics and Operating Conditions

Notes: 1-5; notes appear on page 62; $V_{DD} = +1.8V \pm 0.1V$, $V_{DDQ} = +1.8V \pm 0.1V$

Parameter/Condition	Symbol	Min	Max	Unit	Notes
Supply voltage	V_{DD}	1.7	1.9	V	32, 37
I/O supply voltage	V_{DDQ}	1.7	1.9	V	32, 37
Address and Command Inputs					
Input voltage high	V_{IH}	$0.8 \times V_{DDQ}$	$V_{DDQ} + 0.3$	V	25, 36
Input voltage low	V_{IL}	-0.3	$0.2 \times V_{DDQ}$	V	25, 36
Clock Inputs (CK, CK#)					
DC input voltage	V_{IN}	-0.3	$V_{DDQ} + 0.3$	V	27
DC input differential voltage	$V_{ID(DC)}$	$0.4 \times V_{DDQ}$	$V_{DDQ} + 0.6$	V	8, 27
AC input differential voltage	$V_{ID(AC)}$	$0.6 \times V_{DDQ}$	$V_{DDQ} + 0.6$	V	8, 27
AC differential crossing voltage	V_{IX}	$0.4 \times V_{DDQ}$	$0.6 \times V_{DDQ}$	V	9, 27
Data Inputs					
DC input high voltage	$V_{IH(DC)}$	$0.7 \times V_{DDQ}$	$V_{DDQ} + 0.3$	V	25, 28, 36
AC input high voltage	$V_{IH(AC)}$	$0.8 \times V_{DDQ}$	$V_{DDQ} + 0.3$	V	25, 28, 36
DC input low voltage	$V_{IL(DC)}$	-0.3	$0.3 \times V_{DDQ}$	V	25, 28, 36
AC input low voltage	$V_{IL(AC)}$	-0.3	$0.2 \times V_{DDQ}$		25, 28, 36
Data Outputs					
DC output high voltage: LOGIC 1 ($I_{OH} = -0.1mA$)	V_{OH}	$0.9 \times V_{DDQ}$	-	V	
DC output low voltage: LOGIC 0 ($I_{OL} = 0.1mA$)	V_{OL}	-	$0.1 \times V_{DDQ}$	V	
Leakage Current					
Input leakage current Any input $0V \leq V_{IN} \leq V_{DD}$ (All other balls not under test = 0V)	I_I	-1	1	μA	
Output leakage current (DQs are disabled; $0V \leq V_{OUT} \leq V_{DDQ}$)	I_{OZ}	-5	5	μA	

Table 15: Capacitance (x16, x32)

Notes: 13; notes appear on page 62

Parameter	Symbol	Min	Max	Units	Notes
Delta input/output capacitance: DQs, DQS, DM	DC_{IO}	-	0.50	pF	21
Delta input capacitance: command and address	DC_{I1}	-	0.50	pF	26
Delta input capacitance: CK, CK#	DC_{I2}	-	0.25	pF	26
Input/Output capacitance: DQs, DQS, DM	C_{IO}	3.0	6.0	pF	
Input capacitance: command and address	C_{I1}	1.5	3.5	pF	
Input capacitance: CK, CK#	C_{I2}	1.5	3.8	pF	
Input capacitance: CS#, CKE	C_{I3}	1.5	3.5	pF	



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Electrical Specifications

Table 16: IDD Specifications and Conditions (x16)

Notes: 1–5, 7, 10, 12, 14; notes appear on page 62; V_{DDQ} = +1.8V ±0.1V, V_{DD} = +1.8V ±0.1V

ALL SPECIFICATIONS ARE TARGET VALUES AND ARE SUBJECT TO CHANGE

Parameter/Condition	Symbol	Max			Unit	Notes	
		-6	-75	-10			
Operating one bank active-precharge current: t _{RC} = t _{RC} (MIN); t _{CK} = t _{CK} (MIN); CKE is HIGH; CS is HIGH between valid commands; Address inputs are switching; Data bus inputs are stable	IDD0	85	80	75	mA	19, 40	
Precharge power-down standby current: All banks idle, CKE is LOW; CS is HIGH, t _{CK} = t _{CK} (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD2P	300	300	300	μA	20, 29	
Precharge power-down standby current with clock stopped: All banks idle; CKE is LOW; CS is HIGH, CK = LOW, CK# = HIGH; Address and control inputs are switching; Data bus inputs are stable	IDD2PS	300	300	300	μA	20, 29	
Precharge non power-down standby current: All banks idle CKE = HIGH; CS = HIGH; t _{CK} = t _{CK} (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD2N	30	25	25	mA	39	
Precharge non power-down standby current: clock stopped All banks idle, CKE = HIGH; CS = HIGH; CK = LOW, CK# = HIGH Address and control inputs are switching; Data bus inputs are stable	IDD2NS	20	15	15	mA	39	
Active power-down standby current: One bank active, CKE = LOW; CS = HIGH; t _{CK} = t _{CK} (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD3P	3	3	3	mA	20, 29	
Active power-down standby current: clock stopped One bank active, CKE = LOW; CS = HIGH; CK = LOW; CK# = HIGH; Address and control inputs are Switching; Data bus inputs are stable	IDD3PS	3	3	3	mA	20, 29	
Active non power-down standby: One bank active, CKE = HIGH; CS = HIGH; t _{CK} = t _{CK} (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD3N	30	25	25	mA	19	
Active non-power-down standby: clock stopped One bank active, CKE = HIGH; CS = HIGH; CK = LOW; CK# = HIGH Address and control inputs are switching; Data bus inputs are stable	IDD3NS	25	20	20	mA	19	
Operating burst read: One bank active; BL = 4; CL = 3; t _{CK} = t _{CK} (MIN); continuous read bursts; I _{OUT} = 0mA; Address inputs are switching; 50% data changing each burst	IDD4R	100	90	90	mA	19, 40	
Operating burst write: One bank active; BL = 4; t _{CK} = t _{CK} (MIN); continuous WRITE bursts; Address inputs are switching; 50% data changing each burst	IDD4W	100	90	90	mA	19	
Auto refresh: Burst refresh; CKE = HIGH Address and control inputs are switching; Data bus inputs are stable	t _{RFC} = t _{REFI}	IDD5	90	85	80	mA	42
	t _{RFC} = 7.8125μs	IDD5a	5	5	5	mA	24, 42



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Electrical Specifications

Table 16: IDD Specifications and Conditions (x16) (continued)

Notes: 1–5, 7, 10, 12, 14; notes appear on page 62; $V_{DDQ} = +1.8V \pm 0.1V$, $V_{DD} = +1.8V \pm 0.1V$

ALL SPECIFICATIONS ARE TARGET VALUES AND ARE SUBJECT TO CHANGE

Parameter/Condition		Symbol	Max			Unit	Notes
			-6	-75	-10		
Self refresh CKE = LOW; $t_{CK} = t_{CK}(\text{MIN})$; Address and control inputs are stable; Data bus inputs are stable	Full Array, 85°C	IDD6a	220			μA	11, 13, 43
	Full Array, 70°C	IDD6b	175			μA	11, 13, 43
	Full Array, 45°C	IDD6c	140			μA	11, 13, 43
	Full Array, 15°C	IDD6d	125			μA	11, 13, 43
	Half Array, 85°C	IDD6a	185			μA	11, 13, 43
	Half Array, 70°C	IDD6b	150			μA	11, 13, 43
	Half Array, 45°C	IDD6c	130			μA	11, 13, 43
	Half Array, 15°C	IDD6d	115			μA	11, 13, 43
	1/4 Array, 85°C	IDD6a	165			μA	11, 13, 43
	1/4 Array, 70°C	IDD6b	140			μA	11, 13, 43
	1/4 Array, 45°C	IDD6c	120			μA	11, 13, 43
	1/4 Array, 15°C	IDD6d	115			μA	11, 13, 43
	1/8 Array, 85°C	IDD6a	145			μA	11, 13, 43
	1/8 Array, 70°C	IDD6b	125			μA	11, 13, 43
	1/8 Array, 45°C	IDD6c	115			μA	11, 13, 43
	1/8 Array, 15°C	IDD6d	110			μA	11, 13, 43
	1/16 Array, 85°C	IDD6a	135			μA	11, 13, 43
	1/16 Array, 70°C	IDD6b	120			μA	11, 13, 43
	1/16 Array, 45°C	IDD6c	110			μA	11, 13, 43
	1/16 Array, 15°C	IDD6d	105			μA	11, 13, 43
Deep power-down current Address and control balls are stable; Data bus inputs are stable		IDD8	10			μA	



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Electrical Specifications

Table 17: IDD Specifications and Conditions (x32)

Notes: 1–5, 7, 10, 12, 14; notes appear on page 62

VDDQ = +1.8V ±0.1V, VDD = +1.8V ±0.1V

ALL SPECIFICATIONS ARE TARGET VALUES AND ARE SUBJECT TO CHANGE

Parameter/Condition	Symbol	Max			Unit	Notes	
		-6	-75	-10			
Operating one bank active-precharge current: tRFC = tRFC (MIN); tCK = tCK (MIN); CKE is HIGH; CS is HIGH between valid commands; Address inputs are switching; Data bus inputs are stable	IDD0	85	80	75	mA	19, 40	
Precharge power-down standby current: All banks idle, CKE is LOW; CS is HIGH, tCK = tCK (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD2P	300	300	300	μA	20, 29	
Precharge power-down standby current with clock stopped: All banks idle; CKE is LOW; CS is HIGH, CK = LOW, CK# = HIGH; Address and control inputs are switching; Data bus inputs are stable	IDD2PS	300	300	300	μA	20, 29	
Precharge non-power-down standby current: All banks idle CKE = HIGH; CS = HIGH; tCK = tCK (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD2N	30	25	25	mA	39	
Precharge non-power-down standby current: clock stopped All banks idle, CKE = HIGH; CS = HIGH; CK = LOW, CK# = HIGH Address and control inputs are switching; Data bus inputs are stable	IDD2NS	20	15	15	mA	39	
Active power-down standby current: One bank active, CKE = LOW; CS = HIGH; tCK = tCK (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD3P	3	3	3	mA	20, 29	
Active power-down standby current: clock stopped One bank active, CKE = LOW; CS = HIGH; CK = LOW; CK# = HIGH; Address and control inputs are Switching; Data bus inputs are stable	IDD3PS	3	3	3	mA	20, 29	
Active non-power-down standby: One bank active, CKE = HIGH; CS = HIGH; tCK = tCK (MIN); Address and control inputs are switching; Data bus inputs are stable	IDD3N	30	25	25	mA	19	
Active non-power-down standby: clock stopped One bank active, CKE = HIGH; CS = HIGH; CK = LOW; CK# = HIGH Address and control inputs are switching; Data bus inputs are stable	IDD3NS	25	20	20	mA	19	
Operating burst read: One bank active; BL = 4; CL = 3; tCK = tCK (MIN); continuous read bursts; IOUT = 0mA; Address inputs are switching; 50% data changing each burst	IDD4R	120	120	115	mA	19, 40	
Operating burst write: One bank active; BL = 4; tCK = tCK (MIN); continuous WRITE bursts; Address inputs are switching; 50% data changing each burst	IDD4W	120	120	115	mA	19	
Auto refresh: Burst refresh; CKE = HIGH Address and control inputs are switching; Data bus inputs are stable	tRFC = tREFI	IDD5	90	85	80	mA	42
	tRFC = 7.8125μs	IDD5a	5	5	5	mA	24, 42



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Electrical Specifications

Table 17: I_{DD} Specifications and Conditions (x32) (continued)

Notes: 1–5, 7, 10, 12, 14; notes appear on page 62

V_{DDQ} = +1.8V ±0.1V, V_{DD} = +1.8V ±0.1V

ALL SPECIFICATIONS ARE TARGET VALUES AND ARE SUBJECT TO CHANGE

Parameter/Condition		Symbol	Max			Unit	Notes
			-6	-75	-10		
Self refresh CKE = LOW; t _{CK} = t _{CK} (MIN); Address and control inputs are stable; Data bus inputs are stable	Full Array, 85°C	I _{DD6a}	220			μA	11, 13, 43
	Full Array, 70°C	I _{DD6b}	175			μA	11, 13, 43
	Full Array, 45°C	I _{DD6c}	140			μA	11, 13, 43
	Full Array, 15°C	I _{DD6d}	125			μA	11, 13, 43
	Half Array, 85°C	I _{DD6a}	185			μA	11, 13, 43
	Half Array, 70°C	I _{DD6b}	150			μA	11, 13, 43
	Half Array, 45°C	I _{DD6c}	130			μA	11, 13, 43
	Half Array, 15°C	I _{DD6d}	115			μA	11, 13, 43
	1/4 Array, 85°C	I _{DD6a}	165			μA	11, 13, 43
	1/4 Array, 70°C	I _{DD6b}	140			μA	11, 13, 43
	1/4 Array, 45°C	I _{DD6c}	120			μA	11, 13, 43
	1/4 Array, 15°C	I _{DD6d}	115			μA	11, 13, 43
	1/8 Array, 85°C	I _{DD6a}	145			μA	11, 13, 43
	1/8 Array, 70°C	I _{DD6b}	125			μA	11, 13, 43
	1/8 Array, 45°C	I _{DD6c}	115			μA	11, 13, 43
	1/8 Array, 15°C	I _{DD6d}	110			μA	11, 13, 43
	1/16 Array, 85°C	I _{DD6a}	135			μA	11, 13, 43
	1/16 Array, 70°C	I _{DD6b}	120			μA	11, 13, 43
	1/16 Array, 45°C	I _{DD6c}	110			μA	11, 13, 43
	1/16 Array, 15°C	I _{DD6d}	105			μA	11, 13, 43
Deep power-down current Address and control pins are stable; Data bus inputs are stable		I _{DD8}	10			μA	



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Electrical Specifications

Table 18: Electrical Characteristics and Recommended AC Operating Conditions

Notes: 1–6, 27; notes appear on page 62

VDDQ = +1.8V ±0.1V, VDD = +1.8V ±0.1V

Parameter		Symbol	-6		-75		-10		Unit	Notes
			Min	Max	Min	Max	Min	Max		
Access window of DQs from CK/CK#	CL = 3	^t AC	2.0	5.5	2.0	6.0	2.0	7.0	ns	
	CL = 2	^t AC	-	-	2.0	6.5	2.0	7.0	ns	
CK high-level width		^t CH	0.45	0.55	0.45	0.55	0.45	0.55	tCK	
CK low-level width		^t CL	0.45	0.55	0.45	0.55	0.45	0.55	tCK	
Clock cycle time	CL = 3	^t CK(3)	6		7.5		9.6		ns	7, 30, 49
	CL = 2	^t CK(2)	-		12		15		ns	7, 30, 49
Auto precharge write recovery + precharge time		^t DAL	-		-		-			45
DQ and DM input hold time relative to DQS		^t DH	0.6		0.75		1.1		ns	23, 28, 44
DQ and DM input setup time relative to DQS		^t DS	0.6		0.75		1.1		ns	23, 28, 44
DQ and DM input pulse width (for each input)		^t DIPW	2.1		2.5		3.4		ns	46
Access window of DQS from CK/CK#	CL = 3	^t DQSCK	2.0	5.5	2.0	6.0	2.0	7.0	ns	
	CL = 2	^t DQSCK	-	-	2.0	6.5	2.0	7.0	ns	
DQS input high pulse width		^t DQSH	0.35	0.6	0.4	0.6	0.4	0.6	^t CK	
DQS input low pulse width		^t DQSL	0.35	0.6	0.4	0.6	0.4	0.6	^t CK	
DQS-DQ skew, DQS to last DQ valid, per group, per access		^t DQSQ		0.5		0.6		0.7	ns	22, 23
Write command to first DQS latching transition		^t DQSS	0.75	1.25	0.75	1.25	0.75	1.25	^t CK	
DQS falling edge to CK rising - setup time		^t DSS	0.2		0.2		0.2		^t CK	
DQS falling edge from CK rising - hold time		^t DSH	0.2		0.2		0.2		^t CK	
Half clock period		^t HP	^t CH, ^t CL		^t CH, ^t CL		^t CH, ^t CL		ns	30
Data-out High-Z window from CK/CK#		^t HZ	1.0	5.5	1.0	6	1.0	7.0	ns	15, 38
Data-out Low-Z window from CK/CK#		^t LZ	1.0		1.0		1.0		ns	15, 38
Address and control input hold time (fast slew rate)		^t IH _F	1.1		1.3		1.5		ns	14, 44
Address and control input setup time (fast slew rate)		^t IS _F	1.1		1.3		1.5		ns	14, 44
Address and control input hold time (slow slew rate)		^t IH _S	1.2		1.5		1.7		ns	14, 44
Address and control input setup time (slow slew rate)		^t IS _S	1.2		1.5		1.7		ns	14, 44
Address and control input pulse width		^t IPW	2.7		3.2		3.9		ns	46
LOAD MODE REGISTER command cycle time		^t MRD	2		2		2		^t CK	
DQ-DQS hold, DQS to first DQ to go non-valid, per access		^t QH	^t HP - ^t QHS		^t HP - ^t QHS		^t HP - ^t QHS		ns	22, 23
Data hold skew factor		^t QHS		0.65		0.75		1	ns	
ACTIVE-to-PRECHARGE command		^t RAS	42	70,000	45	70,000	50	70,000	ns	31
ACTIVE-to-ACTIVE/AUTO-REFRESH command period		^t RC	60		75		80		ns	
AUTO REFRESH command period		^t RFC	70		70		70		ns	42



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Electrical Specifications

Table 18: Electrical Characteristics and Recommended AC Operating Conditions (continued)

Notes: 1–6, 27; notes appear on page 62



VDDQ = +1.8V ±0.1V, VDD = +1.8V ±0.1V

Parameter	Symbol	-6		-75		-10		Unit	Notes
		Min	Max	Min	Max	Min	Max		
ACTIVE-to-READ or WRITE delay	t_{RCD}	18		22.5		30		ns	
PRECHARGE command period	t_{RP}	18		22.5		30		ns	
DQS read preamble CL = 2	$t_{\text{RPRE}}(2)$	-	-	0.5	1.1	0.5	1.1	t_{CK}	38
DQS read preamble CL = 3	$t_{\text{RPRE}}(3)$	0.9	1.1	0.9	1.1	0.9	1.1	t_{CK}	38
DQS read postamble	t_{RPST}	0.4	0.6	0.4	0.6	0.4	0.6	t_{CK}	
ACTIVE bank <i>a</i> to ACTIVE bank <i>b</i> command	t_{RRD}	12		15		15		ns	
DQS write preamble	t_{WPRE}	0.25		0.25		0.25		t_{CK}	
DQS write preamble setup time	t_{WPRES}	0		0		0		ns	17, 18
DQS write postamble	t_{WPST}	0.4	0.6	0.4	0.6	0.4	0.6	t_{CK}	16
Write recovery time	t_{WR}	12		15		15		ns	
Internal WRITE-to-READ command delay	t_{WTR}	1		1		1		t_{CK}	
Data valid output window (DVW)	n/a	$t_{\text{QH}} - t_{\text{DQSQ}}$		$t_{\text{QH}} - t_{\text{DQSQ}}$		$t_{\text{QH}} - t_{\text{DQSQ}}$		ns	22
Average periodic refresh interval	t_{REFI}		7.8		7.8		7.8	μs	20
Exit SELF REFRESH to first valid command	t_{XSR}	120		120		120		ns	47
Exit power-down mode to first valid command	t_{XP}	25		25		25		ns	48
Minimum t_{CKE} HIGH/LOW time	t_{CKE}	2		2		2		t_{CK}	



Notes

- Notes:
1. All voltages referenced to Vss.
 2. All parameters assume proper device initialization.
 3. Tests for AC timing, IDD, and electrical AC and DC characteristics may be conducted at nominal supply voltage levels, but the related specifications and device operation are guaranteed for the full voltage range specified.
 4. Outputs measured with equivalent load:



5. Timing and IDD tests may use a V_{IL} -to- V_{IH} swing of up to 1.5V in the test environment, but input timing is still referenced to $V_{DDQ}/2$ (or to the crossing point for CK/CK#). The output timing reference voltage level is $V_{DDQ}/2$.
6. All AC timings assume an input slew rate of 1V/ns.
7. CAS latency definition: with CL = 2 the first data element is valid at ($t_{CK} + t_{AC}$) after the clock at which the READ command was registered, for CL = 3 the first data element is valid at ($2 \times t_{CK} + t_{AC}$) after the first clock at which the READ command was registered.
8. VID is the magnitude of the difference between the input level on CK and the input level on CK#.
9. The value of VIX is expected to equal $V_{DDQ}/2$ of the transmitting device and must track variations in the DC level of the same.
10. IDD is dependent on output loading and cycle rates. Specified values are obtained with minimum cycle time at CL = 2 for -10 and CL = 3 for -75 with the outputs open.
11. Enables on-chip refresh and address counters.
12. IDD specifications are tested after the device is properly initialized, and is averaged after test condition is met.
13. This parameter is sampled. $V_{DD} = +1.8V \pm 0.1V$, $V_{DDQ} = +1.8V \pm 0.1V$, $f = 100 \text{ MHz}$, $T_A = 25^\circ\text{C}$, $V_{OUT}(\text{DC}) = V_{DDQ}/2$, $V_{OUT}(\text{peak-to-peak}) = 0.2V$. DM input is grouped with I/O balls, reflecting the fact that they are matched in loading.
14. Fast command/address input slew rate $\geq 1V/\text{ns}$. Slow command/address input slew rate $\geq 0.5V/\text{ns}$. If the slew rate is less than 0.5V/ns, timing must be derated: t_{IS} has an additional 50ps per each 100mV/ns reduction in slew rate from the 0.5V/ns. t_{IH} has 0ps added, that is, it remains constant. If the slew rate exceeds 4.5V/ns, functionality is uncertain.
15. t_{HZ} and t_{LZ} transitions occur in the same access time windows as valid data transitions. These parameters are not referenced to a specific voltage level, but specify when the device output is no longer driving (HZ) or begins driving (LZ).



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Notes

16. The maximum limit for this parameter is not a device limit. The device will operate with a greater value for this parameter, but system performance (bus turnaround) will degrade accordingly.
17. This is not a device limit. The device will operate with a negative value, but system performance could be degraded due to bus turnaround.
18. It is recommended that DQS be valid (HIGH or LOW) on or before the WRITE command. The case shown (DQS going from High-Z to logic LOW) applies when no WRITES were previously in progress on the bus. If a previous WRITE was in progress, DQS could be HIGH during this time, depending on t_{DQSS} .
19. MIN (t_{RC} or t_{RFC}) for IDD measurements is the smallest multiple of t_{CK} that meets the minimum absolute value for the respective parameter. t_{RAS} (MAX) for IDD measurements is the largest multiple of t_{CK} that meets the maximum absolute value for t_{RAS} .
20. The refresh period equals 64ms. This equates to an average refresh rate of 7.8125 μ s.
21. The I/O capacitance per DQS and DQ byte/group will not differ by more than this maximum amount for any given device.
22. The valid data window is derived by achieving other specifications: t_{HP} ($t_{CK}/2$), t_{DQSQ} , and t_{QH} ($t_{HP} - t_{QHS}$). The data valid window derates directly proportional with the clock duty cycle and a practical data valid window can be derived. The clock is allowed a maximum duty cycle variation of 45/55. Functionality is uncertain when operating beyond a 45/55 ratio.
23. Referenced to each output group: For x16, LDQS with DQ0–DQ7; and UDQS with DQ8–DQ15. For x32, DQS0 with DQ0–DQ7, DQS1 with DQ8–DQ15, DQS2 with DQ16–DQ23 and DQS3 with DQ24–DQ31.
24. This limit is actually a nominal value and does not result in a fail value. CKE is HIGH during REFRESH command period (t_{RFC} [MIN]) else CKE is LOW (i.e., during standby).
25. To maintain a valid level, the transitioning edge of the input must:
 - a. Sustain a constant slew rate from the current AC level through to the target AC level, $V_{IL}(AC)$ or $V_{IH}(AC)$.
 - b. Reach at least the target AC level.
 - c. After the AC target level is reached, continue to maintain at least the target DC level, $V_{IL}(DC)$ or $V_{IH}(DC)$.
26. The input capacitance per pin group will not differ by more than this maximum amount for any given device.
27. CK and CK# input slew rate must be ≥ 1 V/ns (2 V/ns if measured differentially).
28. DQ and DM input slew rates must not deviate from DQS by more than 10 percent. If the DQ/DM/DQS slew rate is less than 0.5 V/ns, timing must be derated: 50ps must be added to t_{DS} and t_{DH} for each 100mv/ns reduction in slew rate. If slew rate exceeds 4 V/ns, functionality is uncertain.
29. VDD must not vary more than 4 percent if CKE is not active while any bank is active.
30. t_{HP} (MIN) is the lesser of t_{CL} minimum and t_{CH} minimum actually applied to the device CK and CK# inputs, collectively.
31. READs and WRITEs with auto precharge are not allowed to be issued until t_{RAS} (MIN) can be satisfied prior to the internal precharge command being issued.
32. Any positive glitch must be less than 1/3 of the clock cycle and not more than +200mV or 2.0V, whichever is less. Any negative glitch must be less than 1/3 of the clock cycle and not exceed either -150mV or 1.6V, whichever is more positive.
33. Normal Output Drive Curves.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Notes

34. Reduced Output Drive Curves.
35. The voltage levels used are derived from a minimum V_{DD} level and the referenced test load. In practice, the voltage levels obtained from a properly terminated bus will provide significantly different voltage values.
36. V_{IH} overshoot: $V_{IH} (MAX) = V_{DDQ} + 1.0V$ for a pulse width $\leq 3ns$ and the pulse width can not be greater than 1/3 of the cycle rate. V_{IL} undershoot: $V_{IL} (MIN) = -1.0V$ for a pulse width $\leq 3ns$ and the pulse width can not be greater than 1/3 of the cycle rate.
37. V_{DD} and V_{DDQ} must track each other and V_{DDQ} must be less than or equal to V_{DD} .
38. $t_{HZ} (MAX)$ will prevail over $t_{DQSCK} (MAX) + t_{RPST} (MAX)$ condition.
39. $IDD2N$ specifies DQ , DQS , and DM to be driven to a valid HIGH or LOW logic level. $IDD2Q$ is similar to $IDD2F$ except $IDD2Q$ specifies the address and control inputs to remain stable. Although $IDD2F$, $IDD2N$, and $IDD2Q$ are similar, $IDD2F$ is "worst case."
40. Random addressing changing 50 percent of data changing at every transfer.
41. Random addressing changing 100 percent of data changing at every transfer.
42. CKE must be active (HIGH) during the entire time a REFRESH command is executed. That is, from the time the AUTO REFRESH command is registered, CKE must be active at each rising clock edge, until t_{RFC} later.
43. With the inclusion of the temperature sensor on the low-power Mobile DDR device, these numbers are shown as examples only, and will change due to the case temperature that the device is sensing. They are expected to be maximum values at this time.
44. The transition time for input signals ($CAS\#$, CKE , $CS\#$, DM , DQ , DQS , $RAS\#$, $WE\#$ and addresses) are measured between $V_{IL(DC)}$ to $V_{IH(AC)}$ for rising input signals and $V_{IH(DC)}$ to $V_{IL(AC)}$ for falling input signals.
45. $t_{DAL} = (t_{WR}/t_{CK}) + (t_{RP}/t_{CK})$: for each term, if not already an integer, round to the next higher integer.
46. These parameters guarantee device timing but they are not necessarily tested on each device.
47. Clock must be toggled a minimum of two times during this period.
48. Clock must be toggled a minimum of one time during this period.
49. Must ensure that all data sheet specifications are satisfied.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Notes

Table 19: Target Normal Output Drive Characteristics (Full-Drive Strength)

Voltage (V)	Pull-Down Current (mA)		Pull-Up Current (mA)	
	Minimum	Maximum	Minimum	Maximum
0.00	0.00	0.00	0.00	0.00
0.10	2.80	18.53	-2.80	-18.53
0.20	5.60	26.80	-5.60	-26.80
0.30	8.40	32.80	-8.40	-32.80
0.40	11.20	37.05	-11.20	-37.05
0.50	14.00	40.00	-14.00	-40.00
0.60	16.80	42.50	-16.80	-42.50
0.70	19.60	44.57	-19.60	-44.57
0.80	22.40	46.50	-22.40	-46.50
0.85	23.80	47.48	-23.80	-47.48
0.90	23.80	48.50	-23.80	-48.50
0.95	23.80	49.40	-23.80	-49.40
1.00	23.80	50.05	-23.80	-50.05
1.10	23.80	51.35	-23.80	-51.35
1.20	23.80	52.65	-23.80	-52.65
1.30	23.80	53.95	-23.80	-53.95
1.40	23.80	55.25	-23.80	-55.25
1.50	23.80	56.55	-23.80	-56.55
1.60	23.80	57.85	-23.80	-57.85
1.70	23.80	59.15	-23.80	-59.15
1.80	-	60.45	-	-60.45
1.90	-	61.75	-	-61.75

Note: The above characteristics are specified under best and worst process variation/conditions.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Notes

Table 20: Target Reduced Output Drive Characteristics (Half Strength)

Voltage (V)	Pull-Down Current (mA)		Pull-Up Current (mA)	
	Minimum	Maximum	Minimum	Maximum
0.00	0.00	0.00	0.00	0.00
0.10	1.27	8.42	-1.27	-8.42
0.20	2.55	12.30	-2.55	-12.30
0.30	3.82	14.95	-3.82	-14.95
0.40	5.09	16.84	-5.09	-16.84
0.50	6.36	18.20	-6.36	-18.20
0.60	7.64	19.30	-7.64	-19.30
0.70	8.91	20.30	-8.91	-20.30
0.80	10.16	21.20	-10.16	-21.20
0.85	10.80	21.60	-10.80	-21.60
0.90	10.80	22.00	-10.80	-22.00
0.95	10.80	22.45	-10.80	-22.45
1.00	10.80	22.73	-10.80	-22.73
1.10	10.80	23.21	-10.80	-23.21
1.20	10.80	23.67	-10.80	-23.67
1.30	10.80	24.14	-10.80	-24.14
1.40	10.80	24.61	-10.80	-24.61
1.50	10.80	25.08	-10.80	-25.08
1.60	10.80	25.54	-10.80	-25.54
1.70	10.80	26.01	-10.80	-26.01
1.80	-	26.48	-	-26.48
1.90	-	26.95	-	-26.95


Note: The above characteristics are specified under best and worst process variation/conditions.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Timing Diagrams

Figure 36: Data Output Timing – t_{DQSQ} , t_{QH} , and Data Valid Window (x16)

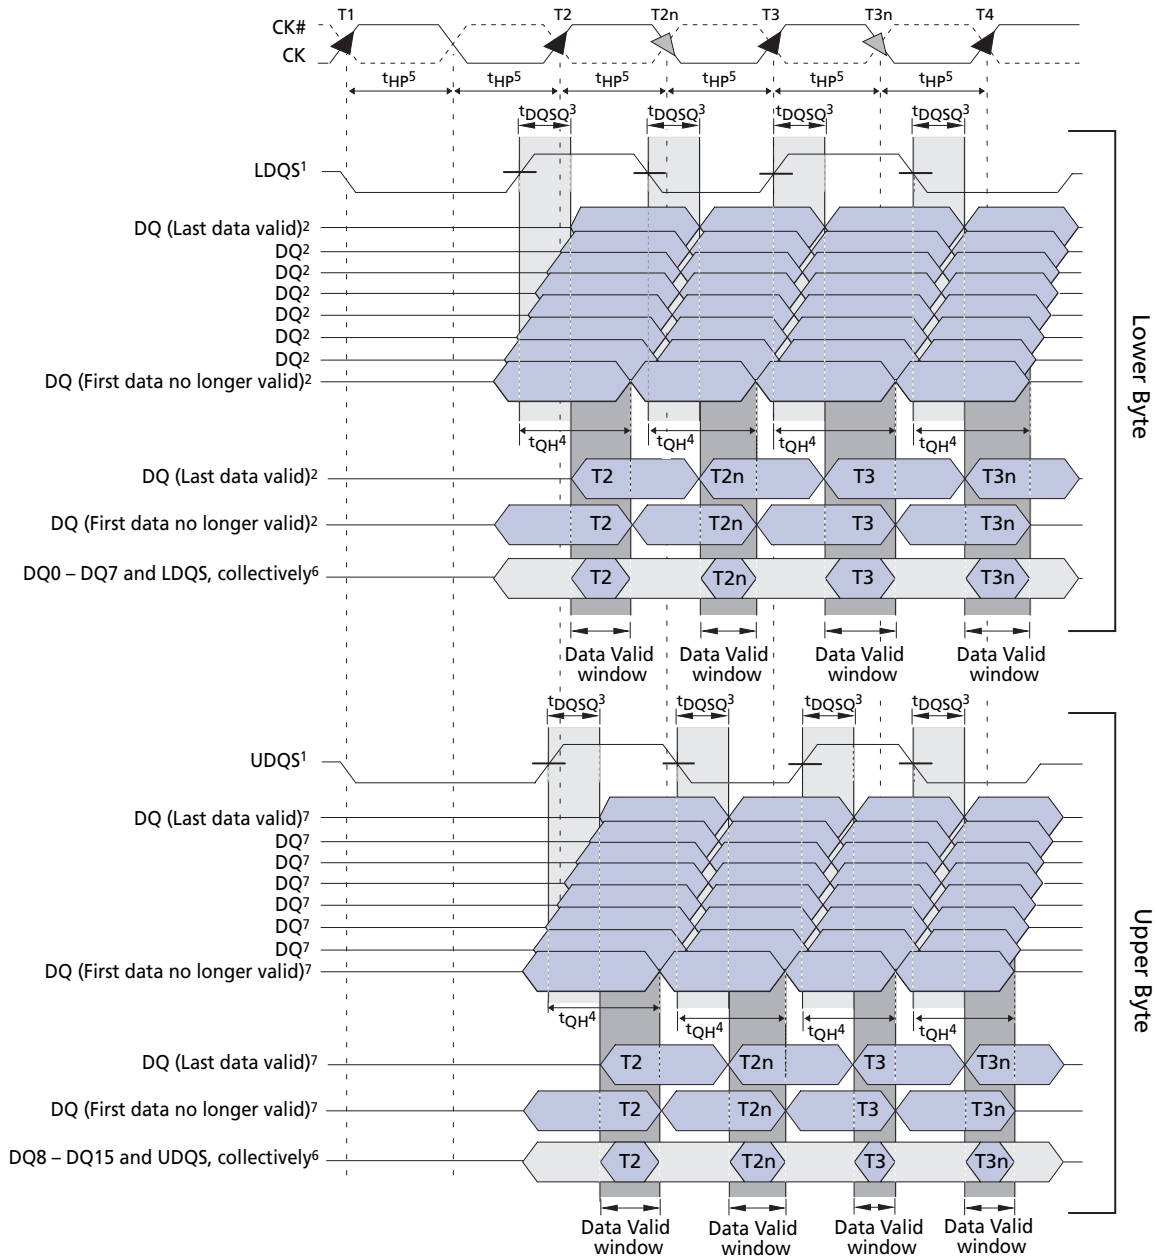


- Notes:
1. DQ transitioning after DQS transition define t_{DQSQ} window. LDQS defines the lower byte and UDQS defines the upper byte.
 2. DQ0, DQ1, DQ2, DQ3, DQ4, DQ5, DQ6, or DQ7.
 3. t_{DQSQ} is derived at each DQS clock edge and is not cumulative over time and begins with DQS transition and ends with the last valid DQ transition.
 4. t_{QH} is derived from t_{HP} : $t_{QH} = t_{HP} - t_{QH5}$.
 5. t_{HP} is the lesser of t_{CL} or t_{CH} clock transition collectively when a bank is active.
 6. The data valid window is derived for each DQS transitions and is defined as $t_{QH} - t_{DQSQ}$.
 7. DQ8, DQ9, DQ10, DQ11, DQ12, DQ13, DQ14, or DQ15.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 37: Data Output Timing – t_{DQSQ} , t_{QH} , and Data Valid Window (x32)

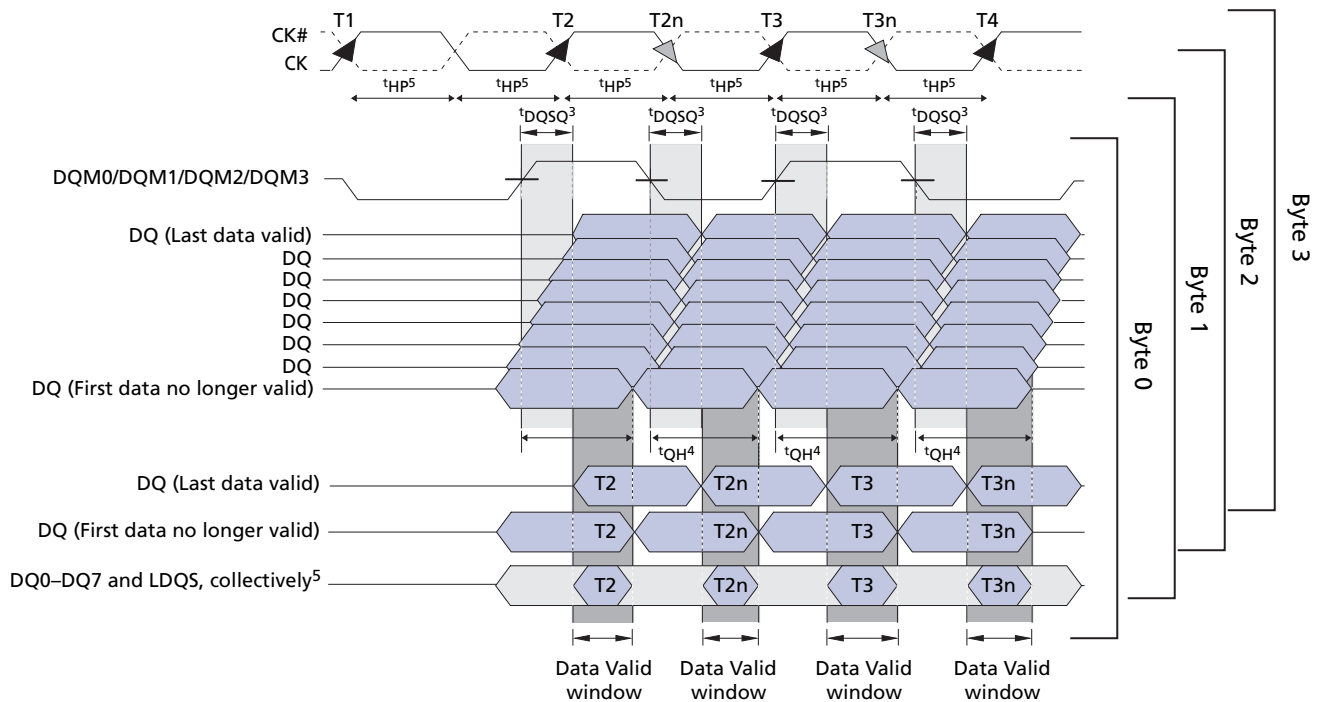


- Notes:
1. DQ transitioning after DQS transition define t_{DQSQ} window. LDQS defines the lower byte and UDQS defines the upper byte.
 2. Byte 0 is DQ0...7, Byte 1 is DQ8...15, Byte 2 is DQ16...23, Byte 3 is DQ24...31. t_{DQSQ} is derived at each DQS clock edge and is not cumulative over time and begins with DQS transition and ends with the last valid DQ transition.
 3. t_{QH} is derived from t_{HP} : $t_{QH} = t_{HP} - t_{QHS}$.
 4. t_{HP} is the lesser of t_{CL} or t_{CH} clock transition collectively when a bank is active.
 5. The data valid window is derived for each DQS transition and is $t_{QH} - t_{DQSQ}$.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 38: Data Output Timing – t_{AC} and t_{DQSCK}

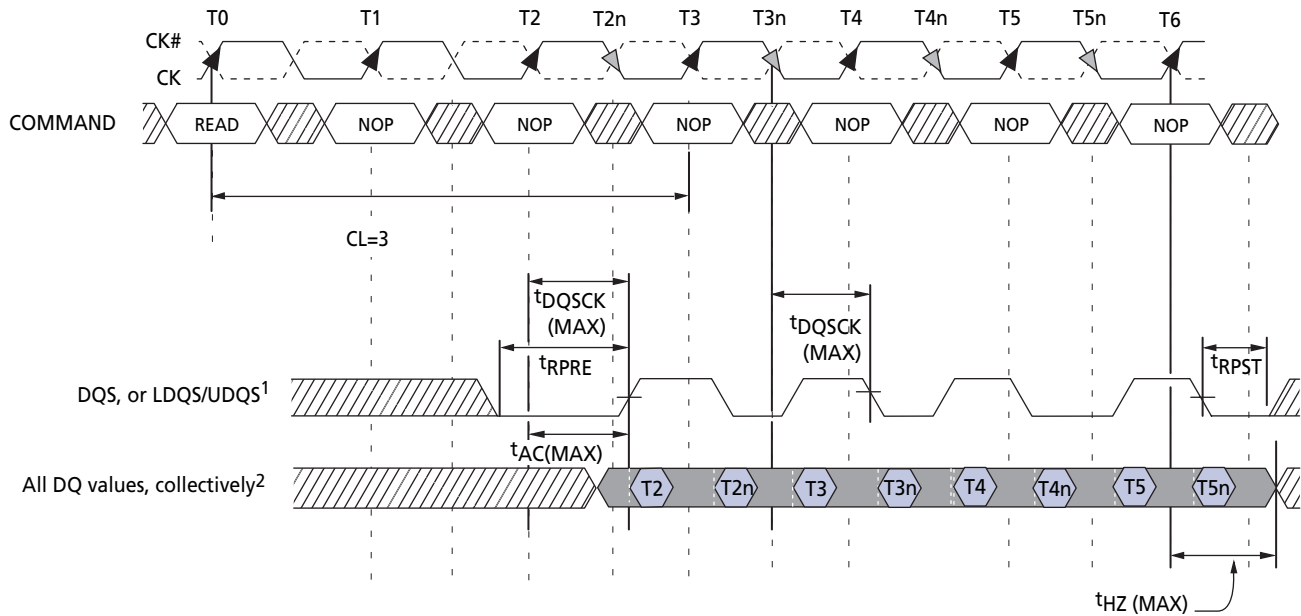


- Notes:
1. DQ transitioning after DQS transition define t_{DQSCK} window.
 2. All DQ must transition by t_{DQSCK} after DQS transitions, regardless of t_{AC} .
 3. t_{AC} is the DQ output window relative to CK, and is the "long term" component of DQ skew.
 4. Shown with CL = 3.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 39: Data Input Timing

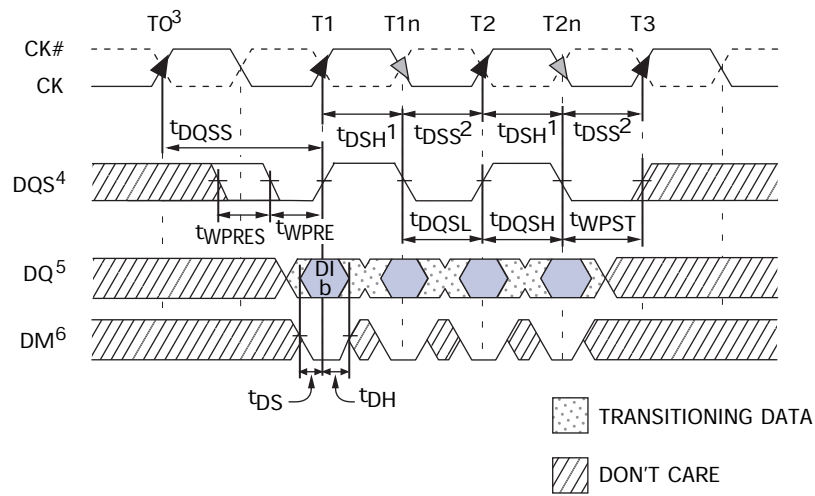


- Notes:
1. t_{DSH} (MIN) generally occurs during t_{DQSS} (MIN).
 2. t_{DSS} (MIN) generally occurs during t_{DQSS} (MAX).
 3. WRITE command issued at T0.
 4. For x16, LDQS controls the lower byte; UDQS controls the upper byte.
For x32, DQSO controls DQ[7:0], DQS1 controls DQ[15:8], DQS2 controls DQ[23:16], and DQS3 controls DQ[31:24].
 5. For x16, LDM controls the lower byte; UDM controls the upper byte.
For x32, DMO controls DQ[7:0], DM1 controls DQ[15:8], DM2 controls DQ[23:16], and DM3 controls DQ[31:24].



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 40: Initialize and Load Mode Registers

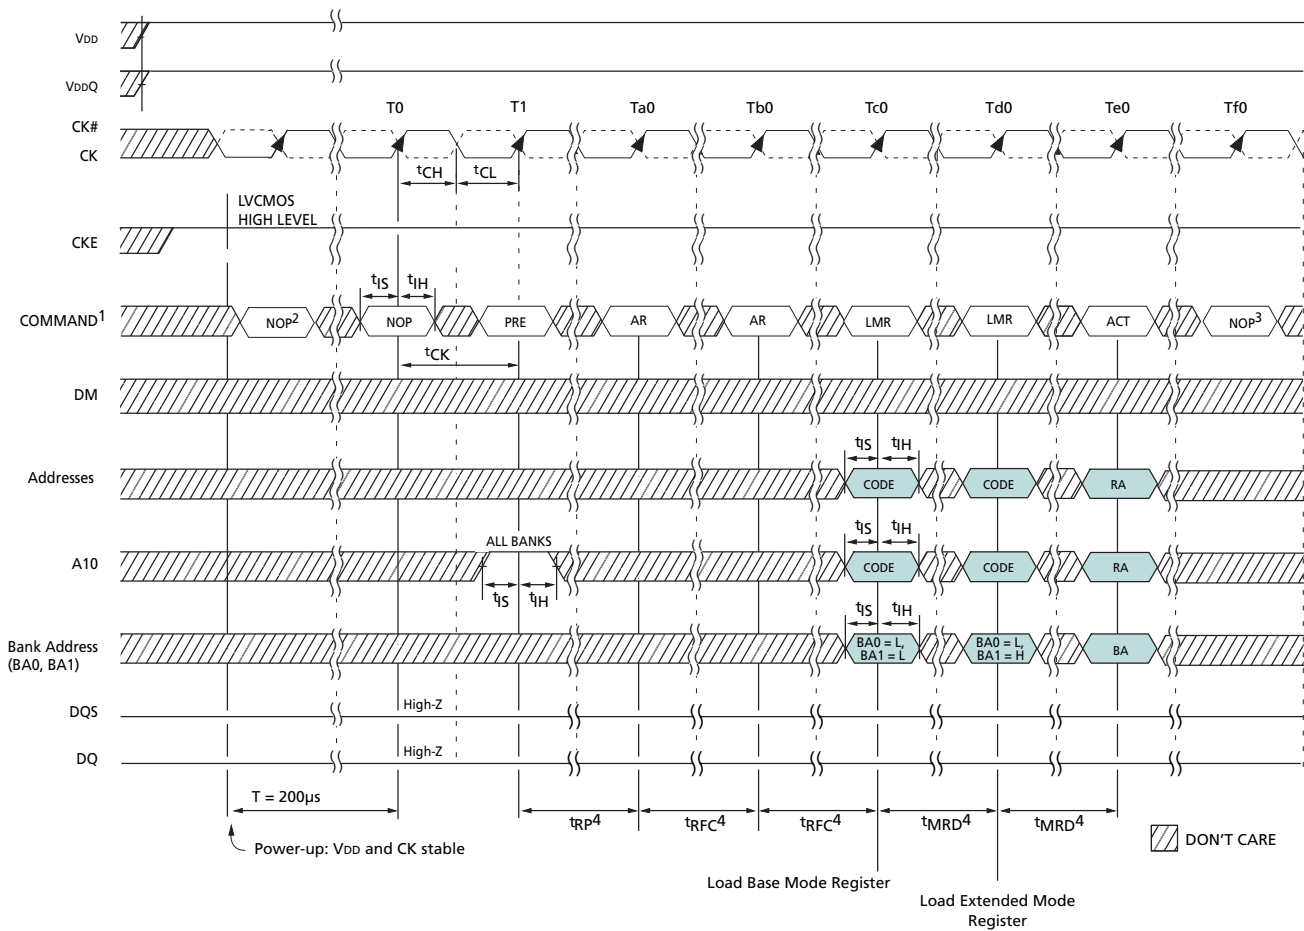


- Notes:
1. PRE = PRECHARGE command, LMR = LOAD MODE REGISTER command, AR = AUTO REFRESH command, ACT = ACTIVE command, RA = Row Address, BA = Bank Address.
 2. NOP or DESELECT commands are required for at least 200μs.
 3. Other valid commands are possible.
 4. NOPs or DESELECTs are required during this time.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 41: Power Down Mode (Active or Precharge)

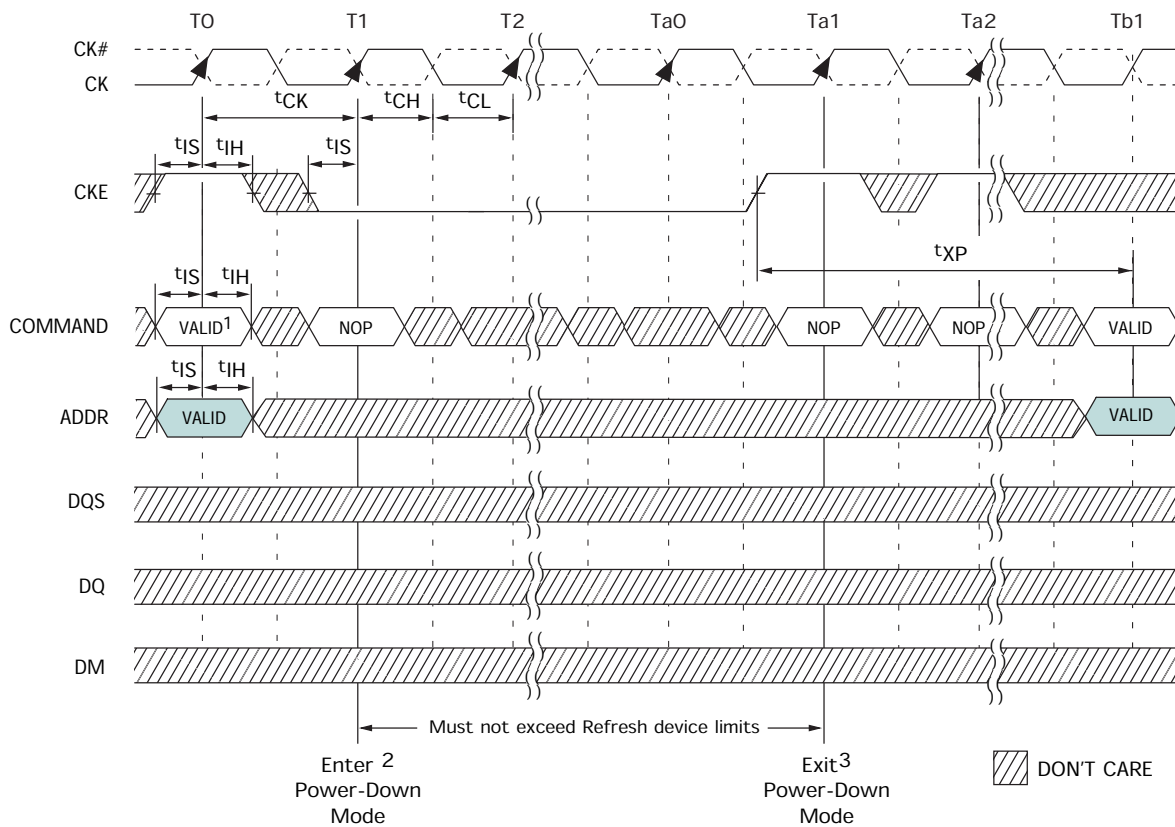


- Notes:
1. If this command is a PRECHARGE (or if the device is already in the idle state), then the power-down mode shown is precharge power-down. If this command is an ACTIVE (or if at least one row is already active), then the power-down mode shown is active power-down.
 2. No column accesses are allowed to be in progress at the time power-down is entered.
 3. There must be at least one clock pulse during t_{XP} time.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 42: Auto Refresh Mode

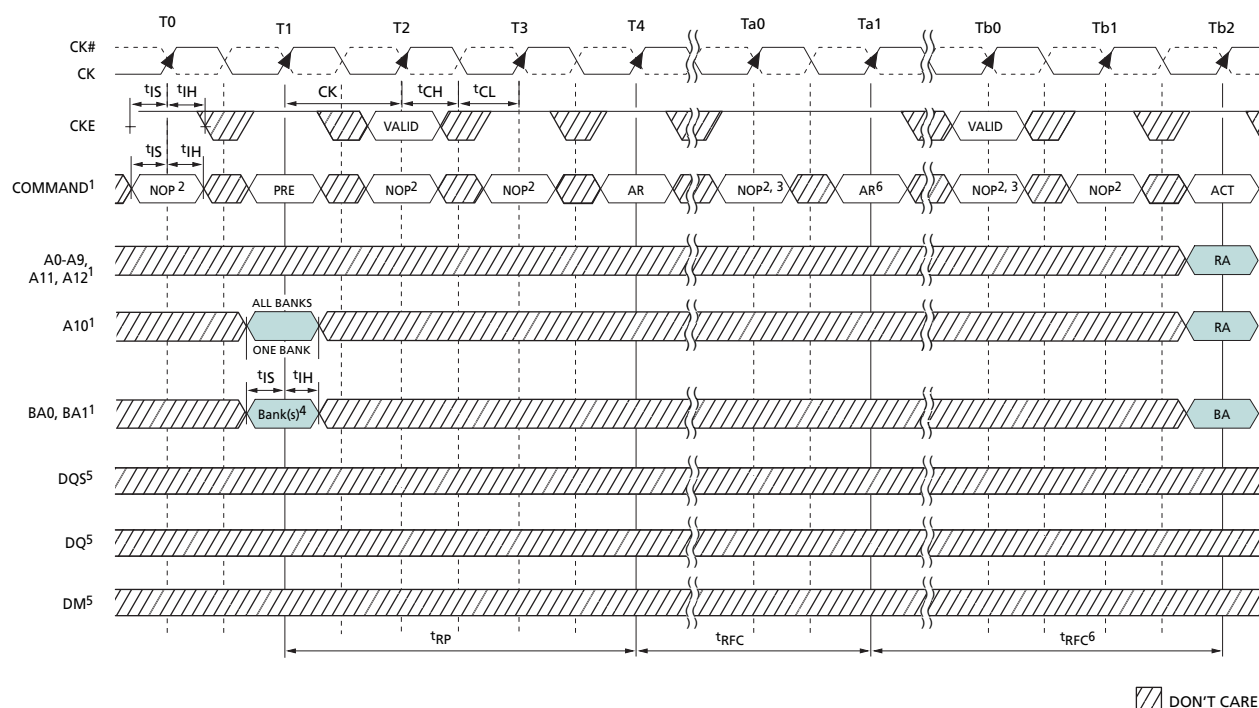


- Notes:
1. PRE = PRECHARGE, ACT = ACTIVE, AR = AUTO REFRESH, RA = Row Address, BA = Bank Address.
 2. NOP commands are shown for ease of illustration; other valid commands may be possible at these times. CKE must be active during clock positive transitions.
 3. NOP or COMMAND INHIBIT are the only commands allowed until after t_{RFC} time, CKE must be active during clock positive transitions.
 4. "Don't Care" if A10 is HIGH at this point; A10 must be HIGH if more than one bank is active (i.e., must precharge all active banks).
 5. DM, DQ, and DQS signals are all "Don't Care"/High-Z for operations shown.
 6. The second AUTO REFRESH is not required and is only shown as an example of two back-to-back AUTO REFRESH commands.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 43: Self Refresh Mode

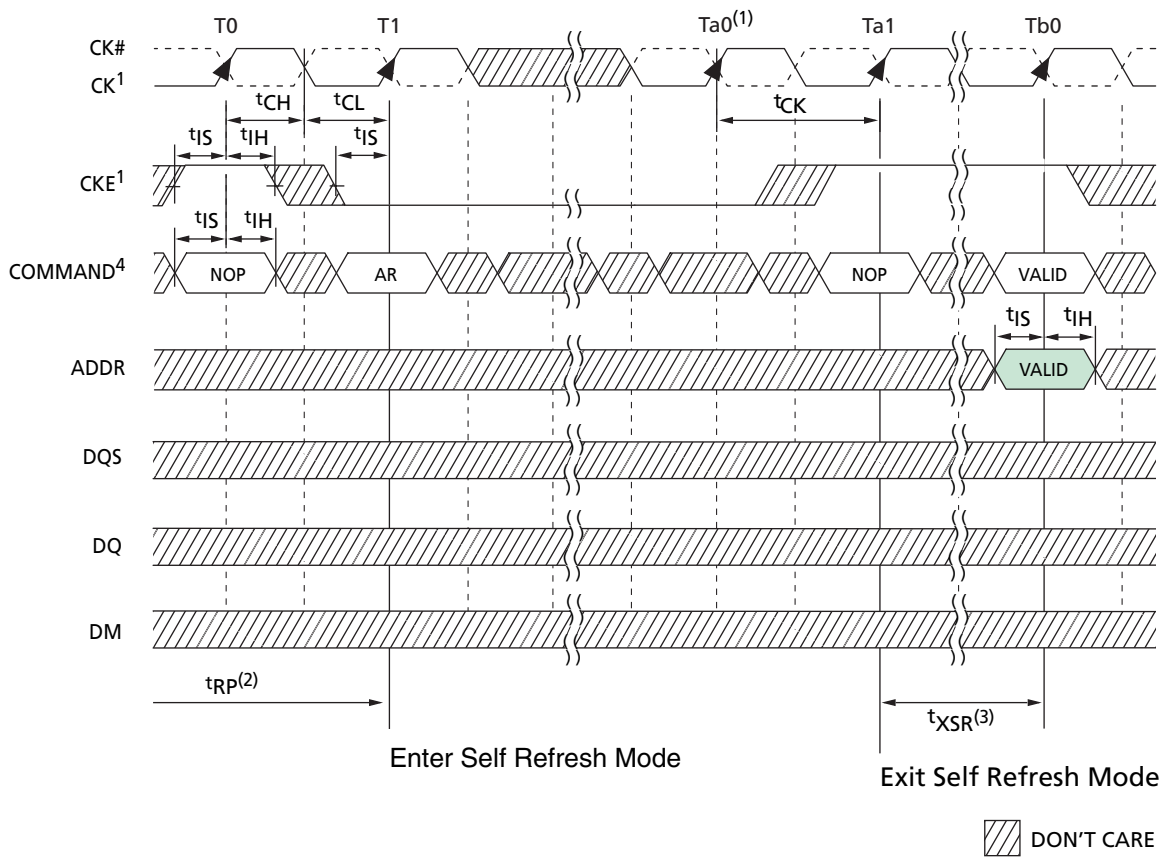


- Notes:
1. Clock must be stable before exiting self refresh mode. That is, the clock must be cycling within specifications by Ta0.
 2. Device must be in the all banks idle state prior to entering self refresh mode.
 3. NOPs or DESELECT are required for $t_{XSR}^{(3)}$ time with at least two clock pulses.
 4. AR = AUTO REFRESH command.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 44: Bank Read – Without Auto Precharge

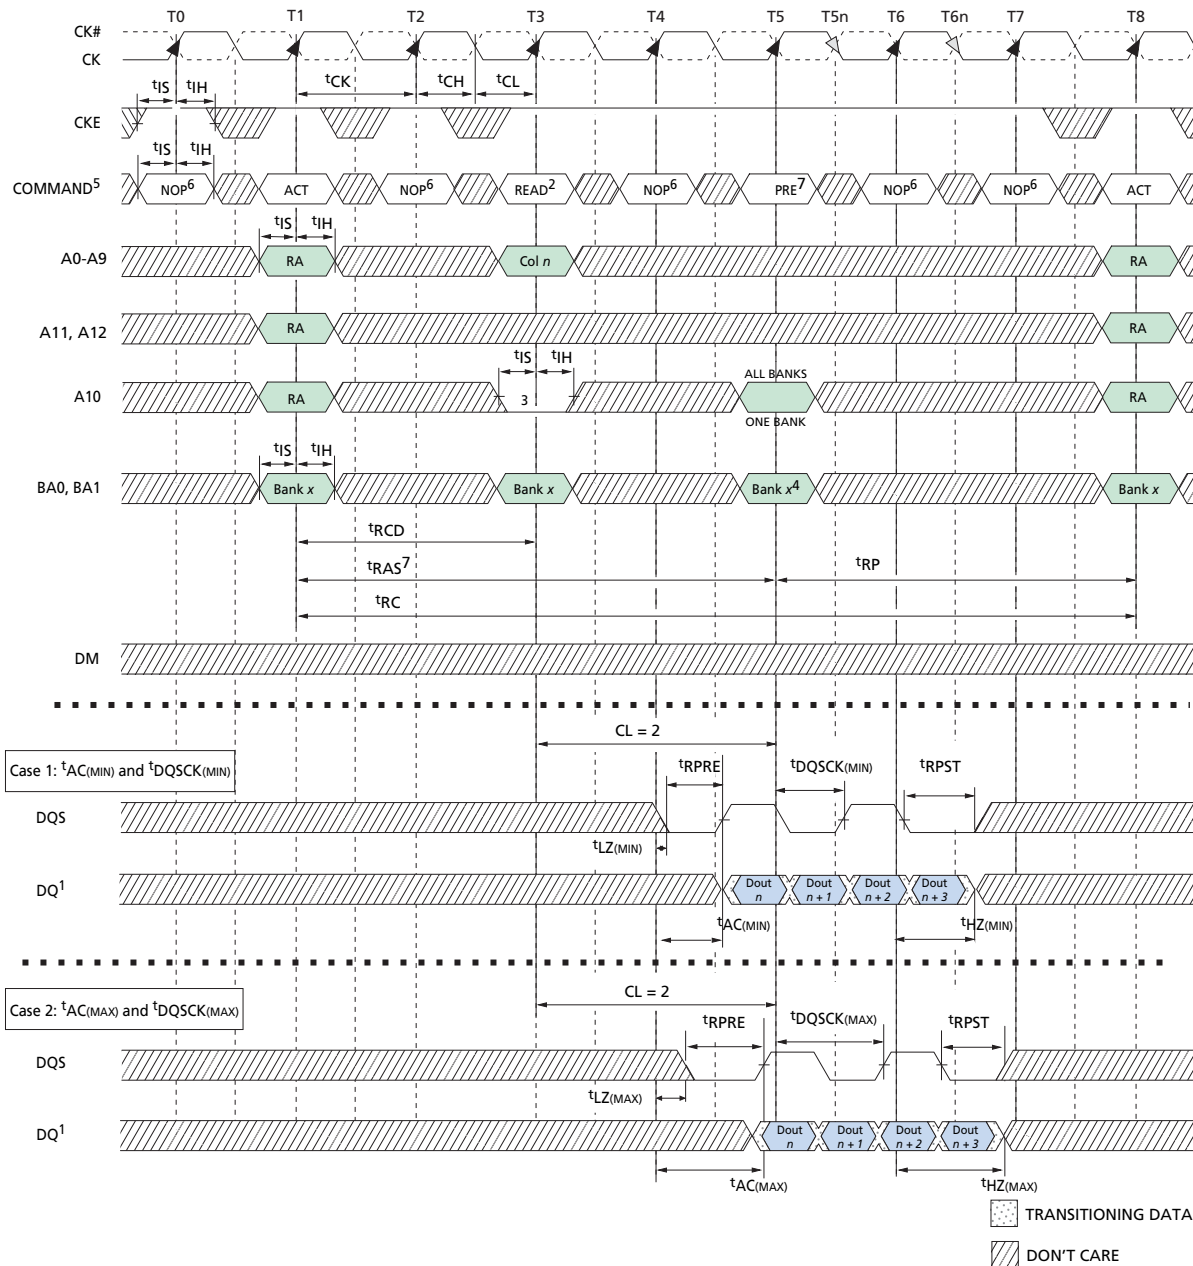


- Notes:
1. DOUT n = data out from column n .
 2. BL = 4 in the case shown.
 3. Disable auto precharge.
 4. "Don't Care" if A10 is HIGH at T5.
 5. PRE = PRECHARGE, ACT = ACTIVE, RA = Row address, BA = Bank address.
 6. NOP commands are shown for ease of illustration; other commands may be valid at these times.
 7. The PRECHARGE command can only be applied at T5 if t_{RAS} minimum is met.
 8. Refer to Figure 34 on page 49 and Figure 35 on page 49 for DQS and DQ timing details.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 45: Bank Read – With Auto Precharge

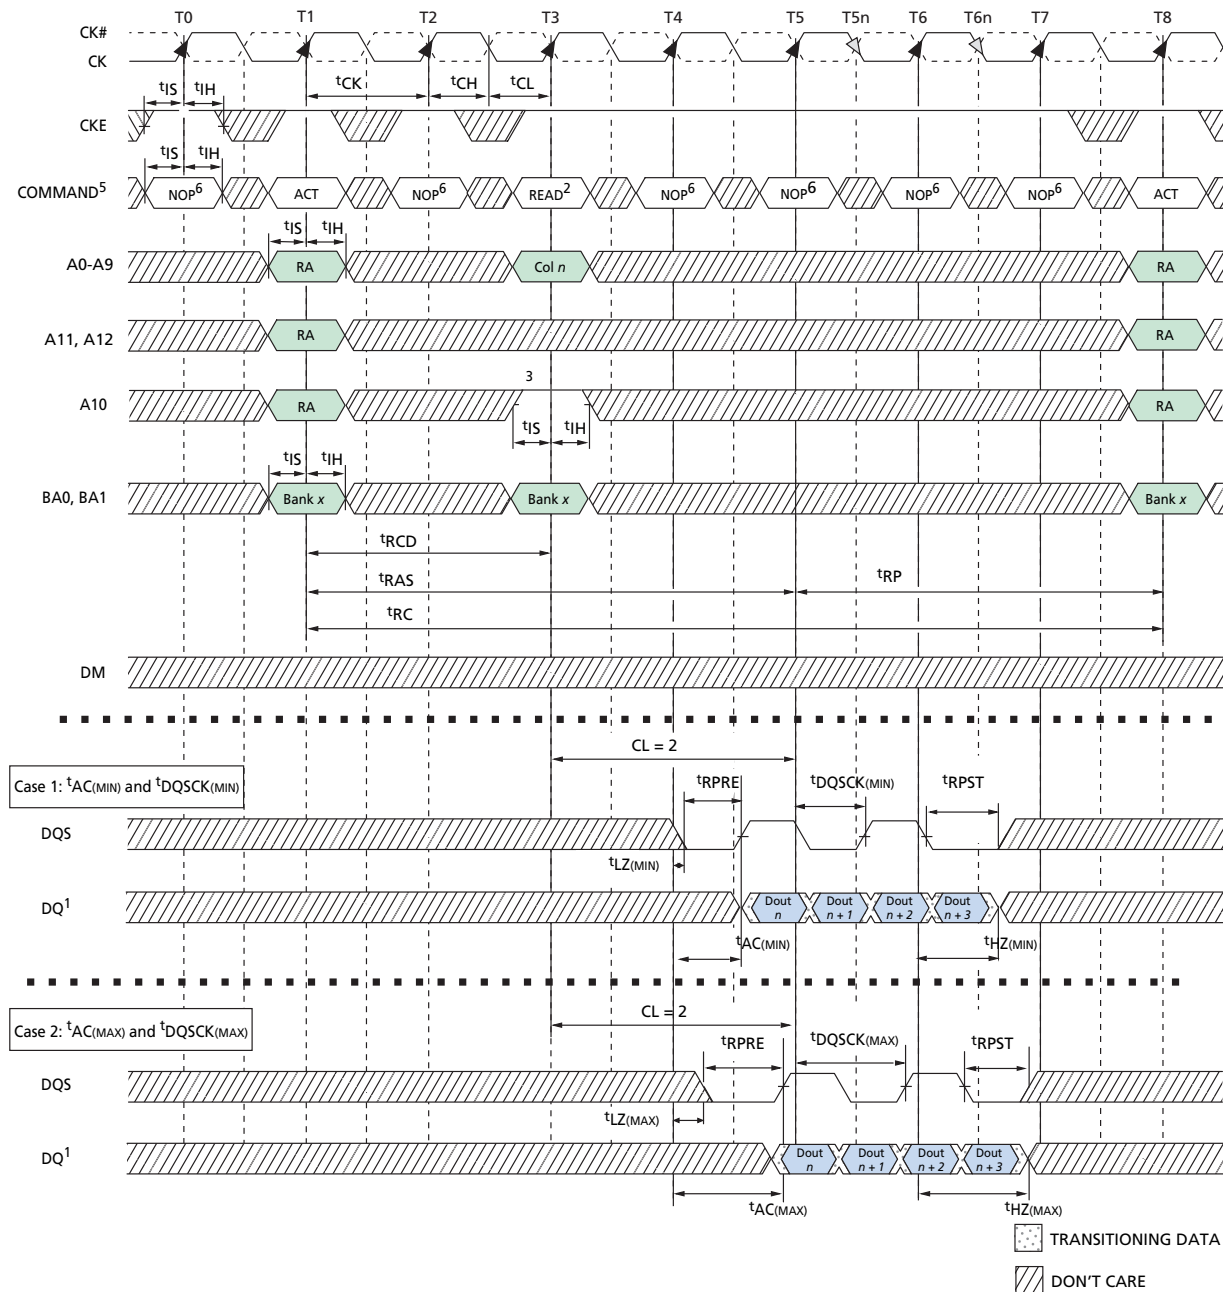


- Notes:
1. DOUT n = data-out from column n .
 2. BL = 4 in the case shown.
 3. Enable auto precharge.
 4. "Don't Care" if A10 is HIGH at T5.
 5. PRE = PRECHARGE, ACT = ACTIVE, RA = Row address, BA = Bank address.
 6. NOP commands are shown for ease of illustration; other commands may be valid at these times.
 7. Refer to Figure 34 on page 49 and Figure 35 on page 49 for detailed DQS and DQ timing.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 46: Bank Write – Without Auto Precharge

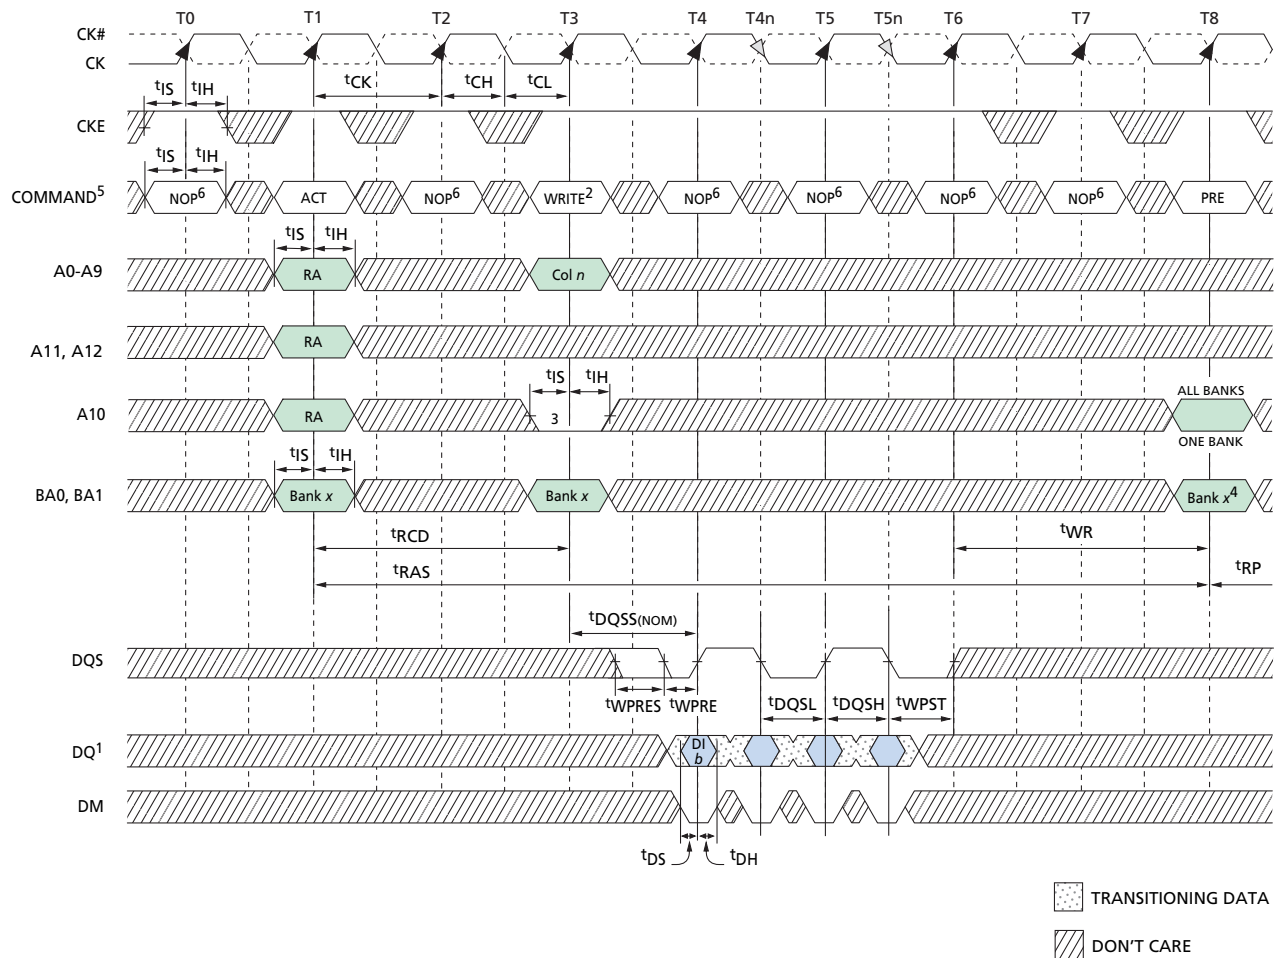


- Notes:
1. DI_n = data-out from column n ; subsequent elements are provided in the programmed order.
 2. $BL = 4$ in the case shown.
 3. Disable auto precharge.
 4. "Don't Care" if A10 is HIGH at T8.
 5. PRE = PRECHARGE, ACT = ACTIVE, RA = Row address, BA = Bank address.
 6. NOP commands are shown for ease of illustration; other commands may be valid at these times.
 7. t_{DSH} is applicable during t_{DQSS} (MIN) and is referenced from CK T4 or T5.
 8. t_{DSH} is applicable during t_{DQSS} (MIN) and is referenced from CK T5 or T6.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 47: Bank Write – With Auto Precharge

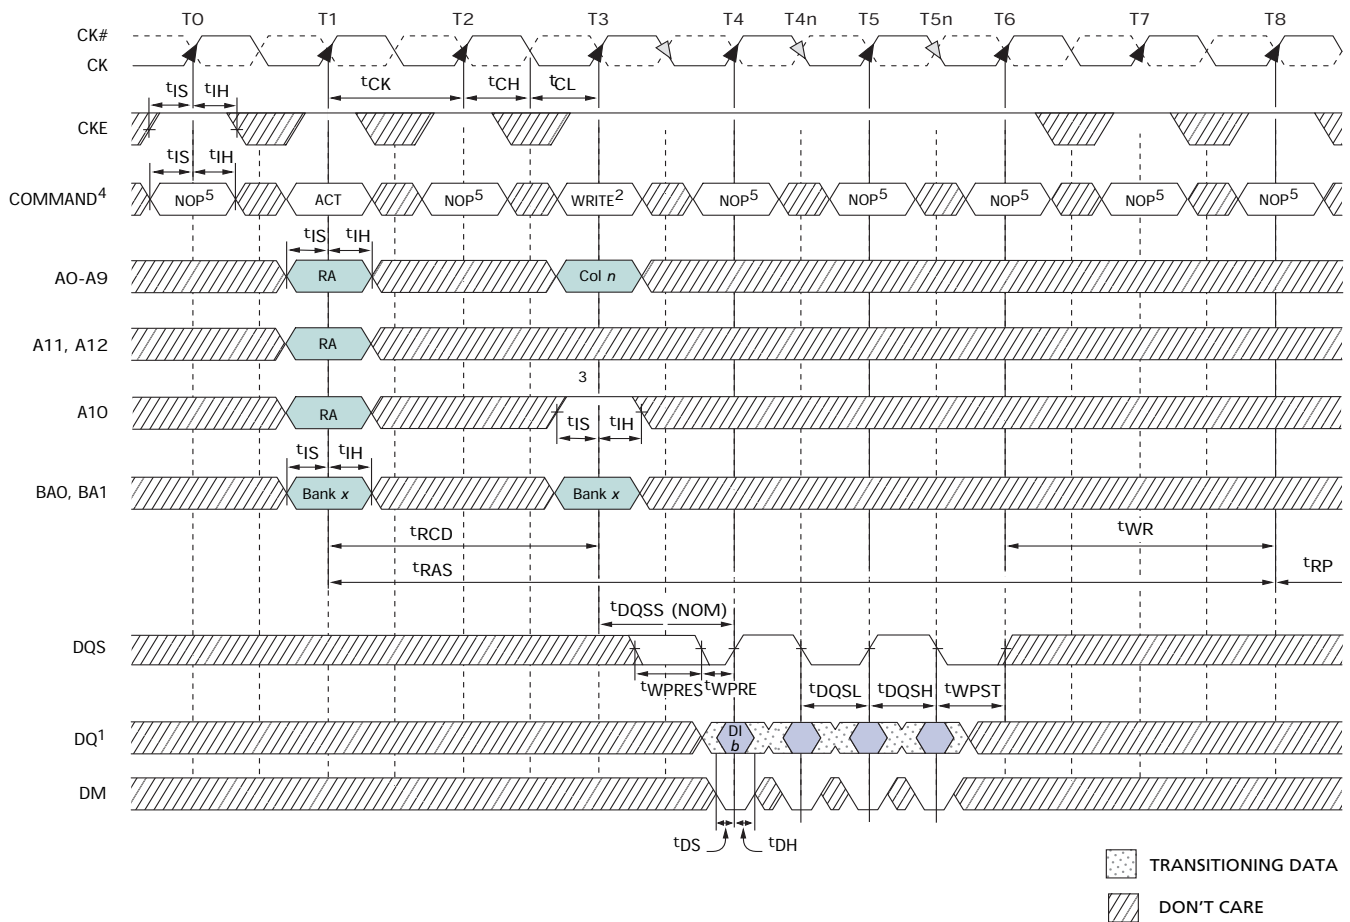


- Notes:
1. DI_n = data-out from column n ; subsequent elements are provided in the programmed order.
 2. $BL = 4$ in the case shown.
 3. $A10 = \text{HIGH}$; enable auto precharge.
 4. ACT = ACTIVE, RA = Row address, BA = Bank address.
 5. NOP commands are shown for ease of illustration; other commands may be valid at these times.
 6. t_{DSH} is applicable during $t_{DQSS}(\text{MIN})$ and is referenced from CK T4 or T5.
 7. t_{DSH} is applicable during $t_{DQSS}(\text{MIN})$ and is referenced from CK T5 or T6.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Timing Diagrams

Figure 48: Write – DM Operation

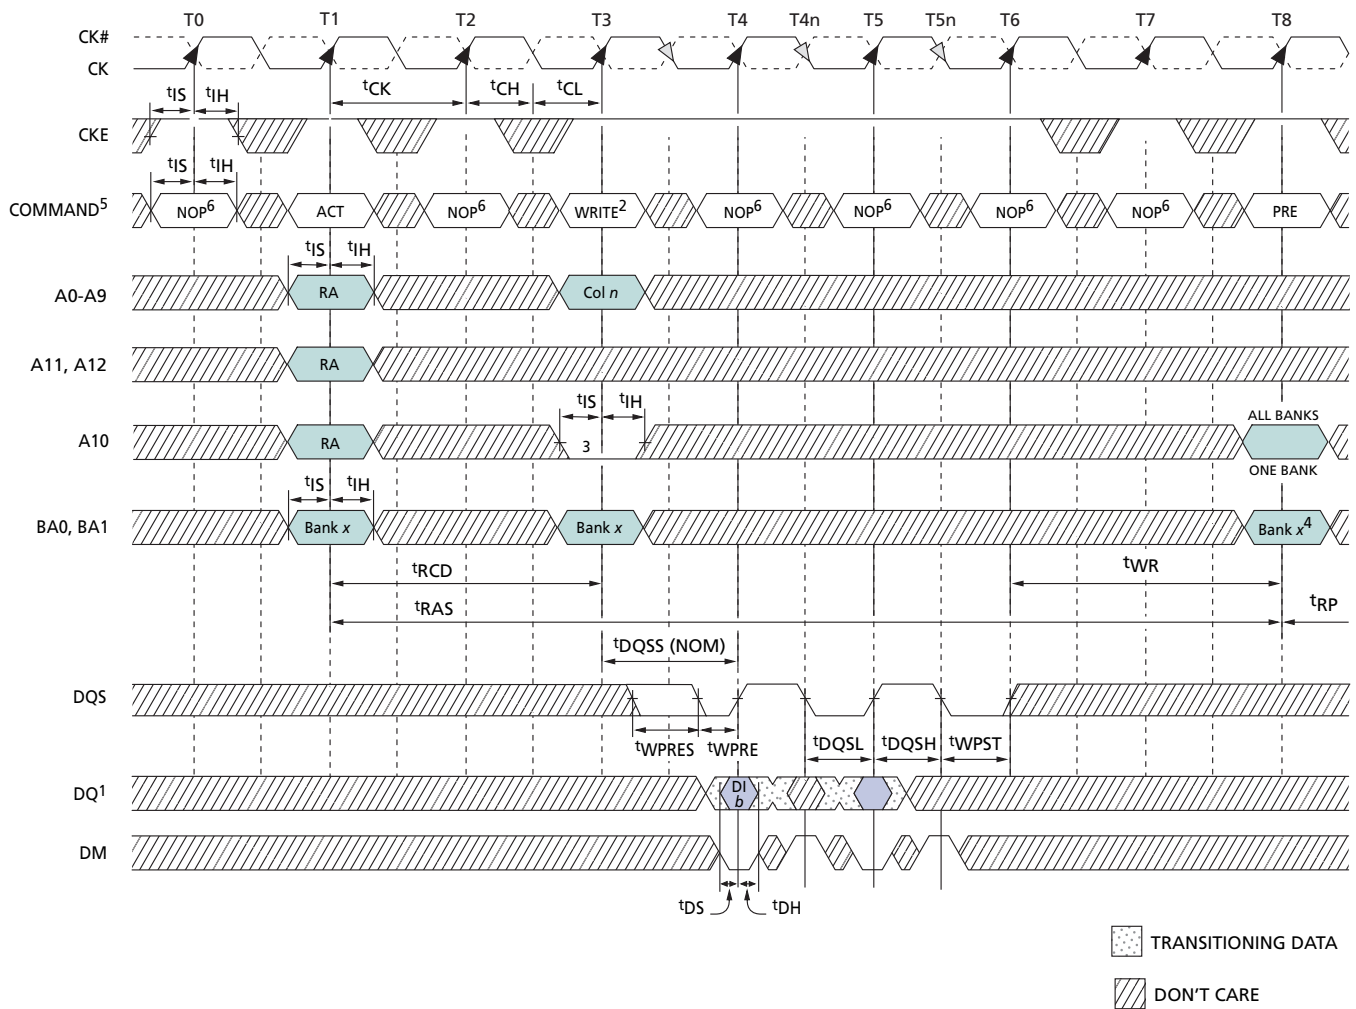


- Notes:
1. DI n = data-in from column n.
 2. BL = 4 in the case shown.
 3. Disable auto precharge.
 4. "Don't Care" if A10 is HIGH at T8.
 5. PRE = PRECHARGE, ACT = ACTIVE, RA = Row address, BA = Bank address.
 6. NOP commands are shown for ease of illustration; other commands may be valid at these times.
 7. t_{DSH} is applicable during t_{DQSS} (MIN) and is referenced from CK T4 or T5.
 8. t_{DSH} is applicable during t_{DQSS} (MIN) and is referenced from CK T5 or T6.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Package Dimensions

Package Dimensions

Figure 49: 60-Ball VFBGA Package

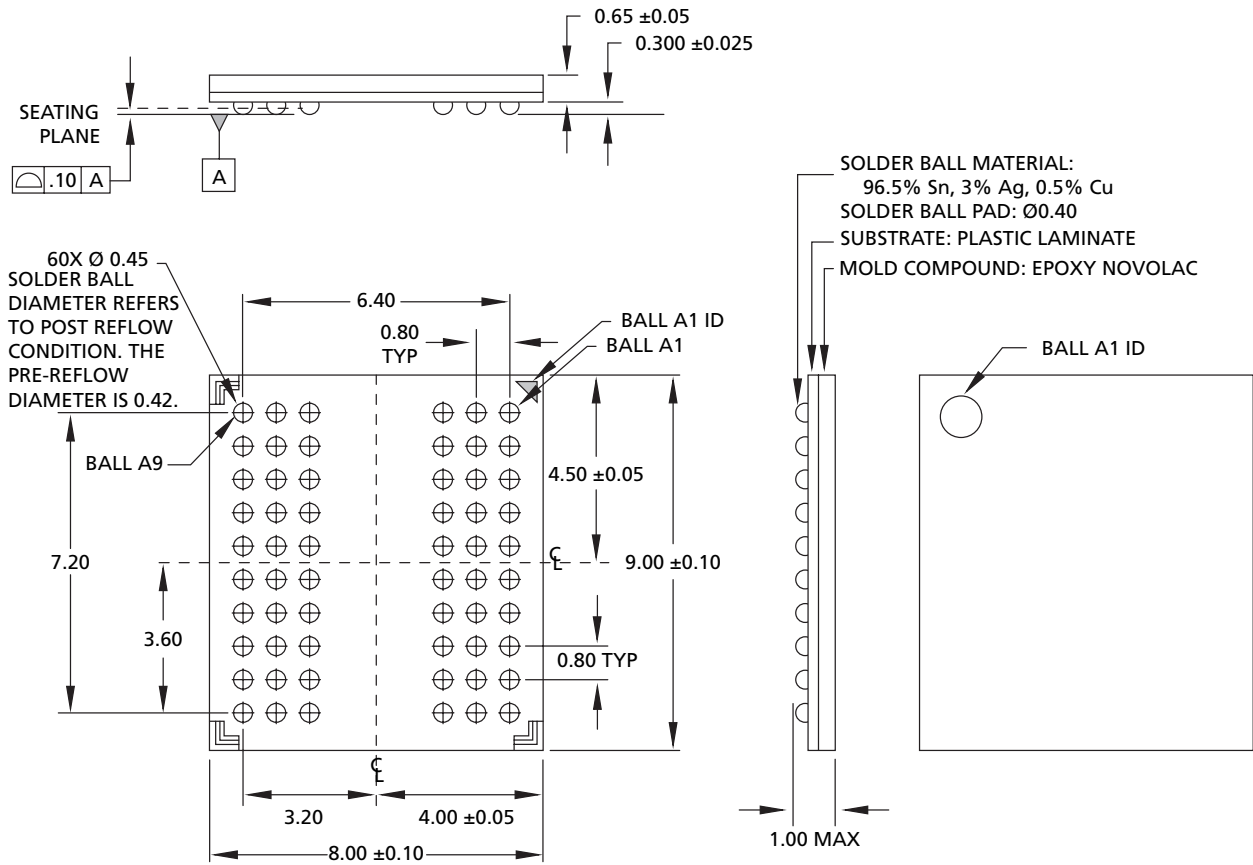


Note: All dimensions are in millimeters.



256Mb: 16 Meg x 16, 8 Meg x 32 Mobile DDR SDRAM Package Dimensions

Figure 50: 90-Ball VFBGA Package

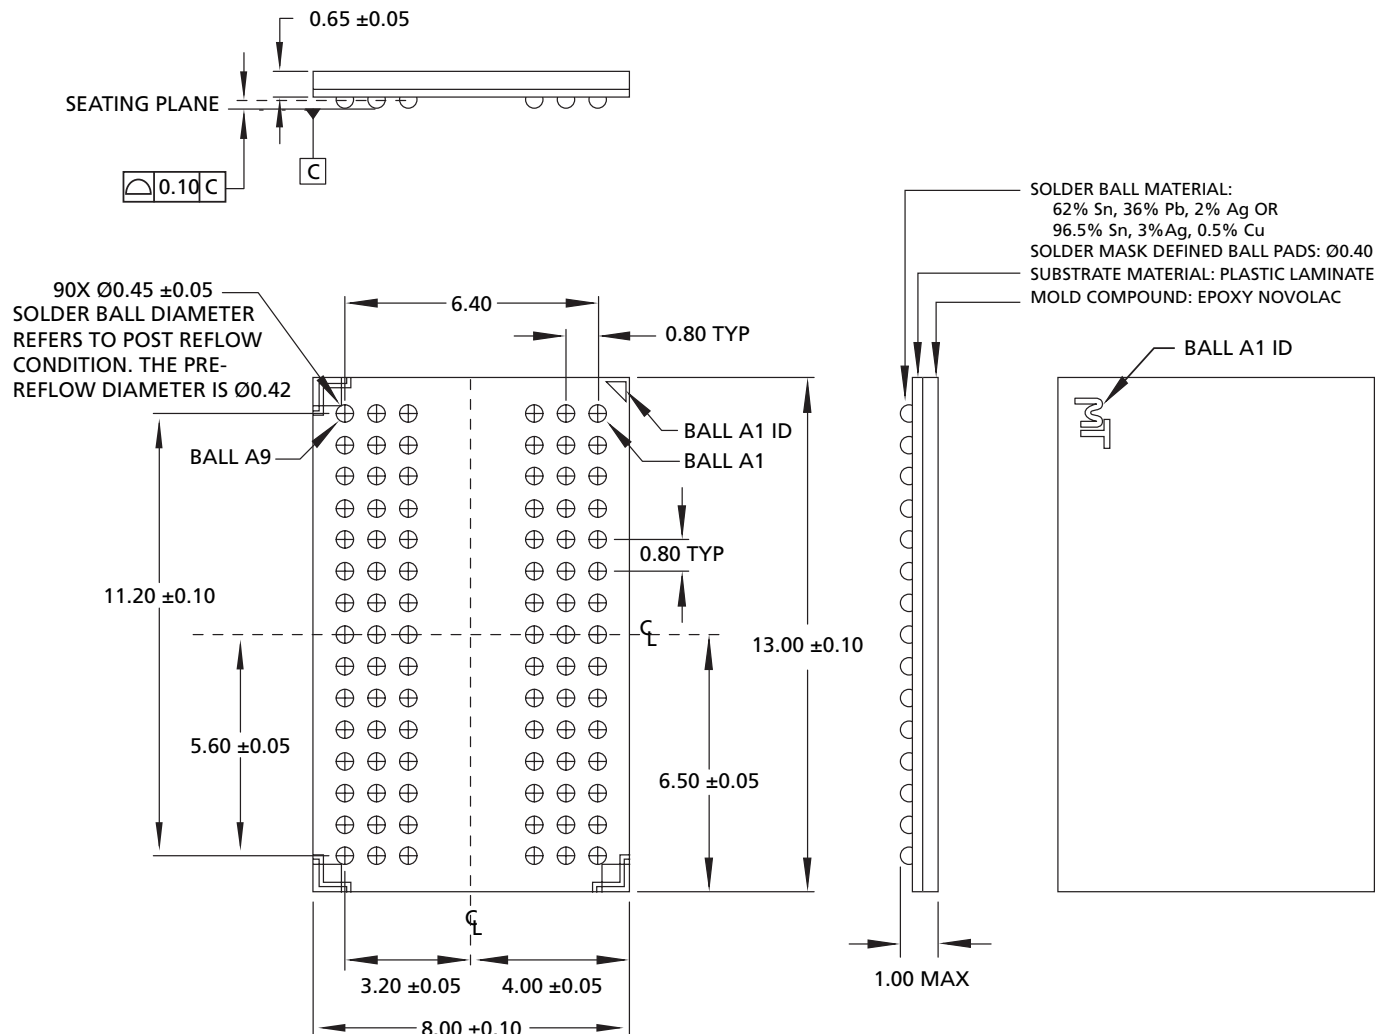

Note: All dimensions are in millimeters.



8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-3900
 prodmktg@micron.com www.micron.com Customer Comment Line: 800-932-4992
 Micron, the M logo, and the Micron logo are trademarks of Micron Technology, Inc.
 All other trademarks are the property of their respective owners.

This data sheet contains minimum and maximum limits specified over the complete power supply and temperature range for production devices. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.