




[POWER DECOUPLING]




[1] 125kHz TRANSMITTER DRIVER

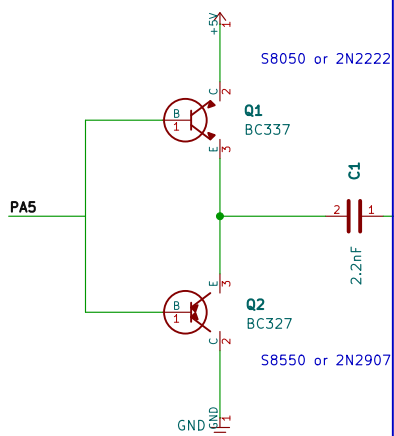

[2] RESONANT LC TANK & EMULATOR SWITCH

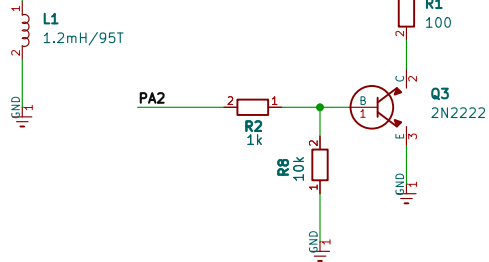

[3] ENVELOPE DEMODULATOR & AMPLIFIER

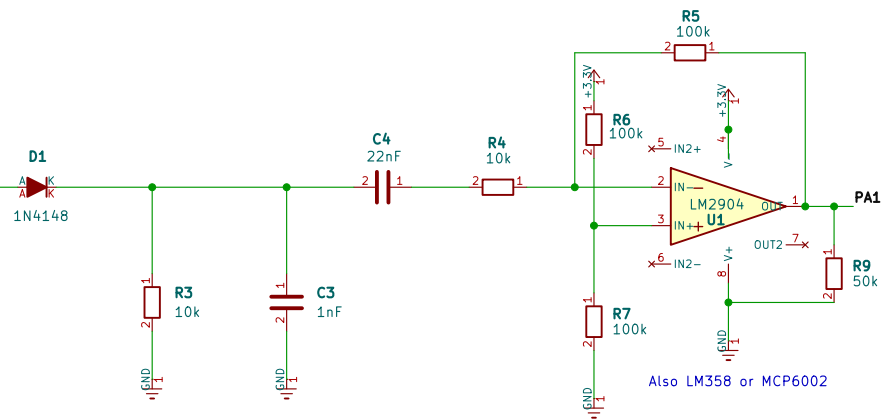

Hardware: STM32WB55 WeAct Core Board
125kHz LF-RFID Module (Reader & Emulator)
artema0g

Sheet: /
File: rfid_lf.kicad_sch

Title: DIY Flipper Zero – LF-RFID 125kHz Subsystem

Size: A4 Date: 2026-07-31

KiCad E.D.A. 10.0.4

Rev: 2.3

Id: 1/1