


規制番号 名称		26-0023	造賀郵便局前		運 用 開始日時	2014年6月19日		製造番号	TQ9482	
制御機機種		交通信号制御機		LTC-AR31		9時20分	～	製造年月	2012年9月	
警交仕規第1012号版2		製作所	(株)京三製作所		作動時間	終日		施工会社	PSN(株)	
署別	東広島	付加機能	系統						新型錠	

2014年6月19日 確認

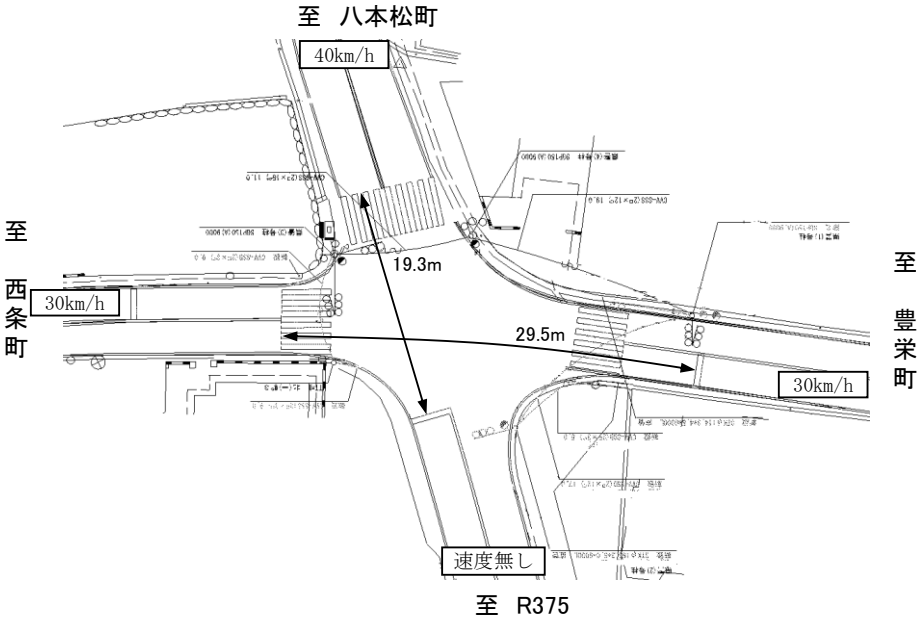

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	2G	2Y	2R	3PG	3PW	3G	3Y	3R								
流動図	9.8m 歩灯2								歩灯2 6.0m 7.2m											
	1P [1P]																			
	1 [1V]			~~~~~																
	2 [2V]					~~~~~														
	3P [3P]																			
	3 [3V]								~~~~~											
パターン																		周期	オフセット	
保安	33	5	2	3	15	3	4	20	5	5	3	2						100		
P0																		0		
P1	18	5	2	3	5	3	4	18	5	2	3	2						70	0	
P2	26	5	2	3	5	3	4	20	5	2	3	2						80	0	
P3	29	5	2	3	5	3	4	27	5	2	3	2						90	0	
P4	33	5	2	3	15	3	4	20	5	5	3	2						100	0	
P5	39	5	2	3	5	3	4	27	5	2	3	2						100	0	
P6	56	5	2	3	5	3	4	20	5	2	3	2						110	0	
P7	66	5	2	3	5	3	4	20	5	2	3	2						120	0	
P8	76	5	2	3	5	3	4	20	5	2	3	2						130	0	
P9	86	5	2	3	5	3	4	20	5	2	3	2						140	0	
PA	96	5	2	3	5	3	4	20	5	2	3	2						150	0	
最長時間(秒)	110	110	110	10	110	10	10	110	110	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95								
AB出力	A	B	B	B	B	B	B	B	A	A	A	A								

パターン切替		(1) 平日			(2) 土曜			(3) 日曜			(4)特殊日1			(5)特殊日2			(6)特殊日3			(7)特殊日4		
	切替番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号	時	分	ハタ番号
	1	6	00	1	6	00	1	6	00	1												
	2	7	00	4	7	00	4	7	00	2												
	3	9	00	2	9	00	2	19	00	1												
	4	16	00	3	16	00	3															
	5	19	00	2	19	00	2															
	6	20	00	1	20	00	1															
	7																					
	8																					
9																						
A																						
動作切替	系統	00:00～00:00			00:00～00:00			00:00～00:00														