


Display 7 segmentos - ARRAY

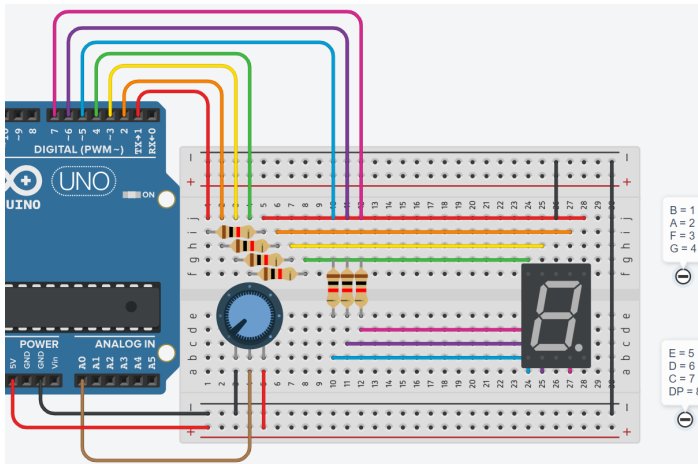

Código Arduino

```
// C++ code
#define PTM A0

int i = 0, lectura = 0, opt = 0;

int cero[7] = {HIGH, HIGH, HIGH, LOW, HIGH, HIGH, HIGH};
int uno[7] = {HIGH, LOW, LOW, LOW, LOW, LOW, HIGH};
int dos[7] = {HIGH, HIGH, LOW, HIGH, HIGH, HIGH, LOW};
int tres[7] = {HIGH, HIGH, LOW, HIGH, LOW, HIGH, HIGH};
int cuatro[7] = {HIGH, LOW, HIGH, HIGH, LOW, LOW, HIGH};
int cinco[7] = {LOW, HIGH, HIGH, HIGH, LOW, HIGH, HIGH};
int seis[7] = {LOW, LOW, HIGH, HIGH, HIGH, HIGH, HIGH};
int siete[7] = {HIGH, HIGH, LOW, LOW, LOW, LOW, HIGH};

void setup()
{
    //inicializamos todos los puertos usando un for
    for (i = 0; i < 7; i++){
        pinMode(i, OUTPUT);
    }
}

void loop()
{
    lectura = analogRead(PTM);
    opt = map(lectura, 0, 1023, 0, 7);

    switch(opt){
        case 1:
            for (i = 0; i < 7; i++)
            {
                digitalWrite(i, uno[i]);
            }
        }
    }
```

```

    }
    break;
    case 2:
        for (i = 0; i < 7; i++)
        {
            digitalWrite(i,
dos[i]);
        }
        break;
    case 3:
        for (i = 0; i < 7; i++)
        {
            digitalWrite(i,
tres[i]);
        }
        break;
    case 4:
        for (i = 0; i < 7; i++)
        {
            digitalWrite(i,
cuatro[i]);
        }
        break;
    case 5:
        for (i = 0; i < 7; i++)
        {
            digitalWrite(i,
cinco[i]);
        }
        break;
    case 6:
        for (i = 0; i < 7; i++)
        {
            digitalWrite(i,
seis[i]);
        }
        break;
    case 7:
        for (i = 0; i < 7; i++)
        {
            digitalWrite(i,
siete[i]);
        }
        break;
    default:
        for (i = 0; i < 7; i++)
        {
            digitalWrite(i,
cero[i]);
        }
        break;
    }
}

```

```
}
```

[enlace en línea](#)