


Mesero AI — board-to-board signals

GABOTRIX AI®

Six signals cross between the two boards. Every number here is read from the firmware.

No wiring — a 14-pin board-to-board seat

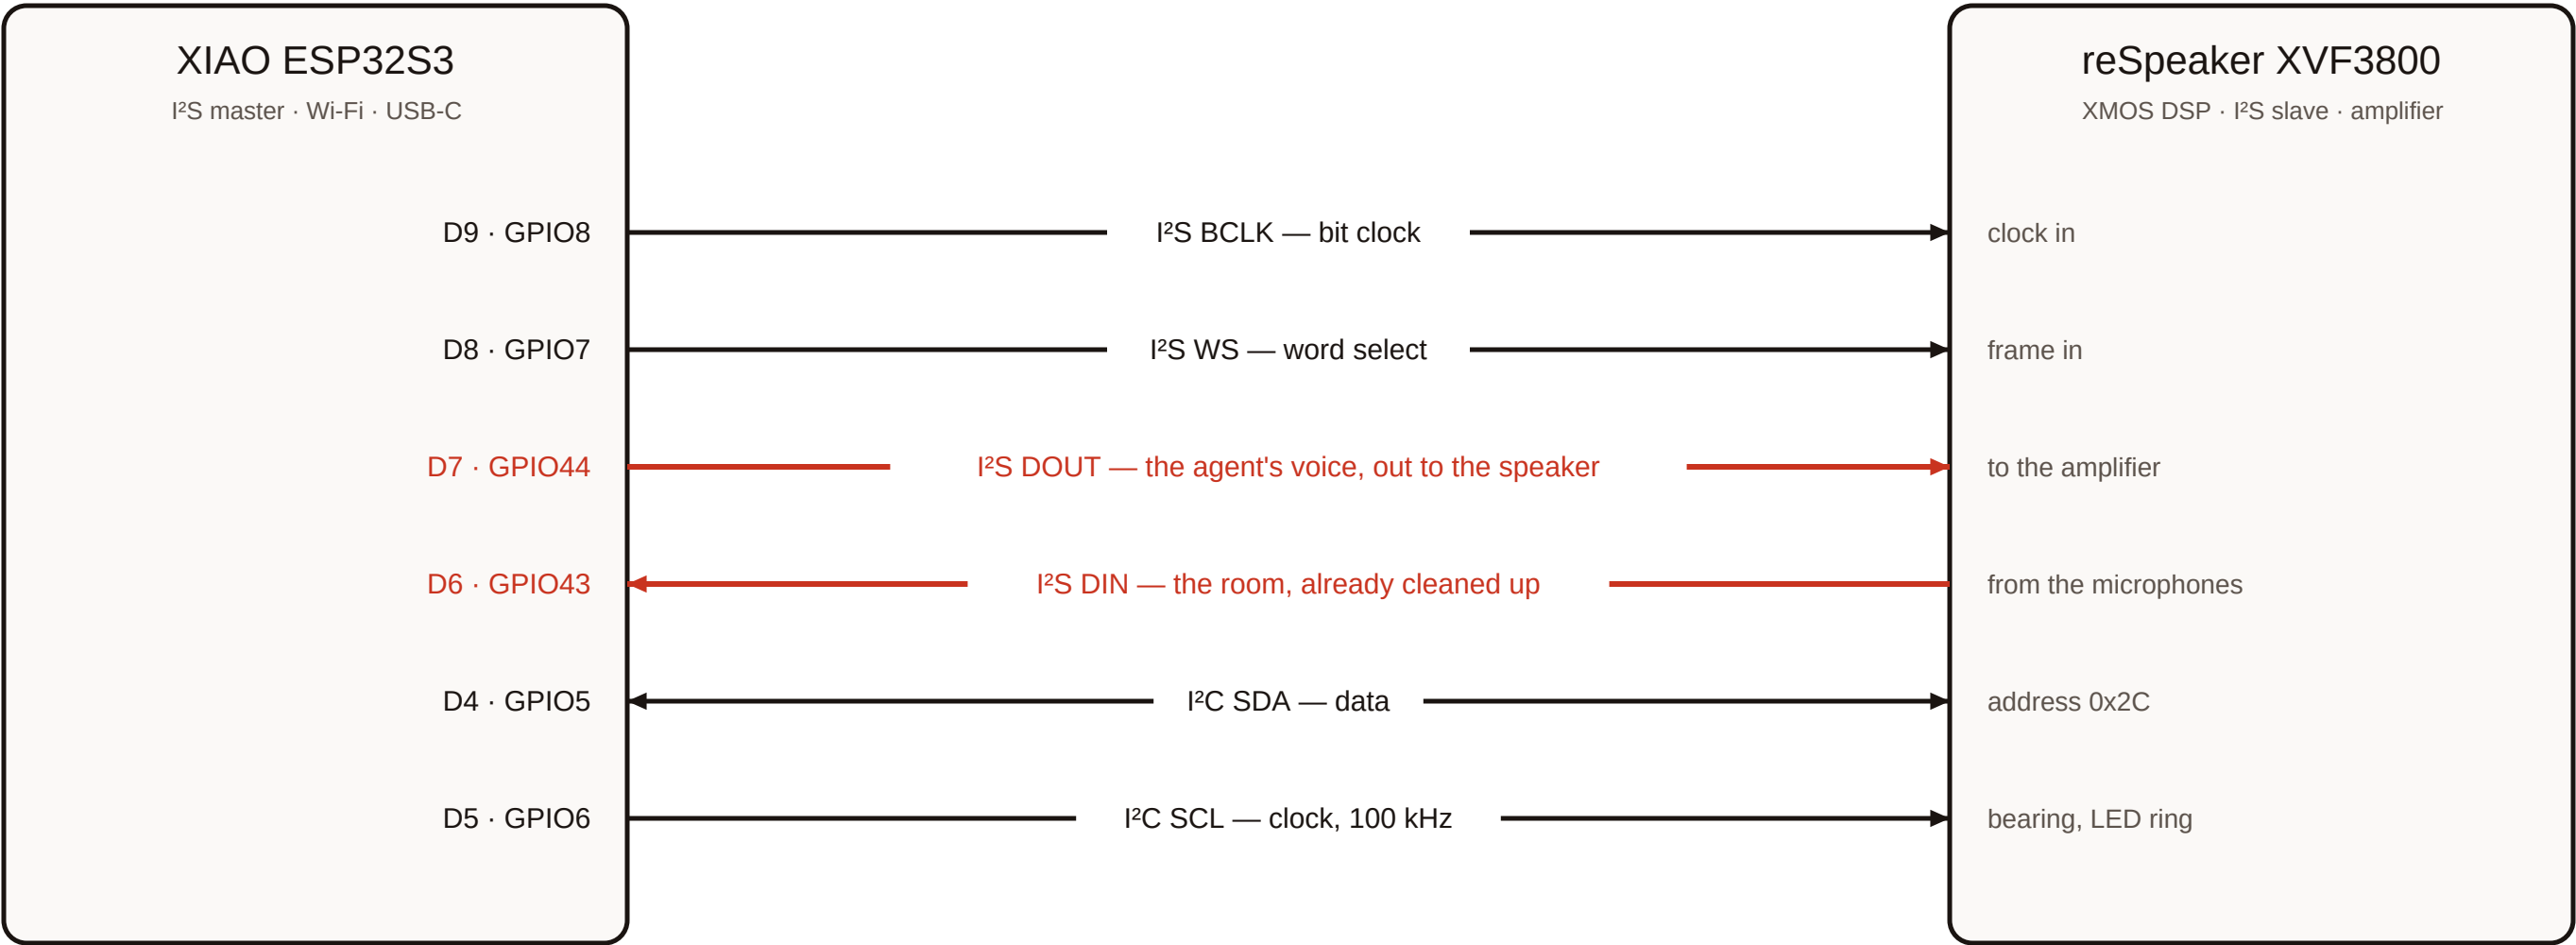

The audio format, both directions

16 000 Hz · 32-bit slots · stereo frame · I²S standard

One DMA block = 20 ms = 320 samples = 640 bytes of PCM16

The ESP32 is the master; the XVF3800 follows its clock

MCLK is not connected — the DSP makes its own

What I²C is for — and the trap inside it

The control channel reads which direction a phrase came from. That is what puts each dish on the right diner's tab, and what drives the LED ring.

It answers only on XVF3800 firmware 1.0.5. On 1.0.4 the register returns 65535 for ever: the gadget still takes orders, but cannot tell two diners apart.