



CONFIGURE SOLDER JUMPERS FIRST

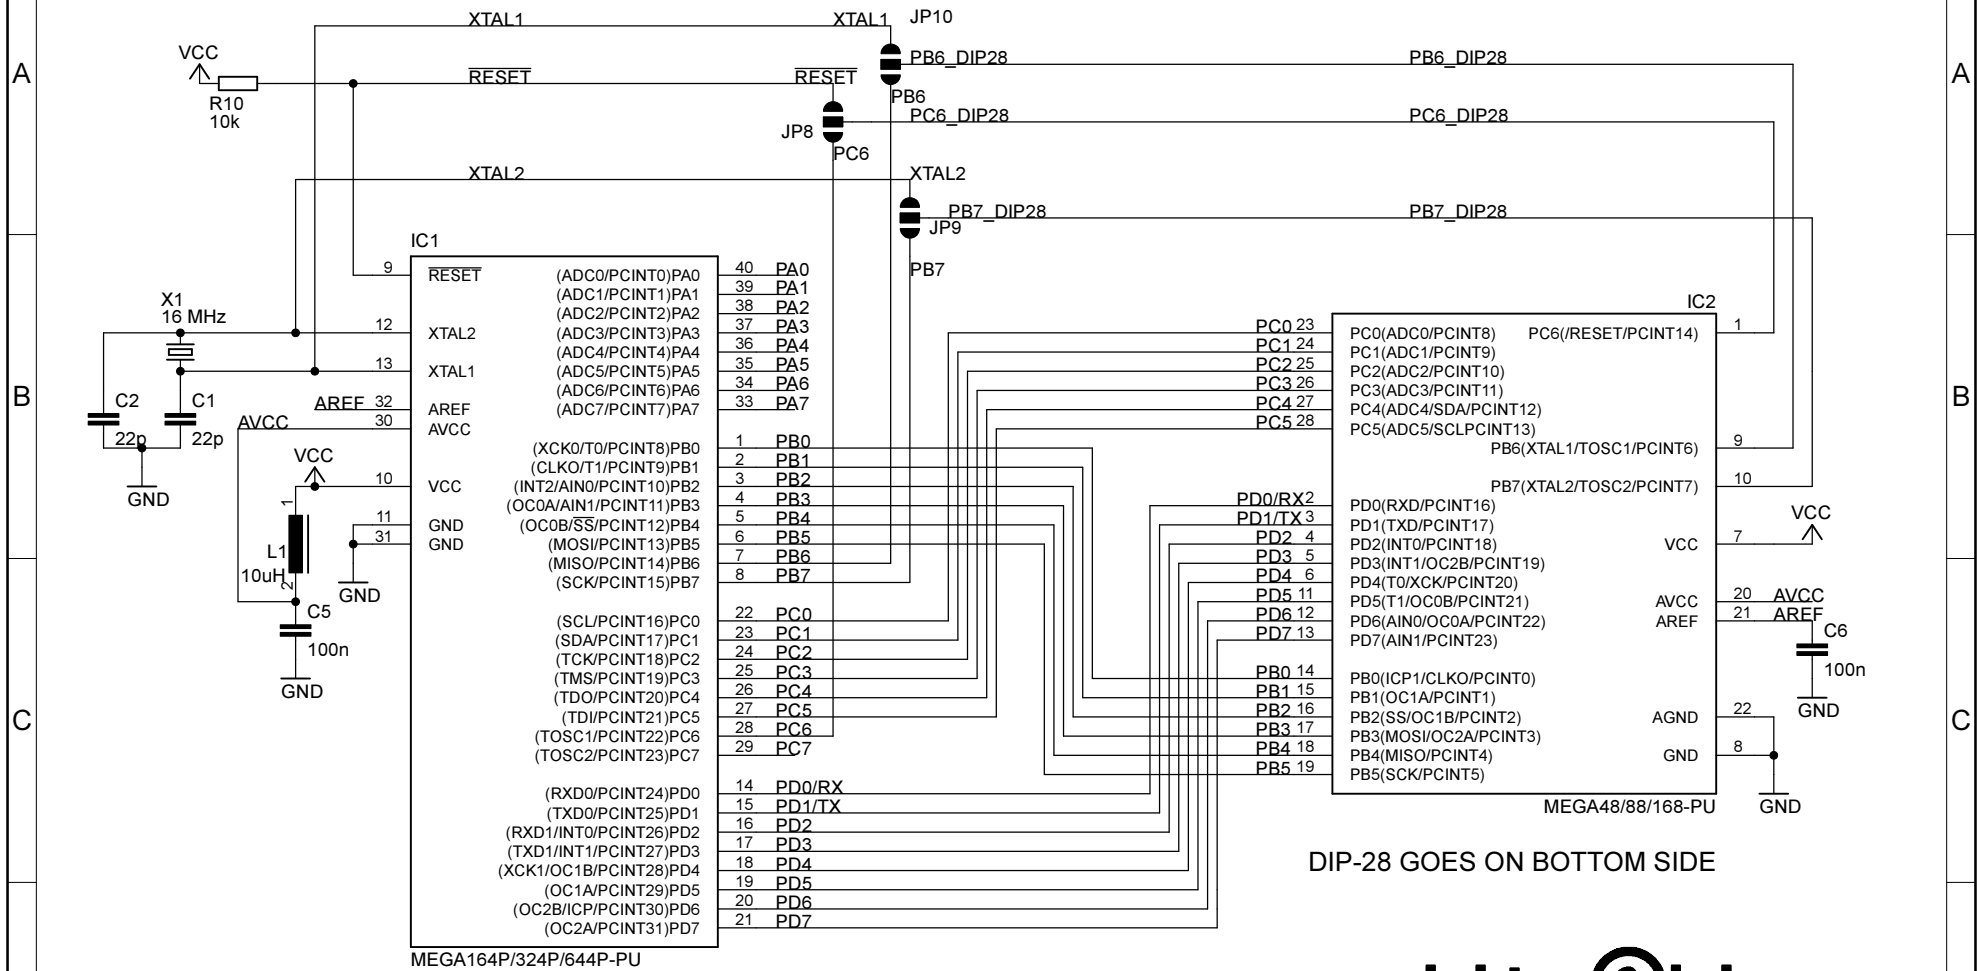

DIP-40 GOES ON TOP SIDE

DIP-28 GOES ON BOTTOM SIDE

elektorlabs



PLATINO

CPU

CPV

150555-I



150555-1-Platino-v1.4

26/10/2015 18:07:52

Sheet: 1/3

1.4

CONFIGURE SOLDER JUMPERS FIRST

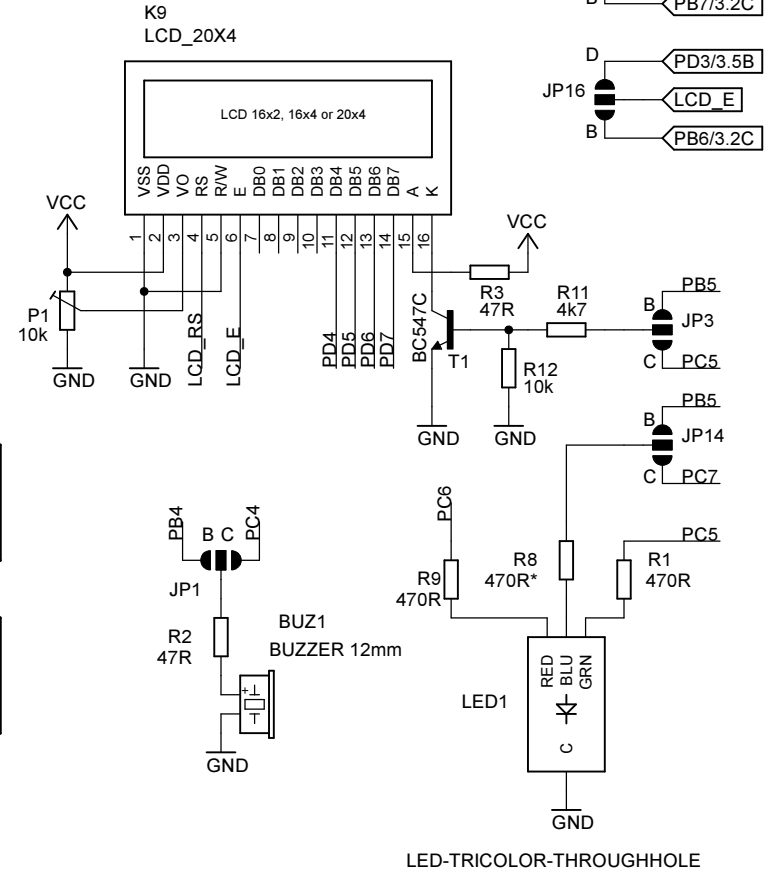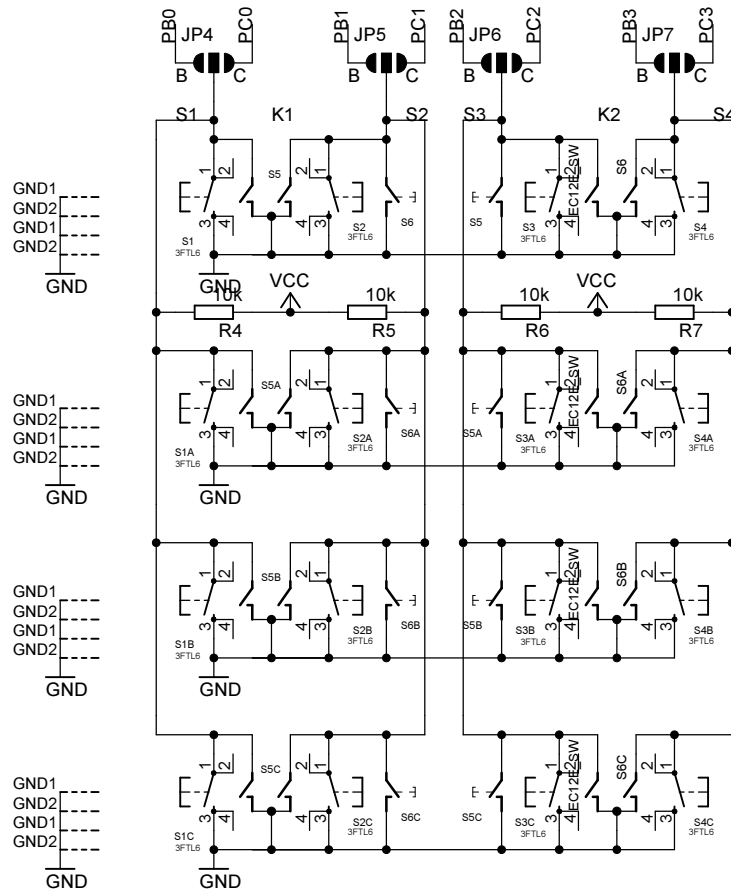

PLATINO

Switches
Rotary encoders
LCD, buzzer

CPV

150555-I

150555-1-Platino-v1.4

26/10/2015 18:07:52


Sheet: 2/3

1.4

Changes since v1.3

- Added K12 2-way power terminal block
- Added IC4 + C7 for on-board 3V3 regulation
- Added D3 for protection in case both FTDI cable and external power are present
- Added JP15 & JP16 to allow use of second UART available in DIP-40 devices
- Deleted JP2 because no longer needed
- PCB silkscreen touched-up

elektorlabs

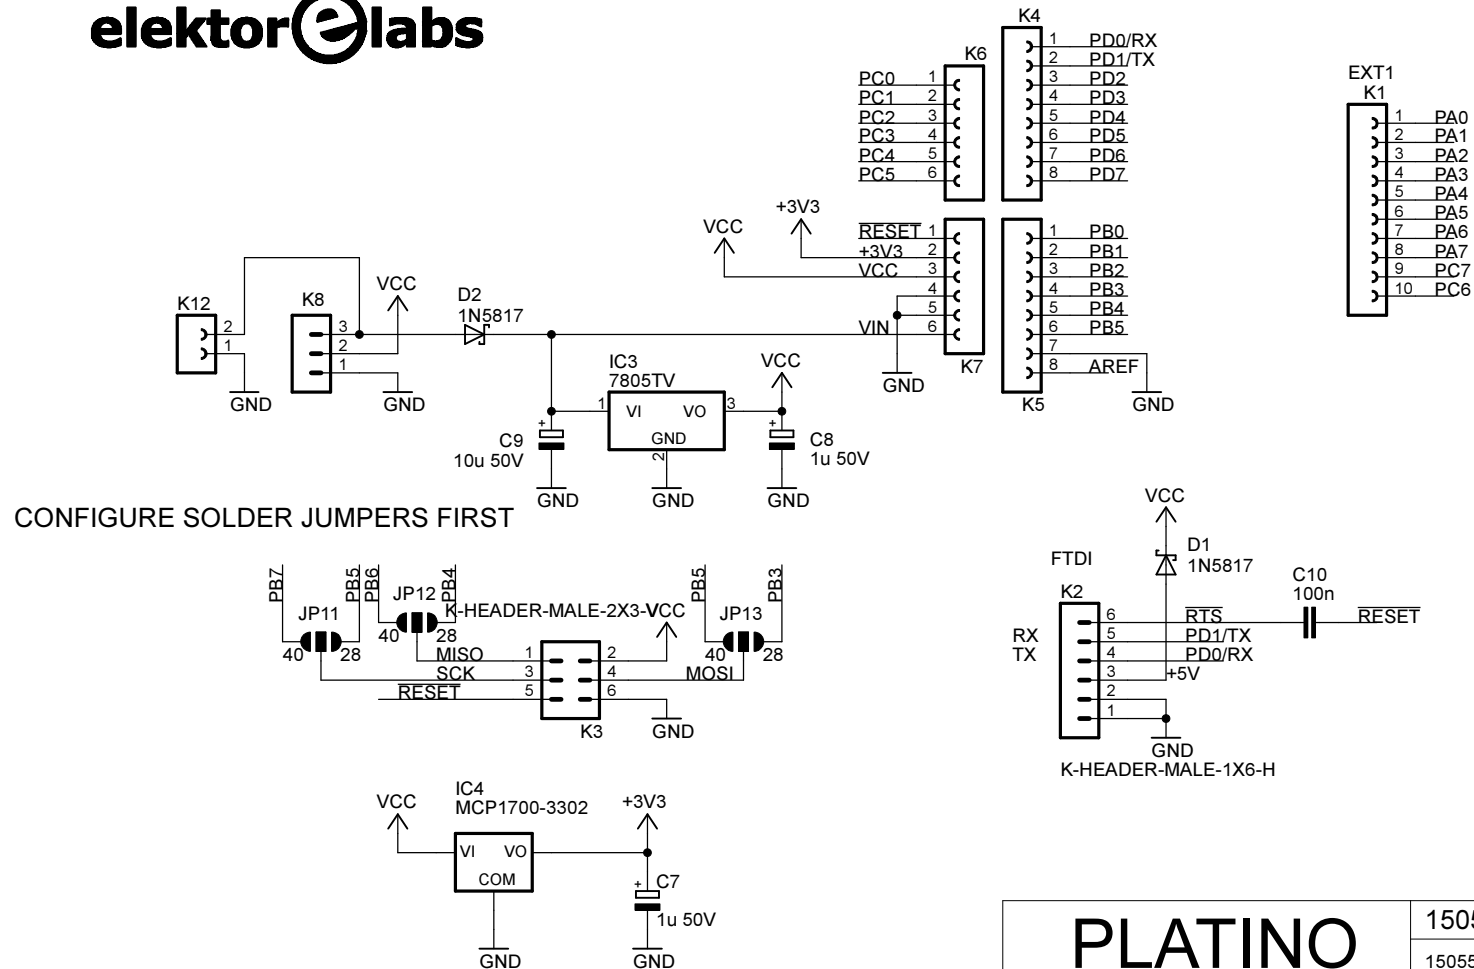

CONFIGURE SOLDER JUMPERS FIRST

PLATINO

Arduino, ISP, FTDI

CPV

150555-I	
150555-1-Platino-v1.4	
26/10/2015 18:07:52	
Sheet: 3/3	1.4