
SIGNAL PROCESSING

Through GATE

G. V. V. Sharma



Copyright ©2024 by G. V. V. Sharma.

<https://creativecommons.org/licenses/by-sa/3.0/>

and

<https://www.gnu.org/licenses/fdl-1.3.en.html>

Contents

Introduction	iii
1 Harmonics	1
2 Filters	3
3 Z-transform	7
4 Systems	9
5 Sequences	21
6 Sampling	25
7 Contour Integration	29
8 Laplace Transform	31
9 Fourier transform	47

Introduction

This book provides solutions to signal processing problems in GATE.

Chapter 1

Harmonics

- 1.1 Let $y(t)=x(4t)$, where $x(t)$ is a continuous-time periodic signal of 100s. the fundamental period of $y(t)$ is (**rounded off to the nearest integer**) (GATE IN 2023)

Solution:

Chapter 2

Filters

2.1 For the circuit given below, choose the angular frequency ω_0 at which voltage across capacitor has maximum amplitude?

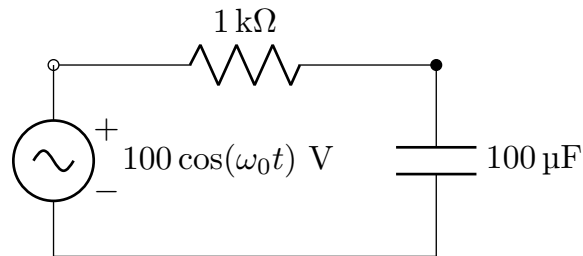


Figure 2.1: circuit

- (A) 1000
- (B) 100
- (C) 1
- (D) 0

(GATE BM 2023 Question 16)

2.2 In the following circuit, the switch S is open for $t < 0$ and closed for $t \geq 0$. What is the steady state voltage (in Volts) across the capacitor when the switch is closed?

(GATE BM 2023 Question 30)

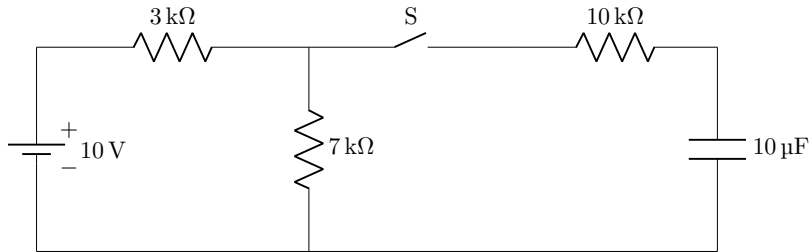


Figure 2.2: circuit

2.3 A finite impulse response (FIR) filter has only two non-zero samples in its impulse response $h[n]$, namely $h[0] = h[1] = 1$. The Discrete Time Fourier Transform (DTFT) of $h[n]$ equals $H(e^{j\omega})$, as a function of the normalized angular frequency ω . For the range $|\omega| \leq \pi$, $|H(e^{j\omega})|$ is equal to

(A) $2|\cos(\omega)|$


(B) $2|\sin(\omega)|$

(C) $2\left|\cos\left(\frac{\omega}{2}\right)\right|$

(D) $2\left|\sin\left(\frac{\omega}{2}\right)\right|$


(GATE BM 2023 Question 17)

2.4 For the circuit shown, if $i = \sin 1000t$, the instantaneous value of the Thevenin's voltage (in volts) across the terminals a and b at time $t = 5\text{ms}$ is

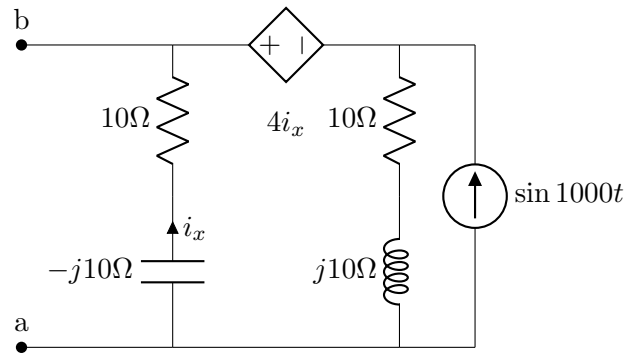

(GATE EE 2023 Question 51)

2.5 In the circuit shown, $\omega = 100\pi \text{ rad/s}$, $R_1 = R_2 = 2.2\Omega$ and $L = 7\text{mH}$. the capacitance C for which Y_{in} is purely real is mF

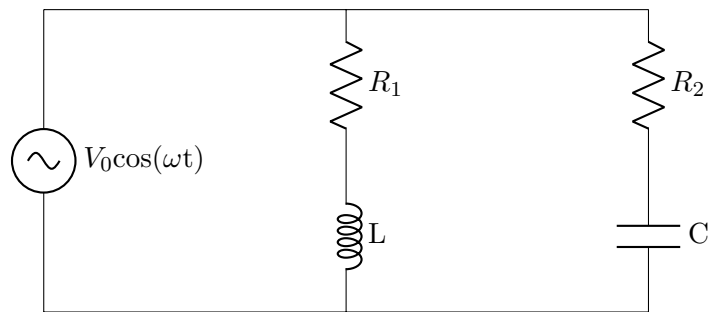

(GATE IN 2023 Q46)

Solution:

Chapter 3

Z-transform

Chapter 4

Systems

- 4.1 Consider a unity-gain negative feedback system consisting of the plant $G(s)$ and a proportional-integral controller. Let the proportional gain and integral gain be 3 and 1, respectively. For a unit step reference input, the final values of the controller output and the plant output, respectively, are

$$G(s) = \frac{1}{(s-1)}$$

(GATE EE 2023)

Solution:

Parameter	Description	Value
K_p	Proportional Gain	3
K_i	Integral Gain	1
$r(t)$	Reference Input	$u(t)$
$w(t)$	Controller Output	?
$y(t)$	Plant Output	?
$e(t)$	Error Input	$r(t) - y(t)$

Table 1: Parameter Table

From the Fig. 4.1:

$$E(s) = U(s) - Y(s) \quad (4.1)$$

$$W(s) = 3E(s) + \frac{1}{s}E(s) \quad (4.2)$$

$$Y(s) = G(s)W(s) \quad (4.3)$$

Some results:

$$tx(t) \xleftrightarrow{\mathcal{L}} -\frac{dX(s)}{ds} \quad (4.4)$$

$$e^{-at}x(t) \xleftrightarrow{\mathcal{L}} X(s+a) \quad (4.5)$$

By using (4.4) and (4.5):

$$e^{-t}u(t) \xleftrightarrow{\mathcal{L}} \frac{1}{s+1}, \text{Re}(s) > -1 \quad (4.6)$$

$$te^{-t}u(t) \xleftrightarrow{\mathcal{L}} \frac{1}{(s+1)^2}, \text{Re}(s) > -1 \quad (4.7)$$

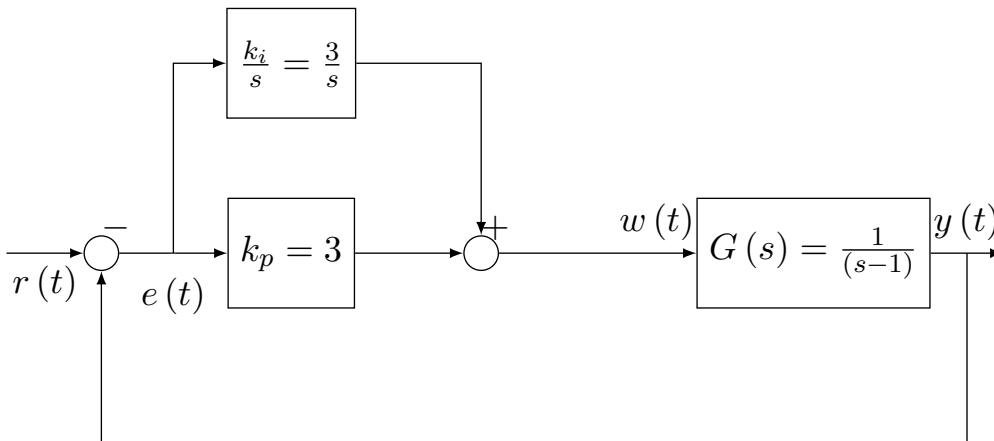


Figure 4.1: Block Diagram of System

(a) **Plant Output:**

From (4.1) , (4.2) and (4.3):

$$Y(s) = \frac{3s+1}{s(s+1)^2}, \text{Re}(s) > -1 \quad (4.8)$$

Final Value Theorem:

$$\lim_{t \rightarrow \infty} x(t) = \lim_{s \rightarrow 0} sX(s) \quad (4.9)$$

Using (4.9) on Y(s):

$$\lim_{t \rightarrow \infty} y(t) = \lim_{s \rightarrow 0} sY(s) \quad (4.10)$$

$$= 1 \quad (4.11)$$

Taking partial fraction of (4.8) :

$$Y(s) = \frac{1}{s} + \frac{2}{(s+1)^2} - \frac{1}{s+1} \quad (4.12)$$

Using (4.6) and (4.7):

$$\therefore y(t) = u(t) + 2te^{-t}u(t) - e^{-t}u(t) \quad (4.13)$$

(b) **Controller Output:**

From (4.2)

$$W(s) = \frac{3}{s} + \frac{1}{s^2} - Y(s) \left(3 + \frac{1}{s} \right) \quad (4.14)$$

Substituting (4.8)

$$W(s) = \frac{(s-1)(3s+1)}{s(s+1)^2}, \operatorname{Re}(s) > -1 \quad (4.15)$$

Using (4.9) on $W(s)$

$$\lim_{t \rightarrow \infty} w(t) = \lim_{s \rightarrow 0} sW(s) \quad (4.16)$$

$$= -1 \quad (4.17)$$

Taking partial fraction of equation(4.15) :

$$W(s) = -\frac{1}{s} - \frac{4}{(s+1)^2} + \frac{4}{s+1} \quad (4.18)$$

Using equations (4.6) and (4.7) and taking inverse lapalace transform:

$$w(t) = -u(t) - 4te^{-t}u(t) + 4e^{-t}u(t) \quad (4.19)$$

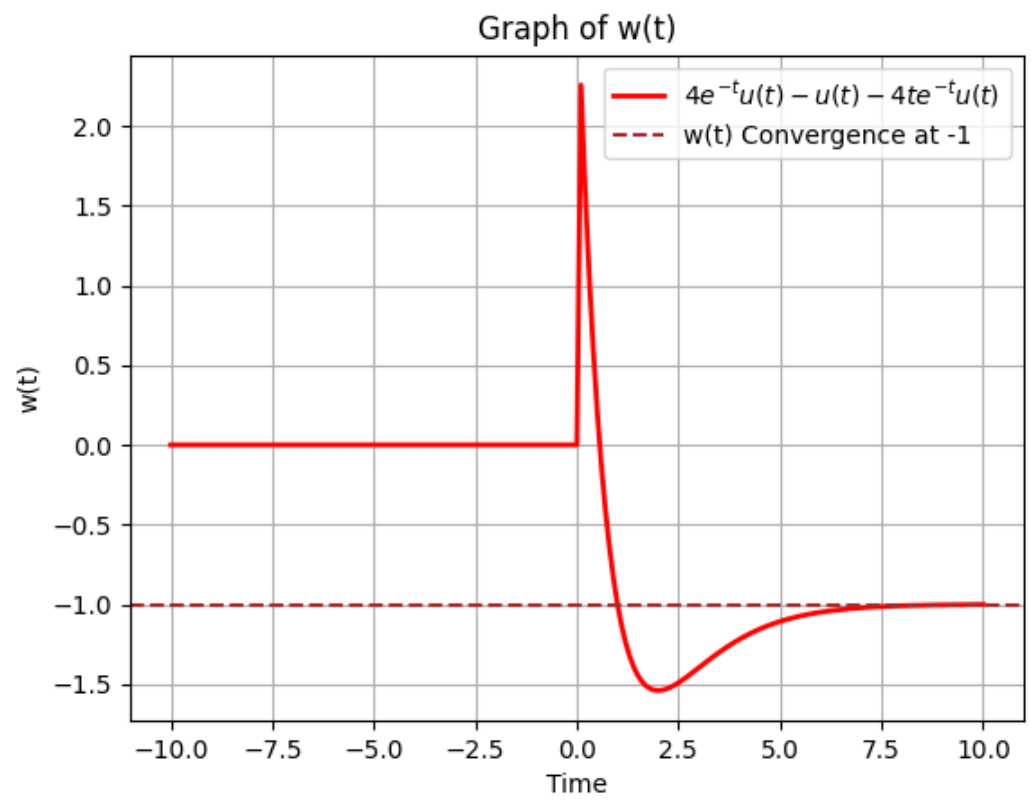


Figure 4.2: $w(t)$ converges at -1.

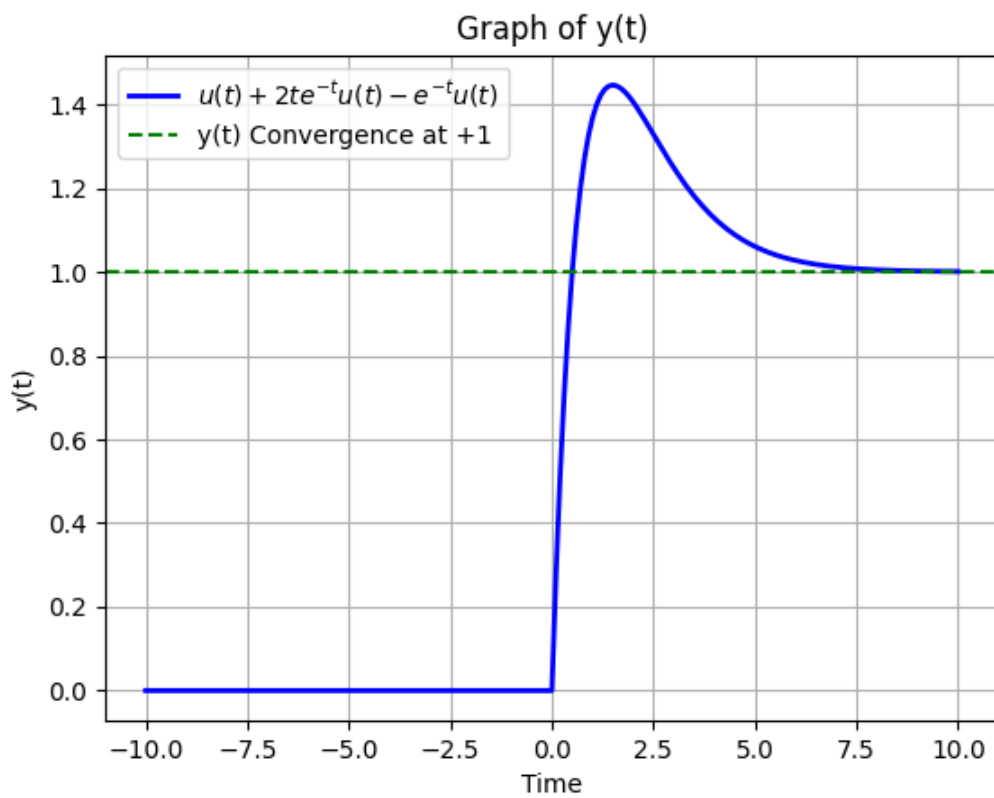


Figure 4.3: $y(t)$ converges at $+1$

4.2 Level (h) in a steam boiler is controlled by manipulating the flow rate (F) of the break-up(fresh) water using a proportional (P) controller. The transfer function between the output and the manipulated input is

$$\frac{h(s)}{F(s)} = \frac{0.25(1-s)}{s(2s+1)}$$


The measurement and the valve transfer functions are both equal to 1. A process engineer wants to tune the controller so that the closed loop response gives the decaying oscillations under the servo mode. Which one of the following is the CORRECT value of the controller gain to be used by the engineer?

- (a) 0.25
- (b) 2
- (c) 4
- (d) 6

GATE CH 2023

Solution:

- 4.3 The figure shows a block of mass $m = 20$ kg attached to a pair of identical linear springs, each having a spring constant $k = 1000$ N/m. The block oscillates on a frictionless horizontal surface. Assuming free vibrations, the time taken by the block to complete ten oscillations is _____ seconds . (Rounded off to two decimal places)
Take $\pi = 3.14$. (GATE ME 2023)

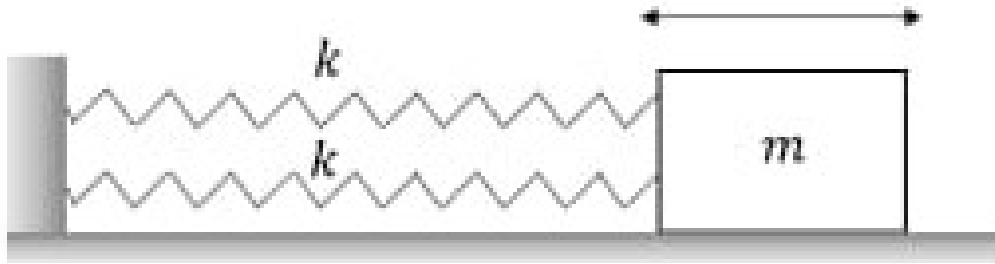

- 4.4 A system has transfer function

$$\frac{Y(s)}{X(s)} = \frac{s - \pi}{s + \pi}$$

let $u(t)$ be the unit step function. The input $x(t)$ that results in a steady-state output $y(t) = \sin(\pi t)$ is _____. (GATE IN 2023)

Solution:

4.5 The state equation of a second order system is

$$\dot{\mathbf{x}}(t) = A\mathbf{x}(t), \quad \mathbf{x}(0) \text{ is the initial condition.}$$

Suppose λ_1 and λ_2 are two distinct eigenvalues of A , and ν_1 and ν_2 are the corresponding eigenvectors. For constants α_1 and α_2 , the solution, $\mathbf{x}(t)$, of the state equation is

(A) $\sum_{i=1}^2 \alpha_i e^{\lambda_i t} \nu_i$

(B) $\sum_{i=1}^2 \alpha_i e^{2\lambda_i t} \nu_i$

(C) $\sum_{i=1}^2 \alpha_i e^{3\lambda_i t} \nu_i$

(D) $\sum_{i=1}^2 \alpha_i e^{4\lambda_i t} \nu_i$

GATE 2023 EC Question 43

4.6 Consider the complex function

$$f(z) = \frac{z^2 \sin z}{(z - \pi)^4}$$

At $z = \pi$, which of the following options is (are) correct?

- (A) The order of the pole is 4
- (B) The order of the pole is 3
- (C) The residue at the pole is $\frac{\pi}{6}$
- (D) The residue at the pole is $\frac{2\pi}{3}$

(GATE PH 2023)

4.7 A buoy of virtual mass 30 kg oscillates in a fluid medium as a single degree of freedom system. If the total damping in the system is set as 188.5 N-s/m, such that the oscillation just ceases to occur, then the natural period of the system is _____ s (round off to one decimal place) (GATE MN 2023 question 63)

Chapter 5

Sequences

5.1 Consider the discrete time signal $x[n] = u[-n + 5] - u[n + 3]$, where

$$u[n] = \begin{cases} 1; n \geq 0 \\ 0; n < 0 \end{cases}$$

The smallest n for which $x[n] = 0$ is?

Solution: From Fig. 1, the minimum value of n is given as

$$n = -3 \tag{5.1}$$

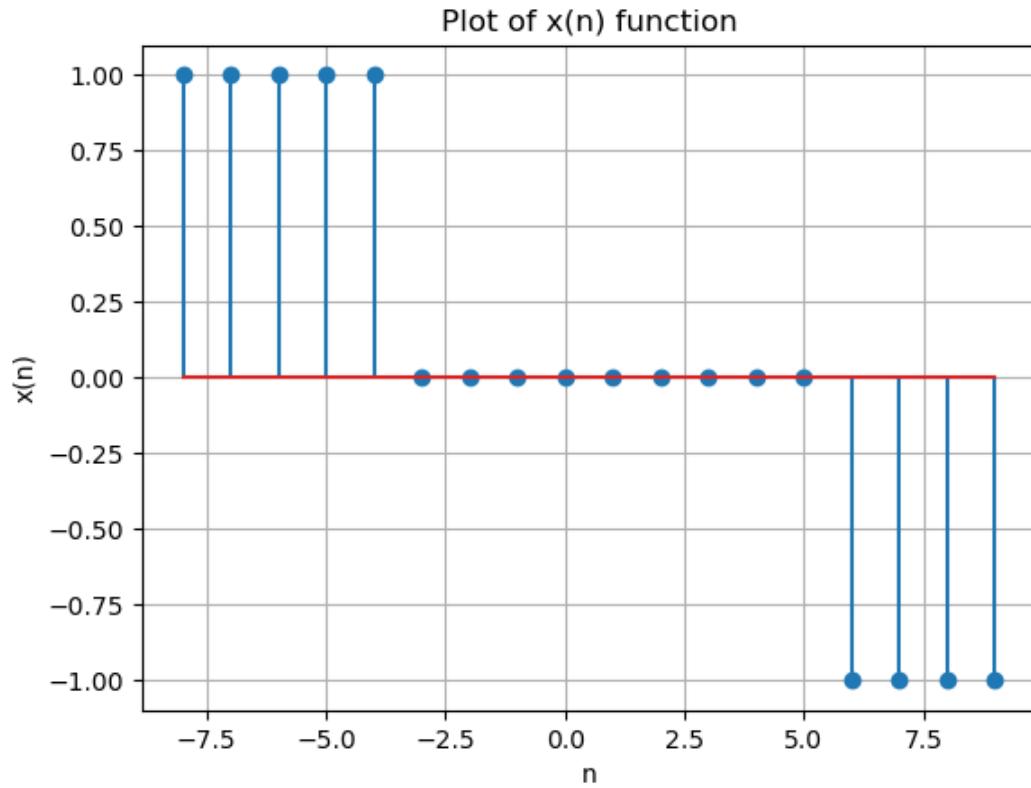


Figure 1: Plot of function $x(n)$ taken from python3

5.2 Two sequences $x_1[n]$ and $x_2[n]$ are described as follows:

$$x_1[0] = x_2[0] = 1 \quad (5.2)$$

$$x_1[1] = x_2[2] = 2 \quad (5.3)$$

$$x_1[2] = x_2[1] = 1 \quad (5.4)$$

$$x_1[n] = x_2[n] = 0 \text{ for all } n < 0 \text{ and } n > 2$$

If $x[n]$ is obtained by convoluting $x_1[n]$ with $x_2[n]$, which of the following equa-

tions is/are TRUE?

(A) $x[2] = x[3]$

(B) $x[1] = 2$

(C) $x[4] = 3$

(D) $x[2] = 5$

Solution:

5.3 A series (S) is given as $S=1+3+5+7+9+\dots$. The sum of the first 50 terms of S is

_____ **Solution:**

Chapter 6

Sampling

6.1 An 8 bit ADC converts analog voltage in the range of 0 to $+5\text{ V}$ to the corresponding digital code as per the conversion characteristics shown in figure. For $V_{in} = 1.9922\text{ V}$, which of the following digital output, given in hex, is true?

(a) $64H$

(b) $65H$

(c) $66H$

(d) $67H$

(GATE EE 40)

Solution:



Figure 6.1:

Calculating the step-size:

$$\Delta V_{in} = \frac{V_{max} - V_{min}}{2^n - 1} \quad (6.1)$$

$$= \frac{5 - 0}{2^8 - 1} \quad (6.2)$$

$$= \frac{5}{255} \quad (6.3)$$

$$\Rightarrow V_{out} = \frac{V_{in}}{\Delta V_{in}} \quad (6.4)$$

$$= \frac{1.9922 \times 255}{5} \quad (6.5)$$

$$= 101.59 \quad (6.6)$$

$$\approx 102_{10} \quad (6.7)$$

Symbol	Value	Description
n	8	Number of bits of ADC
V_{min}	0V	Minimum Analog Voltage
V_{max}	5V	Maximum Analog Voltage
V_{in}	1.9922V	Input Voltage
V_{out}		Output Voltage

Table 6.1: Given Parameters

\therefore correct answer is option (c).



Figure 6.2:

Chapter 7

Contour Integration

Chapter 8

Laplace Transform

8.1 The number of zeroes of the polynomial $P(s) = s^3 + 2s^2 + 5s + 80$ in the right side of the plane? (GATE IN 2023)

Solution: The table below shows the Routh array of the n^{th} - order characteristic polynomial :

$$a_0s^n + a_1s^{n-1} + \dots + a_{n-1}s^1 + a_ns^0 \quad (8.1)$$

s^n	a_0	a_2	a_4	...
s^{n-1}	a_1	a_3	a_5	...
s^{n-2}	$b_1 = \frac{a_1a_2 - a_3a_0}{a_1}$	$b_2 = \frac{a_1a_4 - a_5a_0}{a_1}$
s^{n-3}	$c_1 = \frac{b_1a_3 - b_2a_1}{b_1}$	\vdots		
\vdots	\vdots	\vdots		
s^1	\vdots	\vdots		
s^0	a_n			

Table 8.1: Routh Array

Characteristic Equation:

$$s^3 + 2s^2 + 5s + 80 = 0 \quad (8.2)$$

From Table 8.1:

s^3	1	5
s^2	2	80
s^1	$\frac{2 \times 5 - 80 \times 1}{2} = -35$	
s^0	$\frac{-35 \times 80}{-35} = 80$	

Table 8.2:


From Table 8.2:

Since there are 2 sign changes in the first column of the Routh tabulation. So, the number of zeros in the right half of the s-plane will be 2.



Figure 8.1:

8.2 The circuit shown in the figure is initially in the steady state with the switch K in open condition and \overline{K} in closed condition. The switch K is closed and \overline{K} is opened simultaneously at the instant $t = t_1$, where $t_1 > 0$. The minimum value of t_1 in milliseconds such that there is no transient in the voltage across the $100\ \mu\text{F}$ capacitor, is _____. (Round off to 2 decimal places) (GATE EE 2023)

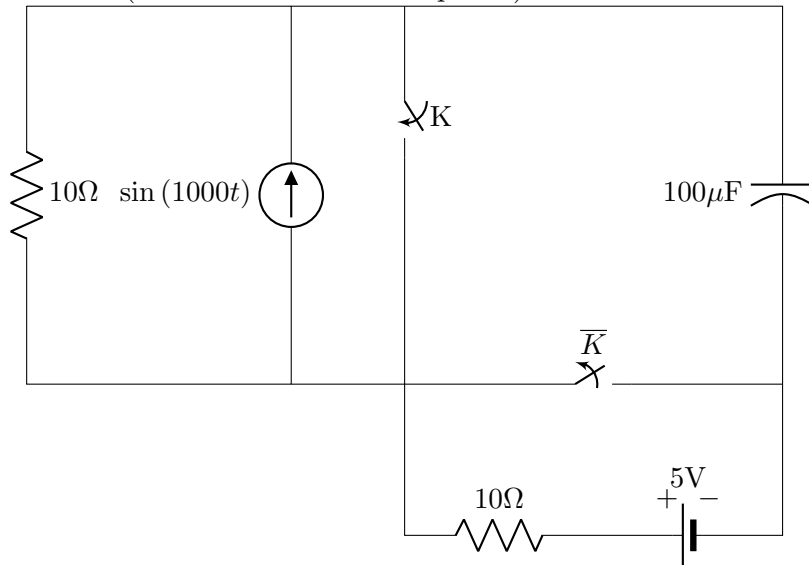

8.3 $y = e^{mx} + e^{-mx}$ is the solution of which differential equation?

1. $\frac{dy}{dx} - my = 0$
2. $\frac{dy}{dx} + my = 0$
3. $\frac{d^2y}{dx^2} + m^2y = 0$
4. $\frac{d^2y}{dx^2} - m^2y = 0$

(GATE AG 2023) **Solution:**

8.4 A cascade control strategy is shown in the figure below. The transfer function between the output (y) and the secondary disturbance (d_2) is defined as

$$G_{d2}(s) = \frac{y(s)}{d_2(s)}$$

. Which one of the following is the CORRECT expression for the transfer function $G_{d2}(s)$?




Figure 8.2:

- A. $\frac{1}{(11s+21)(0.1s+1)}$
- B. $\frac{1}{(s+1)(0.1s+1)}$
- C. $\frac{(s+1)}{(s+2)(0.1s+1)}$
- D. $\frac{(s+1)}{(s+1)(0.1s+1)}$

(GATE CH 2023) **Solution:**

8.5 In the differential equation $\frac{dy}{dx} + \alpha xy = 0$, α is a positive constant. If $y = 1.0$ at $x = 0.0$, and $y = 0.8$ at $x = 1.0$, the value of α is (rounded off to three decimal places). (GATE CE 2023) **Solution:**

8.6 The switch S_1 was closed and S_2 was open for a long time. At $t=0$, switch S_1 is opened and S_2 is closed, simultaneously. The value of $i_c(0^+)$, in amperes, is . (GATE EC 2023)

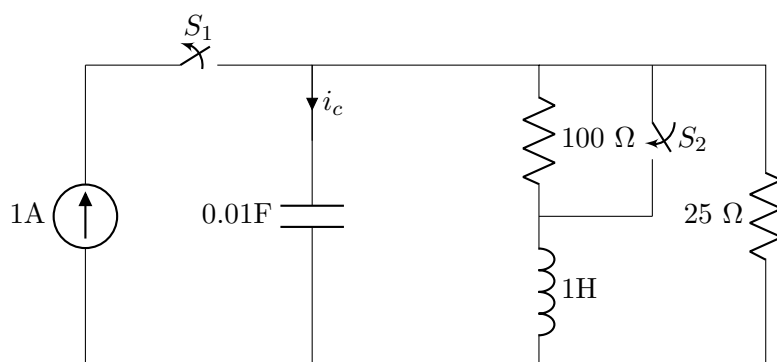

8.7 The continuous time signal $x(t)$ is described by:

$$x(t) = \begin{cases} 1, & \text{if } 0 \leq t \leq 1 \\ 0, & \text{elsewhere} \end{cases} \quad (8.3)$$

If $y(t)$ represents $x(t)$ convolved with itself, which of the following options is/are TRUE?

A $y(t) = 0$ for all $t < 0$

B $y(t) = 0$ for all $t > 1$

C $y(t) = 0$ for all $t > 3$

D $\int_{0.1}^{0.75} \frac{dy(t)}{dt} dt \neq 0$

Solution:

8.8 The Z-transform of a discrete signal $x(n)$ is

$$X(z) = \frac{4z}{\left(z - \frac{1}{5}\right)\left(z - \frac{2}{3}\right)(z - 3)} \text{ with ROC} = R \quad (8.4)$$

Which one of the following statements is TRUE?

- (a) Discrete time Fourier transform of $x[n]$ converges if R is $|z| > 3$
- (b) Discrete time Fourier transform of $x[n]$ converges if R is $\frac{2}{3} < |z| < 3$
- (c) Discrete time Fourier transform of $x[n]$ converges if R is such that $x[n]$ is a left-sided sequence.
- (d) Discrete time Fourier transform of $x[n]$ converges if R is such that $x[n]$ is a right-sided sequence.

GATE EE 2023 Solution:

8.9 The phase margin of the transfer function $G(s) = \frac{2(1-s)}{(1+s)^2}$ is _____ degrees. (rounded off to the nearest integer). (GATE IN 2023)

Solution:

8.10 Consider the second-order linear differential equation

$$x^2 \frac{d^2 y}{dx^2} + x \frac{dy}{dx} - y = 0, \quad x \geq 1$$

with the initial conditions

$$y(x=1) = 6, \quad \left. \frac{dy}{dx} \right|_{x=1} = 2.$$

Then the value of y at $x = 2$ is _____.

GATE ME 2023

Solution:

8.11 The transfer function of a measuring instrument is

$$G_m(s) = \frac{1.05}{2s + 1} \exp(-s)$$

At time $t = 0$, a step change of +1 unit is introduced in the input of this instrument. The time taken by the instrument to show an increase of 1 unit in its output is (rounded off to two decimal places).

(GATE CH 2023) **Solution:**

8.12 The laplace transform of $x_1(t) = e^{-t}u(t)$ is $X_1(s)$, where $u(t)$ is the unit step function. The laplace transform of $x_2(t) = e^t u(-t)$ is $X_2(s)$. Which one of the following statements is TRUE?

- (a) The region of convergence of $X_1(s)$ is $\text{Re}(s) \geq 0$
- (b) The region of convergence of $X_2(s)$ is confined to the left half-plane of s .
- (c) The region of convergence of $X_1(s)$ is confined to the right half-plane of s .
- (d) the imaginary axis in the s -plane is included in both the region of convergence of $X_1(s)$ and the region of convergence of $X_2(s)$.


(GATE BM 2023)

Solution:

- 8.13 Given that $\frac{dy}{dx} = 2x + y$ and $y = 1$, when $x = 0$ Using Runge-Kutta fourth order method, the value of y at $x = 0.2$ is (GATE 2023 AG 50)

Solution:

- 8.14 The magnitude and phase plots shown in the figure match with the transfer- function

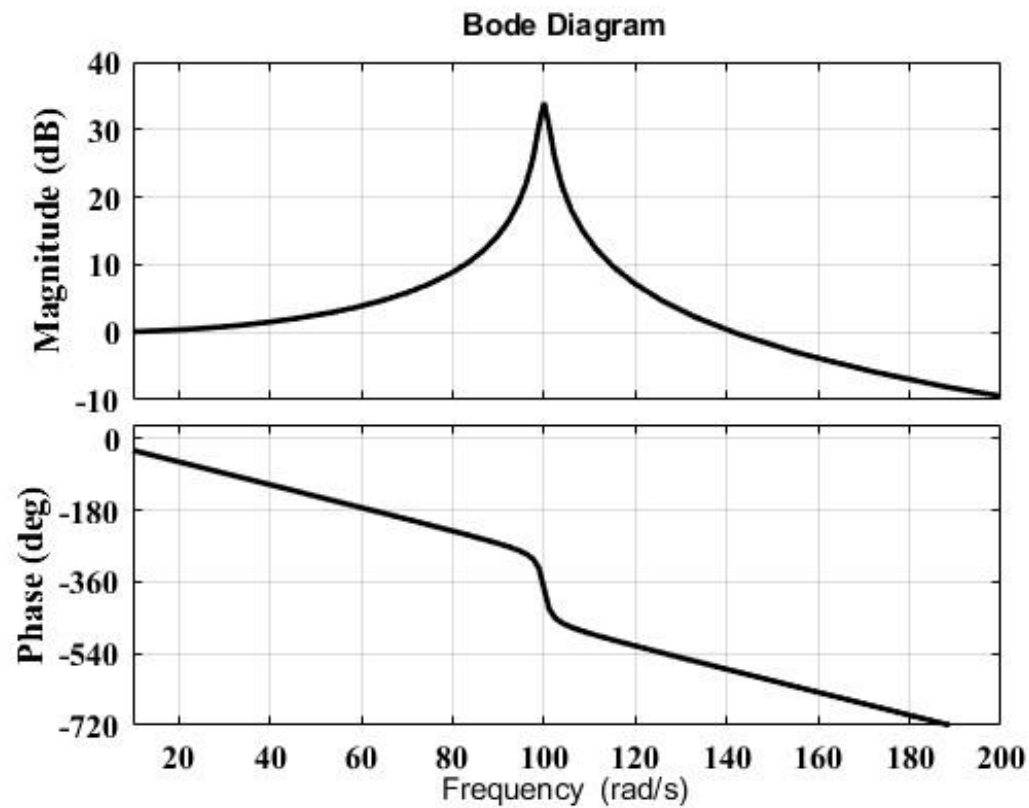

(a) $\frac{10000}{s^2 + 2s + 10000}$

(b) $\frac{10000}{s^2 + 2s + 10000} e^{-0.05s}$

$$(c) \frac{10000}{s^2+2s+10000} e^{-0.5 \times 10^{-12} s}$$

$$(d) \frac{100}{s^2+2s+100}$$

(GATE IN 2023) **Solution:**

Chapter 9

Fourier transform

9.1 The discrete-time Fourier transform of a signal $x[n]$ is $X(\Omega) = (1 + \cos \Omega) e^{-j\Omega}$.

Consider that $x_p[n]$ is a periodic signal of period $N = 5$ such that

$$x_p[n] = x[n], \text{ for } n = 0, 1, 2 \quad (9.1)$$

$$= 0, \text{ for } n = 3, 4 \quad (9.2)$$

Note that $x_p[n] = \sum_{k=0}^{N-1} a_k e^{j\frac{2\pi}{N}kn}$. The magnitude of the Fourier series coefficient a_3 is _____ (Round off to 3 decimal places). (GATE EE 2023) **Solution:**

9.2 Let a frequency modulated (FM) signal : $x(t) = A \cos(\omega_c t + k_f \int_{-\infty}^t m(\lambda) d\lambda)$, where $m(t)$ is a message signal of bandwidth W . It is passed through a non-linear system with output $y(t) = 2x(t) + 5(x(t))^2$. Let B_T denote the FM bandwidth. The minimum value of ω_c required to recover $x(t)$ from $y(t)$ is:

(A) $B_T + W$

(B) $\frac{3}{2} B_T$

(C) $2B_T + W$

(D) $\frac{5}{2} B_T$

Solution:

- 9.3 Let an input $x[n]$ having discrete-time Fourier transform $X(e^{j\Omega}) = 1 - e^{-j\Omega} + 2e^{-3j\Omega}$ be passed through an LTI system. The frequency response of the LTI system is $H(e^{j\Omega}) = 1 - \frac{1}{2}e^{-2j\Omega}$. The output $y[n]$ of the system is
- (GATE EC 2023) **Solution:**

9.4 The Fourier transform $X(\omega)$ of $x(t) = e^{-t^2}$ is

Note: $\int_{-\infty}^{\infty} e^{-y^2} dy = \sqrt{\pi}$

A) $\sqrt{\pi} e^{\frac{\omega^2}{2}}$

B) $\frac{e^{-\frac{\omega^2}{4}}}{2\sqrt{\pi}}$

C) $\sqrt{\pi} e^{-\frac{\omega^2}{4}}$

D) $\sqrt{\pi} e^{-\frac{\omega^2}{2}}$

Gate 2023 EC Question 28

- 9.5 Let $x(t) = 10 \cos(10.5\omega t)$ be passed through an LTI system with impulse response $h(t) = \pi \left(\frac{\sin(\omega t)}{\pi t} \right)^2 \cos(10\omega t)$. The output of the system is:
(GATE EC 2023) **Solution:**

9.6 Q27) Let $m(t)$ be a strictly band-limited signal with bandwidth B and energy E . Assuming $\omega_0 = 10B$, the energy in the signal $m(t) \cos(\omega_0 t)$

(A) $\frac{E}{4}$

(B) $\frac{E}{2}$

(C) E

(D) $2E$

(GATE EC 2023)

Solution:

9.7 The following function is defined over the interval $[-L, L]$:

$$f(x) = px^4 + qx^5$$

It is expressed as a Fourier series,

$$f(x) = a_0 + \sum_{n=1}^{\infty} \left\{ a_n \sin\left(\frac{\pi x}{L}\right) + b_n \cos\left(\frac{\pi x}{L}\right) \right\}$$

which options amongst the following are true?

- (a) $a_n, n = 1, 2, \dots, \infty$ depend on p
- (b) $a_n, n = 1, 2, \dots, \infty$ depend on q
- (c) $b_n, n = 1, 2, \dots, \infty$ depend on p
- (d) $b_n, n = 1, 2, \dots, \infty$ depend on q

(GATE 2023 CE Question 25)

Solution:

9.8 A continuous real-valued signal $x(t)$ has finite positive energy and $x(t) = 0, \forall t < 0$.

From the list given below, select ALL the signals whose continuous-time Fourier transform is purely imaginary.

(a) $x(t) + x(-t)$

(b) $x(t) - x(-t)$

(c) $j(x(t) + x(-t))$

(d) $j(x(t) - x(-t))$

(GATE IN 2023)

Solution:

9.9 Let $w^4 = 16j$. Which of the following can not be the value of w ?

(A) $2e^{\frac{j2\pi}{8}}$

(B) $2e^{\frac{j\pi}{8}}$

(C) $2e^{\frac{j5\pi}{8}}$

(D) $2e^{\frac{j9\pi}{8}}$

(GATE EC 2023)

Solution:

