

# An AI Based High-Precision Industrial Thermometer

Puni Aditya, Vivek K. Kumar, Jnanesh Sathisha Karmar, Burra Shreyas Goud, G.V.V. Sharma

*Department of Electrical Engineering*  
*Indian Institute of Technology Hyderabad*  
Kandi, India  
gadepall@ee.iith.ac.in

**Abstract**—Measuring temperature accurately is necessary for many industrial processes. The PT100, a Platinum Resistance Temperature Detector (RTD), is preferred for this purpose for its stability and linearity. Its calibration traditionally requires expensive and dedicated hardware. In this paper, we design and develop a more cost-effective industrial thermometer. This is done by analyzing the suitability of different machine learning (ML) techniques: two different types of quadratic Least Squares (LSQ) model, a Stochastic Gradient Descent (SGD) trained model and a non-linear Random Forest Regressor (RFR) by calibrating them with respect to a commercial pen thermometer. This calibration process is also automate by the use of Optical Character Recognition (OCR). Through numerical results, we conclude that the LSQ model is superior to other models and yields a Mean Squared Error (MSE) of 0.009198 and an  $R^2$  of 0.999956. We then implement it using the Arduino framework on an Arduino UNO.

**Index Terms**—PT100, Machine Learning, Optical Character Recognition, , Automated Training.

## I. INTRODUCTION

Temperature measurement is a fundamental requirement in process control, automotive systems, and instrumentation. Among the various contact temperature sensors available, the Platinum Resistance Temperature Detector (RTD), commonly known as the PT100, is considered the standard for precision thermometry [1]. The PT100, are widely favored in industrial applications for their linearity and stability. [2] implemented the circuit using dedicated differential amplifiers.

[4] used an Artificial Neural Network (ANN) to non-linearly calibrate PT100 sensor readings across  $-50^\circ\text{C}$  to  $150^\circ\text{C}$ . Both the above works require either expensive hardware testing for accurate dataset generation or specialized analog components and a high-performance microcontroller. They did not implement or compare against machine learning models, relying solely on theoretical circuit performance, leaving the real-time processing feasibility and computational overhead on embedded hardware unaddressed.

To address the gap between expensive hardware calibration and software simulations, this paper presents a novel framework for PT100 calibration. First, we propose an automated Optical Character Recognition (OCR) based dataset generation pipeline that synchronizes analog readings with sensor voltages, completely circumventing the need for expensive thermal calibration chambers. Second, we present a comparative study

evaluating various ML models to identify the most robust algorithm for steady-state non-linearity correction.

In the process, we detail the calibration and characterization of a PT100 sensor by comparing two hardware signal conditioning setups: a simple voltage divider and a precision Wheatstone bridge interfaced with an ADS1115 ADC. We also automate the process of generating the dataset by using OCR to capture the readings of the analog thermometer through a mobile phone camera. The parameters for all the above ML techniques are finally hardcoded in the ATMEGA328P microcontroller, using the Arduino UNO board.

## II. PT-100 FUNDAMENTALS

The PT100 is defined by a nominal resistance of  $100\Omega$  at  $0^\circ\text{C}$ . Unlike thermocouples which generate a voltage, RTDs differ in that they operate by changing electrical resistance in direct proportion to temperature changes [5]. This relationship is inherently non-linear over wide ranges, though it is highly predictable. The resistance  $R(t)$  at temperature  $t$  is governed by the Callendar-Van Dusen equation [6]

$$R(t) = R_0(1 + At + Bt^2) \quad (1)$$

for temperatures  $t > 0^\circ\text{C}$ , where  $A$  and  $B$  are standard coefficients. This quadratic physical relationship serves as the theoretical justification for using LSQ models in this work.

While PT100 sensors offer high stability, the resistance change is relatively small ( $\approx 0.385\Omega/^\circ\text{C}$ ). Consequently, accurate reading requires precise signal conditioning to convert resistance changes into measurable voltage levels [7]. This paper aims to optimize this conversion by analyzing different hardware front-ends and software regression models to find an optimal solution for high-precision, low-cost temperature sensing.

## III. HARDWARE SETUP

Two main analog front-ends were tested to evaluate the trade-off between circuit complexity and measurement accuracy. Table IV lists the components required for both analog front-ends, detailing the specific parts used for high-accuracy and cost-effective implementations. The detailed hardware component list, alongside the pin-connection configurations for the ADS1115 and LCD, are provided in Appendix A to facilitate reproducibility.

- *High-Precision Wheatstone Bridge with ADC*: This uses a Wheatstone bridge configuration coupled with an external 16-bit ADS1115 ADC [8]. This setup allows for differential measurement, significantly reducing noise and common-mode errors. The connection details for integrating the external 16-bit ADS1115 ADC are available in Table V. The complete circuit schematic for the high-precision Wheatstone bridge setup is illustrated in Fig. 3.
- *Simple Voltage Divider*: This uses a simple voltage divider utilizing the Arduino's internal 10-bit ADC. The complete circuit schematic for the simple voltage divider setup is illustrated in Fig. 4.

The Arduino-LCD connections are available in Table VI. The code for the Arduino, which reads the voltage across the PT-100 and displays it on the LCD, alongside flashing instructions, is provided in our repository<sup>1</sup>.

#### IV. AUTOMATED TRAINING USING OCR

The dataset is collected by simulating a real-world thermal change (cooling cycle) to capture paired temperature readings. Since the training data is available only on an analog thermometer, instead of manually noting the temperature, we automate the data collection process using OCR based techniques. The block diagram for the same is shown in Fig. 1. Appendix B has more information on the software execution.

##### A. Experimental Setup

The practical requirements and experimental setup are listed below

###### 1) Hardware:

- The arduino setup with the code from the previous section flashed.
- A phone connected to your computer.
- (Optional) An NVIDIA GPU with CUDA installed. The script is pre-set to use `gpu=True` for much faster processing.

###### 2) Software:

- Python 3.x
- The required Python libraries: `opencv-python`, `easyocr`, and `numpy`.

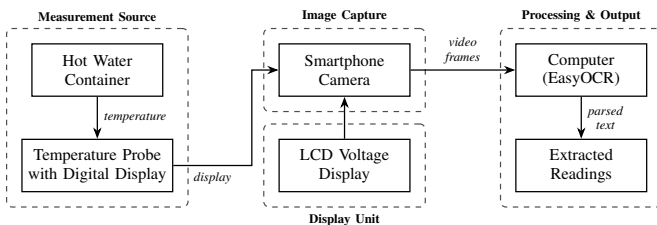


Fig. 1: Block diagram of the experimental setup

<sup>1</sup>Arduino Data Collection Code: <https://github.com/gadepall/pt100/tree/main/codes/arduino/datacollection/code>

##### B. Data Collection Methodology

- 1) Setup: Place both the PT100 probe and the reference thermometer inside an electric kettle, submerged in water.
- 2) Heating Phase: Turn on the kettle and heat the water to its boiling point.
- 3) Recording Phase:
  - Switch off the kettle at boiling point.
  - Start recording a video using the smartphone.
  - Ensure both the PT100 LCD display and reference thermometer are visible in the frame.
- 4) Cooling Phase: Continue recording the cooling process as the water temperature drops naturally.
- 5) Data Extraction: The recorded video acts as the raw dataset.
- 6) Extract frames and apply OCR to detect readings from both displays.

#### V. MACHINE LEARNING MODELS

##### A. Model Explanations

The LSQ and SGD models obtained from the dataset derived in the previous section are available in Table I. The coefficients are determined through linear least squares regression.

TABLE I: Extracted Polynomial Coefficients for Forward and Inverse Regression Models. (Note:  $X$  represents sensor voltage in Volts, and  $Y$  represents Temperature in  $^{\circ}\text{C}$ )

| Model                | Equation            | $a$           | $b$           | $c$           | Description                                                   |
|----------------------|---------------------|---------------|---------------|---------------|---------------------------------------------------------------|
| Inverse LSQ (No ADC) | $X = aY^2 + bY + c$ | -0.000014990  | 0.005589496   | 2.526066163   | Inverse Least Squares with voltage divider setup without ADC. |
| Inverse LSQ (ADC)    | $X = aY^2 + bY + c$ | -0.000006744  | 0.004344843   | 0.056019368   | Inverse Least Squares with ADC setup and Wheatstone bridge.   |
| Quadratic LSQ (ADC)  | $Y = aX^2 + bX + c$ | 147.376208110 | 197.568472526 | -10.357480491 | Least Squares (Quadratic) for Wheatstone bridge with ADC.     |
| SGD                  | $Y = aX^2 + bX + c$ | 190.226107678 | 173.380527679 | -7.072446221  | Stochastic Gradient Descent model fit.                        |
| Inverse SGD          | $X = aY^2 + bY + c$ | -0.000005386  | 0.004183549   | 0.060452454   | Inverse Stochastic Gradient Descent model fit.                |

###### 1) Least Squares (LSQ) and Inverse LSQ Regression:

The Callendar-Van Dusen equation gives the relationship between the temperature and resistance. This by extension gives us the relation  $Y = aX^2 + bX + c$ , which we call *LSQ* model. We also define another model  $X = aY^2 + bY + c$ , which we refer to as *Inverse LSQ* model. The coefficients for both these models are found by applying the least square regression utilizing the data obtained using the Optical Character Recognition. The *Inverse LSQ* was also chosen to be quadratic to obtain more accuracy.

###### 2) Stochastic Gradient Descent (SGD) Regressor:

SGD is a common iterative optimization algorithm used to fit a linear regression model [9]. We include it to test whether a standard linear approximation can effectively map the sensor data without relying on the physical quadratic model. It also highlights the necessity of proper data normalization in ML pipelines.

SGD is a regression technique

###### 3) Random Forest Regressor (RFR):

RFR is a standard ensemble learning method based on decision trees [10]. It is included to evaluate if a generalized non-linear machine

learning model can outperform the physically based LSQ approach. Because tree-based models rely on discrete spatial partitioning (step functions), we investigate their ability to smoothly interpolate continuous analog variables like temperature.

The models are obtained and implemented using Python and the scikit-learn [11] library. The implementation of these models and the evaluation of Mean Squared Error (MSE) and R-squared ( $R^2$ ) metrics are available in the repository<sup>2</sup>.

## VI. MODEL EVALUATION AND COMPARISON

Table II summarizes the Mean Squared Error (MSE) and R-squared ( $R^2$ ) scores for all evaluated models [12]. MSE was specifically selected to heavily penalize larger temperature prediction deviations—a critical safety requirement in industrial control systems. Conversely, the  $R^2$  metric is utilized to measure the proportion of variance in the actual temperature that is predictably explained by the sensor’s input voltage. A robust industrial thermometer must achieve an MSE approaching zero and an  $R^2$  approaching 1.0. Based on these metrics, the LSQ (Quadratic) model for the Wheatstone bridge with ADC vastly outperforms the rest.

TABLE II: Low MSE and high  $R^2$  is desirable

| Model                                | MSE      | $R^2$    |
|--------------------------------------|----------|----------|
| 1. Inverse LSQ (Volt. Div w/o ADC)   | 0.6612   | 0.9977   |
| 2. Inverse LSQ (Wheatstone w/ ADC)   | 0.016221 | 0.999922 |
| 3. LSQ (Wheatstone w/ ADC)           | 0.009198 | 0.999956 |
| 4. SGD Regressor (Wheatstone w/ ADC) | 0.030477 | 0.999854 |
| 5. Inverse SGD (Wheatstone w/ ADC)   | 0.016221 | 0.999922 |
| 6. Random Forest (Wheatstone w/ ADC) | 1.161318 | 0.994451 |

Table III presents a small subset of the test data, showing the actual temperature values alongside the predictions from the Random Forest, Inverse LSQ, LSQ, SGD, and Inverse SGD Regressor models for the Wheatstone bridge setup with ADC. The corresponding graph is available in Fig. 2. We thus conclude that the LSQ model is best at predicting the temperature. Though the results are provided only for a small range of temperatures in Table III and Fig. 2 for brevity and visualization respectively, the results hold true for all values of practical interest.

TABLE III: Wheatstone Validation Data and Predictions

| Volt (V) | Actual (°C) | Inv LSQ (ADC) | LSQ (ADC) | SGD (ADC) | Inv SGD (ADC) | RF (ADC) |
|----------|-------------|---------------|-----------|-----------|---------------|----------|
| 0.2634   | 51.9        | 51.9136       | 51.9070   | 51.7938   | 51.9906       | 53.3456  |
| 0.3127   | 65.9        | 65.7972       | 65.8329   | 65.7442   | 65.8829       | 67.6248  |
| 0.2083   | 37.2        | 37.1962       | 37.1906   | 37.2964   | 37.1134       | 37.0563  |
| 0.4037   | 93.1        | 93.6290       | 93.4194   | 93.9231   | 93.2383       | 89.0505  |
| 0.2092   | 37.5        | 37.4305       | 37.4238   | 37.5239   | 37.3513       | 37.0563  |
| 0.2978   | 61.6        | 61.5231       | 61.5485   | 61.4304   | 61.6219       | 61.8901  |
| 0.2028   | 35.8        | 35.7687       | 35.7707   | 35.9127   | 35.6628       | 36.7501  |
| 0.2666   | 52.7        | 52.7931       | 52.7892   | 52.6712   | 52.8748       | 53.3456  |
| 0.3185   | 67.5        | 67.4803       | 67.5183   | 67.4462   | 67.5568       | 68.7954  |
| 0.2850   | 57.9        | 57.9067       | 57.9202   | 57.7921   | 58.0053       | 58.6497  |

<sup>2</sup>Model Implementation: [https://github.com/gadepall/pt100/blob/main/code/s/models/PT100\\_models.ipynb](https://github.com/gadepall/pt100/blob/main/code/s/models/PT100_models.ipynb)

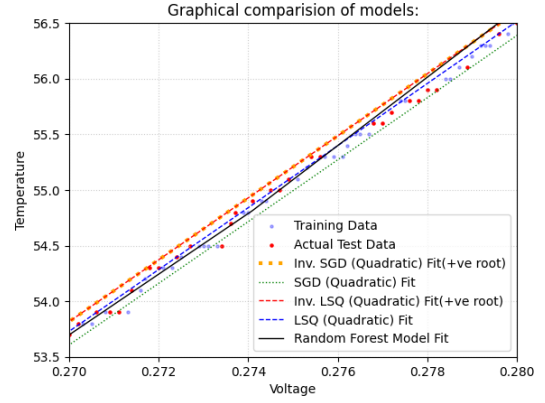


Fig. 2: Comparison of Random Forest, Inverse LSQ, LSQ, SGD and Inverse SGD Regressor predictions against actual test data for the Wheatstone bridge with ADC for temperatures between 53.5°C to 56.5°C

The code for the Arduino, which predicts the temperature from the voltage and flashing instructions are available in the repository<sup>3</sup>.

## APPENDIX A HARDWARE CONFIGURATION AND SCHEMATICS

TABLE IV: Component List

| Component                           | Qty. | Description                                                                                            |
|-------------------------------------|------|--------------------------------------------------------------------------------------------------------|
| Arduino Uno                         | 1    | Microcontroller for processing and control.                                                            |
| ADS1115 ADC                         | 1    | 16-bit external ADC for high-precision voltage measurement.                                            |
| PT100 RTD Sensor                    | 1    | Platinum resistance thermometer.                                                                       |
| 100Ω Resistor                       | 1    | Precision resistor for Wheatstone bridge.                                                              |
| 4kΩ Resistors                       | 2    | Resistors for Wheatstone bridge.                                                                       |
| JHD 162A Parallel LCD               | 1    | For displaying the final temperature.                                                                  |
| 22kΩ Potentiometer                  | 1    | To adjust the contrast of the LCD.                                                                     |
| Breadboard                          | 1    | For creating solderless circuit connections.                                                           |
| Jumper Wires                        | Set  | For connecting all the components.                                                                     |
| Pen Thermometer <= 0.1°C resolution | 1    | Used for training purpose and as a reference.                                                          |
| Kettle/Heater with water            | 1    | To heat the water, so that training data corresponding to a wide range of temperatures can be obtained |

TABLE V: ADS1115 Connections

| ADS1115 Pin | Arduino Pin                                               | Purpose                            |
|-------------|-----------------------------------------------------------|------------------------------------|
| VDD         | 5V                                                        | Power Supply                       |
| GND         | GND                                                       | Common Ground                      |
| SCL         | A5 (SCL)                                                  | I2C Clock Line                     |
| SDA         | A4 (SDA)                                                  | I2C Data Line                      |
| A0          | Input from Voltage Divider Node (between PT100 and R_REF) | Reading Voltage                    |
| A1          | Junction between the two 4kΩ resistors                    | Reference for differential reading |

<sup>3</sup>Temperature Prediction: <https://github.com/gadepall/pt100/tree/main/code/s/arduino/inference/code>

TABLE VI: LCD Connections

| LCD Pin     | Arduino Pin              |
|-------------|--------------------------|
| VSS         | GND                      |
| VDD         | 5V                       |
| V0          | Potentiometer Middle Pin |
| RS          | Digital 12               |
| RW          | GND                      |
| E           | Digital 11               |
| D4          | Digital 5                |
| D5          | Digital 4                |
| D6          | Digital 3                |
| D7          | Digital 2                |
| A (Anode)   | 5V                       |
| K (Cathode) | GND                      |

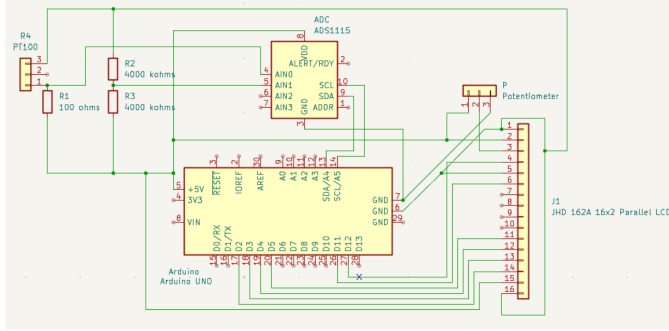


Fig. 3: Circuit Schematic of the High-Precision Wheatstone Bridge

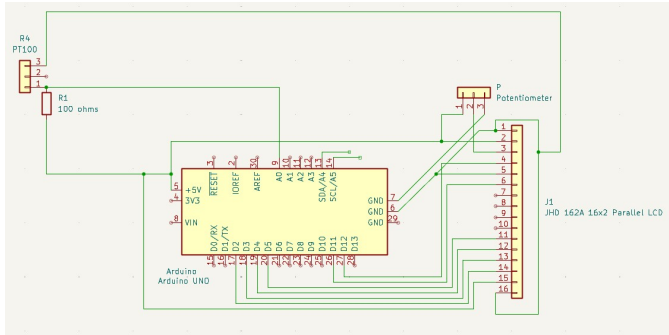


Fig. 4: Circuit Schematic of the simple voltage divider

## APPENDIX B

## AUTOMATED OCR TRAINING PIPELINE SETUP

## A. Pipeline Architecture and Data Logging

The automated data acquisition pipeline was developed using Python. To capture the real-world thermal cycle, a smartphone camera was interfaced with a computer via Droid-Cam and OBS Studio, providing a continuous video feed of both the analog reference thermometer and the sensor's LCD display. The text extraction was handled using the *easyocr* [13] library, which relies on PyTorch [14] for deep learning-based inference, accelerated via an NVIDIA GPU.

During the cooling phase of the thermal cycle, the script continuously monitored the video feed. Every 15 frames, if text was successfully detected in both regions, the script

synchronized the readings and logged them into a structured dataset, formatted as paired voltage and temperature values. To facilitate manual debugging, the isolated bounding boxes of the digits were saved as individual image frames. Because the OCR engine is susceptible to occasional character misclassification, the generated dataset (*out.txt*) was manually reviewed and corrected to produce the final high-fidelity training dataset.

## B. Image Processing and Region of Interest (ROI) Calibration

To achieve high OCR accuracy, the raw video frames required specific preprocessing and spatial cropping. The camera feed was divided into distinct Regions of Interest (ROIs): the voltage display was isolated from the top half of the frame, while the physical thermometer was isolated from the bottom-left third.

Because the analog thermometer display was highly sensitive to ambient lighting, standard grayscaling was insufficient for reliable digit extraction. Therefore, an inverse binary thresholding operation was applied (with a threshold value of 130) to separate the liquid crystal digits from the background. To reconstruct broken segments within the digital numbers, a morphological closing operation was executed utilizing an  $11 \times 11$  rectangular structuring element. Finally, a  $17 \times 17$  Gaussian blur was applied to the inverted mask to smooth the edges of the characters, significantly reducing background noise before the frames were passed to the *easyocr* engine. The further information regarding the installation and setup is provided in

<https://github.com/gadepall/pt100/tree/main/AutoTrainer>

## REFERENCES

- [1] T. Bartelt, *Industrial Control Electronics: Devices, Systems & Applications*. Delmar Cengage Learning, 2005.
- [2] A. Samuk and M. Çakır, "New circuit design and implementation for temperature measurement based on pt100 sensor," *ResearchGate*, 2023.
- [3] M. Li, C. Zeng, and Y. Wang, "Pt100 temperature measurement sensors design and transducer simulation," *Journal of Physics: Conference Series*, vol. 2897, no. 1, p. 012011, 2024.
- [4] C. Liu, C. Zhao, Y. Wang, and H. Wang, "Machine-learning-based calibration of temperature sensors," *Sensors*, vol. 23, no. 17, p. 7347, 2023.
- [5] J. Fraden, *Handbook of Modern Sensors: Physics, Designs, and Applications*. Springer, 2016.
- [6] H. L. Callendar, "On the practical measurement of temperature," *Philosophical Transactions of the Royal Society of London. A*, vol. 178, pp. 161–230, 1887.
- [7] T. Mien and N. Hien, "Precision temperature measurement using wheatstone bridge," in *2019 International Conference on System Science and Engineering (ICSSE)*. IEEE, 2019, pp. 145–149.
- [8] *ADS111x Ultra-Small, Low-Power, I2C-Compatible, 860-SPS, 16-Bit ADCs*, Texas Instruments, 2018, sBAS444D.
- [9] H. Robbins and S. Monro, "A Stochastic Approximation Method," *The Annals of Mathematical Statistics*, vol. 22, pp. 400 – 407, 1951.
- [10] L. Breiman, "Random forests," *Machine Learning*, vol. 45, no. 1, pp. 5–32, 2001.
- [11] F. e. a. Pedregosa, "Scikit-learn: Machine learning in python," *Journal of Machine Learning Research*, vol. 12, pp. 2825–2830, 2011.
- [12] Y. M. e. a. Jaradat, "Beyond one-size-fits-all: Comparing and selecting regression metrics for robust model assessment," in *2025 12th International Conference on Information Technology (ICIT)*, 2025, pp. 416–422.
- [13] JaidedAI, "Easyocr: Ready-to-use ocr with 80+ supported languages," 2020.

- [14] A. e. a. Paszke, “Pytorch: An imperative style, high-performance deep learning library,” in *Advances in Neural Information Processing Systems*, vol. 32, 2019, pp. 8024–8035.