


KX312

24/07/31 首次编辑
24/09/09 补充USB_HUB电路使用注意事项

INDEX/NOTES

Page1	01 REVISION HISTORY
Page2	02 INDEX/NOTES
Page3	03 BLOCK DIAGRAM
Page4	04 POWER TREE
Page5	05 POWER SEQUENCE
Page6	06 CLOCK MAP/I2C MAP
Page7	07 UART MAP/OTHER MAP
Page8	08 GPIO ASSIGNMENT
Page9	09 CPU-eMMC-DDR-GPIO
Page10	10 CPU-Perphery
Page11	11 CPU-PWR
Page12	12 CPU-SYS-GPIO
Page13	13 POWER-EXT DCDC
Page14	14 POWER-SPM8821
Page15	15 Memory-LPDDR4x
Page16	16 Storage-eMMC
Page17	17 Storage-FLASH-CARD-EEPROM
Page18	18_VO-HDMI_TO_DP
Page19	19_VO-MIPI_EDP
Page20	20_WIFI/BT
Page21	21_ANX7447_DP_TYPEC1
Page22	22_ANX7447_PWR_TYPEC2
Page23	23_USB3_USB2_HUB_TP
Page24	24_PCIEB_M_2_KEY_M
Page25	25_PWR_SELECTOR
Page26	26_AUDIO_ES8326B
Page27	27_KEY_DEBUG_DB_USB3_CONN
Page28	28_PWR_CHARGE
Page29	29_EC_KB_LED

BLOCK

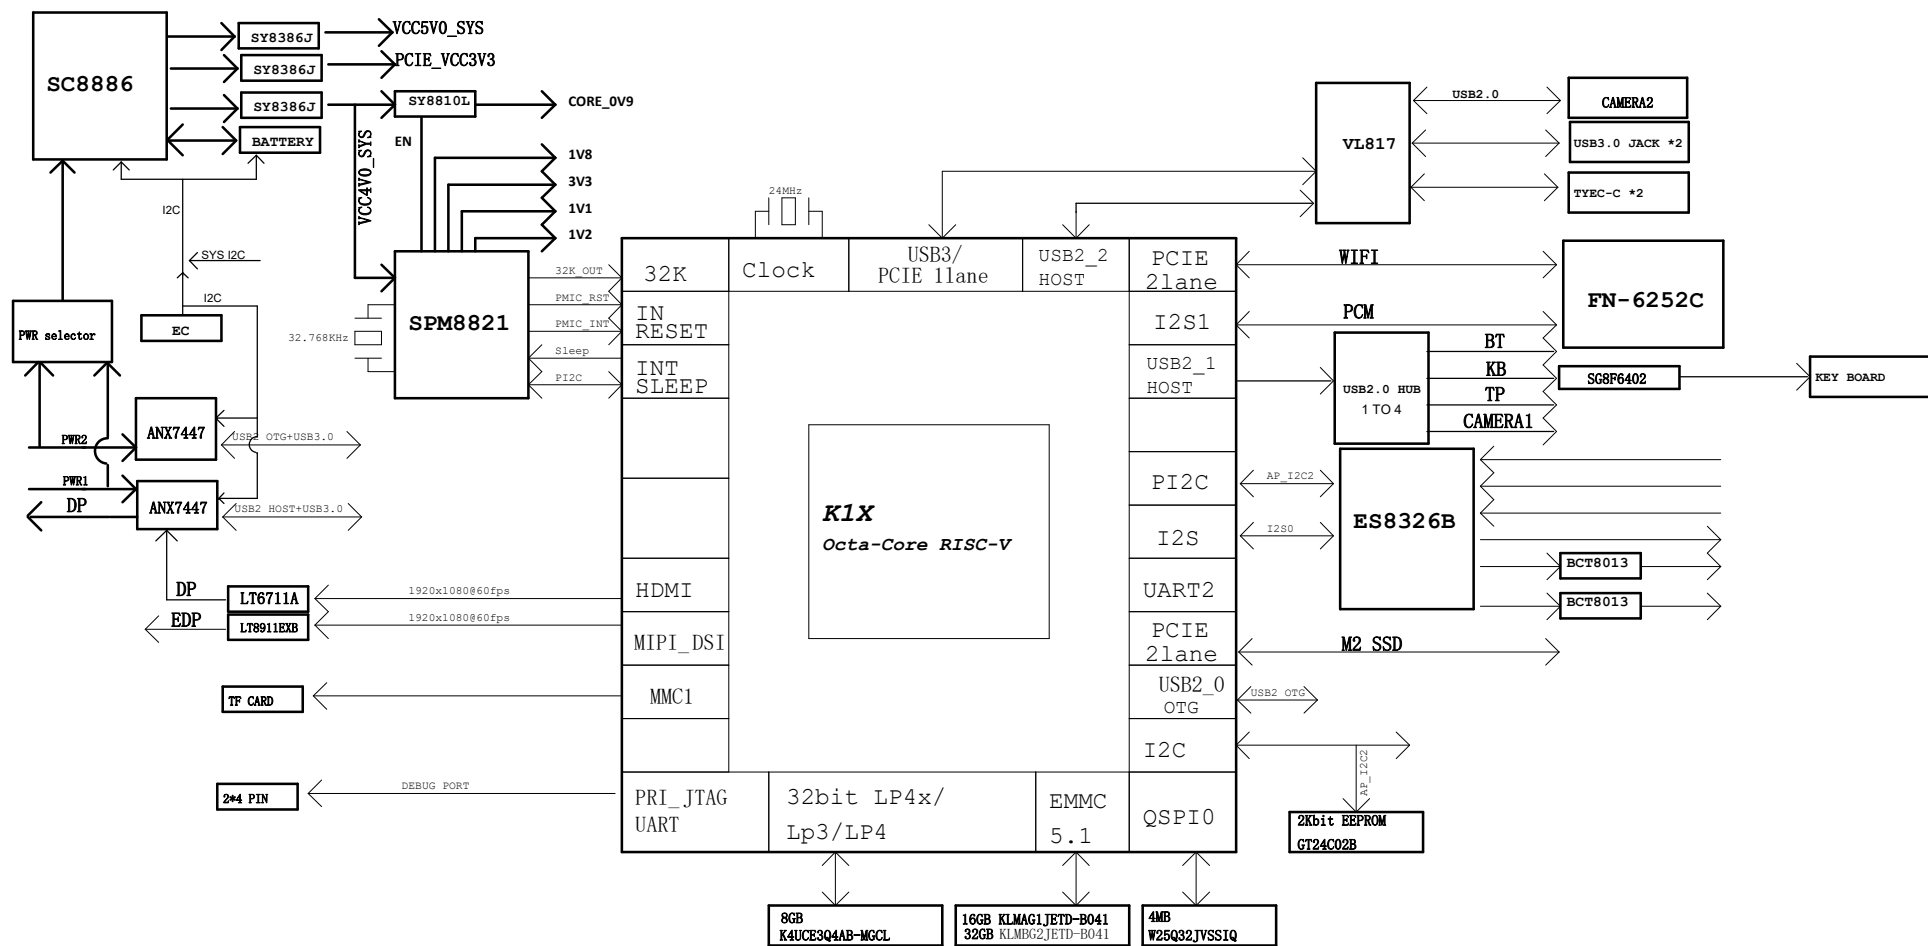

POWER TREE

The diagram illustrates the power distribution for the SPM8821 U1401. It shows the flow of power from input sources (Type-C, USB, SY8386J, SY8810L) through various regulators (BUCK1-7, ALDO1-4, AONLDO, DLDO1-7) to various output blocks (PHY0-4, WiFi, LCD, VCC1V8, VCC5V0, VCC3V3, etc.).

SPM8821 U1401

Input	Output	Regulator	Output	Current	Regulator	Output	Current
VIN1	0.5~3.4V@3.5A	BUCK1	0.9V±1%	Seq:1	CORE_0V9		
VIN2	0.5~3.4V@3.5A	BUCK2	1.8V±1%	Seq:3			
VIN3	0.5~3.4V@2.5A	BUCK3	3.3V±1%	Seq:4	BUCK4_3V3		
VIN4	0.5~3.4V@2.5A	BUCK4	3.3V±1%	Seq:4	LCD_VCC5V0		
SWIN	1A	SWOUT	2.1V±1%	Seq:1	BUCK5_2V1		
VIN5	0.5~3.4V@2.5A	BUCK5	1.1V±1%	Seq:4			
VIN6	0.5~3.4V@2.5A	BUCK6	3.3V±1%	Seq:4			
	0.5~3.4V@0.3A	ALDO1	2.8V±1%				
	0.5~3.4V@0.3A	ALDO2	2.8V±1%				
ALDO IN	0.5~3.4V@0.3A	ALDO3	2.8V±1%				
	0.5~3.4V@0.3A	ALDO4	1.8V±2%	Always on			
	0.5~3.4V@0.2A	AONLDO	1.2V±1%	Seq:4	AVDD12_DSI		
	0.5~3.4V@0.3A	DLDO1	1.2V±1%				
	0.5~3.4V@0.3A	DLDO2	1.8V±1%				
DLDO IN1	0.5~3.4V@0.3A	DLDO3	1.8V±1%	Seq:4	AVDD18_DDR		
	0.5~3.4V@0.5A	DLDO4	1.8V±1%		AVDD18_EFUSE		
	0.5~3.4V@0.3A	DLDO5	1.8V±1%	Seq:2	AVDD18_AFEAP	AVDD18_PLL	AVDD18_AUD
DLDO IN2	0.5~3.4V@0.5A	DLDO6	1.8V±1%				
		DLDO7					

Inputs:

- Type-C (Jxx) → USBVBUS → SY8386J Uxxx → PCIE_VCC3V3 (Jxx) → PCIE_VCC3V3 (Jxx) → Seq:3
- USBVBUS → SY8386J Uxxx → Seq:3
- USBVBUS → SY8810L Uxxx → Seq:1

Outputs:

- BUCK5_2V1 → DLDO IN1
- BUCK5_2V1 → DLDO IN2
- ETA3512 Uxxx → Seq:3 → PHY0 Uxxx (PHY0_VCC33, PHY0_VCCIO18) → Seq:3 → PHY1 Uxxx (PHY1_VCC33, PHY1_VCCIO18) → Seq:3 → WiFi Uxxx (WiFi_VCC33, WiFi_VCCIO18) → Seq:3 → Jxx (LCD_VCC5V0, VCC1V8_SYS) → Seq:3 → VCC5V0_SYS → Jxx (VCC3V3_SYS) → VCC3V3_SYS
- ETA3512 Uxxx → EXT_DCDC_0V6 → Seq:4 → CORE_0V9 → Seq:1

Control by PMIC

冷起自动上电，后接长按关机，短接开机

PowerOn

VCC18 M1
AVDD09_DDR
AVDD09_HDMI
AVDD09_PCIE
AUD_VDDU09
AVDD09_PLL
AVDD09_EMMC
AVDD09_DSI
AVDD09_USB
AVDD09_AFEAP
AVDD09_CSI

36ms

18ms

1ms

AVDD18_PLL
AVDD18_AFEAP
AVDD18_AUD
AUD_VPOS

VCC18_GPIO
AVDD18_USB
AVDD18_HDMI
AVDD18_PCIE
AVDD18_EMMC
AVDD18_CSI
AVDD18_DSI

1ms

AVDD12_DSI
AVDD06_DDR
AVDD11_DDR
AVDD18_DDR
VCC1833_GPIO2
VCC1833_GPIO3
VCC1833_QSPI
VCC1833_MMCI
AVDD33_USB
AVDD33V3_AUD
AVDD33_HDMI

1ms

≥10ms

EXT_32K_IN

RESET_IN_N

Internal Reset

Sleep_OUT


冷起和PMIC复位，PMIC不检测Sleep_OUT；
主控复位，PMIC不掉电，Sleep_OUT保持高电平

24MHz crystal


7ms

SPM8821


CLOCK MAP

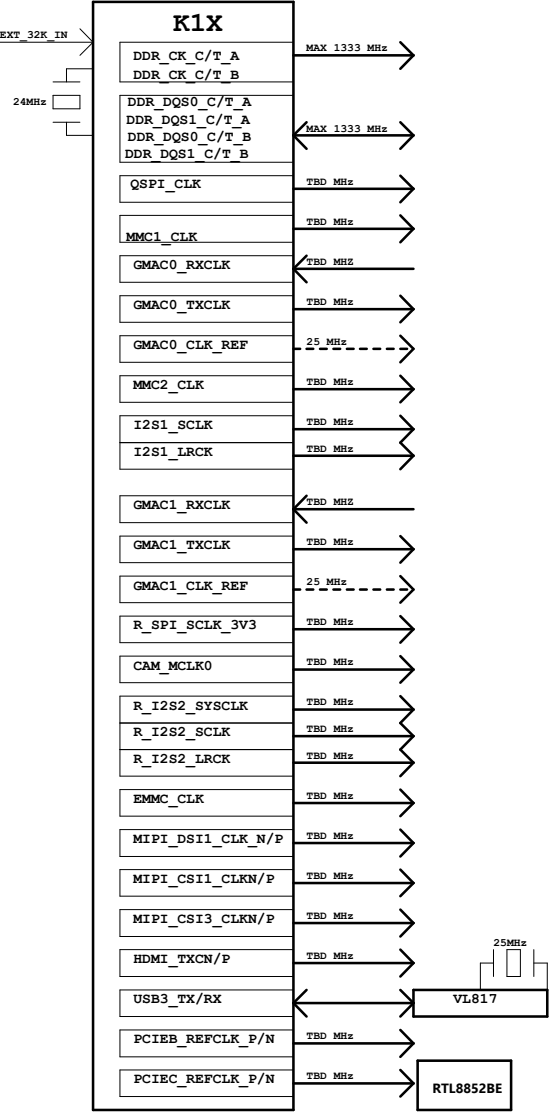


I2C MAP

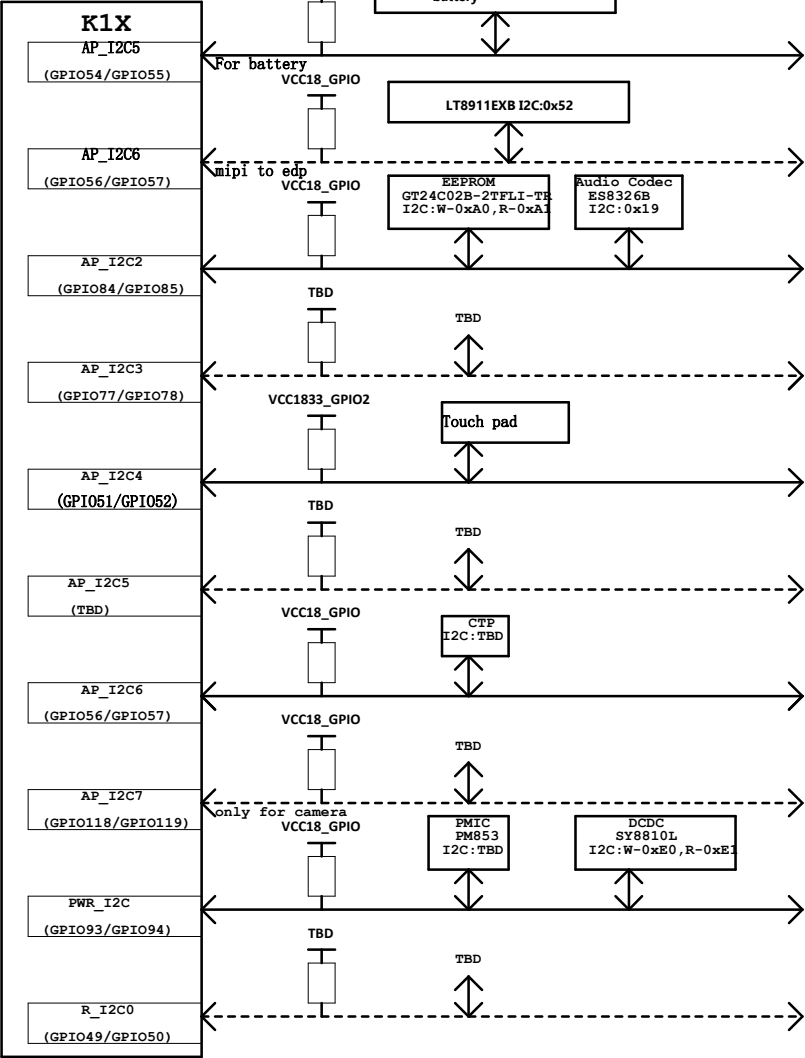


UART MAP

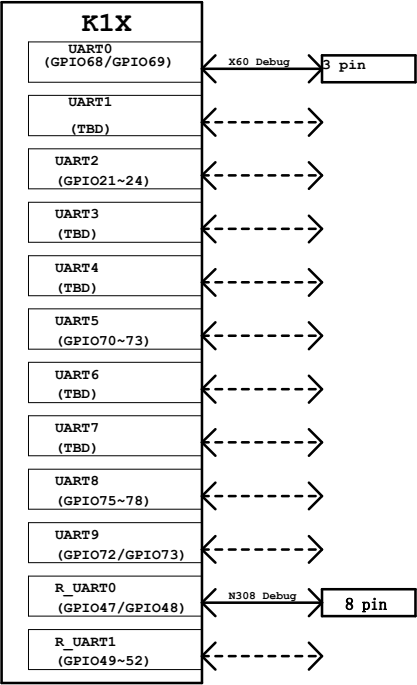

SW&RESET MAP

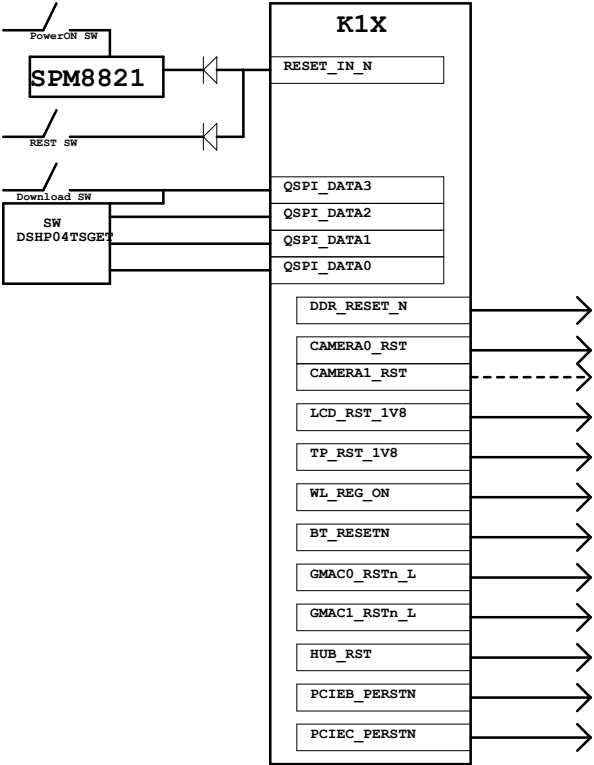

PCIE/USB MAP

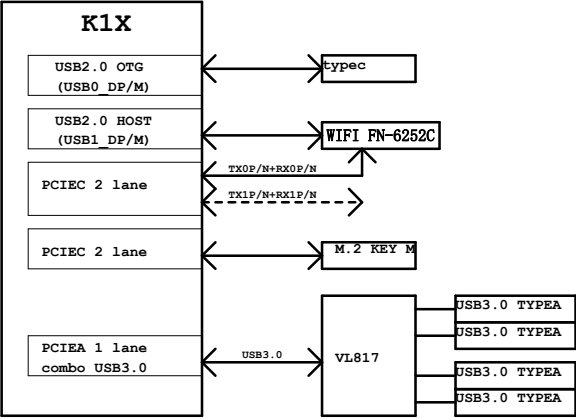

GPIO ASSIGNMENT

PIN	Define	CFG	Function
GPIO0		1	
GPIO1		1	
GPIO2		1	
GPIO3		1	
GPIO4		1	
GPIO5		1	
GPIO6		1	
GPIO7		1	
GPIO8		1	
GPIO9		1	
GPIO10		1	
GPIO11		1	
GPIO12		1	
GPIO13		1	
GPIO14		1	WiFi/BT
GPIO15		1	
GPIO16		1	
GPIO17		1	
GPIO18		1	
GPIO19		1	
GPIO20		1	
GPIO21		1	
GPIO22		1	
GPIO23		1	
GPIO24		1	
GPIO25	BT_PCM_CLK	1	
GPIO26	BT_PCM_SYNC	1	
GPIO27	BT_PCM_DIN	1	
GPIO28	BT_PCM_DOUT	1	Ethernet -GMAC1
GPIO29		1	
GPIO30		1	
GPIO31		1	
GPIO32		1	
GPIO33		1	
GPIO34		1	
GPIO35		1	
GPIO36		1	
GPIO37		1	
GPIO38		1	
GPIO39		1	
GPIO40		1	
GPIO41		1	
GPIO42		1	
GPIO43		1	LCD/CTP
GPIO44	LCD_BL_PWM_1V8	4	
GPIO45		1	
GPIO46		1	

PIN	Define	CFG	Function
GPIO110		0	
GPIO115		0	
GPIO116		0	WiFi/BT
GPIO117	PCIEC_CLKREQN	4	PCIEC
GPIO118	I2S0_SCLK	3	Audio Codec
GPIO119	I2S0_LRCK	3	
GPIO120	I2S0_OUT	3	
GPIO121	I2S0_IN	3	
GPIO122	I2S0_SYSCLK	3	
GPIO123	HUB_PWREN	0	USB3_HUB
GPIO124		0	
GPIO125	VBUS_ON0	1	USB2
GPIO126	CODEC_IRQ	0	Audio
GPIO127	PA_SHUTDOWN	0	Codec

PIN	Define	CFG	Function
GPIO53	WIFI_PWR_EN	1	
GPIO54	AP_I2C5_SCL	1	BATTERY
GPIO55	AP_I2C5_SDA	1	
GPIO56	AP_I2C6_SCL	5	LCD/CTP
GPIO57	AP_I2C6_SDA	5	
GPIO58	EDP_INTN	0	
GPIO111	BAT_INT	1	BATTERY
GPIO112	PCIEC_WAKEN	3	PCIEC
GPIO113	PCIE_VCC3V3_EN	1	
GPIO114	EDP_RSTN	0	LCD/CTP
GPIO63	SINK1	0	TYPEC
GPIO64		0	
GPIO65	BT_WAKE_HOST	0	WiFi/BT
GPIO66	SINK2	0	TYPEC
GPIO67		0	
GPIO68	UART0_TXD	2	X60 Debug
GPIO69	UART0_RXD	2	

PIN	Define	CFG	Function
GPIO59	PCIEB_PERSTN	4	PCIEB
GPIO60	PCIEB_WAKEN	4	
GPIO61	PCIEB_CLKREQN	4	
GPIO62	PCIEC_PERSTN	4	PCIEC
GPIO70	GPIO70	1	2x4 pin
GPIO71	GPIO71	1	
GPIO72	GPIO72	1	
GPIO73	GPIO73	1	
GPIO74	HALL_N	0	HALL

红色字体GPIO表示默认、持续上拉，等效上拉电阻约60K。需要软件修改才能解除默认上拉状态

PIN	Define	CFG	Function
GPIO93	PI2C_SCL	0	PMIC
GPIO94	PI2C_SDA	0	
GPIO95	SLEEP_OUT	0	
GPIO96		1	
GPIO97		1	
GPIO81	AP_I2C5_SCL	0	EC
GPIO82	AP_I2C5_SDA	0	
GPIO83	LCD_PWR_EN_1V8	0	LCD/CTP
GPIO84	AP_I2C2_SCL	4	EEPROM
GPIO85	AP_I2C2_SDA	4	Audio
GPIO86	HDMI_SCL	1	HDMI_OUT
GPIO87	HDMI_SDA	1	
GPIO88	HDMI_CEC	1	
GPIO89	HDMI_HPD	1	
GPIO90	GPIO90	0	SPI
GPIO91	VCC5V0_SYS_EN	0	
GPIO92	EDP_STANDBY	0	LCD/CTP


PIN	Define	CFG	Function
GPIO98	QSPI_DATA3	0	SPI FLASH
GPIO99	QSPI_DATA2	0	
GPIO100	QSPI_DATA1	0	
GPIO101	QSPI_DATA0	0	
GPIO102	QSPI_CLK	0	
GPIO103	QSPI_CS1	0	

PIN	Define	CFG	Function
GPIO104	MMC1_DATA3	0	TF CARD
GPIO105	MMC1_DATA2	0	
GPIO106	MMC1_DATA1	0	
GPIO107	MMC1_DATA0	0	
GPIO108	MMC1_CMD	0	
GPIO109	MMC1_CLK	0	

PIN	Define	CFG	Function
GPIO75	BL_ENABLE_3V3	2	LCD/CTP
GPIO76	WL_DIS_N	2	WiFi/BT
GPIO77	HOST_WAKE_BT	2	
GPIO78	PCIE1_BT_ON	2	
GPIO79	HUB_RST_3V3	2	USB3_HUB
GPIO80	SD_CD_3V3	1	TF CARD

PIN	Define	CFG	Function
GPIO47	R_UART0_TXD_3V3	1	2x4 pin
GPIO48	R_UART0_RXD_3V3	1	
GPIO49	EC_INT	0	
GPIO50	TP_INT	0	TP BOARD
GPIO51	AP_I2C4_SCL_3V3	4	TYPEC BATTERY
GPIO52	AP_I2C4_SDA_3V3	4	

eMMC+DDR

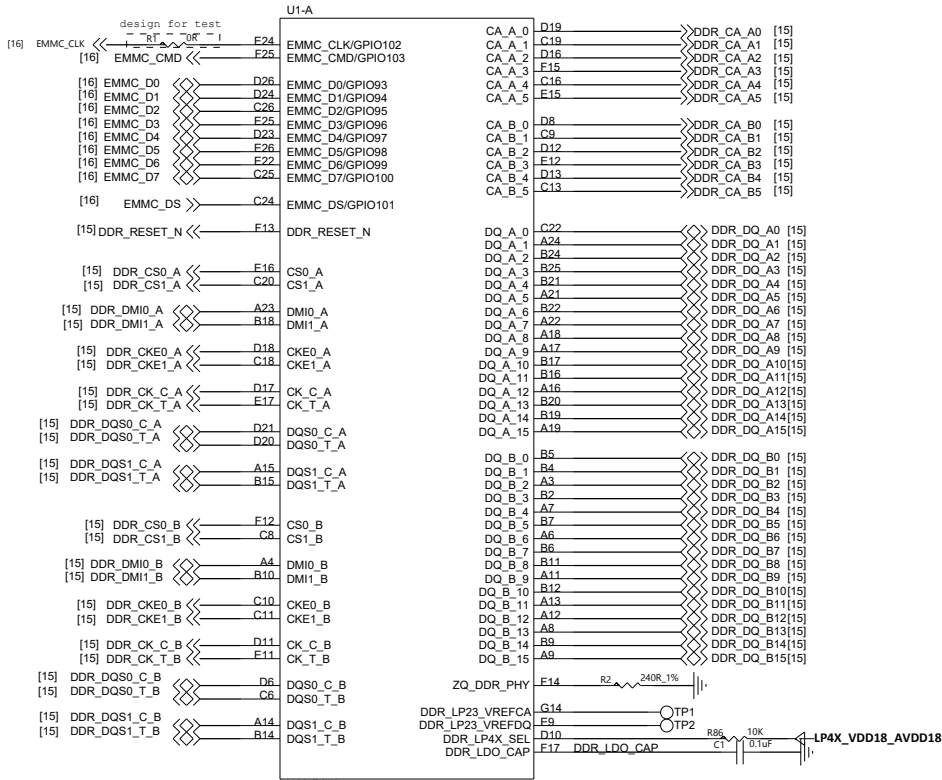

M103-P676

GPIO

[20] BT_PCM_CLK << A25

[20] BT_PCM_SYNC << Y22

[20] BT_PCM_DIN << Y23

[20] BT_PCM_DOUT << Y25

[24] PCIEC_CLKREQN << W26

[26] I2S0_SCLK << W26

[26] I2S0_LRCK << W25

[26] I2S0_OUT << V24


[26] I2S0_IN << V21

[26] I2S0_SYCLK << V26

[23] HUB_PWREN << U21

[26] CODEC_IRQ << U25

[26] PA_SHUTDOWN << U26



U1-G

AC18 GPIO0/GMAC0_RXDV/UART6_TXD/PWM8

AD18 GPIO1/GMAC0_RX_D0/UART6_RXD/PWM9

AB17 GPIO2/GMAC0_RX_D1/UART6_CTS_N/PWM10

AB18 GPIO3/GMAC0_RX_CLK/UART6_RTS_N/PWM11

AD17 GPIO4/GMAC0_RX_D2/UART7_TXD/PWM12

AC17 GPIO5/GMAC0_RX_D3/UART7_RXD/PWM13

AE18 GPIO6/GMAC0_TX_D0/UART7_CTS_N/PWM14

AE18 GPIO7/GMAC0_TX_D1/UART7_RTS_N/PWM15

AE17 GPIO8/GMAC0_TX/UART8_TXD

AE19 GPIO9/GMAC0_TX_D2/UART8_RXD/PWM16

AE19 GPIO10/GMAC0_TX_D3/UART8_CTS_N/PWM17

AE17 GPIO11/GMAC0_TX_EN/UART8_RTS_N/PWM18

AD24 GPIO12/GMAC0_MDC/UART9_TXD/CXO_OUT

AE25 GPIO13/GMAC0_MDIO/UART9_RXD/PWM19

AD23 GPIO14/GMAC0_INT_N/PWM0

AD26 GPIO15/MMC2_DATA3/PCIE0_PERSTN/PCIE1_PER

AD25 GPIO16/MMC2_DATA2/PCIE0_WAKEN/CXO_REQ/P

AC24 GPIO17/MMC2_DATA1/PCIE0_CLKREQN/CXO_OUT

AC26 GPIO18/MMC2_DATA0/UART3_TXD/PCIE2_PERSTN

AB23 GPIO19/MMC2_CMD/UART3_RXD/PCIE2_WAKEN

AB25 GPIO20/MMC2_CLK/UART3_CTS_N/MN_CLK/PCIE2

AA22 GPIO21/UART2_TXD/UART3_RTS_N/32K_OUT

AB26 GPIO22/UART2_RXD/PWM2/PWM0

AA24 GPIO23/UART2_CTS_N/UART4_TXD/MN_CLK/PWM1

AA23 GPIO24/UART2_RTS_N/UART4_RXD/I2S1_SYCLK

AE25 GPIO25/I2S1_SCLK/UART5_TXD/PWM3

Y22 GPIO26/I2S1_LRCK/UART5_RXD

Y23 GPIO27/I2S1_TXD/UART5_CTS_N

Y25 GPIO28/I2S1_RXD/UART5_RTS_N/32K_OUT

M103-P676

U1-H

AA20 GPIO29/GMAC1_RXDV/UART1_TXD<SECURE_DOMA

AD19 GPIO30/GMAC1_RX_D0/UART1_RXD<SECURE_DOMA

AC20 GPIO31/GMAC1_RX_D1/UART1_CTS_N<SECURE_DO

AA19 GPIO32/GMAC1_RX_CLK/UART1_RTS_N<SECURE_D

AD20 GPIO33/GMAC1_RX_D2/UART4_TXD/PWM3/PCIE1_

AC21 GPIO34/GMAC1_RX_D3/UART4_RXD/PWM4/PCIE1_

AE21 GPIO35/GMAC1_TX_D0/UART4_CTS_N/PWM5/PCIE

AE22 GPIO36/GMAC1_TX_D1/UART4_RTS_N/PWM6/PCIE

AE20 GPIO37/GMAC1_TX/PWM7/PCIE2_CLKREQN

AE22 GPIO38/GMAC1_TX_D2/AP_I2C3_SCL<SECURE_DO

AE23 GPIO39/GMAC1_TX_D3/AP_I2C3_SDA<SECURE_DO

AE21 GPIO40/GMAC1_TX_EN/AP_I2C4_SCL/R_I2S3_TX

AB21 GPIO41/GMAC1_MDC/AP_I2C4_SDA/R_I2S3_RXD/

AC22 GPIO42/GMAC1_MDIO/UART5_TXD/R_I2S3_SYCLK

AC23 GPIO43/GMAC1_INT_N/UART5_RXD/PWM13

AB22 GPIO44/MN_CLK/UART5_CTS_N/R_IR_RX/PWM14

AE24 GPIO45/GMAC0_CLK_REF/UART5_RTS_N/PWM15

AE23 GPIO46/GMAC1_CLK_REF/PWM16

W21 GPIO110/R_CAN_TX0/R_UART1_TXD/UART9_CTS_

Y26 GPIO115/R_CAN_RX0/R_UART1_RXD/UART9_RTS_

W23 GPIO116/R_PWM1/R_UART1_CTS_N/UART9_TXD/P

W22 GPIO117/R_PWM2/R_UART1_RTS_N/UART9_RXD/P

W26 GPIO118/AP_I2C7_SCL<CAM/AF_I2C8_SCL/I2

W25 GPIO119/AP_I2C7_SDA<CAM/AF_I2C6_SDA/I2

V24 GPIO120/CAM_MCLK2/I2S0_TXD/R_PWM6/KP_MKI

V21 GPIO121/CAMERA2_RST/VBUS_ON2/I2S0_RXD/R

V26 GPIO122/CAMERA2_PDN/USB_ID2/I2S0_SYCLK/

U21 GPIO123/DRIVE_VBUS2_ISO/KP_DKIN0/KP_MKIN

W23 GPIO124/DRIVE_VBUS1_ISO/KP_DKIN1/KP_MKOU






U22 GPIO125/VBUS_ON0/KP_DKIN2/KP_MKIN1

U25 GPIO126/USB_ID0/KP_DKIN3/KP_MKOUT1


U26 GPIO127/DRIVE_VBUS0_ISO/KP_DKIN4/KP_MKIN

M103-P676









Periphery

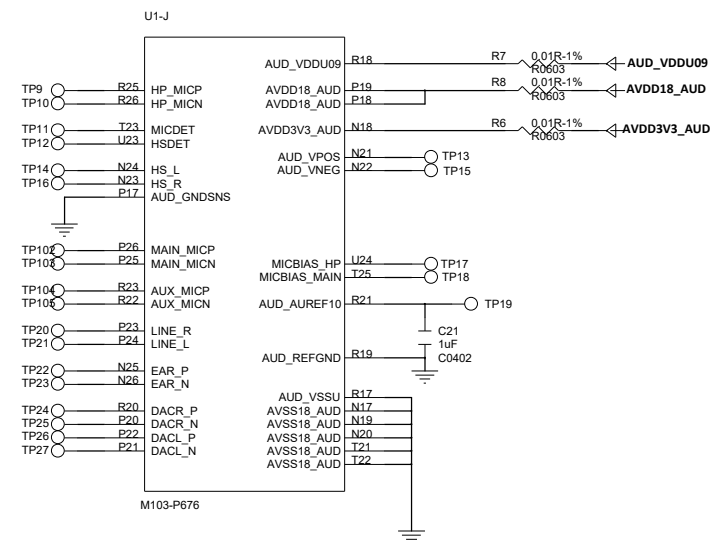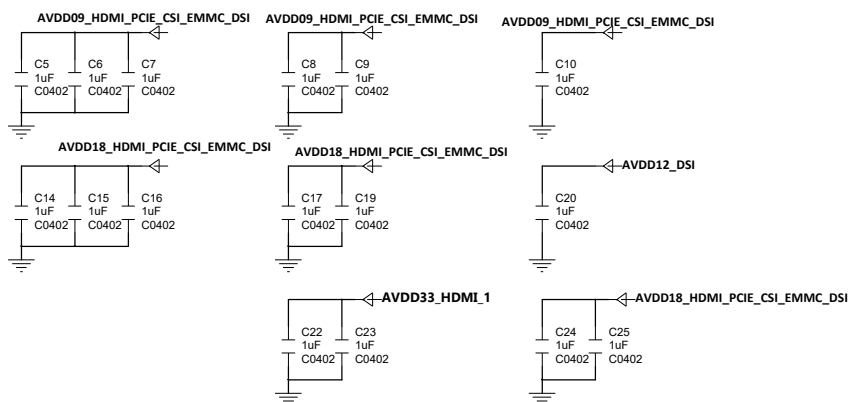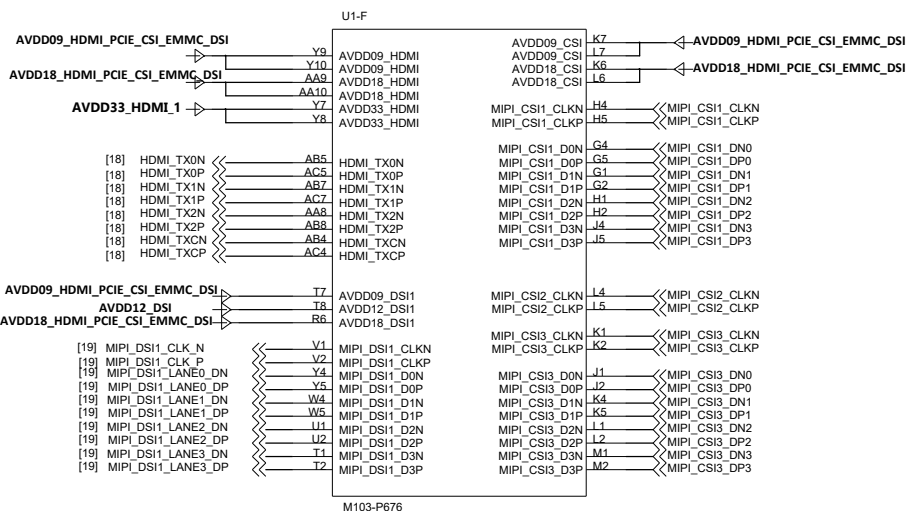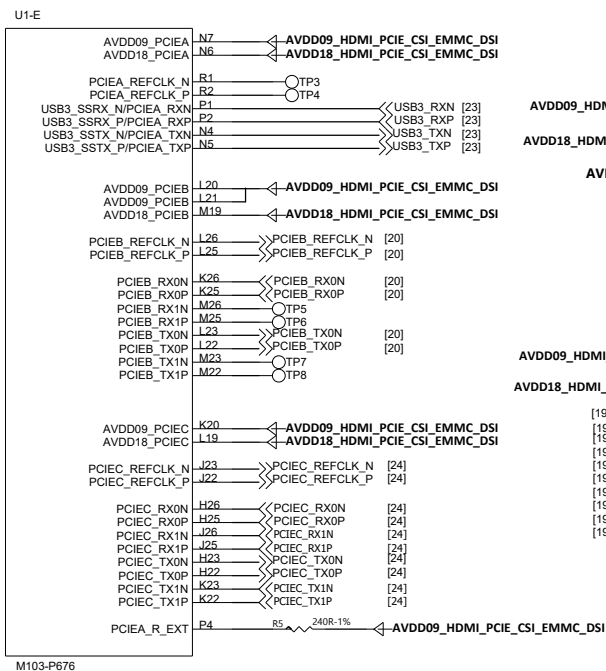


CPU-PWR

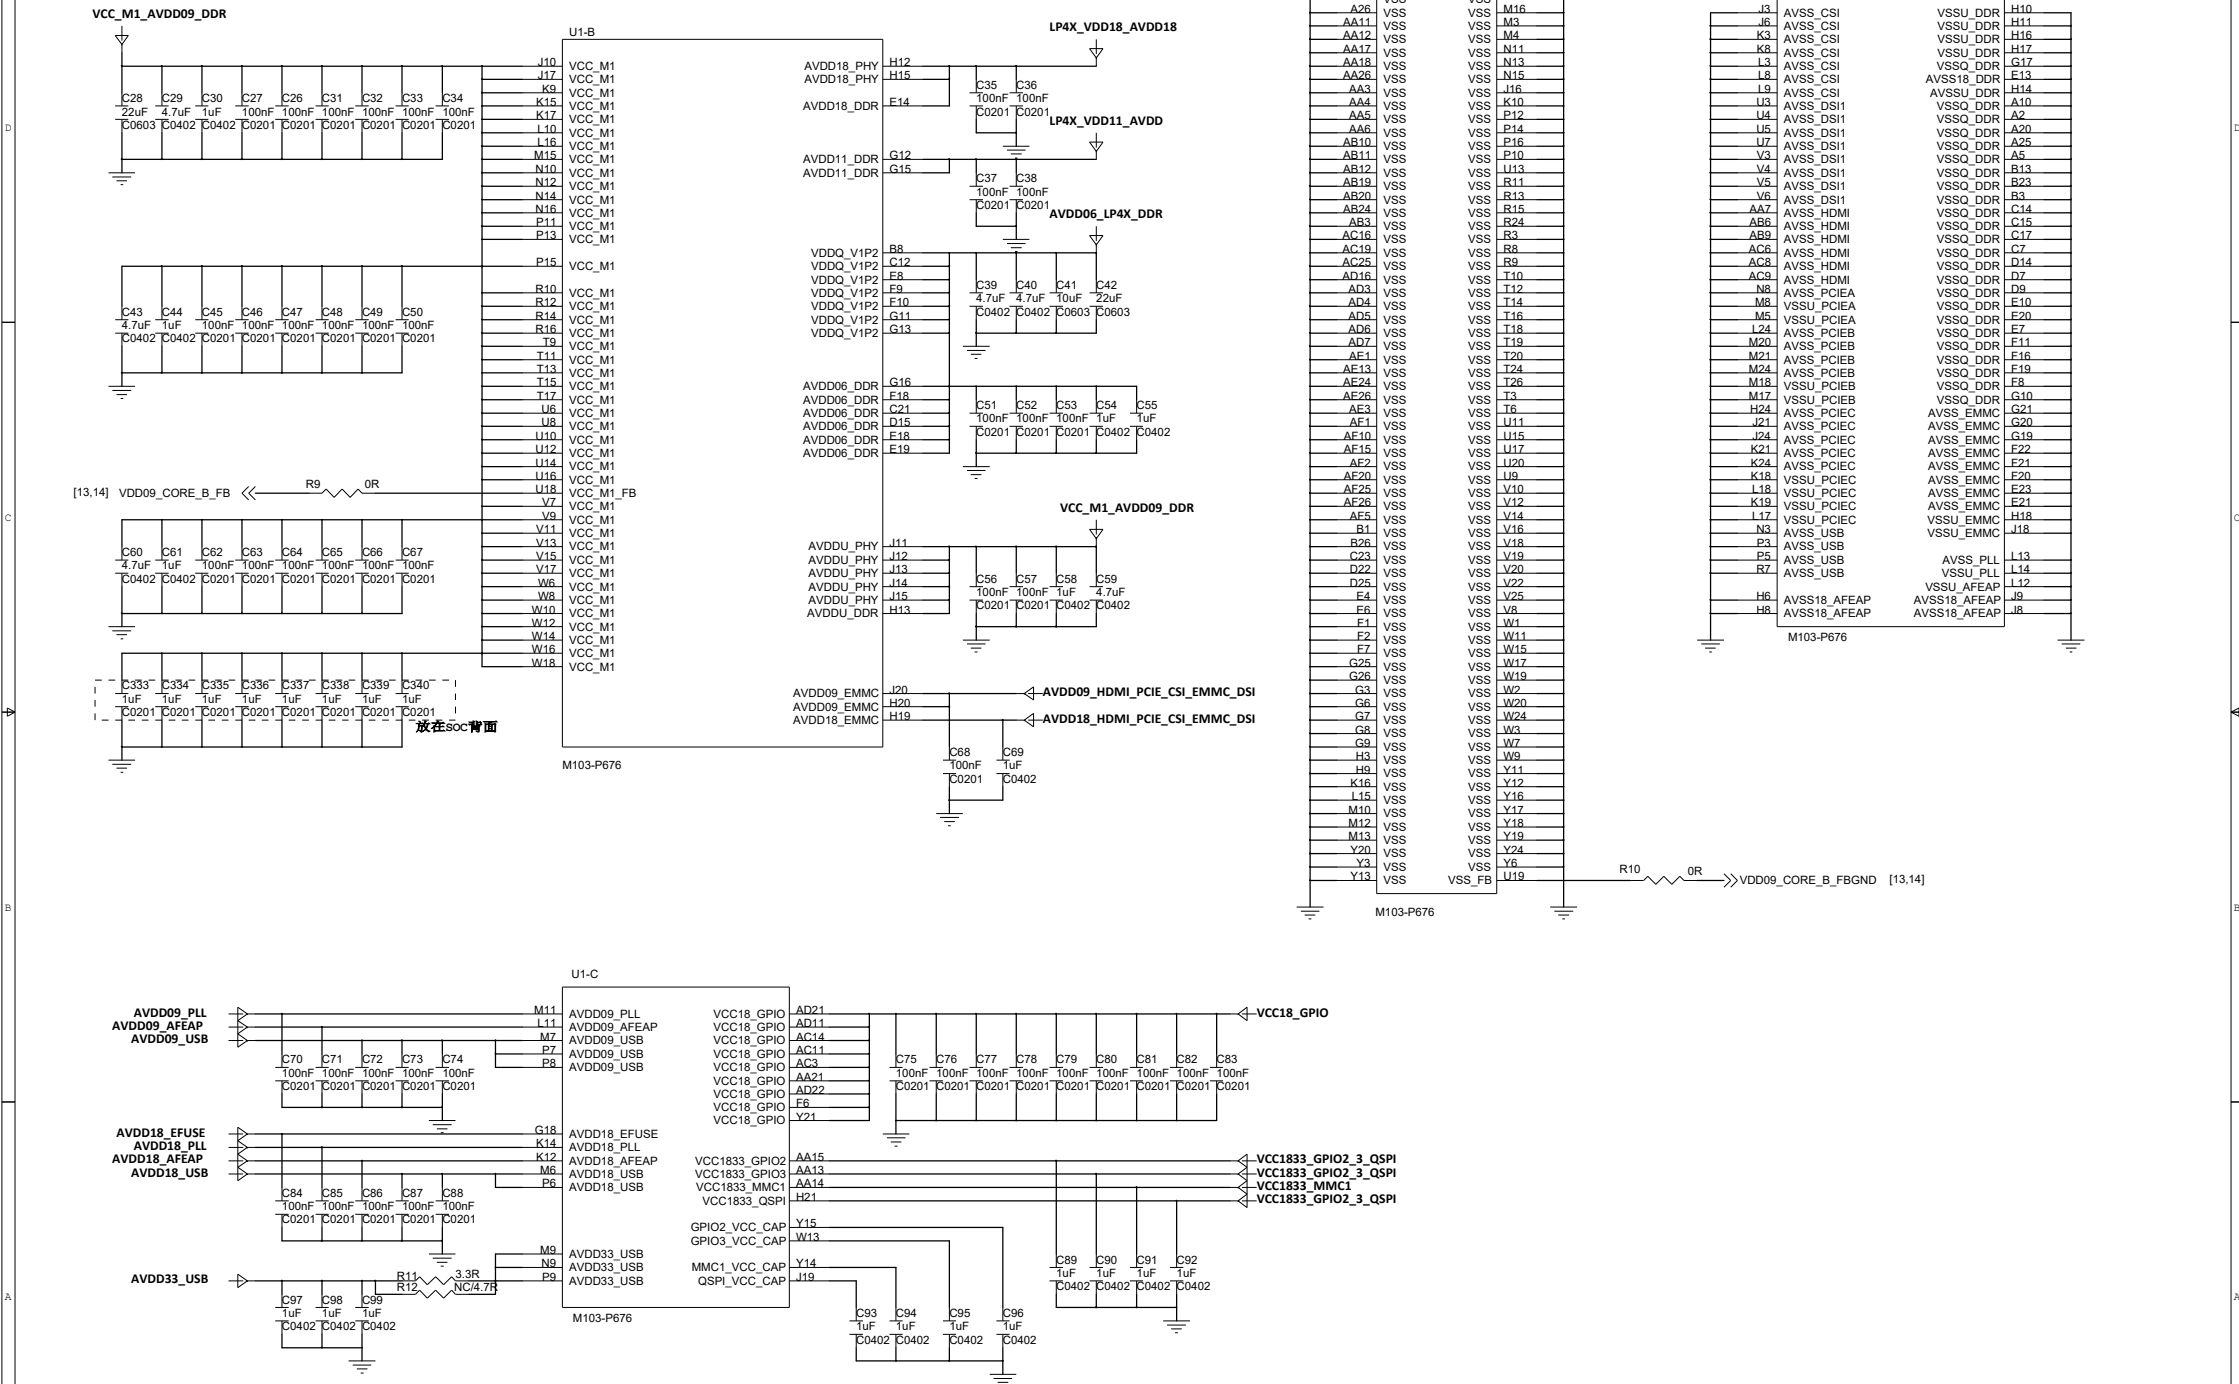


SYS-GPIO

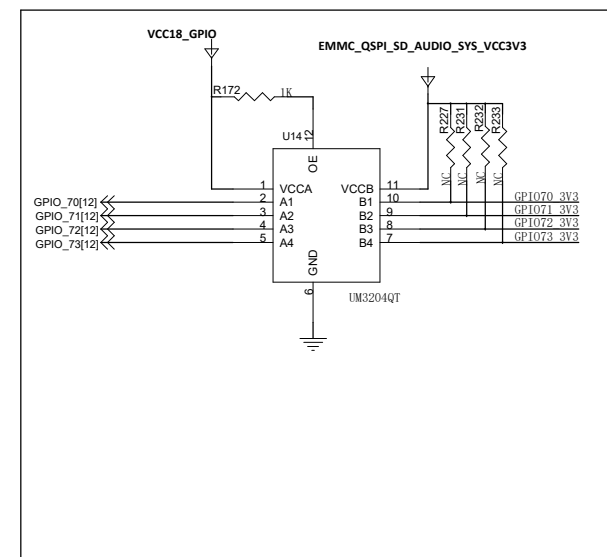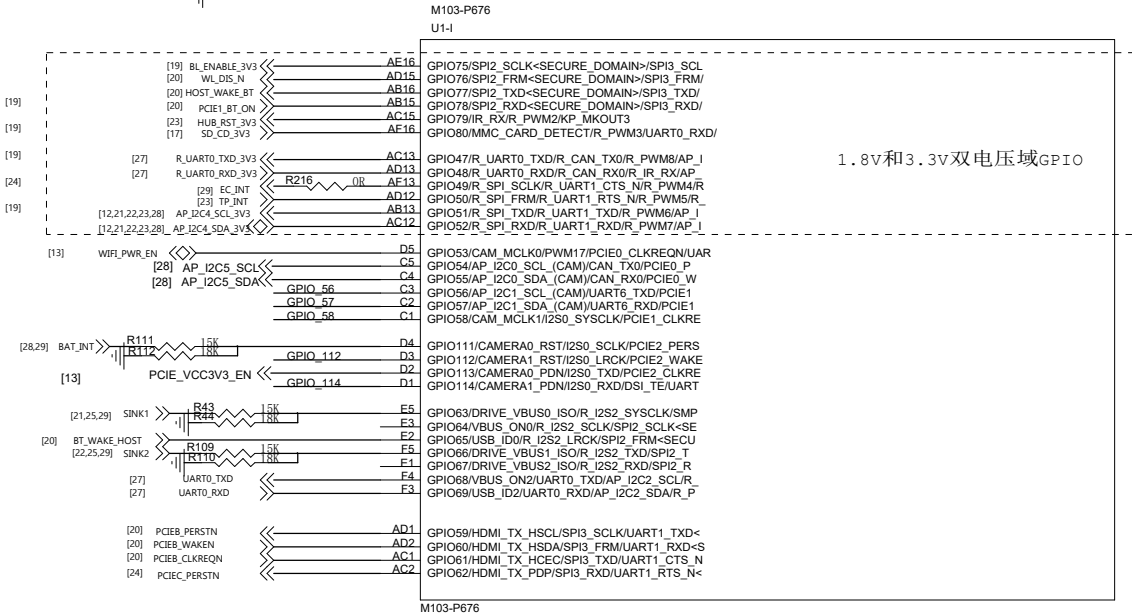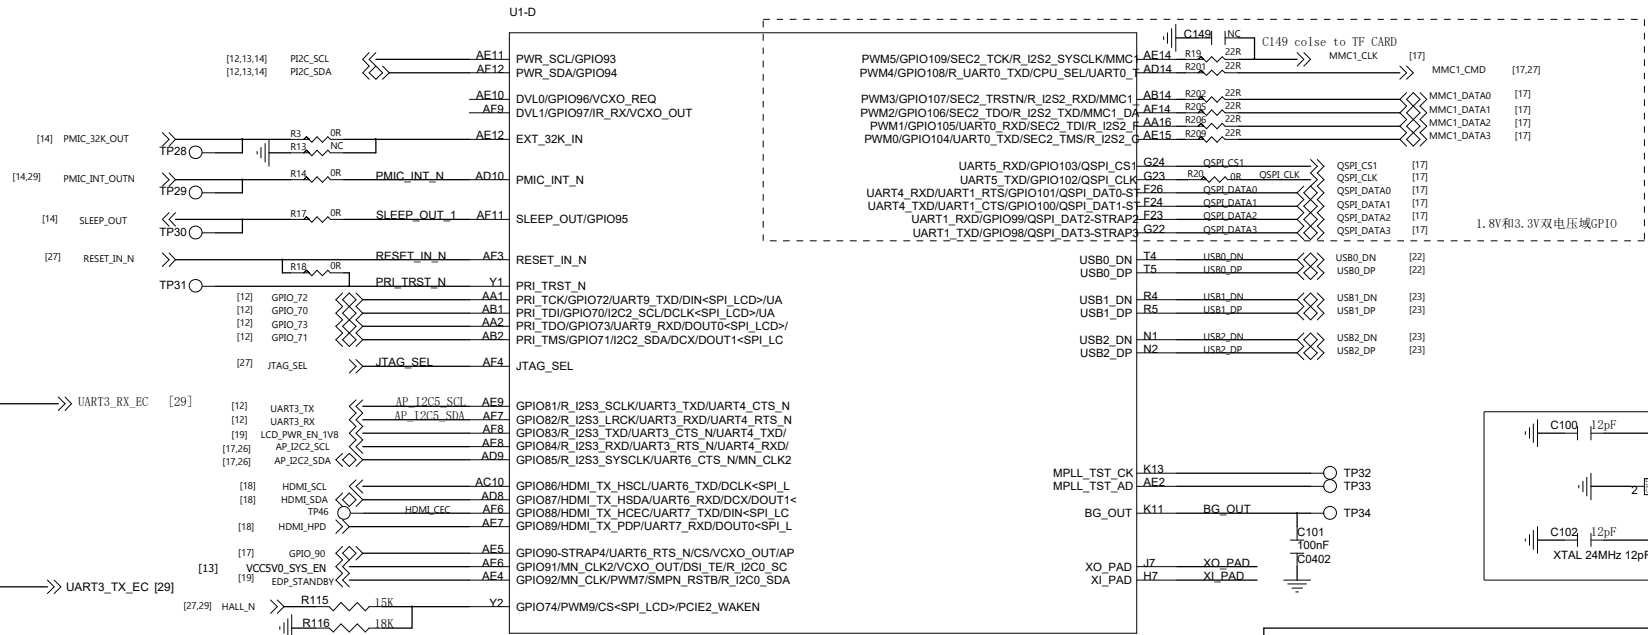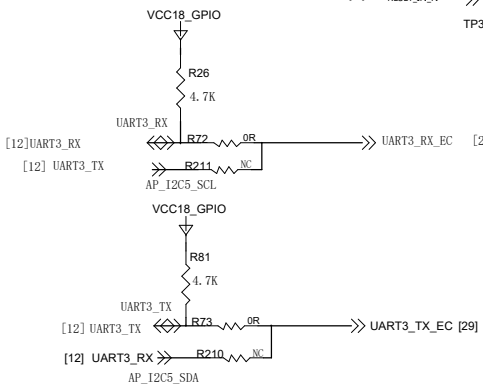


VCC5V0_SYS

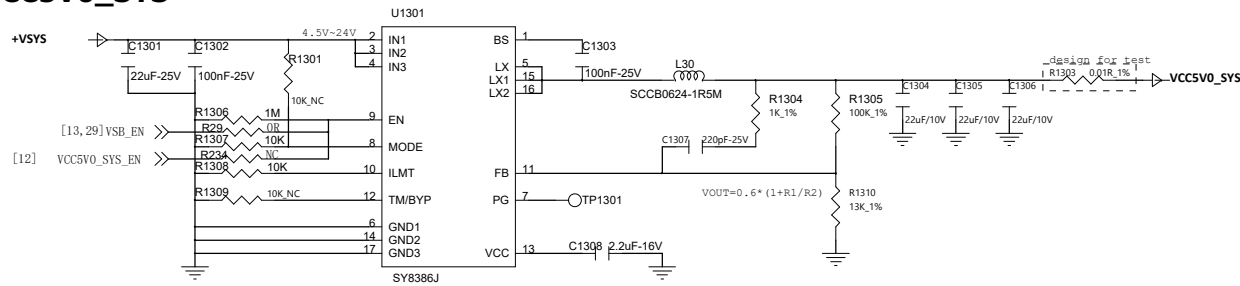


EXT_CORE_B_0V9

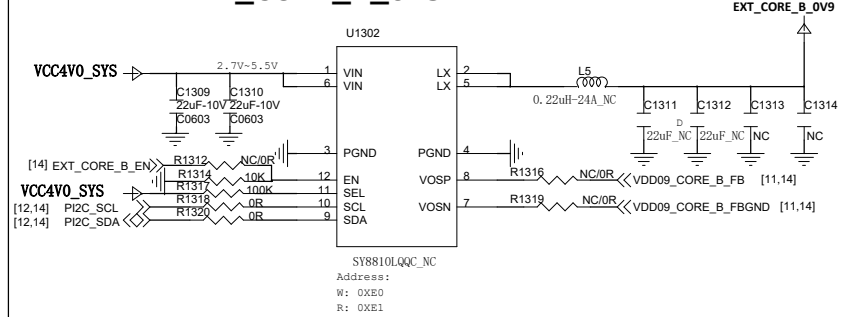


VCC4V0_SYS

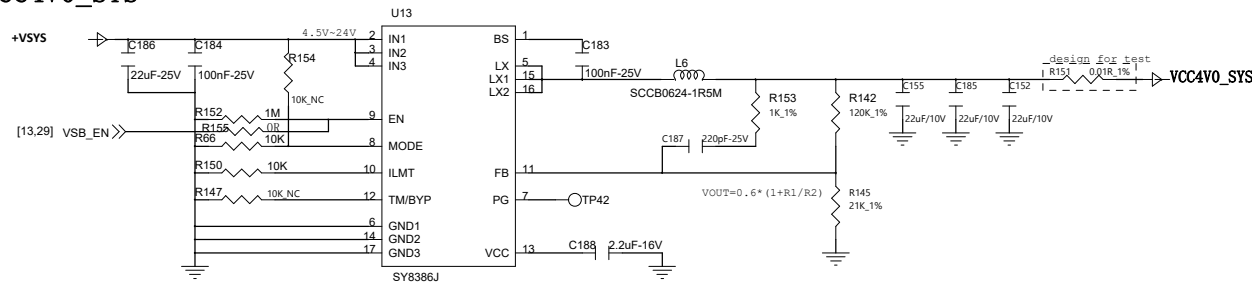


PCIE_VCC3V3


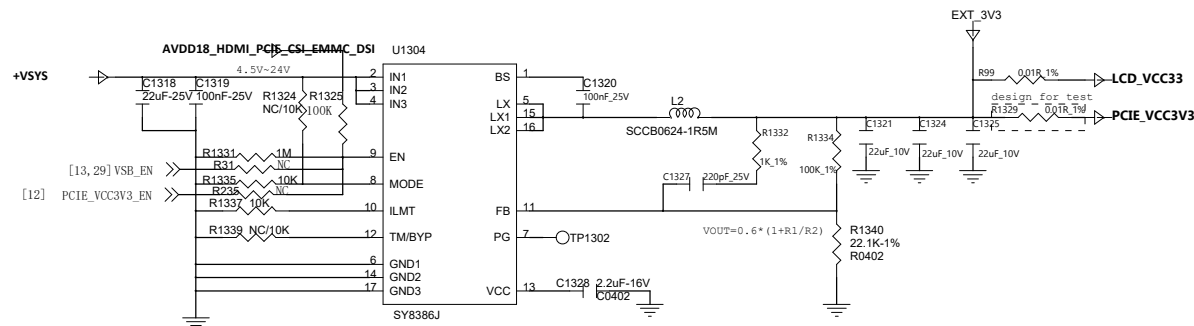


WIFI_3V3

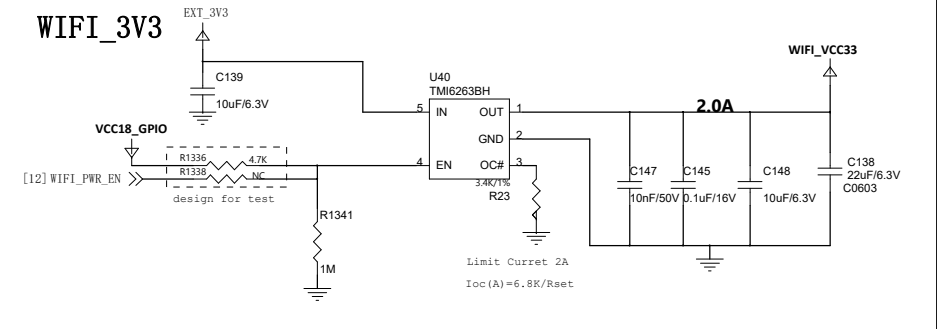

EXT_DCDC_0V6

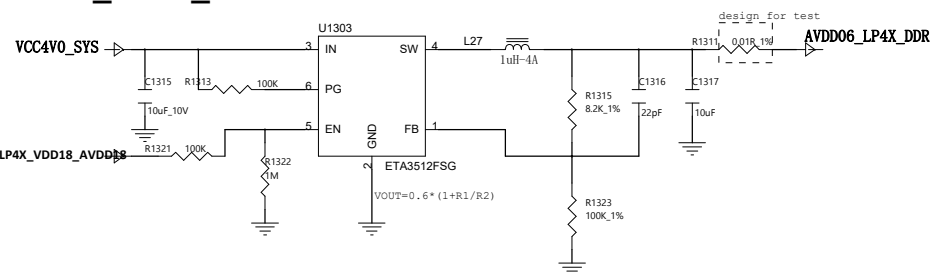

SPM8821


4



3




EMMC

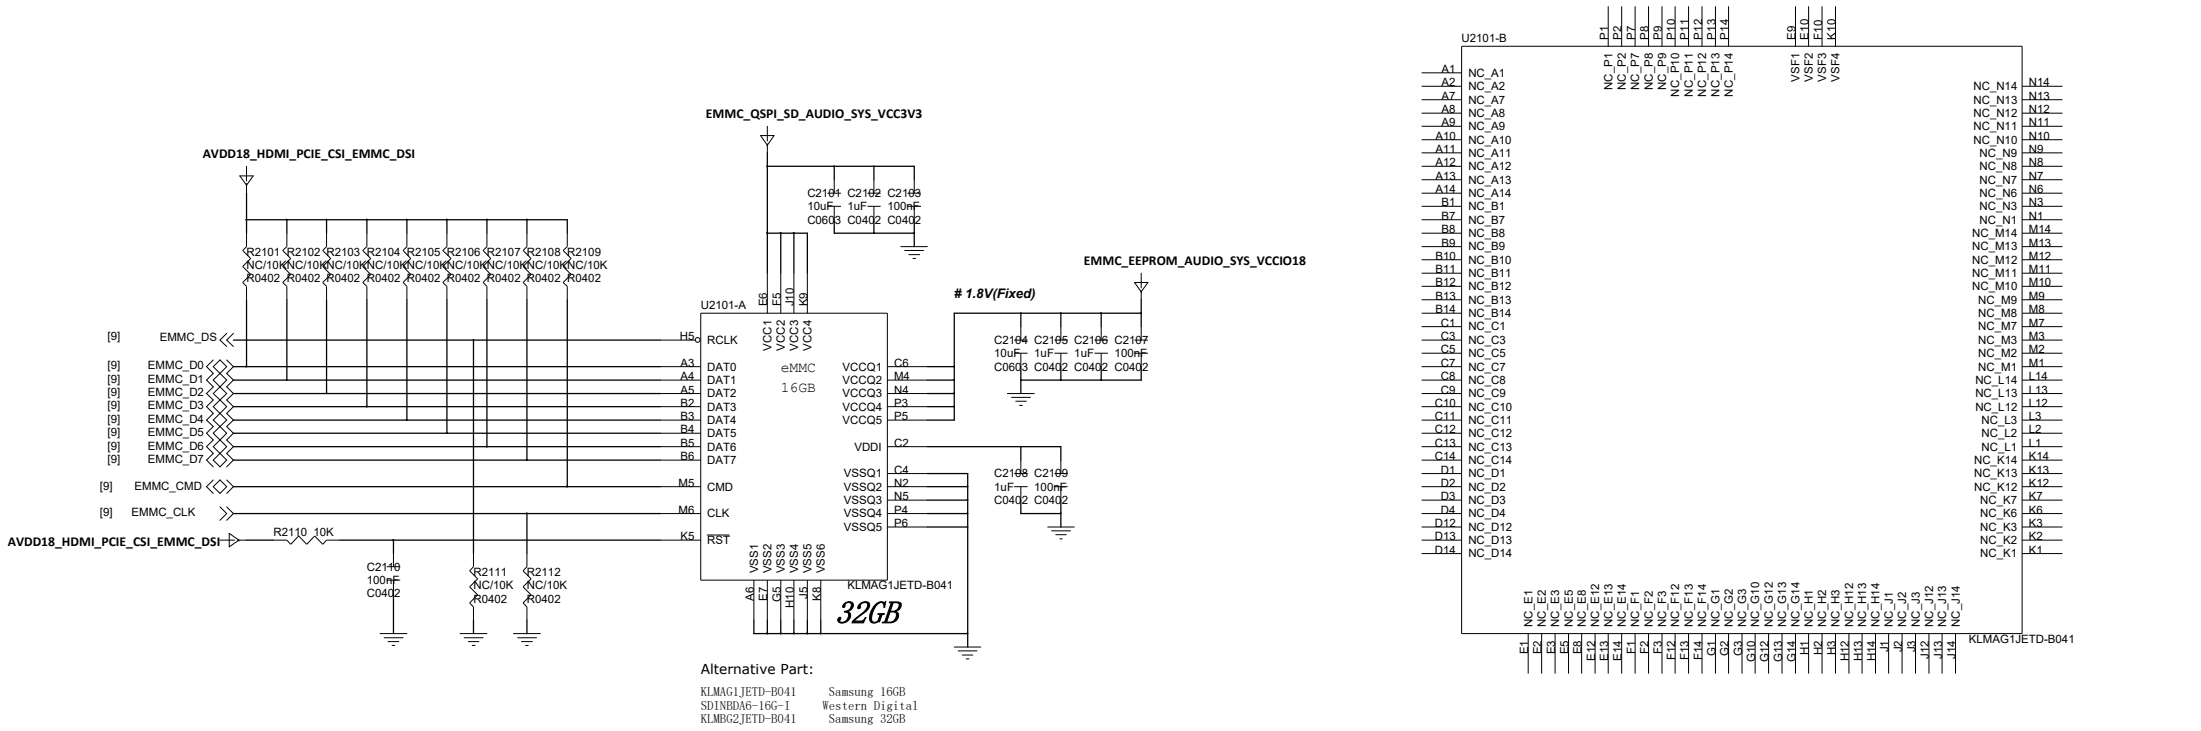


Alternative Part:
KLMAG1JETD-B041 Samsung 16GB
SDINBDA6-16G-I Western Digital
KLMB62JETD-B041 Samsung 32GB


EEPROM

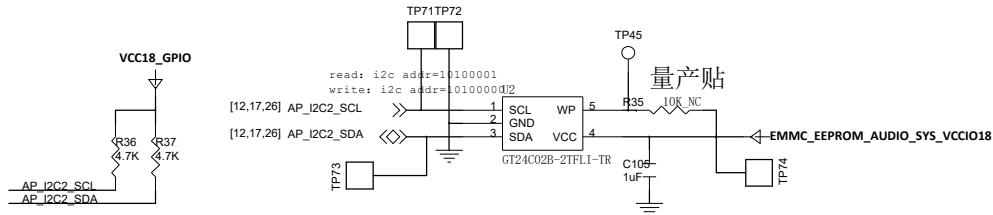


Micro SD Connector

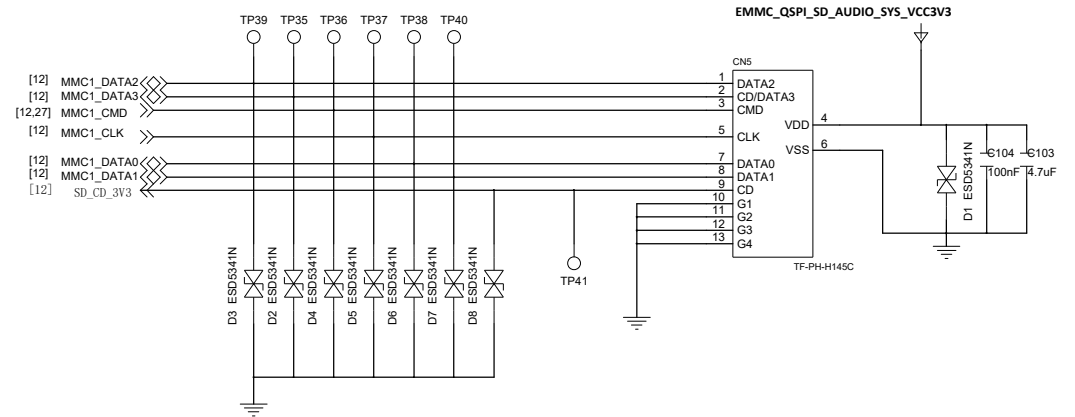

SPI FLASH

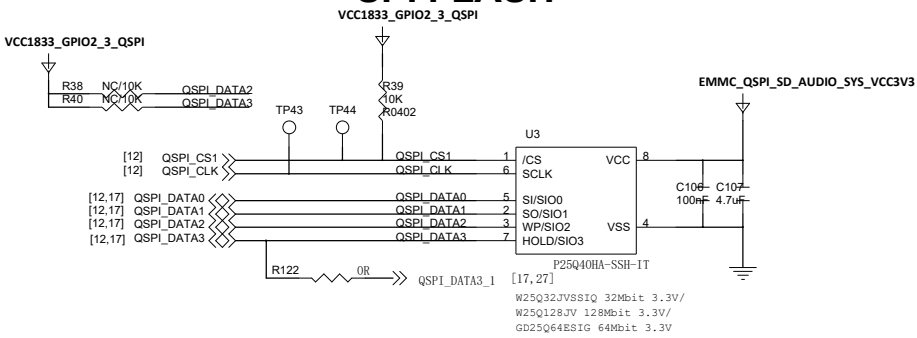

Flash Boot voltage sel

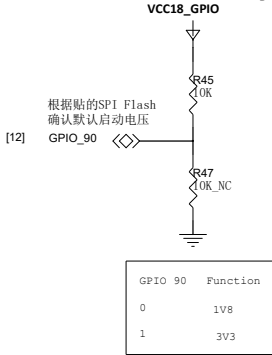

boot download sel


QSPI_DATA3	Function
0	启动
1	下载

download sel







QSPI_DATA2	Function
0	USB
1	UART

Boot SEL


QSPI_DATA3	QSPI_DATA2	Function
0	0	TF Card -> EMMC
0	1	TF Card -> SPI NOR
1	0	TF Card -> SPI NAND
1	1	TF Card -> SD

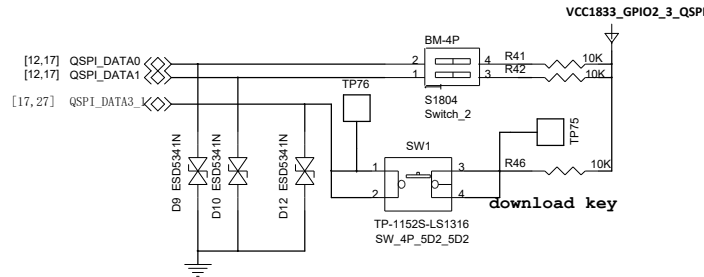





LT6711A

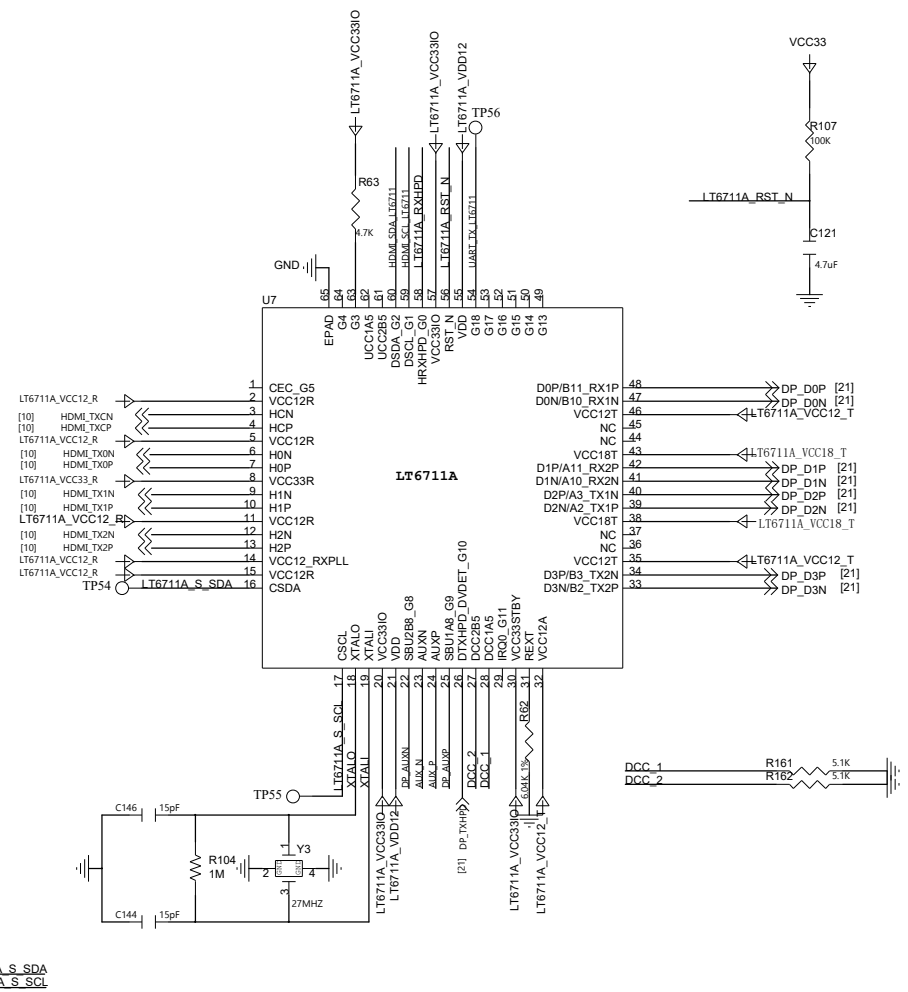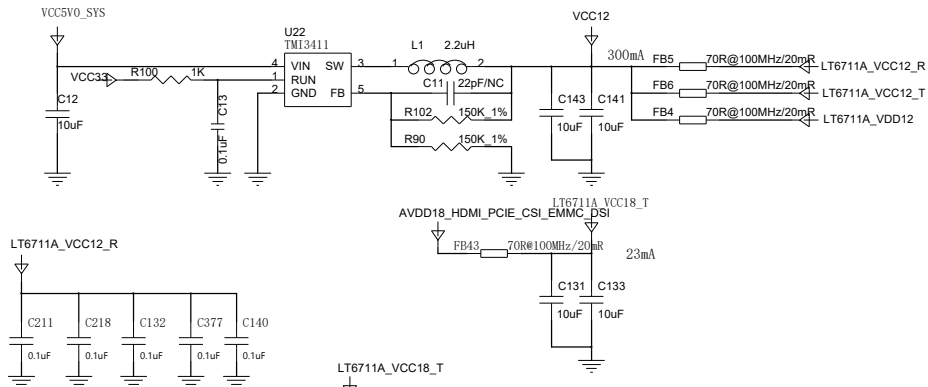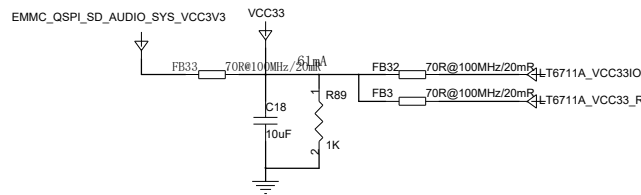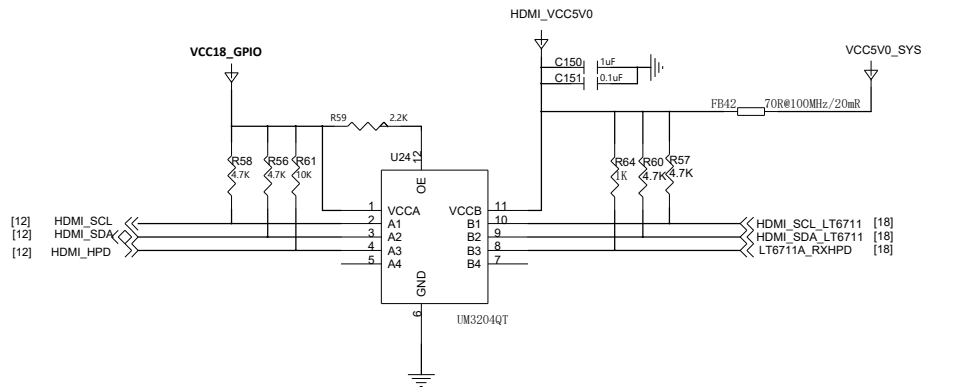



MIPI-DSI

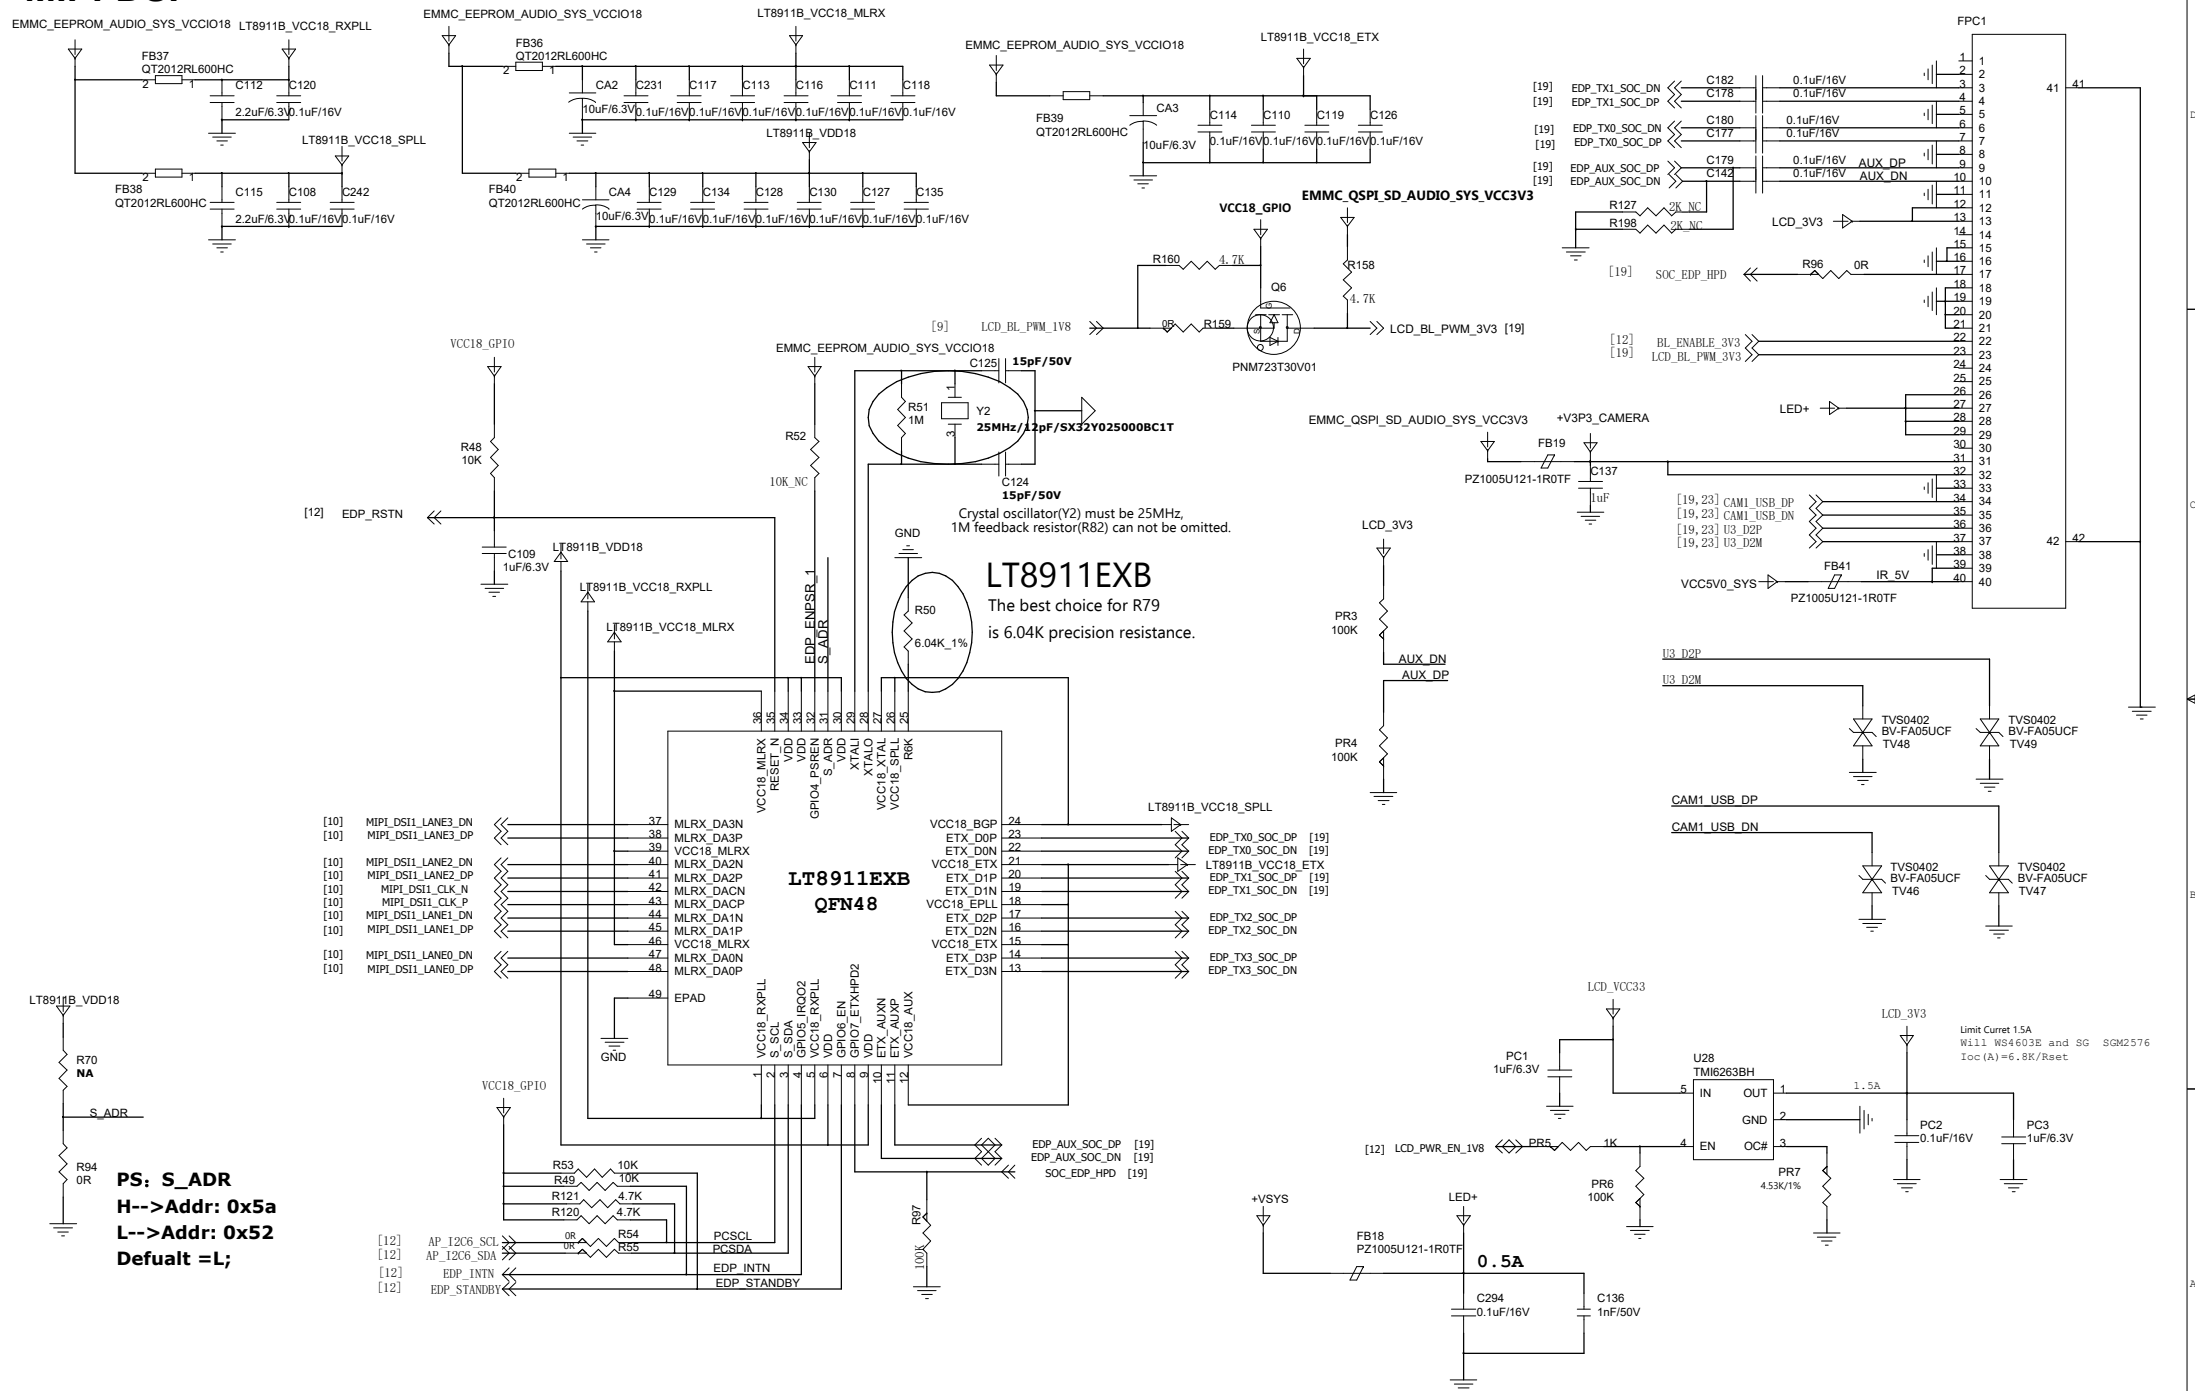

FN-6252C

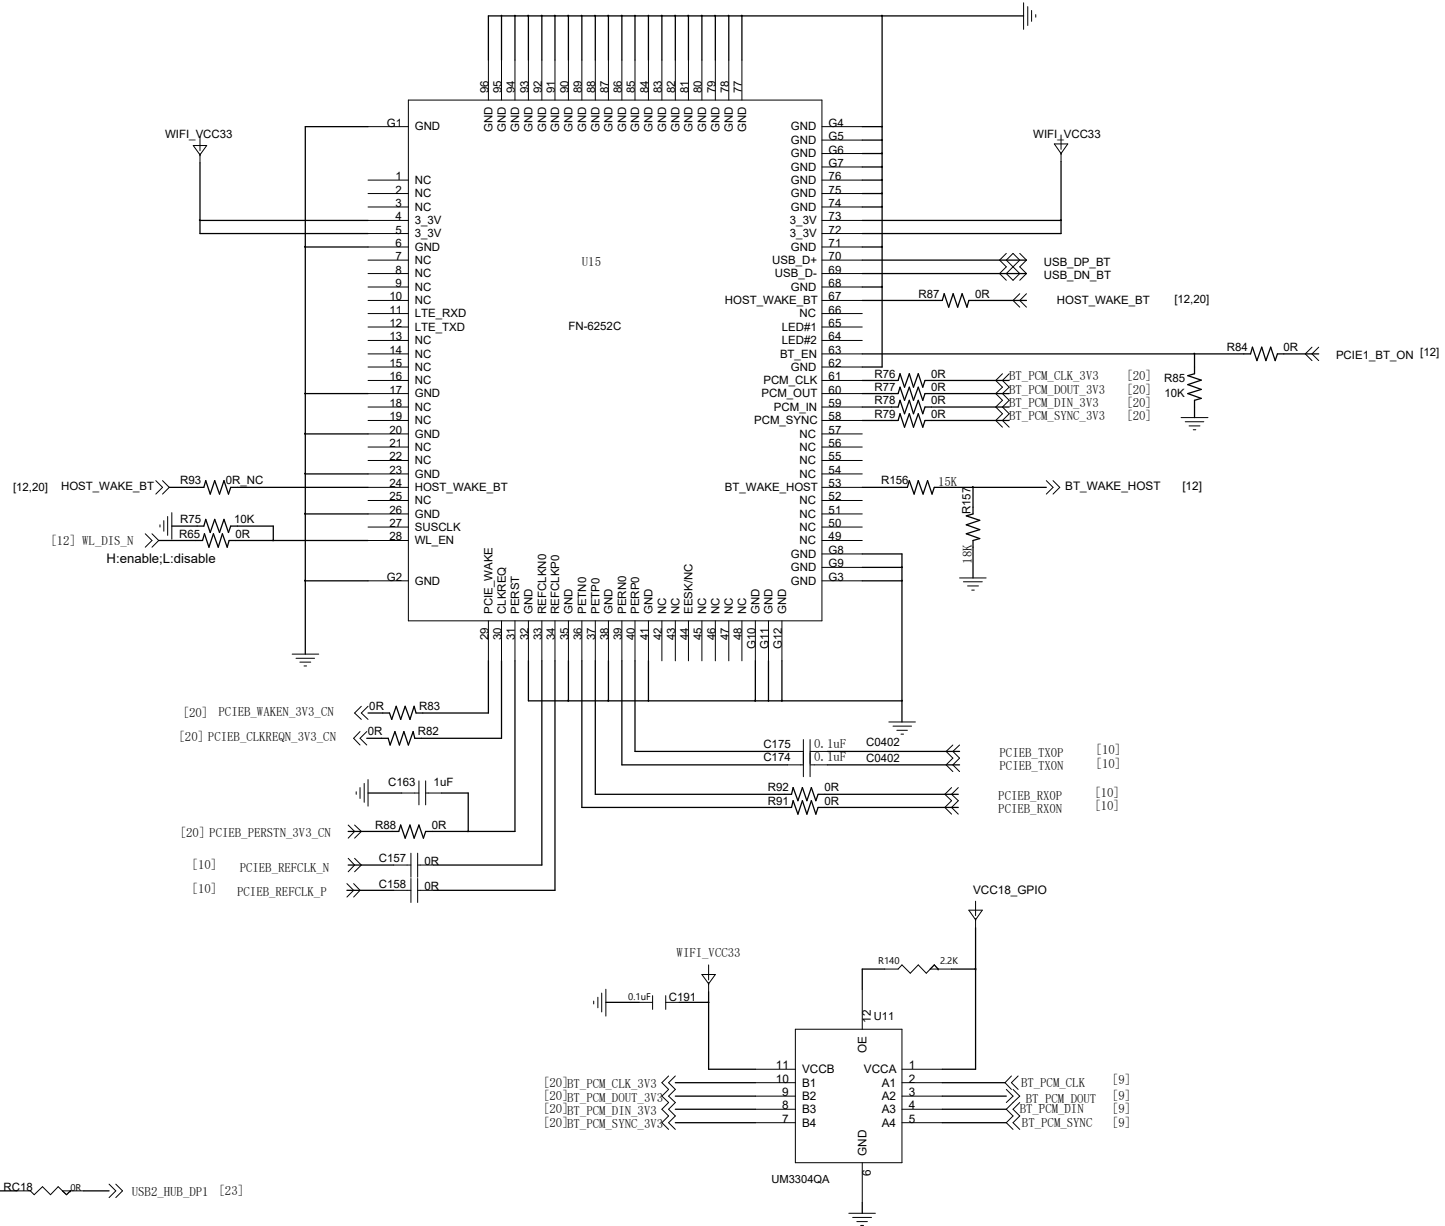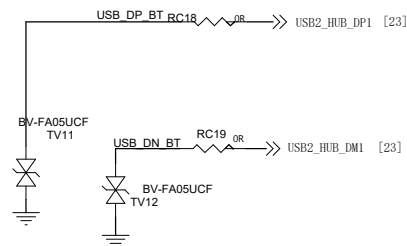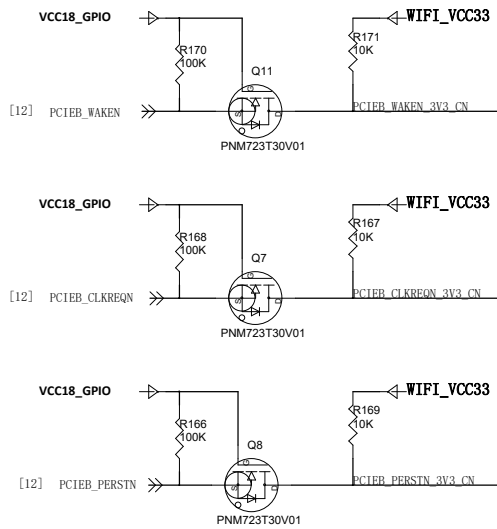




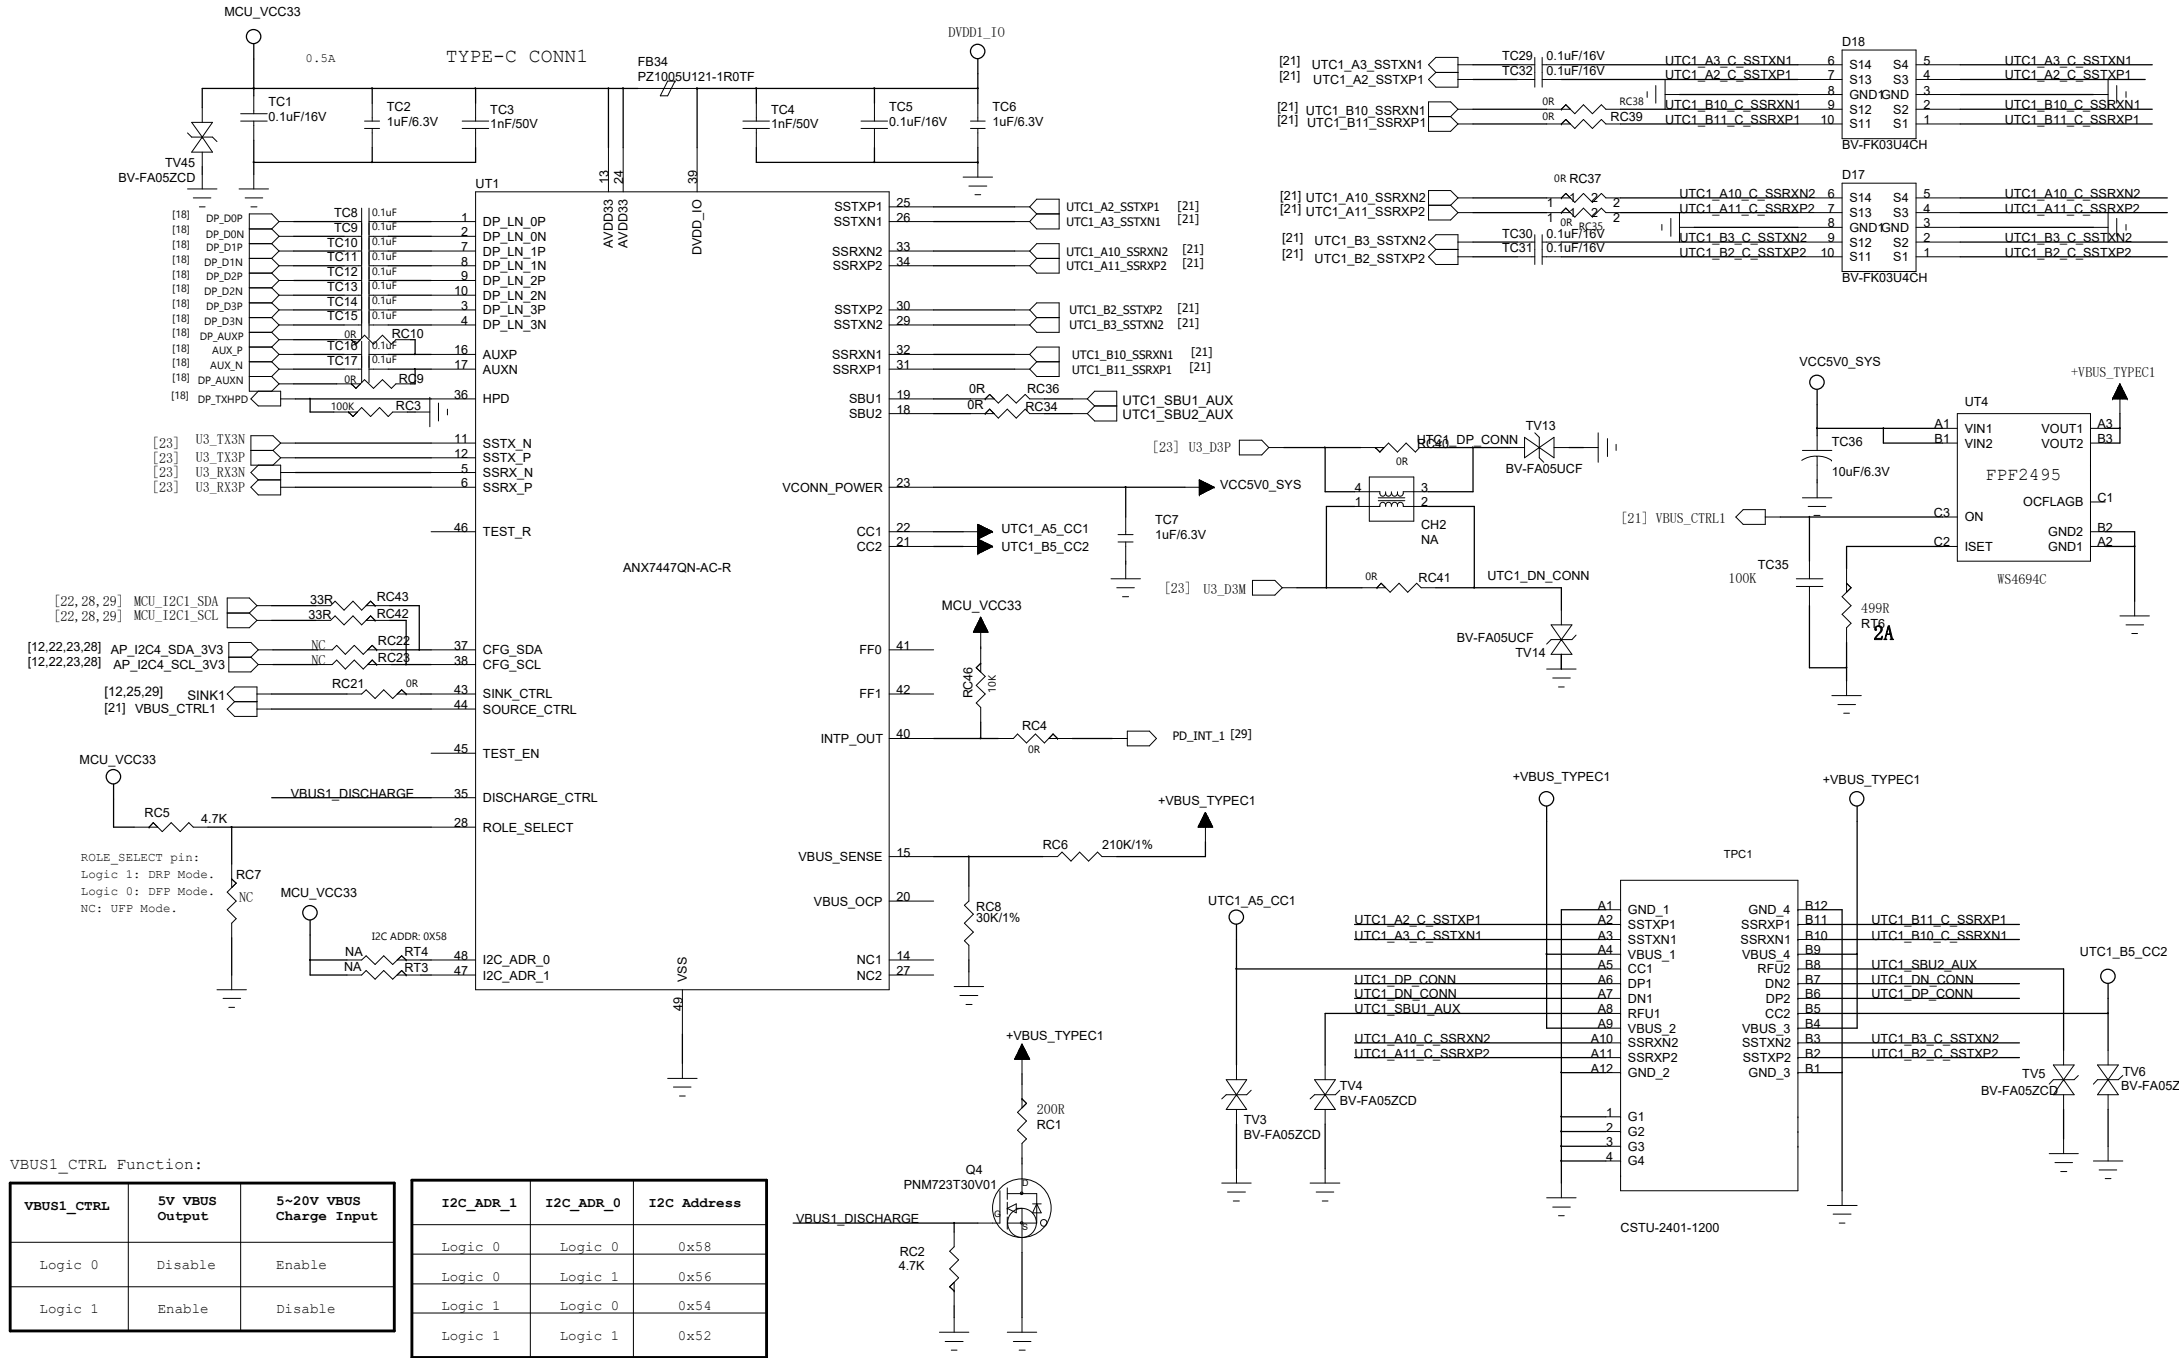


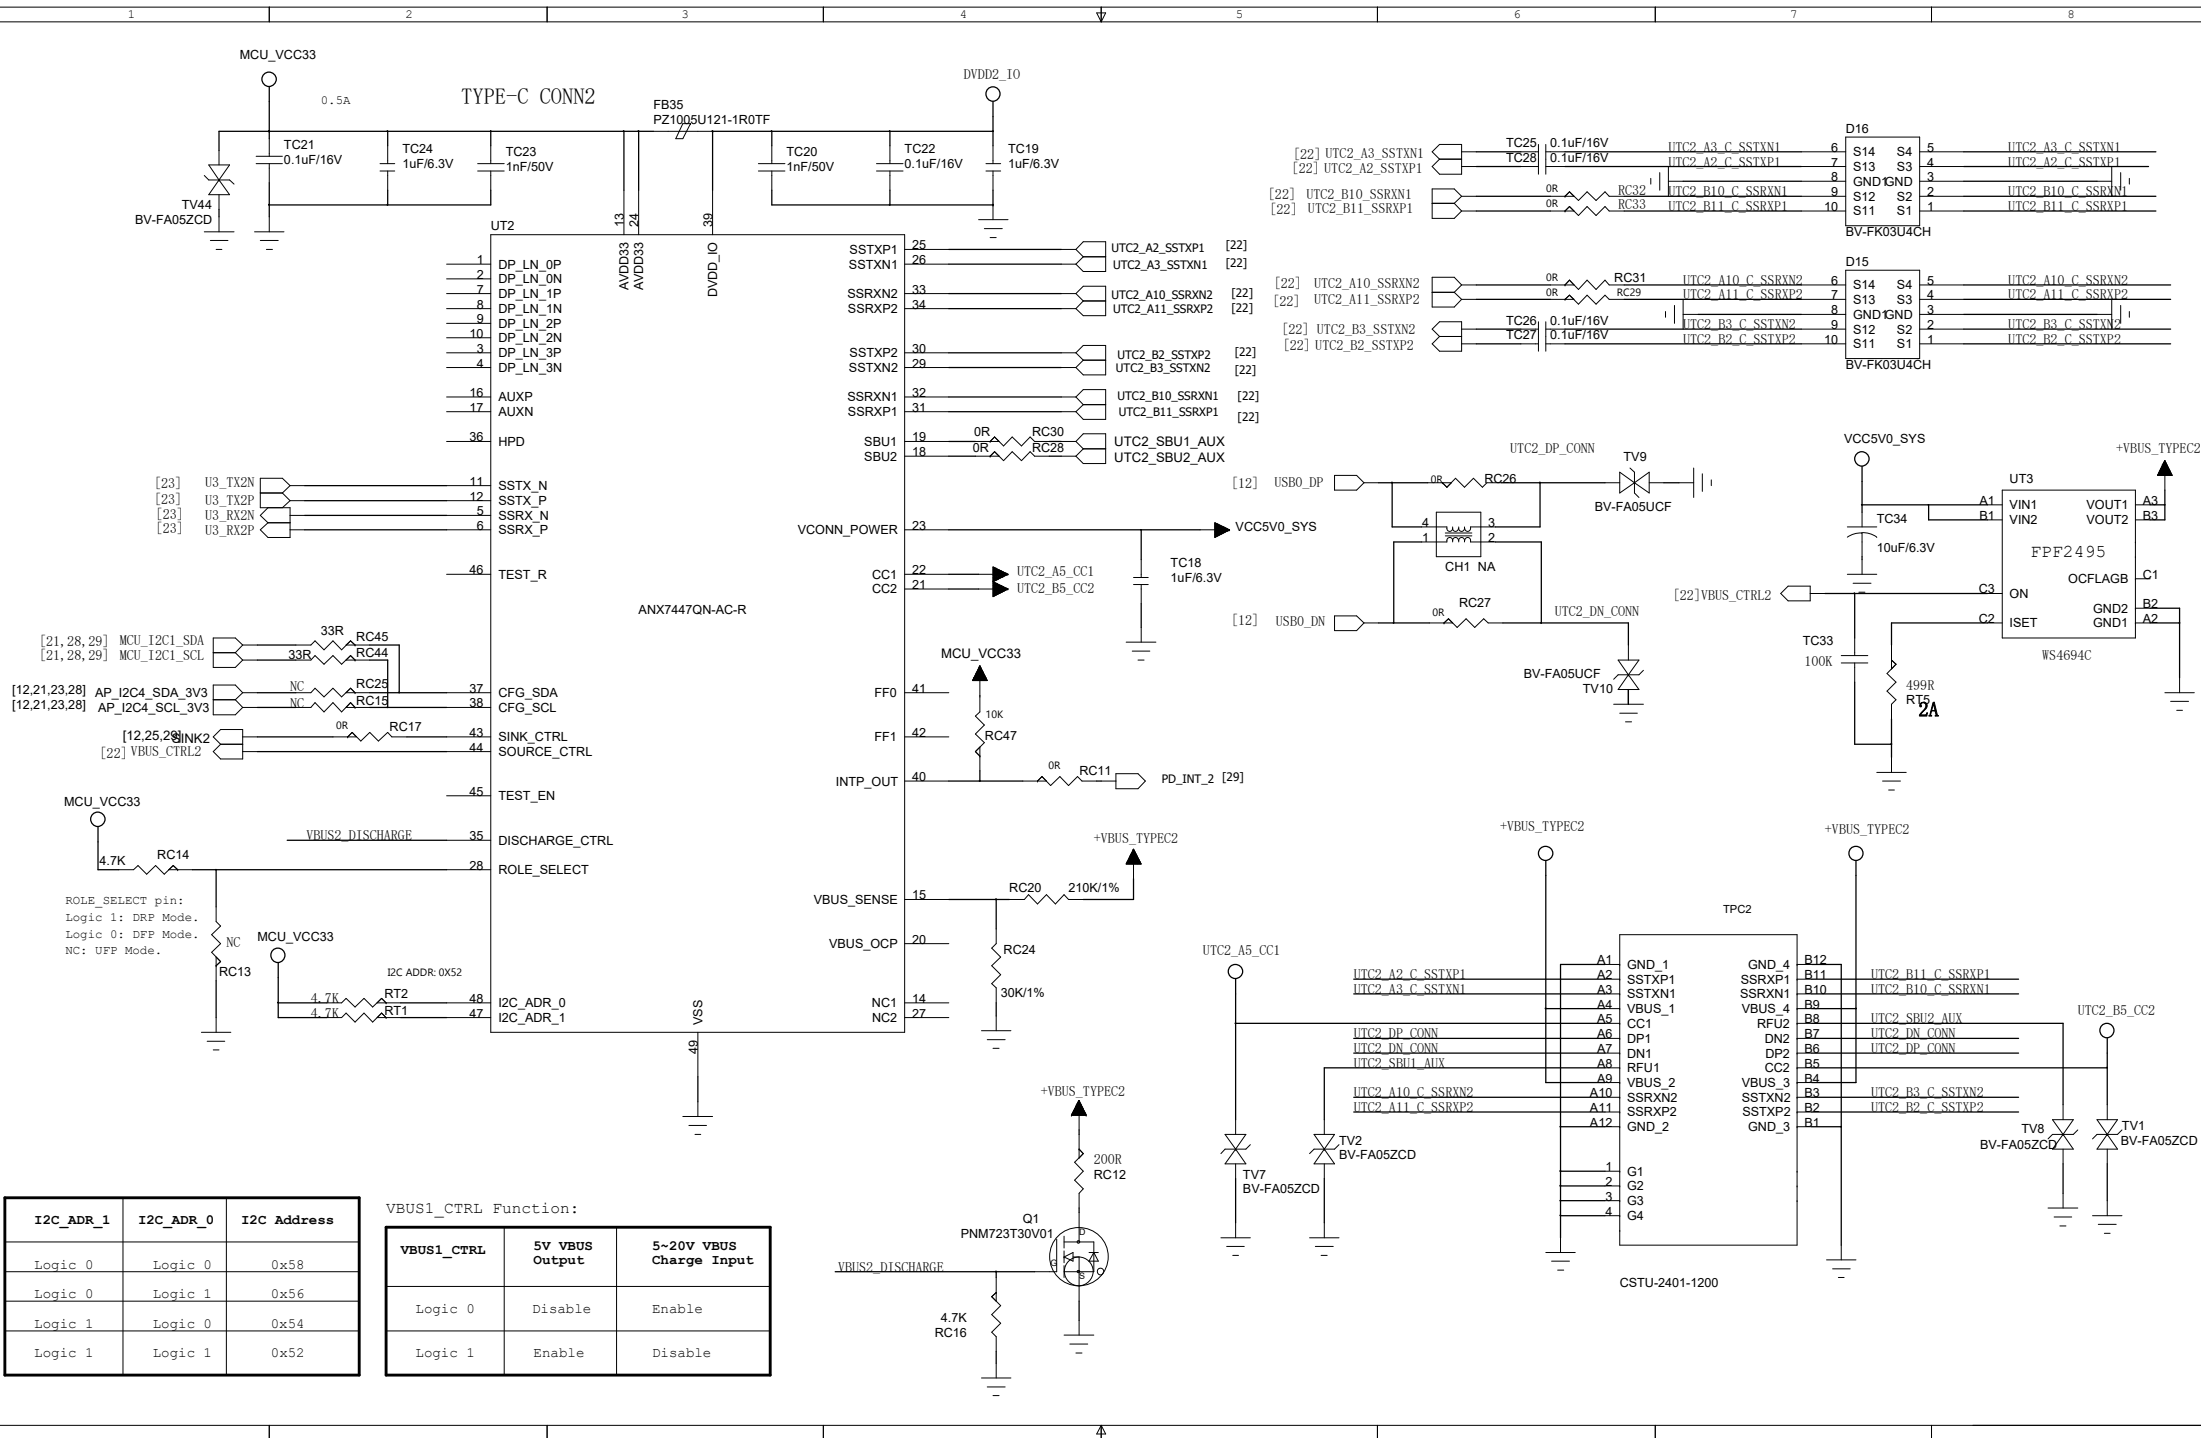



I2C_ADR_1	I2C_ADR_0	I2C Address
Logic 0	Logic 0	0x58
Logic 0	Logic 1	0x56
Logic 1	Logic 0	0x54
Logic 1	Logic 1	0x52

VBUS1_CTRL Function:		
VBUS1_CTRL	5V VBUS Output	5-20V VBUS Charge Input
Logic 0	Disable	Enable
Logic 1	Enable	Disable



Pin	Signal	Component	Value	Pin	Signal	Component	Value
[12]	USB2_ON	R219	10k	54	HSD0-		
[12]	USB2_DP	R221	10k	53	HSD0+		
[10]	USB3_RXN	C206	100nF	48	SSTX0-		
[10]	USB3_RXP	C202	100nF	48	SSTX0+		
[10]	USB3_TXN	C209	100nF	51	SSRX0-		
[10]	USB3_TXP	C204	100nF	51	SSRX0+		
	HUB_3V3	R217	10k	45	VBUSDET(3_3V)		
	HUB_3V3	R225	10k	44	RESET#		
	HUB_3V3	C213	10k	24	EXTPWRRON(H=EX_POWER)		
	HUB_3V3	R218	NC	44	TESTEN(L=NORMAL)		
	HUB_3V3	R229	10k	57	SSRXEXT(6K04)		
	HUB_3V3	R222	4.7k	23	SSRX1-		
	HUB_3V3	R230	5.04k 1%	23	SSRX1+		
	HUB_3V3	HUB_XI		55	SSX1(25M)		
	HUB_3V3	HUB_XO		56	SSX0(25M)		
	VCC5V0_HUB			38	VCC5(1_1V_DCDC)		
	HUB_3V3	C219	10uF	20	VCC5(3_3V_LDO)		
	HUB_3V3			21	VCC330		
	HUB_3V3			52	VCC33_L0		
	HUB_3V3			53	VCC33_L1		
	HUB_3V3			63	VCC33_L2		
	HUB_3V3			64	VCC33_L3		
	HUB_3V3			73	VCC33_L4		
	HUB_3V3			43	VCC33D1		
	HUB_3V3			44	VCC33D2		
	HUB_3V3			55	VCC33M		
	ST_3V3 <- HUB_RST_3V3						
	HUB_1V1			49	VCC11_L0		
	HUB_1V1			3	VCC11_L1		
	HUB_1V1			6	VCC11_L2		
	HUB_1V1			12	VCC11_L3		
	HUB_1V1			61	VCC11_L4		
	HUB_1V1			67	VCCD1		
	HUB_1V1			9	VCCD2		
	HUB_1V1			22	VCCD3		
	HUB_1V1			46	VCCD4		
	HUB_1V1			75	VCC11M		
	HUB_1V1			39	LX		
	HUB_1V1			40	VCC11FB		
	HUB_1V1			32	USBLED4_ / SPICS		
	HUB_1V1			33	USBLED3_ / SPI0		
	HUB_1V1			34	USBLED2_ / SPICK		
	HUB_1V1			35	USBLED1_ / SPI1		
	HUB_3V3	R249	10k	36	GPI02/SMCLK/USBHD		
	HUB_3V3	R250	10k	37	GPI01/SMDAT/USBSUS		

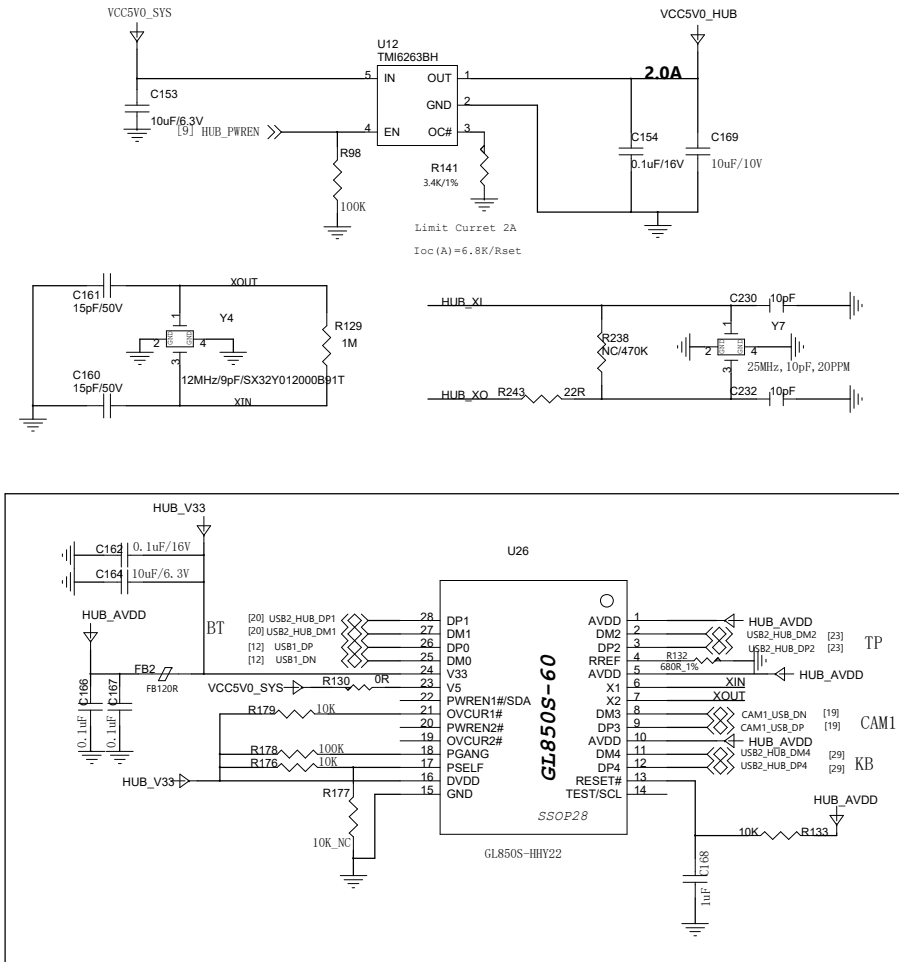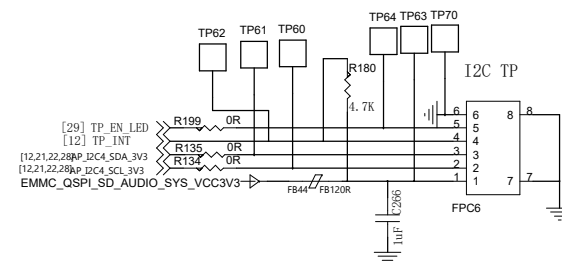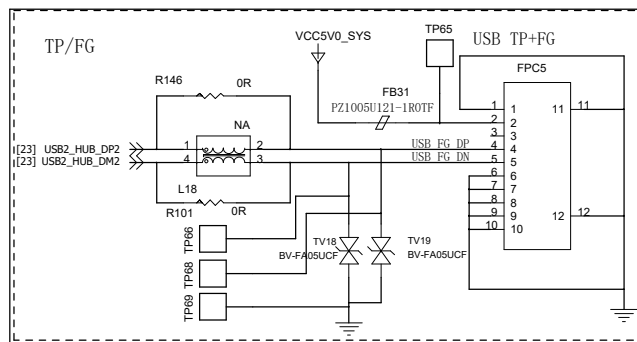


PCIEB

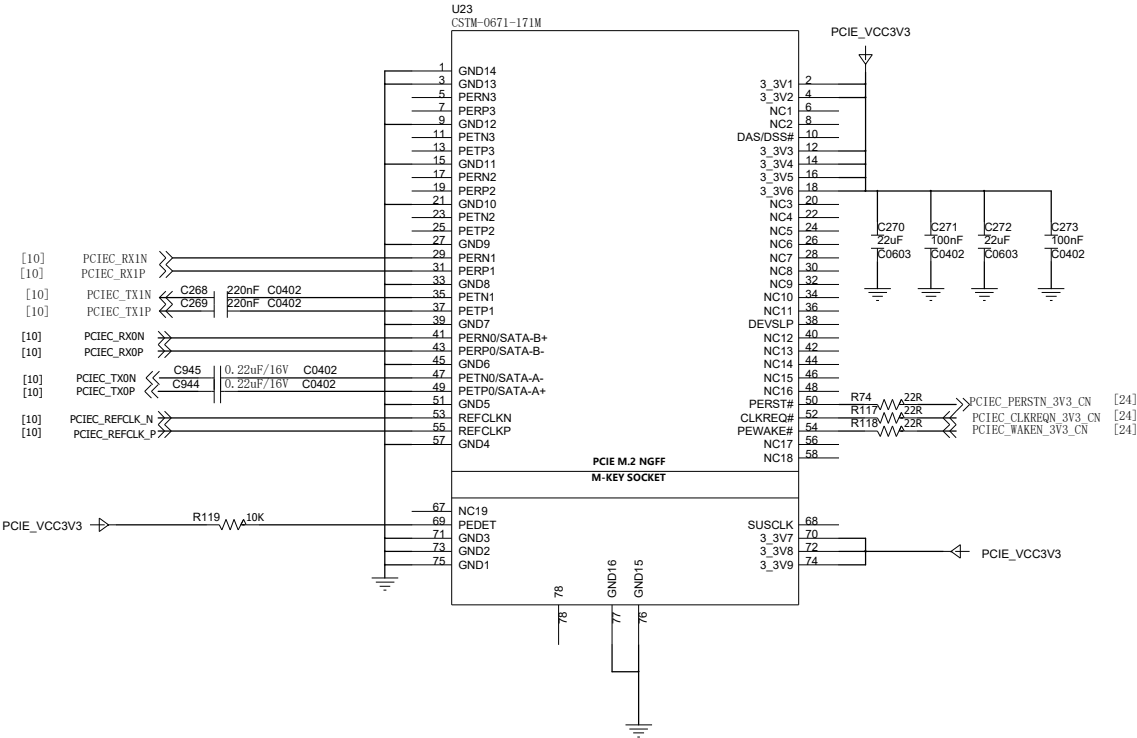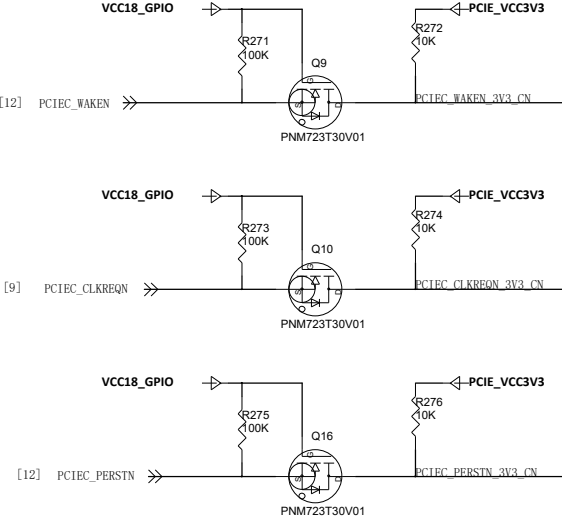


REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

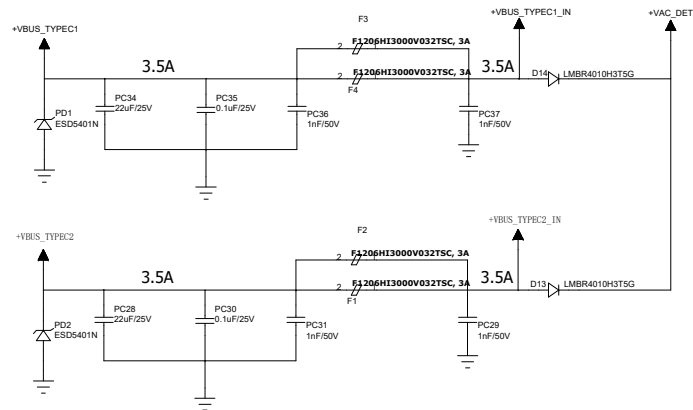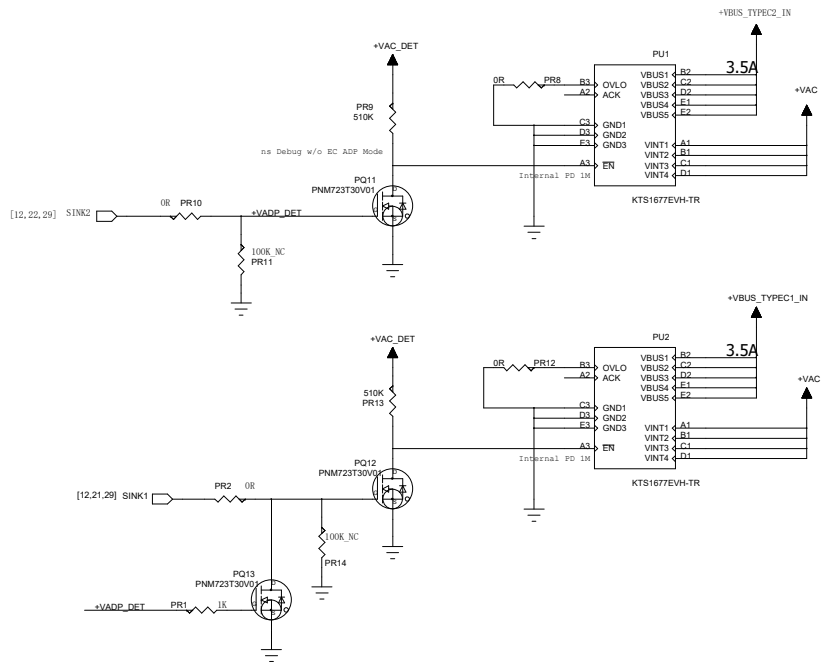


REST

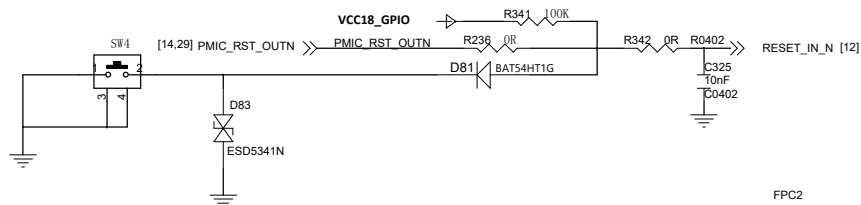

PowerON

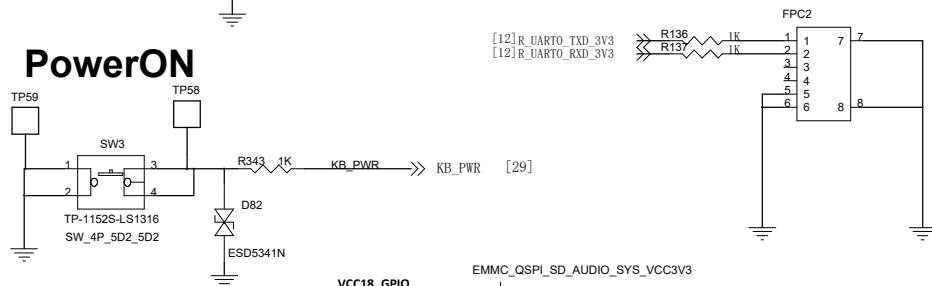


X60 DEBUG

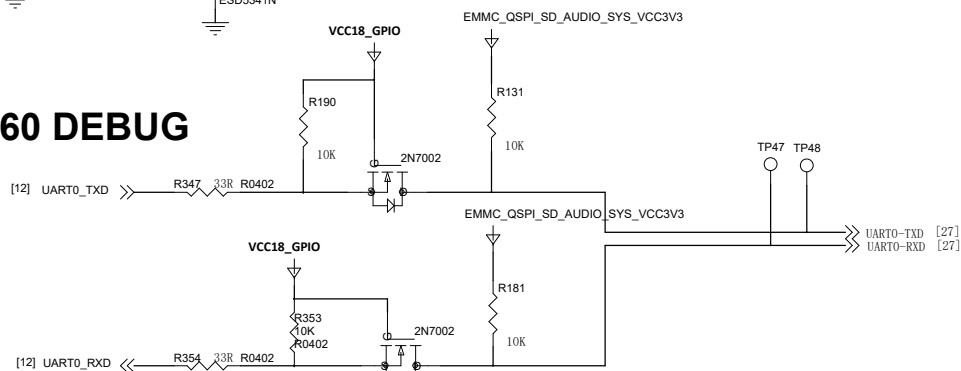


JTAG SEL


SEC JTAG SEL & Route

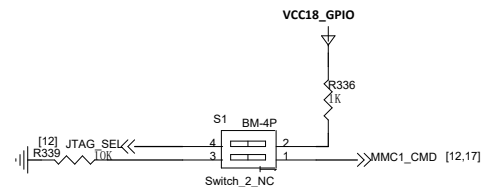



JTAG_SEL	Function	MMC1_CMD	JTAG Route
0	Other	0	X60
1	JTAG	1	N308

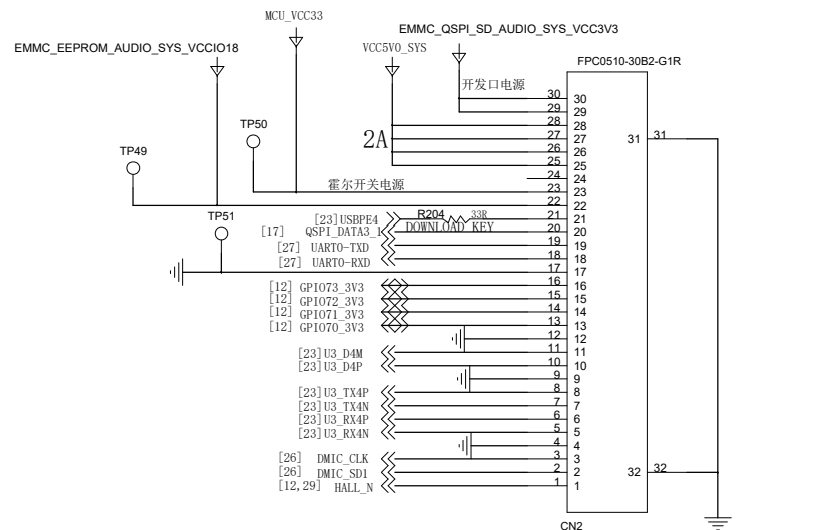

USB3.0 JACK

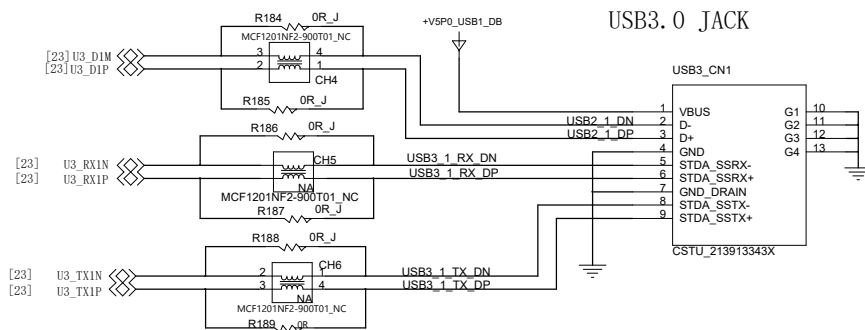

USB SWITCH

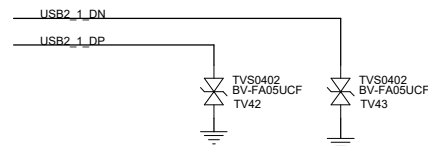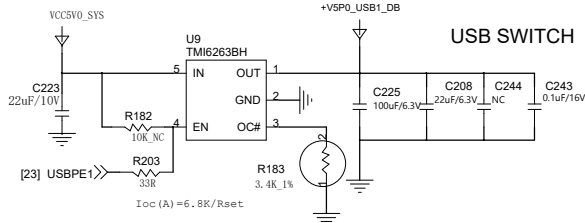

USB3_1_RX_DN	S14	S4	5	USB3_1_RX_DN
USB3_1_RX_DP	S13	S3	4	USB3_1_RX_DP
USB3_1_TX_DN	S12	S2	2	USB3_1_TX_DN
USB3_1_TX_DP	S11	S1	1	USB3_1_TX_DP

BV-FK03U4CD

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

