Online Prescribed Error Sensivity Decoder Learning in Neuromorphic Residual UAV Attitude Control

Gandhi Contreras[1], Steven Sandoval[1], and Luis Rodolfo Garcia Carrillo[2]

***Abstract*— Quadrotor attitude controllers must track time-varying references while respecting coupled rotor-force limits under uncertainty, noise, and disturbances. We propose an online neuromorphic residual in which six continuous membrane-gate (CMG) units generate temporal features and eighteen decoder weights adapt online via prescribed error sensitivity (PES). The residual adds a bounded correction to a saturated quaternion PD controller before rotor-force allocation: it enforces explicit authority bounds, exactly recovers the baseline when disabled, and uses a saturation-aware output gate that prevents opposing an axis already at its torque limit. Against a bandwidth-tuned PD with desired-rate feedforward (PD+ff), the gated residual reduces geometric-mean attitude error by 37.3% (X2) and 22.4% (CF2) noise-free, and reduces burst-phase error under repeated torque disturbances by 14% and 6%. With sensor noise, it preserves 4–11% gains on multi-axis missions and is neutral or slightly negative at the noise floor. Under the same tuned PD+ff baseline, an Izhikevich basis increases geometric-mean error by 18.9% (X2) and 5.4% (CF2) at about twice the realized CMG effort. Ablations trace the benefit to the graded sub-threshold regime of the CMG readout: a reduced, non-latching CMG reaches 46.3% (X2) and 28.6% (CF2) at comparable effort. The residual can be paired directly with LQR, sliding-mode, and model-predictive baselines, and in simulation improves tracking across the tested families and platforms.**

I. Introduction

Classical feedback provides an interpretable stabilizing backbone for quadrotor attitude control, but unmodeled effects and abrupt disturbances can leave structured tracking errors that are hard to remove without retuning or increasing actuator demand. Residual control adds an adaptive correction around an existing feedback law while preserving its plant and actuator interface.

Residual learning has been paired with classical controllers in robotics [1], including geometric $\mathcal{L}_1$ quadrotor augmentation [2]. Related brain-inspired UAS controllers combine model-based feedback with learned terms [3], [4]. Neuromorphic platforms support stateful adaptive corrections through the Neural Engineering Framework and online decoder learning [5], [6], commonly using the local prescribed-error-sensitivity (PES) rule [7]. NEF-based spiking controllers have been designed for quadrotor dynamics with fixed, not online-adapted, weights [8]. More recently, self-tuning spiking PID control has been demonstrated for a quadrotor [9]. However, continuous membrane–gate features for actuator-aware quaternion residual control, and the separate roles of neuron dynamics and decoder learning, remain insufficiently characterized. This gap is especially relevant for real-time execution. The coupled membrane–gate (CMG) dynamics are continuous and integrated with a fixed-step update (Sec. III), avoiding the step-size collapse and numerical drift concerns that can arise with stiff event-driven spiking models. Learning uses the local PES rule, so online adaptation requires only instantaneous error and activity and avoids the memory and replay overhead of backpropagation-through-time [7], [10].

We study a bounded online residual controller for quaternion UAV attitude tracking under individual rotor-force limits. A saturated quaternion PD(+ff) baseline supplies the nominal torque request, and a neuromorphic CMG–PES module provides a compact stateful realization of the residual correction via six continuous membrane–gate (CMG) units and an eighteen-parameter prescribed error sensitivity (PES) decoder. The contributions are: (i) a bounded residual interface for attitude-torque augmentation with explicit authority limits and exact baseline-command recovery at zero residual authority (Fig. 1); (ii) a saturation-aware gate that prevents the residual from opposing an axis already at the prescribed torque limit; (iii) a fully specified CMG–PES realization with paired nonnegative activity, bounded readout, and online local adaptation; and (iv) a two-platform, five-mission simulation study against fixed and bandwidth-tuned baselines (PD+ff primary), including measurement-noise and repeated-disturbance tests, ~~and~~ portability across conventional controller families without per-mission retuning, and mechanism ablations that isolate decoder adaptation, conductance, activity gain, and gate latching.

~~The remainder of this paper is organized as follows. Section II formulates the problem. Section III presents the proposed controller and the bounded-interface result, with discussion in Section IV and proofs in Section V. Section VI reports the numerical experiments, and Section VII concludes and outlines future work.~~

II. Problem Formulation

We seek to reduce shortest-path attitude-tracking error for a prescribed reference $q_d(t)$ while respecting coupled actuator limits induced by individual rotor-force bounds. A baseline attitude law (e.g., PD+ff, LQR, SMC, MPC/NMPC) produces a requested body torque $\boldsymbol{u}_0$; the proposed neuromorphic residual may add a bounded correction to form $\boldsymbol{u}$, after which the same rotor allocator and per-rotor saturation produce the realized actuator torque $\boldsymbol{\tau}_{\text{act}}$ (objective stated in Sec. II-C). ~~The residual is constrained to preserve a fixed~~

[1]New Mexico State University (NMSU), Las Cruces, NM, USA.
[2] Space Vehicles Directorate, Air Force Research Laboratory (AFRL), Kirtland Air Force Base (KAFB), Albuquerque, NM 87108. Email: luis_rodolfo.garcia_carrillo@afrl.af.mil

~~componentwise authority bound and to recover the baseline exactly when its authority is set to zero; no closed-loop stability claim is assumed from these interface properties.~~

A. Process, State, and Tracking Error

Let $Q \in \mathbb{S}^3$ be the scalar-first Hamilton quaternion mapping body to inertial coordinates, and let $\boldsymbol{\omega}$ be the body angular velocity. The rotational dynamics are [11]

$$\dot{Q} = \tfrac{1}{2} Q \otimes [0, \boldsymbol{\omega}^\mathsf{T}]^\mathsf{T}, \tag{1}$$

$$\boldsymbol{J}\dot{\boldsymbol{\omega}} = \boldsymbol{\tau}_{\mathrm{act}} + \boldsymbol{\tau}_{\mathrm{p}} + \boldsymbol{\tau}_{\mathrm{d}} - \boldsymbol{\omega} \times (\boldsymbol{J}\boldsymbol{\omega}). \tag{2}$$

where $\boldsymbol{J} \succ 0$ is the body-frame inertia and $\boldsymbol{\tau}_{\mathrm{act}}$ is the body torque realized by the actuators. The terms $\boldsymbol{\tau}_{\mathrm{p}}$ and $\boldsymbol{\tau}_{\mathrm{d}}$ denote modeled passive and externally applied disturbance torques, respectively. The controller produces a requested body torque $\boldsymbol{u}$, which is mapped to $\boldsymbol{\tau}_{\mathrm{act}}$ through the rotor allocation and force constraints defined in Sec. II-B.

Using the corresponding passive quaternion $q = Q^{-1}$ [12], define

$$\dot{q} = -\tfrac{1}{2}[0, \boldsymbol{\omega}^\mathsf{T}]^\mathsf{T} \otimes q. \tag{3}$$

The desired attitude q_d uses the same convention. Define the attitude error

$$q_e = q_d \otimes q^{-1} = [q_{e,0}, \boldsymbol{q}_{e,v}^\mathsf{T}]^\mathsf{T}, \tag{4}$$

$$\boldsymbol{e}_q = \mathrm{sgn}_+(q_{e,0})\boldsymbol{q}_{e,v}, \qquad \mathrm{sgn}_+(0) = 1, \tag{5}$$

$$\theta_q = 2\,\mathrm{atan2}(\|\boldsymbol{q}_{e,v}\|_2, |q_{e,0}|) \in [0, \pi]. \tag{6}$$

The metric θ_q is invariant to the quaternion sign. No continuous feedback globally stabilizes rigid-body attitude [13]; global formulations require, for example, hybrid switching [14] or geometric-algebra methods [15]. We use the shortest-path branch away from the 180° sign boundary.

For a desired-frame rate $\boldsymbol{\omega}_d$ satisfying the corresponding passive kinematics, differentiation gives

$$\dot{q}_e = \tfrac{1}{2} q_e \otimes [0, \boldsymbol{\omega}_e^\mathsf{T}]^\mathsf{T}, \tag{7}$$

$$\boldsymbol{\omega}_e = \boldsymbol{\omega} - R(q_e)^\mathsf{T}\boldsymbol{\omega}_d, \qquad \dot{q}_{e,0} = -\tfrac{1}{2}\boldsymbol{q}_{e,v}^\mathsf{T}\boldsymbol{\omega}_e. \tag{8}$$

These relations follow directly from the attitude-error quaternion kinematics.

~~Let $\boldsymbol{J} \succ 0$ denote the body-frame inertia [11].~~ If principal moments $\boldsymbol{j}_{\mathrm{p}}$ are given in a rotated principal-axis frame [11], then

$$\boldsymbol{J} = R_{BI}\,\mathrm{diag}(\boldsymbol{j}_{\mathrm{p}})R_{BI}^\mathsf{T}, \tag{9}$$

with R_{BI} the principal-to-body rotation. ~~Controller~~ controller gains use the ~~reported~~ principal moments in their given ordering, $\boldsymbol{j}_{\mathrm{tune}}$ (Table I).

B. Actuation and Sensing

For rotor positions $\boldsymbol{p}_i$ in body coordinates, parallel $+z$ thrust axes, and signed reaction coefficients κ_i, define

$$B = \begin{bmatrix} 1 & 1 & 1 & 1 \\ p_{1,y} & p_{2,y} & p_{3,y} & p_{4,y} \\ -p_{1,x} & -p_{2,x} & -p_{3,x} & -p_{4,x} \\ \kappa_1 & \kappa_2 & \kappa_3 & \kappa_4 \end{bmatrix}. \tag{10}$$

The signs follow $\boldsymbol{p}_i \times [0, 0, f_i]^\mathsf{T}$ and the actuator's local reaction torque $\kappa_i f_i$ [16]. Here B maps rotor thrusts to total thrust and body torque; κ_i has units of meters, not angular velocity. Given a commanded collective thrust T and body-torque command $\boldsymbol{u}$, the corresponding inverse-allocation with per-rotor saturation model is

$$\begin{aligned} \boldsymbol{f}_{\mathrm{req}} &= B^{-1}[T, \boldsymbol{u}^\mathsf{T}]^\mathsf{T}, \\ \boldsymbol{f}_{\mathrm{act}} &= \mathrm{sat}_{[\boldsymbol{0}, \boldsymbol{f}_{\max}]}(\boldsymbol{f}_{\mathrm{req}}), \\ [T_{\mathrm{act}}, \boldsymbol{\tau}_{\mathrm{act}}^\mathsf{T}]^\mathsf{T} &= B\boldsymbol{f}_{\mathrm{act}}. \end{aligned} \tag{11}$$

Here $\boldsymbol{u} = \boldsymbol{u}_0$ for PD; the CMG path in Section III modifies that ~~requested torque~~ request before the same allocation~~and saturation. The operator~~ . $\mathrm{sat}_{[\boldsymbol{a},\boldsymbol{b}]}(\cdot)$ ~~denotes componentwise saturationto the interval $[a_i, b_i]$, i.e.,~~ is componentwise saturation, $\big(\mathrm{sat}_{[\boldsymbol{a},\boldsymbol{b}]}(\boldsymbol{x})\big)_i = \min\{\max\{x_i, a_i\}, b_i\}$. ~~Each~~ , and each f_i is a commanded force in newtons~~, not a rotor-speed command~~. Exact wrench realization requires $B^{-1}[T, \boldsymbol{u}^\mathsf{T}]^\mathsf{T} \in [\boldsymbol{0}, \boldsymbol{f}_{\max}]$ ~~; for four rotors~~ (B is square and invertible ~~, so $B^{-1} = B^\dagger$. A~~ for four rotors); a componentwise torque box is not generally contained in this collective-dependent ~~feasible set. This work uses inverse allocation followed by componentwise saturation , not~~ set, and we use inverse allocation with saturation rather than an optimization-based allocator [17].

Collective thrust remains classical, with $z_d = 1$ m:

$$T = \mathrm{sat}_{[0, 2.5Mg]}\left(\frac{M[g + 6(z_d - z) - 4\dot{z}]}{\max(R(Q)_{33}, 0.35)}\right). \tag{12}$$

Here g is the gravitational acceleration~~. The height loop reads altitude and vertical velocity~~; the denominator compensates tilt~~. The guard 0.35 limits tilt compensation to about~~ , its guard limits compensation to $\arccos(0.35) \approx 69.5^\circ$, and the upper bound does not supersede ~~individual~~ rotor limits. The residual has no ~~direct~~ collective output but can affect height through attitude, tilt compensation, and saturation. The ~~feedback variables used by the~~ attitude and height loops ~~are~~ use only q, $\boldsymbol{\omega}$, z, and $\dot{z}$~~. In the nominal simulations they are read directly~~ , read from the model ~~;~~ except in Sec. VI-E, which perturbs the measured attitude and rate~~before they enter the controller. No additional state or plant output is provided to the residual path~~; the residual receives no additional state.

C. Quaternion PD Baselines and Control Objective

The quaternion PD baseline is

$$\boldsymbol{k}_q = 2\boldsymbol{j}_{\mathrm{tune}} \odot \boldsymbol{\omega}_n^2, \qquad \boldsymbol{k}_\omega = 2\zeta\boldsymbol{j}_{\mathrm{tune}} \odot \boldsymbol{\omega}_n, \tag{13}$$

$$\boldsymbol{u}_0 = \mathrm{sat}_{\boldsymbol{\ell}}(-\boldsymbol{k}_q \odot \boldsymbol{e}_q - \boldsymbol{k}_\omega \odot \boldsymbol{\omega}), \tag{14}$$

with $\boldsymbol{\omega}_n = (4, 4, 3.5)^\mathsf{T}$ rad/s and $\zeta = 0.95$. The torque box is $\mathcal{U} = \prod_{i=1}^3 [-\ell_i, \ell_i]$, where $\ell_i = \max(j_{\mathrm{tune},i}\nu_i, 10^{-6}\ \mathrm{N\,m})$ and $\boldsymbol{\nu} = (12, 12, 10)^\mathsf{T}$ rad/s^2; this component bound on the commanded torque does not, by itself, guarantee that the resulting command is feasible under the individual rotor limits.

Since the derivative term in (14) damps absolute body rate, we also consider a PD baseline with desired-rate feedforward

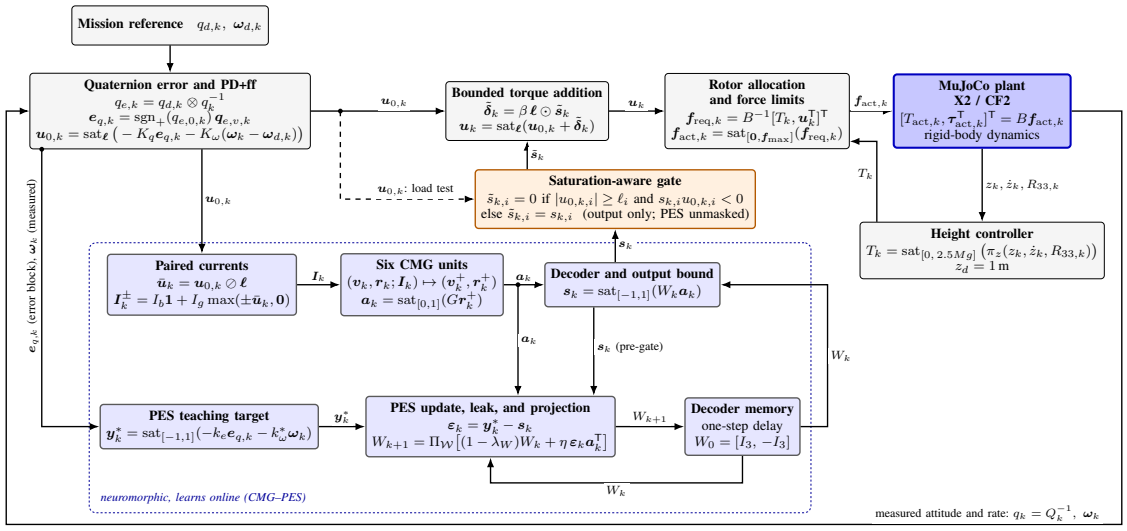


Fig. 1. CMG-PES neuromorphic residual control architecture with online PES decoder learning. The classical feedback, collective-thrust, allocation, and plant interfaces are retained; only the bounded decoder output augments the requested attitude torque, after the saturation-aware gate (28) masks any component that opposes a saturated baseline axis.

(PD+ff), obtained by replacing $\boldsymbol{\omega}$ with the rate-tracking error $\boldsymbol{\omega} - \boldsymbol{\omega}_d$:

$$\boldsymbol{u}_0^{\mathrm{ff}} = \mathrm{sat}_{\boldsymbol{\ell}}\big(-\boldsymbol{k}_q \odot \boldsymbol{e}_q - \boldsymbol{k}_\omega \odot (\boldsymbol{\omega} - \boldsymbol{\omega}_d)\big), \tag{15}$$

The design objective is therefore: given the classical torque request $\boldsymbol{u}_0$, construct an online residual correction that reduces θ_q over time-varying missions while (i) retaining the same attitude and angular rate measurements, collective-thrust loop, rotor allocator, and actuator limits, (ii) imposing an explicit componentwise bound on the deviation from $\boldsymbol{u}_0$, and (iii) recovering the requested baseline exactly when residual authority is set to zero. These implementation properties don't guarantee closed-loop stability.

III. Main Result: Online Neuromorphic Residual Controller

The proposed control framework decouples the adaptive internal dynamics from a bounded residual correction added to the baseline torque command. By setting the residual authority $\beta = 0$, the controller recovers the exact baseline torque request. Figure 1 details the overall signal flow.

A. CMG Temporal Features

For m torque channels and $2m$ units, normalize the saturated baseline and form positive/negative current pairs:

$$\begin{aligned} \bar{\boldsymbol{u}} &= \boldsymbol{u}_0 \oslash \boldsymbol{\ell}, \\ \boldsymbol{I}^\pm &= I_b \mathbf{1} + I_g \max(\pm \bar{\boldsymbol{u}}, \mathbf{0}), \\ \boldsymbol{I} &= [(\boldsymbol{I}^+)^\top, (\boldsymbol{I}^-)^\top]^\top. \end{aligned} \tag{16}$$

Each unit has a dimensionless membrane state v_j and gate r_j:

$$\dot{r}_j = [\sigma(\alpha_h(v_j - v_{\mathrm{th}} + \gamma r_j)) - r_j]/\tau_r, \tag{17}$$

$$\dot{v}_j = -(v_j - v_{\mathrm{rest}})/\tau + I_j/\tau - c_j(v_j - v_{\mathrm{reset}}), \tag{18}$$

$$c_j = (g_0 + \chi g_1 |I_j|) r_j^2, \qquad \chi \in \{0, 1\}. \tag{19}$$

Here $\sigma(x) = (1 + e^{-x})^{-1}$ denotes the logistic sigmoid, which bounds the gate activation to $(0, 1)$.

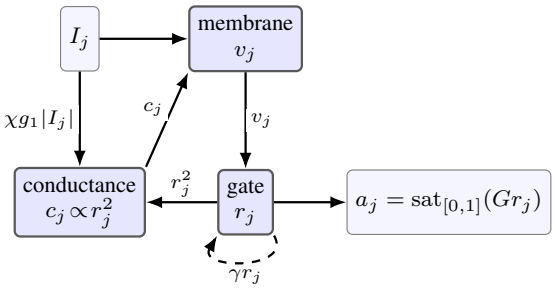


Fig. 2. Coupling topology of one CMG unit, cf. (19). The membrane sets the gate target; the gate acts back twice, shifting its own threshold through γ and shunting the membrane through $c_j \propto r_j^2$ ($\chi = 1$ makes that shunt input dependent). The dynamics are continuous: no spike, no reset, and only a_j leaves the unit.

The gate ~~dynamics in (19) are a first-order relaxation: the bounded sigmoid output $\sigma(\alpha_h(v_j - v_{\mathrm{th}} + \gamma r_j)) \in (0,1)$ provides an instantaneous reference level that depends on membrane voltage and is modulated by feedback from the current gate state. The gate state r_j then relaxes toward that time-varying reference with time constant~~ in (19) relaxes with time constant τ_r ~~, toward the bounded reference $\sigma(\alpha_h(v_j - v_{\mathrm{th}} + \gamma r_j)) \in (0,1)$, set by the membrane and shifted by the gate itself.~~ In parallel, r_j modulates membrane conductance through $c_j \propto r_j^2$ (Fig. 2), so both states participate ~~even though~~ although the decoder reads only the gate-derived activity. ~~The model has~~ There is no threshold-triggered reset or spike~~event~~; v_{reset} is a reversal level in a continuous conductance term~~. The gains~~ , and g_0, g_1 ~~have the units needed to~~ make c_j a rate.

The actual integration is sequential, not exponential Euler for both states. From the old states compute

$$b_{j,k} = \sigma\big(\mathrm{sat}_{[-60,60]}[\alpha_h(v_{j,k} - v_{\mathrm{th}} + \gamma r_{j,k})]\big), \tag{20}$$

$$r_{j,k}^+ = \mathrm{sat}_{[0,1]}[r_{j,k} + (h/\tau_r)(b_{j,k} - r_{j,k})]. \tag{21}$$

Then evaluate $c_{j,k} = (g_0 + \chi g_1 |I_{j,k}|)(r_{j,k}^+)^2$, $\lambda_{j,k} = \tau^{-1} + c_{j,k}$, and $d_{j,k} = (v_{\mathrm{rest}} + I_{j,k})/\tau + c_{j,k} v_{\mathrm{reset}}$. By holding $\lambda_{j,k}$ and $d_{j,k}$ constant over one integration interval h, the

membrane equation is affine in v_j and integrates exactly to

$$v_{j,k}^{+} = e^{-\lambda_{j,k}h} v_{j,k} + (1 - e^{-\lambda_{j,k}h}) d_{j,k}/\lambda_{j,k}. \tag{22}$$

The coefficients are recomputed at the start of ~~the next numerical step; (22) is therefore an exact per-step~~ each step, so (22) is an exact exponential update under that within-step hold ~~, guaranteeing a non-divergent numerical update~~ and cannot diverge within the interval~~. However, this local step formulation does not establish~~ ; this is a numerical property, not closed-loop stability~~for the fully coupled, nonlinear UAV dynamics and adaptive controller~~. Assign $(v_{j,k+1}, r_{j,k+1}) = (v_{j,k}^{+}, r_{j,k}^{+})$. ~~The~~ An exponential-Euler ~~step $r_{j,k}^{+} = e^{-h/\tau_r} r_{j,k} + (1 - e^{-h/\tau_r}) b_{j,k}$ is convex for every $h > 0$ without saturation, and changes~~ gate step would change only the weight on $r_{j,k}$ (0.905 vs. 0.9 at $h/\tau_r = 0.1$); all ~~simulation~~ benchmarks in Section VI use (21).

B. PES Decoder Adaptation and Bounded Residual

The within-step activity, initial decoder, and saturated readout are

$$\begin{aligned} \boldsymbol{a}_k &= \mathrm{sat}_{[0,1]}(G\boldsymbol{r}_k^{+}), \qquad W_0 = [I_m, -I_m], \\ \boldsymbol{s}_k &= \mathrm{sat}_{[-1,1]}(W_k \boldsymbol{a}_k). \end{aligned} \tag{23}$$

The initial readout matrix $W_0 = [I_3, -I_3]$ implements paired-channel subtraction ($a^{+} - a^{-}$), recovering signed ~~directional information~~ direction from a nonnegative ~~activity~~ basis; state memory can delay sign reversal ~~following~~ after a command reversal. With $G = 10^5$, ~~the nonnegative activity $a_j = \mathrm{sat}_1(Gr_j^{+})$ reaches its upper bound of~~ a_j reaches its bound 1 when $r_j^{+} \geq 10^{-5}$~~. Since $r_j^{+} \geq 0$, the symmetric saturation sat_1 acts here over $[0, 1]$. Thus, the~~ , so the activity gain G ~~determines~~ sets how strongly r_j^{+} is amplified ~~before the readout decoder~~ and how quickly ~~the resulting~~ activity saturates. The teaching target and local update are

$$\boldsymbol{y}_k^{*} = \mathrm{sat}_{[-1,1]}(-k_e \boldsymbol{e}_{q,k} - k_\omega^{*} \boldsymbol{\omega}_k), \tag{24}$$

$$\boldsymbol{\varepsilon}_k = \boldsymbol{y}_k^{*} - \boldsymbol{s}_k, \tag{25}$$

$$W_{k+1} = \Pi_{\mathcal{W}}[W_k + \eta \boldsymbol{\varepsilon}_k \boldsymbol{a}_k^{\mathsf{T}} - \lambda_W W_k]. \tag{26}$$

Here $\mathcal{W} = [-W_{\max}, W_{\max}]^{m \times 2m}$. The coefficients η and λ_W are per-step (so changing h changes the effective learning dynamics). PES is a local error-driven update toward the prescribed target $\boldsymbol{y}_k^{*}$; it does not differentiate through the plant or claim to minimize a closed-loop cost.

Using W_k before the update, the requested command is

$$\boldsymbol{u}_k = \mathrm{sat}_{\boldsymbol{\ell}}(\boldsymbol{u}_{0,k} + \beta \boldsymbol{\ell} \odot \boldsymbol{s}_k), \quad \boldsymbol{\delta}_k = \boldsymbol{u}_k - \boldsymbol{u}_{0,k}, \quad 0 \leq \beta \leq 1. \tag{27}$$

For three-axis UAV attitude control ($m = 3$), the network consists of six CMG units and eighteen decoder weights.

a) Saturation-aware gate: At $|u_{0,k,i}| = \ell_i$ the residual acts one-sidedly: a component with the sign of $u_{0,k,i}$ is saturated away, whereas an opposing one removes up to $\beta \ell_i$ of authority exactly when the loop needs all of it. The gated residual therefore replaces $\boldsymbol{s}_k$ in (27) by

$$\tilde{s}_{k,i} = \begin{cases} 0, & |u_{0,k,i}| \geq \ell_i \text{ and } s_{k,i} u_{0,k,i} < 0, \\ s_{k,i}, & \text{otherwise}, \end{cases} \tag{28}$$

and leaves the PES update (26) untouched. Since $|\tilde{s}_{k,i}| \leq |s_{k,i}|$, the gate cannot increase the residual magnitude and introduces no additional tuning parameter. The resulting interface bounds and baseline-recovery property are established formally in Proposition 1.

Proposition 1 (Bounded residual interface and baseline recovery)**.** *Assume the nonnegative CMG parameters of Table I, $r_{j,0} \in [0,1]$, $0 < h \leq \tau_r$, $W_0 \in \mathcal{W}$, and $\boldsymbol{u}_{0,k} \in \mathcal{U}$. Then: (i) every gate remains in $[0,1]$ and each membrane iterate remains in the convex hull of its initial value, v_{reset}, and $[v_{\mathrm{rest}} + I_b, v_{\mathrm{rest}} + I_b + I_g]$; (ii) the projected update keeps $W_k \in \mathcal{W}$; and (iii) $\boldsymbol{u}_k \in \mathcal{U}$ with $|\delta_{k,i}| \leq \beta \ell_i$. If $\beta = 0$, the requested baseline command is recovered at every step, and the same allocator at the same state and collective thrust produces the same actuator output.*

Remark 1 (Interpretation of Bounds): ~~The bounds in~~ Bounds (i)–(ii) keep the ~~adaptive~~ CMG/PES states within their ~~prescribed operational domains. In contrast,~~ operational domains; property (iii) is ~~directly~~ the one exposed to the ~~closed-loop system: it bounds~~ closed loop, bounding the residual torque ~~modification and guarantees exact recovery of the baseline command when~~ and recovering the baseline exactly at $\beta = 0$, independently of the learned ~~internal~~ state.

IV. Discussion of the Main Result

Proposition 1 ~~establishes implementation bounds that hold~~ holds for every $\beta \in [0,1]$, hence for the gated controller ~~actually~~ used in the experiments. ~~Its scope is deliberately limited: it is~~ It is an operational interface bound, not an input-to-state stability certificate~~, and~~ : bounded internal states, weights, and requested torque do not establish state safety, rotor headroom, closed-loop stability, or improved tracking~~. Rotor-force saturation can also couple requested~~ , and because rotor saturation can couple torque components, ~~so the componentwise residual~~ the componentwise bound is not a trajectory-to-trajectory robustness certificate.

~~A restricted~~ The fixed-feature PES ~~contraction observation is summarized in~~ observation of Remark 2 (Sec. VI-C~~(Remark VI-C) and is used only to interpret~~) only interprets activity-limited learning~~behavior~~; it is not a closed-loop convergence result.

V. Proofs

Proof of Proposition 1. For the gate update, $b_{j,k} \in [0,1]$ and $0 < h \leq \tau_r$ make the unsaturated Euler step a convex combination of $r_{j,k}$ and $b_{j,k}$; the componentwise saturation in (21) therefore preserves $r_{j,k} \in [0,1]$. Since $I_j \in [I_b, I_b + I_g]$ and $c_j \geq 0$, d_j/λ_j is a convex combination of $v_{\mathrm{rest}} + I_j$ and v_{reset}. Equation (22) is a convex combination of $v_{j,k}$ and d_j/λ_j, so induction gives the membrane bound. Projection in (26) gives $W_k \in \mathcal{W}$. Finally, the outer saturation in (27) gives $\boldsymbol{u}_k \in \mathcal{U}$; componentwise nonexpansiveness and $\mathrm{sat}_{\ell_i}(u_{0,k,i}) = u_{0,k,i}$ imply $|\delta_{k,i}| \leq |\beta \ell_i s_{k,i}| \leq \beta \ell_i$. Setting $\beta = 0$ gives $\boldsymbol{u}_k = \boldsymbol{u}_{0,k}$, after which the common allocator produces the same actuator output at the same state and collective thrust. □

TABLE I

MODEL/INTERFACE PARAMETERS (TOP) AND CANONICAL CMG–PES SETTINGS (BOTTOM). NEURAL QUANTITIES ARE NORMALIZED MODEL VARIABLES; LEARNING COEFFICIENTS ARE PER STEP.

Parameter	CF2 rotor model	X2 model
Mass M (kg)	0.027	1.325
Rotor $\lvert p_x\rvert, \lvert p_y\rvert$ (m)	$0.0325, 0.0325$	$0.14, 0.18$
Reaction magnitude $\lvert\kappa_i\rvert$ (m)	0.005	0.0201
Rotor force limit (N)	$.0875 \to .13125$	13
$\boldsymbol{j}_{\text{tune}}$ (10^{-5} kg m^2)	$(2.3951, 2.3951, 3.2347)$	—
$\boldsymbol{j}_{\text{tune}}$ (10^{-2} kg m^2)	—	$(6.0711, 3.6468, 2.5412)$
Rigid-body integrator	RK4	Euler

CMG–PES	Value		Value
h, duration	0.0005 s, 45 s	$\alpha_h, \gamma, g_0, g_1$	$50, 2, 120, 30$
τ, τ_r	0.05 s, 0.005 s	I_b, I_g, G	$0.75, 1.25, 10^5$
$v_{\text{rest}}, v_{\text{reset}}, v_{\text{th}}$	$0, 0, 1$	$\beta_{\text{X2}}, \beta_{\text{CF2}}; \eta$	$.5, .2; 8 \times 10^{-4}$
$v_{j,0}, r_{j,0}, \chi$	$0, 0, 1$	$\lambda_W, W_{\max}, k_e, k_\omega^*$	$10^{-6}, 6, 8, 0$

VI. APPLICATION AND EXAMPLES

A. Platforms, Missions, and Metrics

~~Let $\mathcal{B} = \{\boldsymbol{b}_x, \boldsymbol{b}_y, \boldsymbol{b}_z\}$ denote the body-fixed axis triad and $\mathcal{P} = \{\boldsymbol{p}_1, \boldsymbol{p}_2, \boldsymbol{p}_3\}$ the principal-inertia triad. The angular velocity, commanded and realized~~ Angular velocity, torques, and rotor geometry are expressed in ~~$\mathcal{B}$. If the principal moments $\boldsymbol{j}_{\text{p}}$ are specified in $\mathcal{P}$, the body-frame inertia is~~

$$\boldsymbol{J} = R_{BP}\,\text{diag}(\boldsymbol{j}_{\text{p}})R_{BP}^{\text{T}},$$

~~where R_{BP} maps principal-frame coordinates into the body frame (cf. (9)).~~

body axes; inertia follows (9). We evaluate in MuJoCo rigid-body simulation with site-applied actuator wrenches [18], using two Menagerie-derived multirotors (~~CF2, X2; Fig. ??~~Crazyflie 2, CF2; Skydio X2) [19]. The attitude loop commands body torque and the height loop collective thrust. For CF2 we expose four rotor-force channels and use the inverse allocator with per-rotor saturation (11). Table I lists simulation parameters and spec-context values. For CF2 the per-rotor force limit is raised to $1.5\times$ the Menagerie model value ($0.0875 \to 0.13125$ N, Table I) so that the tuned baseline is not permanently rotor-saturated; this is a simulation design choice, not a claim about Crazyflie hardware. X2 uses its model limit unchanged. Both models omit motor/RPM/battery states and validated rotor aerodynamics; feedback uses `qpos`/`qvel`, with noise only in Sec. VI-E. The controllers run in Nengo 4.1.0 (a custom `NeuronType` with direct current injection; its teaching graph adds a one-step latency), and a direct NumPy realization agrees to 2.013×10^{-6} relative mean error over ten cases, which is tested numerical agreement, not formal equivalence. Code, model files, and run archives accompany the submission as a reproducibility package.[1]

CF2 body axes are principal. For X2 the geometry-derived inertia is $\boldsymbol{J} = 10^{-2}[3.66517, 0, -.21000;\ 0, 2.54117, 0;\ -.21000, 0, 6.05280]\,\text{kg m}^2$; torque limits use $\boldsymbol{j}_{\text{tune}}$.

[1] https://github.com/gandhico/online-pes-neuromorphic-residual-control

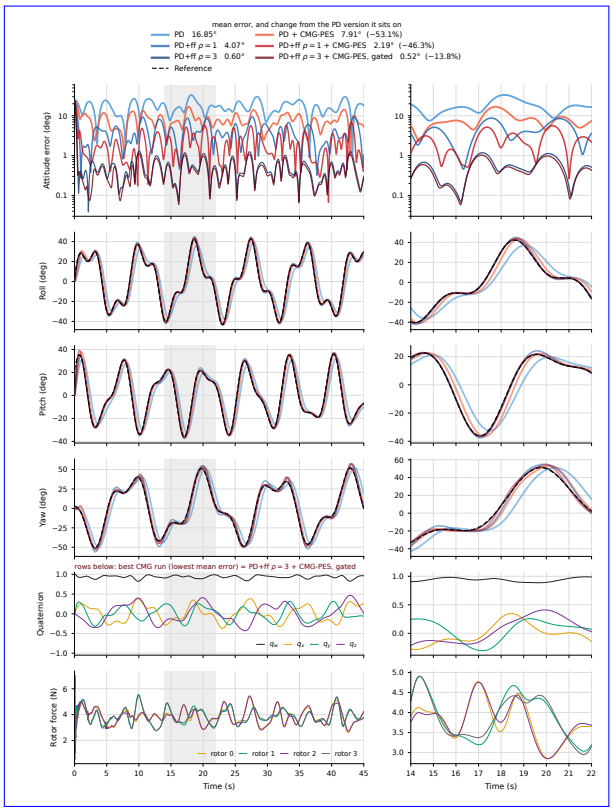


Fig. 3. X2 Hard45 tracking (45 s) across the baseline ladder. Blue: PD baselines (light→dark: fixed PD, PD+ff ρ=1, tuned PD+ff ρ=3). Red: CMG–PES paired with each baseline (matched shading); the ρ=3 pair is gated (β=.5).

Each PD/CMG pair shares initial state, reference, duration, allocator, model, and timestep. The residual authority is $\beta = .5$ on X2 and $\beta = .2$ on CF2, with the ~~saturation-aware~~ gate (28) in the $\rho = 3$ results. Without the gate, a predeclared sweep over $\beta \in \{.5, .2, .1, .05, .02\}$ (lowest five-mission geometric-mean error ratio among settings with every error below 1 rad and saturation fraction below .5) admits only $\beta = .05$ on CF2, because larger values diverge on Hardstep (Sec. VI-F). The gate lifts that restriction noise-free ~~,~~but not under ~~measurement~~ noise (Sec. VI-E), where $\beta = .2$ is the largest ~~sweep value that stayed safe: it was~~ safe sweep value (chosen on two development seeds~~and~~ , confirmed on 13 held-out ones). The $\rho = 1$ and fixed-PD rows of Table II are ungated. The primary campaign is deterministic (no ~~injected~~ disturbances or noise), one run per cell, with learning active throughout.

The primary tracking metric is the time-averaged scalar orientation error $\bar{\theta}_q = \frac{1}{N}\sum_{k=1}^{N}\theta_{q,k}$, reported in milliradians (mrad), where $1\,\text{mrad} = 10^{-3}\,\text{rad} \approx 0.0573°$. We also report the relative reduction $100(\bar{\theta}_{q,\text{PD}} - \bar{\theta}_{q,\text{CMG}})/\bar{\theta}_{q,\text{PD}}$.

For readability, the reference missions are specified below as Euler-angle triples and converted to the desired quaternion $q_d(t)$; attitude-error computation and feedback control remain quaternion based. Reference Euler triples (rad): Roll $(0.25\sin 0.7t, 0, 0)$; Full3 $0.5\sin(t + (0, \pi/2, \pi)^{\text{T}})$; Hard45 $(0.55\sin 0.75t + 0.20\sin(2.10t{+}0.40),\ 0.45\sin(0.95t{+}\pi/3){+}0.18\sin 1.75t,$

$0.65\sin(0.55t+\pi)+0.25\sin(1.35t+0.20)$); Hardstep: 0 for 1 s then 2-s cycles through $(.75,-.45,.55)$, $(-.65,.55,-.70)$, $(.50,.50,.90)$, $(-.80,-.35,.20)$; Yaw360 $(0,0,2\pi(3\xi^2-2\xi^3))$, $\xi=t/45$. Hover, whose nominal error is near zero, is used only for the disturbance test.

B. Comparison with Classical Baselines

The fixed PD law in (14) damps absolute rate, so moving references can contain a velocity-lag contribution. We therefore use the desired-rate feedforward law (15) as the stronger baseline comparison and introduce a dimensionless bandwidth scaling factor $\rho>0$, which scales the nominal natural frequency according to $\boldsymbol{\omega}_n \mapsto \rho\boldsymbol{\omega}_n$. We sweep $\rho\in[0.75,8]$, where $\rho=1$ recovers the nominal closed-loop bandwidth. The best mission-mean occurs at $\rho=3$ on both airframes; CF2 becomes rotor-limited beyond approximately $\rho=4$. This bandwidth-tuned PD+feedforward controller is the primary baseline.

At $\rho=3$, the gated CMG–PES residual ($\beta=.5$ on X2, .2 on CF2) reduces the geometric-mean error from 4.54×10^{-3} to 2.85×10^{-3} rad on X2 (37.3%) and from 3.77×10^{-3} to 2.92×10^{-3} rad on CF2 (22.4%). It improves Roll, Full3, Hard45 (Fig. 3), and Yaw360 on both vehicles; Hardstep is the only mission that does not improve (Sec. VI-F). The geometric mean is dominated by Roll and Yaw360, where PD+ff errors are already below 0.6 mrad; on Full3 and Hard45 the reductions are 12–14% (X2) and 5–7% (CF2). Without the gate, CF2 admits only $\beta=.05$ and the reduction is 6.5% (Table II, ungated row). Against the original fixed PD law (Table II, which also gives the $\rho=1$ ladder), the residual lowers mean quaternion-angle error in all ten nominal cases by 17.3–60.6%, so the apparent margin shrinks as the classical baseline is strengthened.

a) Portability across control families: The residual attaches unmodified to four families beyond PD+ff, by replacing only the nominal law $\boldsymbol{u}_0$ in (27): LQR, sliding-mode control (SMC), unconstrained model-predictive control (MPC), and nonlinear MPC (NMPC), each at the same bandwidth scaling and gate settings, plus a PID variant with rotor-level conditional-integration anti-windup. The gated residual improves the geometric mean for every family on both platforms, with no exceptions: LQR 31.1%/22.4% (X2/CF2), PID+ff 36.7%/22.4%, SMC 43.8%/26.6%, MPC 33.4%/22.7%, and NMPC 31.9%/21.7%. SMC gains the most specifically on Hardstep, where its own baseline is weaker; LQR and MPC each show a large *baseline* error on CF2 Hardstep from the linear-quadratic family's small torque margin there, unrelated to the residual. This is an interface-portability result, not a claim that the residual is tuned for each family; a full per-family study is future work.

C. Mechanism Ablation

The architecture separates ~~intrinsic~~ conductance modulation (χ), gate dynamics, activity gain (G), decoder adaptation (W_k), and residual authority ($\beta\boldsymbol{\ell}$), ~~which affect the CMG dynamics, learned activity-to-output mapping, and maximum residual torque, respectively. This separation allows the effects of the internal dynamics, online learning, and residual authority to be examined separately.~~ so each can be ablated with the others held fixed.

~~We ablate decoder adaptation (PES) and conductance modulation (χ).~~ With decoder mode held fixed, toggling χ (retaining the base shunt $g_0 r_j^2$) is numerically indistinguishable, here and at every tested G. The reason is structural: χ enters only through $c_j\propto r_j^2$, which is $2\times10^{-9}\,\mathrm{s}^{-1}$ at rest against a leak of $\tau^{-1}=20\,\mathrm{s}^{-1}$; after a gate latches (below) it only moves the membrane fixed point ($0.107\to0.092$ at $I_j=I_b$), which the saturated activity hides from the readout.

Remark 2 (Fixed-feature PES contraction): If the teaching target and a nonzero activity $\boldsymbol{a}$ are fixed, decoder leak is zero, and readout saturation and projection remain inactive, then the PES error contracts as

$$\boldsymbol{\varepsilon}_{k+1}=(1-\eta\|\boldsymbol{a}\|_2^2)\boldsymbol{\varepsilon}_k, \tag{29}$$

so a nonzero initial error contracts to zero when $0<\eta\|\boldsymbol{a}\|_2^2<2$. This constant-feature calculation [7] is used only to interpret activity-limited learning behavior; changing targets, loss of excitation, saturation, leakage, and plant dynamics prevent direct application as a closed-loop convergence statement.

Fixed versus adaptive decoder. Holding $W_k=W_0$ keeps CMG dynamics but limits the readout to the paired difference $\boldsymbol{a}^+-\boldsymbol{a}^-$, and yields only modest reductions (Table II).

Gate/activity regime. At $I_j=I_b$, $v_j\approx0.75<v_{\mathrm{th}}$ and $r_j\approx\sigma(-12.5)\approx3.7\times10^{-6}$, i.e., a small but nonzero logistic tail~~.~~; with $G=10^5$ the resting activity is $a_j\approx0.37$. Since $\alpha_h\gamma=100>4$, the gate is bistable: for frozen v_j its equilibria fold at $v_j\approx0.888$ (onset) and $v_j\approx-0.888$ (release). Once $r_j\geq1/2$, Proposition 1~~implies~~ (i) gives $v_j\geq v_{\mathrm{reset}}=0$, hence $b_{j,k}\geq1/2$ in (21), so opened gates latch ~~; with $G=10^5$ the resting activity is $a_j\approx0.37$ and latched units saturate at~~ (none released in the ten primary runs) and read $a_j=1$ thereafter.

When activity is effectively constant ($\boldsymbol{a}_k\approx\bar{\boldsymbol{a}}$) and projection is inactive, the PES update reduces to the recursion for $\boldsymbol{z}_k=W_k\bar{\boldsymbol{a}}$

$$\boldsymbol{z}_{k+1}=(1-\lambda_W)\boldsymbol{z}_k+\eta\|\bar{\boldsymbol{a}}\|^2[\boldsymbol{y}_k^*-\mathrm{sat}_{[-1,1]}(\boldsymbol{z}_k)], \tag{30}$$

a leaky first-order filter of the teaching target (Remark ~~VI-C~~2), i.e., lagged proportional action with corner 9.60 rad/s ~~.~~for $\bar{\boldsymbol{a}}=\mathbf{1}$. This is the constant basis of Sec. VI-D, i.e., PD+ff plus a matched lagged-proportional term. Hard45's highest instantaneous frequency is 2.1 rad/s [20], below that corner. ~~These~~

a) Reduced CMG (non-latching ablation): Setting $\gamma=0$, $g_0=g_1=0$ (so $c_j\equiv0$), and $\tau_r\to0$ in (19) leaves the first-order membrane $\tau\dot{v}_j=-(v_j-v_{\mathrm{rest}})+I_j$ read through the gate's steady state, $a_j=\mathrm{sat}_{[0,1]}(G\sigma(\alpha_h(v_j-v_{\mathrm{th}})))$ (implemented as (21) with $h/\tau_r=1$ and (22) with $c_j=0$); all other settings are unchanged. Below the onset fold ($a_j<1$ requires $r_j<1/G$) the removed terms are negligible ($\alpha_h\gamma r_j\leq10^{-3}$, $c_j<2\times10^{-8}\,\mathrm{s}^{-1}\ll\tau^{-1}$, $\tau_r=\tau/10$), so the two units coincide until a CMG gate latches. Under the

TABLE II

MEAN q-ERROR (10^{-3} RAD, 45 S). Δ: REDUCTION OVER THE BLOCK BASELINE [%]. EFFORT: RMS RESIDUAL / PER-AXIS BOUND. CLOSING COLUMN: GEOMETRIC MEAN (ERROR ROWS), ARITHMETIC MEAN (EFFORT ROWS).

	Skydio X2						Crazyflie 2					
	Roll	Full3	Hard45	Hardstep†	Yaw360	*geo*	Roll	Full3	Hard45	Hardstep†	Yaw360	*geo*
Primary baseline: PD + rate feedforward, $\rho = 3$ (bandwidth-tuned)												
PD+ff	0.34	10.09	10.54	265.91	0.20	*4.54*	0.56	7.06	8.65	262.59	0.084	*3.77*
+CMG–PES, gated	0.074	8.83	9.08	271.35	0.12	*2.85*	0.23	6.67	8.02	263.19	0.067	*2.92*
Δ [%]	78.4	12.4	13.8	-2.0	41.8	*37.3*	59.9	5.4	7.3	-0.2	20.3	*22.4*
+CMG–PES, ungated‡	0.074	8.83	9.08	311.07	0.12	*2.93*	0.43	6.96	8.50	265.93	0.079	*3.52*
Δ [%]	78.4	12.4	13.8	-17.0	41.8	*35.6*	22.9	1.3	1.8	-1.3	5.6	*6.5*
Δ, realistic noise [%]	-4.2	11.3	10.8	-2.6	-5.3	*2.3*	-0.4	3.9	4.0	-0.3	-2.2	*1.0*
Δ, moderate noise [%]	-1.4	11.9	11.2	-2.4	-3.9	*3.3*	2.2	4.2	4.2	-0.2	-2.0	*1.7*
Δ, reduced CMG, gated (Sec. VI-C) [%]	78.5	35.2	45.5	-0.6	41.8	*46.3*	60.1	23.0	24.6	-0.4	20.3	*28.6*
Baseline ladder: PD + rate feedforward, $\rho = 1$												
PD+ff	2.98	72.10	71.02	454.77	1.78	*26.19*	4.91	42.72	53.18	425.93	0.74	*20.39*
+CMG–PES	0.61	32.81	38.17	359.16	0.60	*11.04*	0.97	20.29	28.23	347.68	0.25	*8.65*
Δ [%]	79.5	54.5	46.3	21.0	66.4	*57.8*	80.2	52.5	46.9	18.4	66.4	*57.6*
Original fixed PD baseline, $\boldsymbol{\omega}_n = (4, 4, 3.5)$ rad/s												
PD	50.56	303.28	294.08	454.53	75.86	*173.12*	51.34	288.38	285.45	426.18	75.81	*168.68*
+CMG–PES	41.79	131.75	138.01	359.35	29.90	*96.02*	42.44	126.48	132.32	347.89	29.87	*94.11*
Δ [%]	17.4	56.6	53.1	20.9	60.6	*44.5*	17.3	56.1	53.6	18.4	60.6	*44.2*
Δ, fixed decoder [%]	1.9	9.7	10.3	0.5	0.1	*4.6*	3.3	4.5	6.8	0.4	0.1	*3.1*
Strongest rival basis (Izhikevich): reduction and realized effort												
Δ, Izhikevich–PES, $\rho = 3$ [%]	-48.0	5.8	4.5	-1.1	-76.3	*-18.9*	0.7	1.3	0.8	-0.5	-33.3	*-5.4*
Δ, Izhikevich–PES, fixed PD [%]	39.6	37.5	32.2	6.6	46.6	*33.8*	33.7	38.9	32.2	diverges§	41.5	–
Δ, Izhikevich fixed dec., fixed PD [%]	4.6	4.9	4.6	0.7	0.2	*3.0*	5.6	5.8	4.0	-2.2	-2.2	*2.3*
effort, CMG–PES, $\rho = 3$	0.003	0.023	0.023	0.109	0.001	*0.032*	0.005	0.010	0.012	0.049	<0.001	*0.015*
effort, Izhikevich–PES, $\rho = 3$	0.053	0.051	0.053	0.106	0.052	*0.063*	0.012	0.021	0.021	0.047	0.012	*0.023*

LIF/ALIF/LIFRate stay within 0.1% of fixed PD outside Hardstep. $\rho = 3$ rows are gated (28) with $\beta = .5$ (X2), .2 (CF2); ‡ungated, $\beta = .5, .05$ (the $\rho = 1$ and fixed-PD rows are ungated). †Hardstep commands 63–111° steps every 2 s; 97–99% of its mean error is slew (Sec. VI-F). §CF2 Hardstep under the fixed-PD baseline sustains near-180° tracking loss (2.45 rad mean, t=3–44 s); excluded from the geometric mean rather than averaged in.

primary protocol the reduced unit reaches 46.3%/28.6% (X2/CF2; Table II) at comparable mean effort (0.033/0.016 vs. 0.032/0.015). It matches CMG within 1.5 pp on Roll, Yaw360, and Hardstep and exceeds it on Full3 and Hard45, where CMG units latch. Lowering G to 10^3 or 1 removes the graded tail (9.0/3.6%, 4.4/1.7%), and a two-level basis that replays the recorded CMG latch times reaches 9.6/3.8%. These single-seed, noise-free ablations indicate that decoder adaptation is the dominant lever in the tested regime ~~: the CMG dynamics provide a bounded graded /latched basison which PES shapes the correction~~and that it draws on the graded sub-threshold part of the basis, which irreversible latching removes.

D. Neuron-Family Comparison

The Nengo benchmark isolates the basis choice, holding one actuator interface fixed across two models, five missions, and eleven controllers (PD plus fixed/PES variants of CMG, LIF, ALIF, Izhikevich [21], and LIFRate); only the neuron dynamics and native-state-to-activity map differ. Across the full matrix (figure omitted) two patterns hold. First, PES is the dominant lever in every family: fixed decoders rarely match their PES counterparts, extending Sec. VI-C to every basis. Second, persistent activity is necessary but not sufficient. Remark ~~VI-C~~ 2 explains the flat rows: a sparsely active basis starves the update. In the corrected $\rho = 3$ runs, LIF, ALIF and LIFRate have mission-mean activity occupancy (activity $> 10^{-6}$) of 3.2–4.4%, whereas CMG (resting at $a_j \approx 0.37$) and Izhikevich are active in $\geq$99.9%.

Izhikevich–PES leads on the fixed-PD baseline (Table II, last block) but not on the tuned one: under the primary protocol it is positive but below CMG on Full3 and Hard45 ($+5.8/+4.5\%$ vs. CMG's $+12.4/+13.8\%$ on X2)~~, while its~~ . Its residual sits on a $\pm\beta\ell$ rail in only 0–1.7% of samples, ~~similar to~~ like CMG's~~own low-rail occupancy, its effort still~~ , yet its effort averages about twice CMG's because it stays near 0.05–0.06 regardless of mission ~~rather than~~ instead of tracking the baseline error as CMG's does ~~.~~ (Sec. VI-C). On Roll and Yaw360, ~~where the baseline is already~~ near the noise floor, ~~the residual~~ it raises the geometric-mean error to 1.19× (X2) and 1.05× (CF2) the baseline's~~; CMG's own effort tracks the baseline error by construction (Sec. VI-C), Izhikevich's does not.~~ .

a) Non-neural and conventional alternatives: The same protocol, held fixed, finds no match for CMG among either family: a threshold-tuned LIFRate basis, selected on a held-out mission split, reaches $+15.8\%/+11.4\%$ (X2/CF2); two bases with no neuron dynamics at all – a static paired-current encoding and a constant basis ($\boldsymbol{a} \equiv \mathbf{1}$) – reach $+11.9\%/+4.8\%$ and $+10.3\%/+4.3\%$. Every ~~alternative tested, neural or not, remains well~~ other neuron family and non-neural basis remains short of CMG's $+37.3\%/+22.4\%$~~.~~ ; only the reduced CMG of Sec. VI-C, which removes the gate's hysteresis, exceeds it.

E. Measurement Noise and Repeated Disturbances

Both tests use the tuned PD+feedforward baseline and score the *true*-attitude error. For noise, each case is rerun with paired seeds: at each step independent zero-mean Gaussian samples form a small Euler-angle quaternion left-multiplied into q, and additive samples corrupt each rate component (moderate 0.010 rad and 0.025 rad s^{-1}, 5 seeds; realistic

0.020 rad and 0.050 rad s^{-1}, 10 seeds; neither is a calibrated sensor specification). Both arms see the same noise stream.

Noise ~~introduces~~ sets a floor on the true ~~tracking errorof high-accuracy control loops. On the~~ error: on Roll and Yaw360 ~~missions, the baseline~~ the X2 PD+ff ~~tracking error increases~~ error rises from 0.34 and 0.20 mrad (~~X2) under cleanconditions~~ clean) to 0.77 and 0.71 mrad ~~under moderatenoise. In this regime, the unmodeled error falls near the noise floor, leaving minimal systematic residual for adaptive learning and resulting in relative tracking variations of~~ (moderate), leaving little systematic error to learn, and the residual changes it by -5.3% to $+2.2\%$ across noise levels (Table II). ~~However, whenever the baseline tracking~~ Where the baseline error exceeds this ~~noise~~ floor, the ~~adaptive tracking benefit is consistently preserved across all evaluation seeds~~benefit persists in every seed, with standard deviations ~~remaining~~ below 0.2 percentage points (pp). At the realistic level Full3 and Hard45 keep 11.3 and 10.8% on X2 and 3.9 and 4.0% on CF2, so the five-mission geometric mean falls from 37.3 and 22.4% to 2.3 and 1.0%. The smaller CF2 share is an authority limit: at $\beta = .5$ CF2 keeps 8.7 and 9.3%, but Hardstep diverges in 15/15 seeds (mean error 94°–120°, rotors at a bound in 61–79% of samples), because the requested collective thrust exceeds what the rotors deliver, allocation rather than the torque box binds, and (28) does not act. Two variants that also block on allocator saturation still diverged on the development seeds, so $\beta = .2$ is used.

An equilibrium test applies $\boldsymbol{\tau}_\mathrm{d} = d_b \varrho(t)[\sin(1.31t + .2), .8\sin(1.73t + 1.1), .6\sin(2.17t + 2)]^\mathsf{T}$ in body axes, ϱ alternating 5-s on/off intervals after 5 s of quiet with 0.25-s raised-cosine ramps, $d_b = .15$ N m on X2 and .00015 N m on CF2 (a selected scaling), and also $0.5\times$ and $2\times$ those values. Against PD+ff at $\rho = 3$ the residual lowers the burst-phase mean error from 1.61° to 1.38° (14.4%) on X2 and from 2.27° to 2.14° (5.9%) on CF2, and by 24.0/13.3% (X2) and 6.5/4.7% (CF2) at $0.5\times/2\times$; hover never saturates, so the gate is inert. Quiet-phase error, already below 0.1°, falls by 14.7% (X2) and 19.8% (CF2) at the nominal amplitude but rises on X2 at $0.5\times$ ($0.021° \to 0.036°$). At the nominal amplitude, CF2's burst-phase reduction is 13.7% if it borrows X2's $\beta = .5$, versus 1.5% at CF2's own adopted $\beta = .05$, which never loads the gate.

F. Saturation-Aware Gating on Hardstep

Hardstep commands 63°–111° attitude changes every 2 s, and 97–99% of its mean error accumulates during slew. ~~To preserve attitude-tracking torque authority during such saturation-limited transients, the adaptive residual output s_k is passed through the saturation-aware gate (28) before it enters the bounded torque addition (27). When the baseline is at its prescribed~~ With the baseline at its torque limit ($|u_{0,k,i}| \geq \ell_i$), an ungated ~~residual~~ component with $s_{k,i}u_{0,k,i} < 0$ ~~would reduce the net commanded~~ reduces the torque available for ~~attitude~~ recovery and can drive the decoder toward persistent opposing corrections~~. The gate prevents this failure mode by zeroing only those opposing components, while~~ ; the gate (28) zeroes only those components, leaving same-sign assistance and ~~all~~ non-saturated axes unchanged.

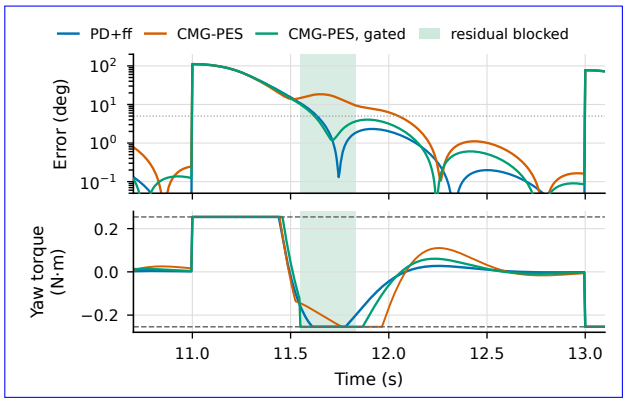


Fig. 4. X2 Hardstep, one step at $t = 11$ s: attitude error (log axis, dotted line: 5° band) and yaw torque against the box $\pm\ell_z$ (dashed). Shading marks where the gate blocks the residual. Ungated, the residual pulls the command off the box during braking; gated, it follows PD+ff into the box and leaves it later.

At $\rho = 3$ the ungated residual degrades Hardstep by 17.0% on X2 and, at $\beta = .5$, diverges on CF2 (mean error 136°, rotors at a bound in 92% of samples). Because the reference is piecewise constant, the latched decoder acts as the first-order filter (30) and lags a 12 rad/s baseline; on a saturated axis that lag can only oppose $\boldsymbol{u}_0$ (Sec. III). At $\beta = .5$ the gate blocks the residual in 20.5% (X2) and 15.5% (CF2) of Hardstep samples and in at most 0.04% elsewhere, so the other eight cells differ from the ungated residual by at most 0.1%. It cuts the X2 loss from 17.0% to 2.0% and, noise-free, removes the CF2 divergence at $\beta = .5$ (-1.2% on Hardstep, 36.5% geometric mean).

The gate does not make the residual beat the baseline here, and Fig. 4 shows why. The gated residual helps while braking (0.25–0.75 s after a step; $-0.13°$ of the X2 45-s mean) but leaves a larger tail once the baseline has left its box ($+0.40°$ over 0.75–1.5 s), because the latched decoder still holds the slew-phase correction, with the 9.6 rad/s corner of Sec. VI-C. ~~During these severe hard steps the~~ The torque limit is reached ~~primarily on the main maneuver axis; the gate strictly~~ mainly on the maneuver axis, where the gate inhibits only opposing ~~residual authorityon that saturated axis. Any small lag-induced transient on adjacent, unsaturated axes is therefore allowed to decay under the PESdynamics, so the gated architecture recovers baseline paritywithout post-saturation overshoot or cross-axis torque chatteringauthority; lag transients on the other axes decay under PES, and the gated residual returns to near baseline parity~~.

VII. Conclusions and Future Work

Six continuous CMG units with an eighteen-parameter PES-adapted decoder form a bounded residual that augments a quaternion PD controller without changing its sensing, collective-thrust, allocation, or actuator interface. ~~The interface bounds and exact zero-authority recovery hold independently of the learned weights, and the saturation-aware gate preserves both.~~ In the numerical study,

the gated residual lowers geometric-mean error against the bandwidth-tuned PD+feedforward baseline by 37.3% on X2 and 22.4% on CF2 noise-free, lowers burst-phase error under repeated torque disturbances, and keeps its benefit under sensor noise only where the baseline error exceeds the noise floor~~; the~~. The ablations identify online decoder adaptation ~~and persistent activity (necessary ,~~ on the graded sub-threshold part of the CMG basis as the principal mechanism in the tested regime (persistent activity is necessary but not sufficient~~for low effort)as the principal mechanisms in the tested regime~~), and irreversible gate latching as its main limit: a reduced, non-latching CMG reaches 46.3% and 28.6% at comparable effort.

Theoretical conclusions on implementation properties: Proposition 1 ~~establishes (i)–(ii) bounded~~ bounds the internal CMG/PES states ~~within their prescribed operational domains and (iii) a plant-facing interface guarantee: the requested torque remains within the prescribed box $\mathcal{U}$ with a componentwise residual bound~~ and guarantees $\boldsymbol{u}_k \in \mathcal{U}$, $|\delta_{k,i}| \leq \beta \ell_i$, and ~~the baseline command is recovered exactly when~~ exact baseline recovery at $\beta = 0$, independently of the learned ~~internal state~~state; the saturation-aware gate preserves these properties. Remark ~~VI-C summarizes a fixed-feature PES contraction property that~~ 2 helps interpret activity-limited learning ~~behavior,~~ but does not imply closed-loop convergence.

Three limitations remain. On Hardstep the gate, designed for saturation-limited slews, restores near-parity for PD+ff but cannot remove the settling-tail lag of the latched decoder on an unsaturated axis, though other baselines can still gain on Hardstep under the same gate. On CF2 under noise, rotor-level saturation defeats a gate defined on the torque box and caps the usable authority at $\beta = .2$. And the noise-free geometric mean overstates the practical benefit, being dominated by missions whose baseline error is already near the noise floor.

The present results are simulation based and do not provide a closed-loop stability certificate for the reported tracking experiments. Future work will add decoder-side lag compensation and an allocation-aware gate; evaluate under model mismatch; ~~sweep the activity gain G and conductance modulation χ more systematically~~design non-latching CMG units ($\alpha_h \gamma < 4$, or v_{reset} below the release fold) and test the reduced CMG under noise, disturbances, and the other control families; test retention with frozen weights and held-out missions; extend the wrapper, already confirmed across five classical control families in simulation, to 6-DOF; and validate the method on hardware.

References

[1] T. Johannink *et al.*, "Residual reinforcement learning for robot control," in *2019 International Conference on Robotics and Automation (ICRA)*, 2019, pp. 6023–6029.

[2] Z. Wu *et al.*, "L1Quad: L_1 adaptive augmentation of geometric control for agile quadrotors with performance guarantees," *IEEE Transactions on Control Systems Technology*, vol. 33, no. 2, pp. 597–612, 2025.

[3] I. Rubio Scola, L. R. Garcia Carrillo, and J. P. Hespanha, "Limbic system-inspired performance-guaranteed control for nonlinear multi-agent systems with uncertainties," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 34, no. 8, pp. 4196–4207, 2023.

[4] I. Rubio Scola, G. A. Guijarro Reyes, L. R. Garcia Carrillo, J. P. Hespanha, and L. Burlion, "A robust control strategy with perturbation estimation for the Parrot Mambo platform," *IEEE Transactions on Control Systems Technology*, vol. 29, no. 4, pp. 1389–1404, 2021.

[5] C. Eliasmith and C. H. Anderson, *Neural Engineering: Computation, Representation, and Dynamics in Neurobiological Systems*. MIT Press, 2004.

[6] T. Bekolay *et al.*, "Nengo: A Python tool for building large-scale functional brain models," *Frontiers in Neuroinformatics*, vol. 7, p. 48, 2014.

[7] A. R. Voelker, "A solution to the dynamics of the prescribed error sensitivity learning rule," Centre for Theoretical Neuroscience, University of Waterloo, Tech. Rep. CTN-TR-20151001-01, Oct. 2015. [Online]. Available: https://www.compneuro.uwaterloo.ca/files/publications/voelker.2015.pdf

[8] O. A. García Alcántara, D. Chavez Arana, E. S. Espinoza, I. Rubio Scola, L. R. Garcia Carrillo, and A. T. Sornborger, "Spiking neural network-based control of an unmanned aerial system implemented on a customized neural flight simulation environment," in *2024 American Control Conference (ACC)*, 2024, pp. 3125–3129.

[9] A. Olivares, E. S. Espinoza, L. E. Ramos, O. A. García Alcántara, L. R. Garcia Carrillo, and A. T. Sornborger, "Self-tuning neuromorphic controller for real-time UAS trajectory tracking based on prescribed error sensitivity," *Neural Computing and Applications*, vol. 38, no. 7, p. 192, 2026.

[10] G. Bellec *et al.*, "A solution to the learning dilemma for recurrent networks of spiking neurons," *Nature Communications*, vol. 11, p. 3625, 2020.

[11] H. Schaub and J. L. Junkins, *Analytical Mechanics of Space Systems*, 4th ed. AIAA, 2018.

[12] J. Diebel, "Representing attitude: Euler angles, unit quaternions, and rotation vectors," *Matrix*, vol. 58, no. 15–16, pp. 1–35, 2006.

[13] N. A. Chaturvedi, A. K. Sanyal, and N. H. McClamroch, "Rigid-body attitude control," *IEEE Control Systems Magazine*, vol. 31, no. 3, pp. 30–51, 2011.

[14] C. G. Mayhew, R. G. Sanfelice, and A. R. Teel, "Quaternion-based hybrid control for robust global attitude tracking," *IEEE Transactions on Automatic Control*, vol. 56, no. 11, pp. 2555–2566, 2011.

[15] I. Rubio Scola, O. A. García Alcántara, S. Sandoval, E. S. Espinoza Quesada, H. Haimovich, and L. R. Garcia Carrillo, "Globally asymptotically stable trajectory tracking of underactuated UAVs using geometric algebra," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 62, pp. 1491–1508, 2026.

[16] L. R. García Carrillo, A. E. Dzul López, R. Lozano, and C. Pégard, *Quad Rotorcraft Control: Vision-Based Hovering and Navigation*, ser. Advances in Industrial Control. London: Springer, 2013.

[17] J. C. Monteiro, F. Lizarralde, and L. Hsu, "Optimal control allocation of quadrotor UAVs subject to actuator constraints," in *2016 American Control Conference (ACC)*, 2016, pp. 500–505.

[18] E. Todorov, T. Erez, and Y. Tassa, "MuJoCo: A physics engine for model-based control," in *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2012, pp. 5026–5033.

[19] Google DeepMind, "MuJoCo Menagerie," https://github.com/google-deepmind/mujoco_menagerie, model repository; accessed Sep. 5, 2026.

[20] S. Sandoval and P. L. De Leon, "The instantaneous spectrum: A general framework for time-frequency analysis," *IEEE Transactions on Signal Processing*, vol. 66, no. 21, pp. 5679–5693, 2018.

[21] E. M. Izhikevich, "Simple model of spiking neurons," *IEEE Transactions on Neural Networks*, vol. 14, no. 6, pp. 1569–1572, 2003.