


AMP HEATSINK (TAS6424 carrier board)


All dimensions in mm. Model: heatsink.step (this drawing governs threads and finish).

BOTTOM VIEW (feet side)

2x M3 x 0.5 - 6H
thread depth 4 min
tap drill 2.5 x 5 deep
from the foot faces

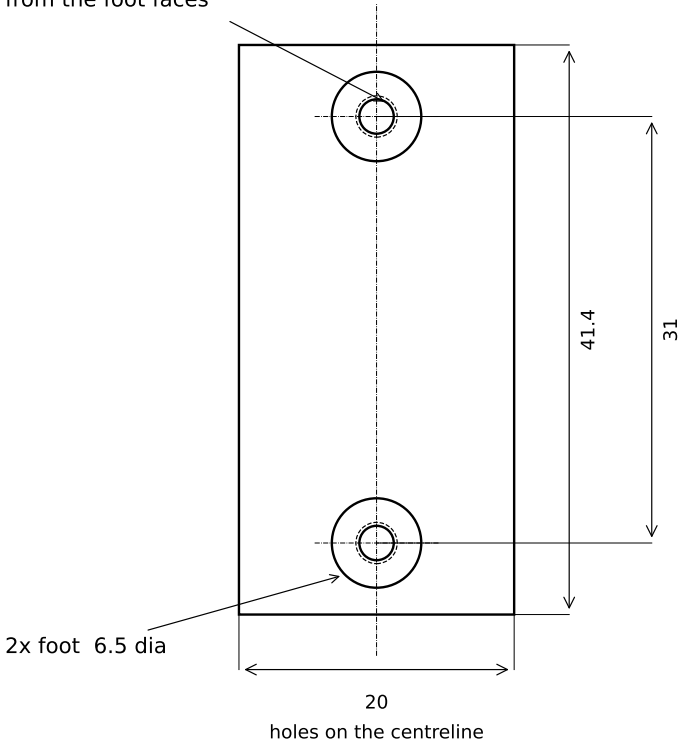

SIDE VIEW (fins up; feet sit on the board)

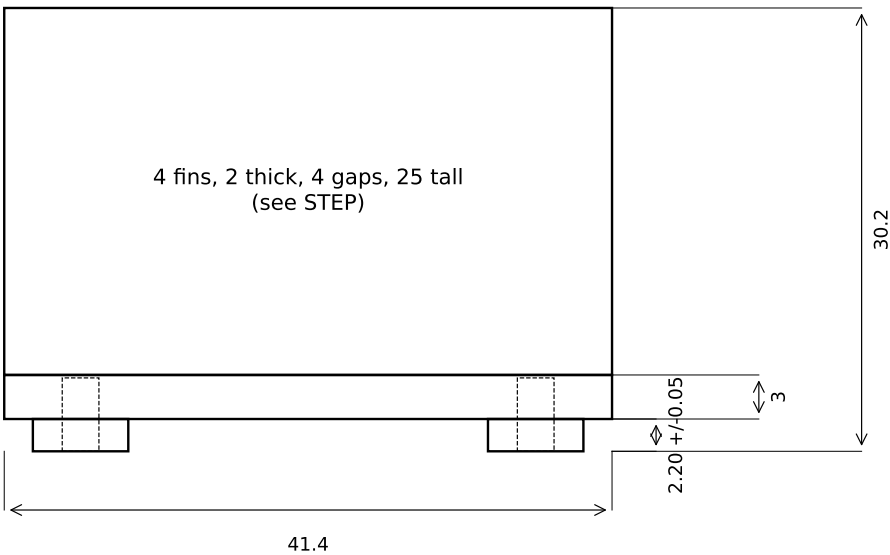

NOTES

Material: aluminium 6061-T6.

Finish: NONE (bare metal). No anodising: the heatsink is grounded through its feet and screws.

Threads: 2x M3 x 0.5-6H, 4 mm full thread min, in the two feet.

Foot height 2.20 +/-0.05 (critical: sets the clamp on the chip).

Base underside flat within 0.05 over the chip area (centre 20 x 12).

Other tolerances: ISO 2768-m. Break sharp edges.

Quantity: 2.