Gamma Academy

Horizon

Technical Support



Version control

Version	Date	Description
1.0	16/06/2016	Document created
1.1	19/08/2016	Gamma Academy Launch
2.1	15/02/2017	Fixed broken link
2.2	10/04/2017	Updated format
2.3	18/07/2017	Updated feedback details
2.4	01/08/2017	Added in version to document name
2.5	02/08/2017	Added more status detail for Horizon Health Check
2.6	23/08/2017	Added in profile rule URL for VVX411
2.7	21/09/2017	Amended file size details in wireshark section to “less than 20mb”
2.8		
2.9	08/01/2019	Added in provisioning URLS for Trio 8500 & 8800 conference phones and VVX150 and reformatted into new document template
3.0	05/03/2019	Updated with Collaborate.
3.1	02/04/2019	Updated Raise Fault content
3.2	11/06/2019	Updated password for polycom and yealink W52P profile rule layout page updated
3.3	19/06/2019	Added in provisioning URLS for Polycom VVX250 & VVX450 devices
3.4	26/06/2019	NSF Updates – removed the term “subscription” and replaced with “Bolt Ons”
3.5	11/09/2019	Added in in the provisioning URLs/profile rules for Cisco MPP devices
3.6	25/09/2019	Added in New call recording technical support content
3.7	06/11/2019	Updated wording for Team user in Call Recording
3.8	06/12/2019	Added in the provisioning URLs/profile rules for Cisco MPP 7832
3.9	17/07/2020	Update the 'I have a problem with the Horizon Portal' section for Active Directory users.
4.0	21/10/2020	Brand update. Updated with new profile rule for Cisco ATA 192
4.1	19/03/2021	Added in profile rule for VVX 601 release and updated branding.
4.3	19/10/2021	Added in Provisioning URL/Profile Rule for Yealink W73P
4.4	07/09/2022	Added in Provisioning URL/Profile Rule for Yealink T46U

Contents

Version control 3

Contents 4

Health Check 7

Access Tab *8*

SIP ALG *8*

Handset Registration *9*

Voice Portal and Voicemail *9*

Site DDI *9*

Call Diverts *10*

Number Presentation *10*

Fraud Management *10*

Do Not Disturb (DND) *10*

Restrict Service *11*

Site Call Barring *11*

User Call Barring *11*

Raise Fault 12

Handset, Soft Phone Client & Collaborate Registration Issues 14

Cisco Handset Profile Rule *14*

Cisco ATA Profile Rule *17*

Polycom VVX Profile Rule *19*

Yealink Profile Rule *21*

Cisco SOS Recovery Process 23

Polycom Recovery Process 24

Polycom SoundPoint 331 & 335 Recovery *24*

Polycom SoundPoint 450 & 650 Recovery *24*

Polycom 5000 Recovery *25*

Handset Returns 26

Faulty Handset 26

Delivery Issues 26

Change of Mind 27

SIP ALG 28

How can it affect VoIP? *28*


How can I check if SIP ALG is affecting my customers' service? *28*
How to switch off SIP ALG using Telnet *28*
Cisco Routers 28
Draytek Routers 29
Technicolour Routers 30
Zyxel Routers 30
Switch off SIP ALG on a Netgear Router *31*
I have a problem with call quality 33
Codecs *33*
Access *33*
Bypass the switch *33*
SIP ALG *33*
I have checked all of the above *34*
I have a problem with call connection / calls are dropping 35
Akixi 36
I have a problem with a feature 37
I have a problem with hardware 38
Local Wireshark Traces 39
I have a problem with a Soft Phone or Collaborate Clients 42
I am unable to download the soft client / Collaborate file to my desktop *42*
I am unable to install the Soft Client / Collaborate Client to my desktop *42*
Soft Client / Collaborate does not load on my desktop *42*
I cannot log into any of the Soft Clients / Collaborate (PC, Android and iOS) *42*
Collaborate 43
Audio *43*
Audio Settings / Headsets 43
Video *44*
No Video 44
Poor Video Quality *46*
Network Configuration (LAN) 46
Bandwidth 46
Obtain Client Logs 46
Conference (MyRoom) *47*
Presence *47*
Presence not updating from Outlook 48


Automatic Presence not updating 48
Obtain Client Logs 49
Contacts *50*
Contacts not searching Outlook 50
Unable to find the Company Directory 51
Guest Client *52*
New Call Recording Technical Support 54
Call Recording Audio Playback Issues *54*
Can't Find recording *54*
Call Recording Feature not working as expected *55*
Policy controls *55*
Policy control by feature *57*
Single Sign on *61*
Raising Faults *62*
Service Alerts *63*
I have a problem with the Horizon Portal 64
Feedback 66

Health Check

Our Horizon Health Check gives you information to some of the most common queries we receive on the Service Desk so that you've got the information up front and in one easy to view place. This can help you whilst setting up your Horizon Company, adding or changing features or if your Horizon Company is experiencing any technical problems.

To access the Health Check go to the Gamma Portal, Provisioning and Service Management, Hosted, Horizon and select Manage Horizon Company. Locate the company and then using the actions drop down select "Health Check".

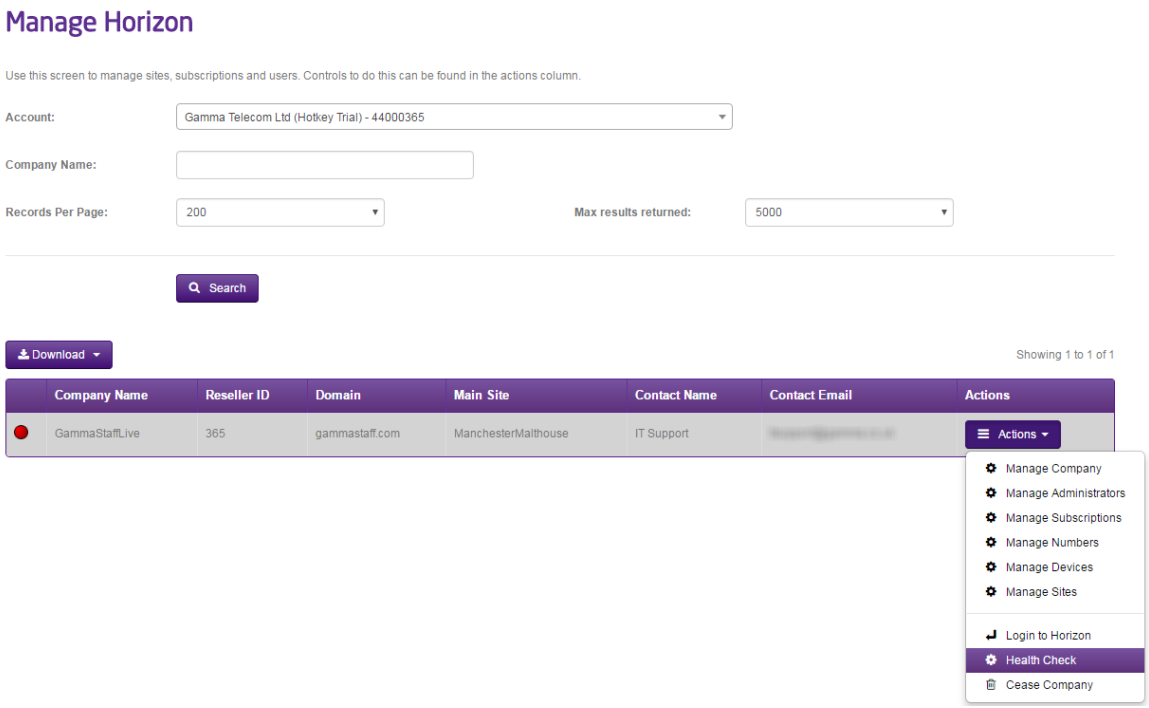

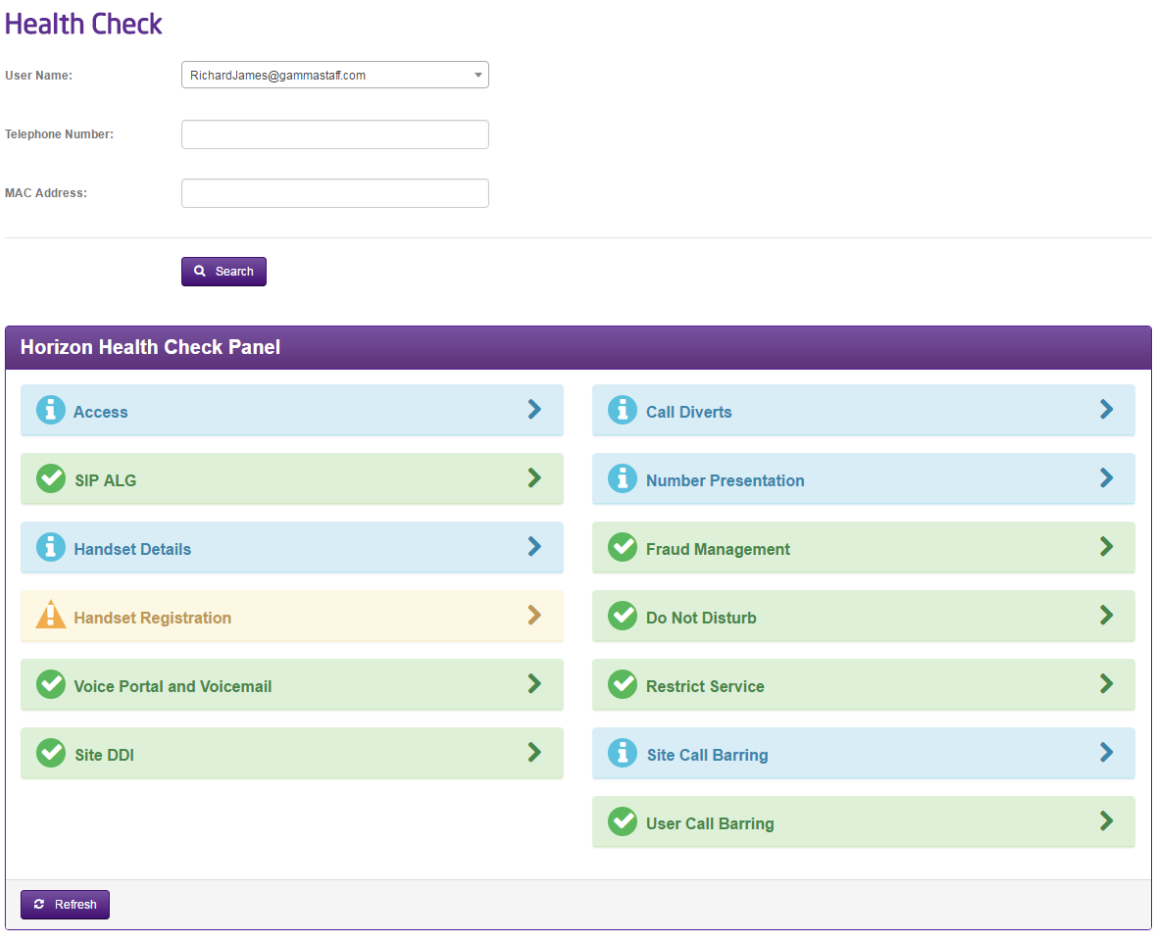

Access Tab

If the access is Gamma Broadband this will link you to the Broadband service management page of the exact circuit that your user is connected to, and also let you know if the PPP session is up or down at that moment in time. If the access is 3rd party then a blue panel will be displayed advising you that your user is connected to a 3rd party circuit, and if they are experiencing any dropped calls or media related issues to check your access first (this is usually the root cause of these issues).

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	The IP address against the Horizon User's Handset is an external IP. The IP is checked against Broadband and Ethernet	Gamma Broadband or Ethernet Circuit is up.	Gamma Broadband or Ethernet Circuit is down.	Error in retrieving the information please refresh and try again.

SIP ALG

SIP ALG is a setting on your customer's router, for Horizon to work this setting needs to be disabled. This check see's if the router that your user is connected to has SIP ALG disabled.

Related SIP ALG Content

Network Configuration Guidelines - this document is available on the Gamma Academy Knowledgebase.

How to switch of SIP ALG using Telnet

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	N/A	SIP ALG is disabled	SIP ALG is enabled	The user does not have a desk device assigned or the device could not be found.

Handset Registration

This checks to see if we've seen the handset register within the last 10 minutes (green). If it has been longer than 10 minutes this panel will show as amber.

Voice Portal and Voicemail

Does your Horizon Company have a Voice Portal set up to enable Voicemail, and does the user have the voicemail bolt on enabled? This will tell you straight away. For more information, please see the Horizon Feature Guide.

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	N/A	The company voice portal is set up and the user has the voicemail bolt on assigned.	1) The company voice portal is set but the user doesn't have the voicemail sub assigned. 2) The company voice portal is not set up and the user has the voice mail bolt on assigned.	N/A

Site DDI

This checks to see if the site that your user is assigned to has a Site DDI assigned. If not this could cause unexpected problems. For more information, please see the Horizon Feature Guide.

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
N/A	Potential Gamma Issue	The user's site DDI is set up	The user's site does not have a site DDI set up.	N/A

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
	please report to the service desk			

Call Diverts

Call diverts lets you know what settings your user has configured, such as Call Forwarding, Remote Office, Availability Profiles, Twinning and Sequential Ringing. For more information, please see the Horizon Feature Guide.

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	Horizon is up and the user has call diverts set up	N/A	N/A	N/A

Number Presentation

Number Presentation lets you know what a user has set up to present when making outbound calls. For more information, please see the Horizon Feature Guide.

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	Horizon is up and the user has Number presentation set up	N/A	N/A	N/A

Fraud Management

You can see if Fraud Management is set up, and if it is whether the agreed limits have been breached or not. For more information on Fraud Management, please see the Horizon Provisioning and In Life Changes guide and the Horizon Service Description.

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	N/A	The user's company is not barred and fraud management is set up.	The user's company is currently barred and fraud management is set up.	The user's company currently doesn't have fraud management set up. The company can either be barred or not barred.

Do Not Disturb (DND)

This check lets you know if the user you're searching against has Do Not Disturb enabled or disabled. For more information, please see the Horizon Feature Guide.

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	N/A	Do not disturb is disabled	N/A	Do not disturb is enabled

Restrict Service

Checks to see if there are any restrictions in place for your Horizon Company, and if they are what they are. For more information on Restrict Service, please see the Horizon Provisioning and In Life Changes guide. For more information please see the Horizon Feature Guide.

Grey Meaning	Blue Meaning	Green Meaning	Red Meaning	Amber Meaning
Potential Gamma Issue please report to the service desk	N/A	The user's company service is not restricted	The User's company service is restricted from making outgoing calls. Or The User's company service is restricted from making and receiving calls	The User's company service is restricted from making outgoing calls. Any outgoing calls made will be transferred to a specific number. Or The User's company service is restricted from making and receiving calls. Any outgoing or incoming calls will be transferred to a specific number.

Site Call Barring

What are the call barring options for the site that your user is assigned to? A quick and simple snapshot. For more information please see the Horizon Feature Guide.


User Call Barring

What are the call barring options for the site that your user is assigned to? A quick and simple snapshot. For more information please see the Horizon Feature Guide.


Raise Fault

To raise a fault you will need to log into the Horizon Health check and follow the below steps.


Step 1 -Find the user in the Health Check and then select the “Raise Fault” button in the bottom right.

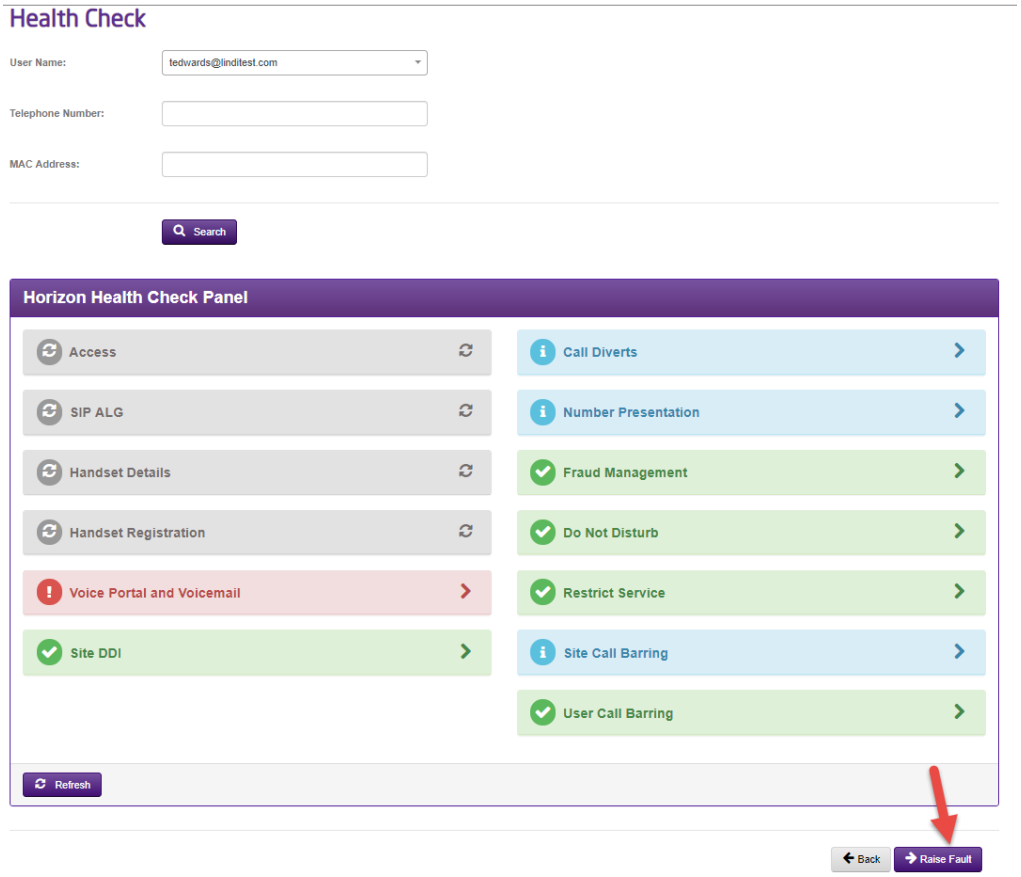

Step 2 – This will then present you with the below screen where you can add in a reference and then select the fault type from the dropdown.

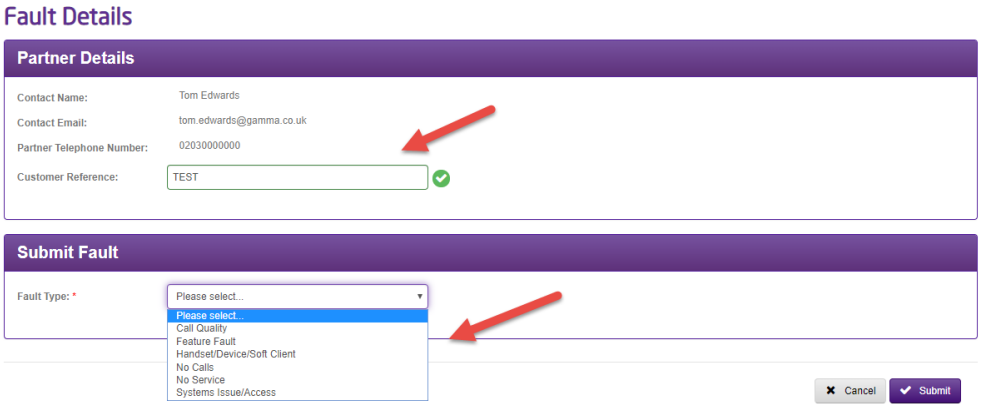

Step 3 – After selecting the fault type you will then be required to complete the rest of the fault form before submitting. Please note that where examples are required you will need to provide a minimum of 3.

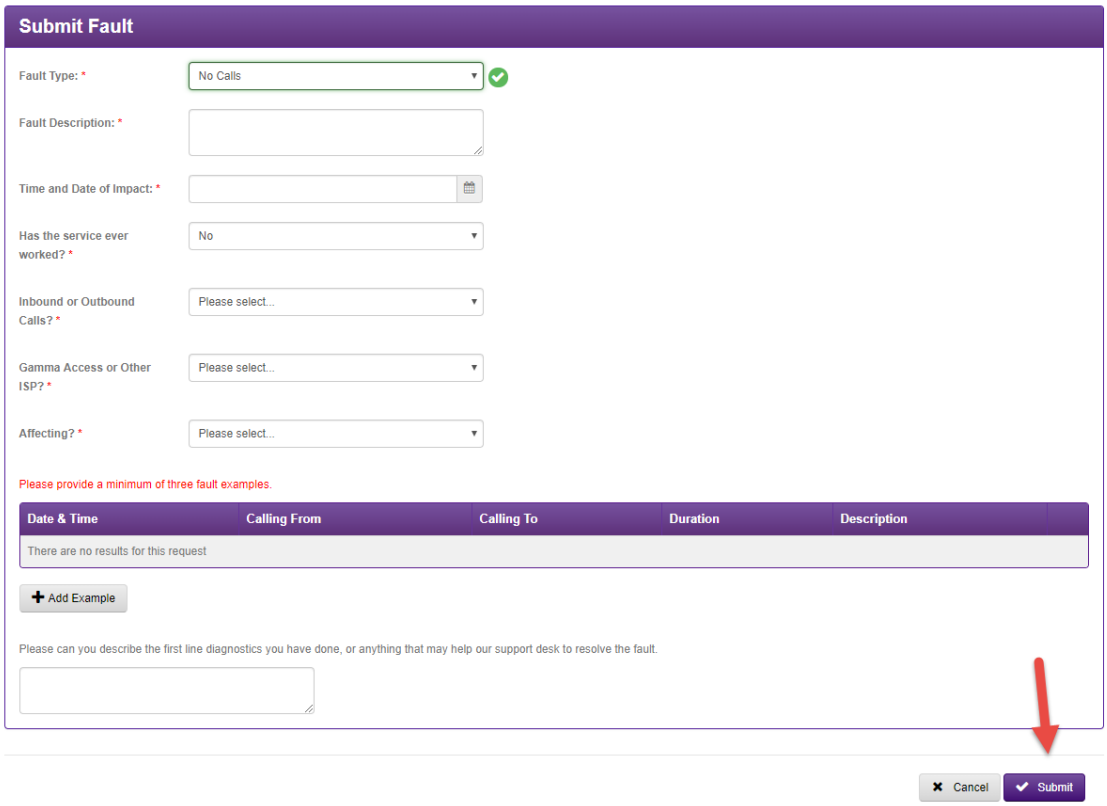

Step 4 – After submitting the fault you will be given the support call reference, that you can then use to view the status and request updates to the fault.

Handset, Soft Phone Client & Collaborate Registration Issues

Handsets, Soft Phone Clients and Collaborate on Horizon will attempt to register and pull their configuration from the ports detailed in the Access Control section of the Horizon Network Configuration Guidelines document. This should be the first check if you're devices are struggling with registering.

If the router or switch does not allow these ports to communicate with the Handsets, Soft Phone Clients or Collaborate then they will not register and will display messages like the following:

- URL calling disabled
- DHCP error
- Initialising (all devices will display this, it is when this message is displayed for a prolong period of time).

In these instances, you should check that the router is delivering an IP address to the device and also check that the handset has the correct profile rule.

Cisco Handset Profile Rule

Step 1

Use a Laptop/PC to connect to the handset using an Ethernet cable. Connect one end of the cable into your computer, and the other end into the SW port on the handset.

Step 2

Hand the handset go to the Menu and navigate to "Network".

The first line should display the IP address of the handset. Enter this IP address into a web browser on your computer and press enter.

Step 3

Click on "Admin Login"



Step 4

Click on "Advanced".




Step 5

Click on "Provisioning".



Step 6

This will take you to the screen where the profile URL needs to be checked.

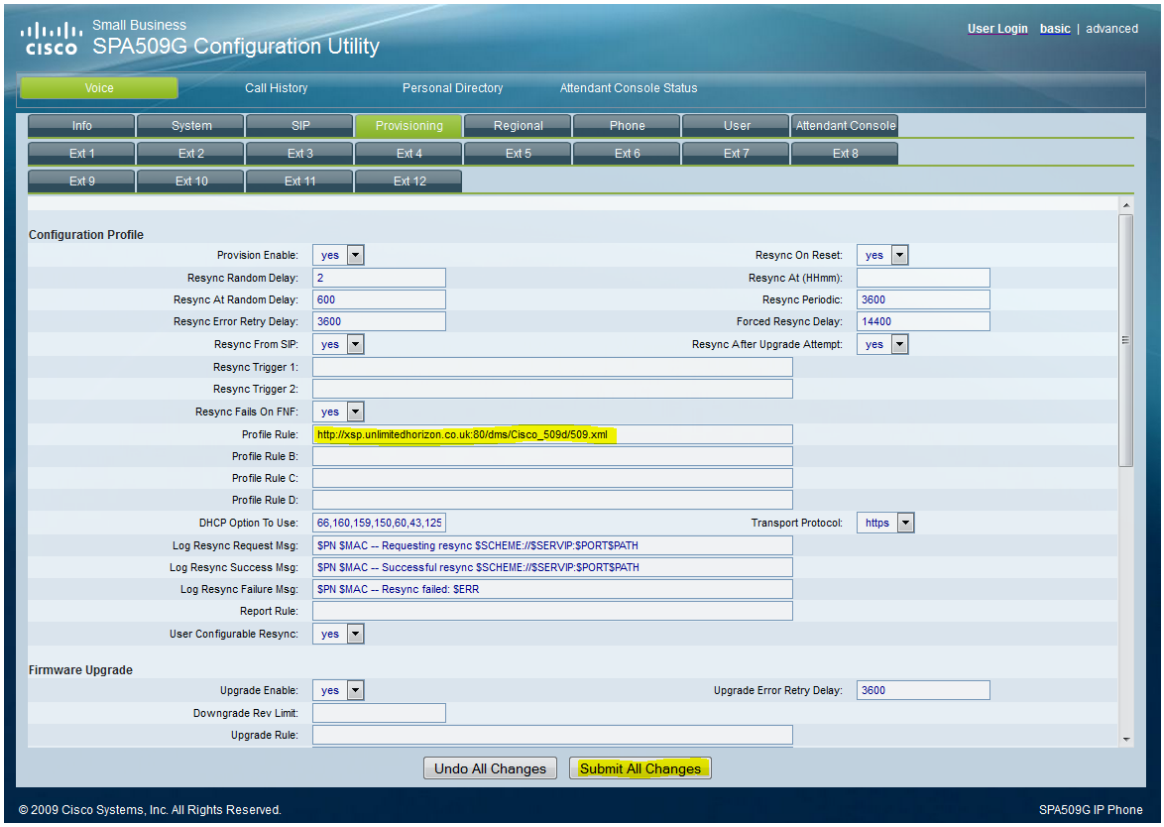

Below is the list of the profile URLs for Cisco handsets Gamma supplies. Check if the URL is correct, if it is not; replace it with the correct one. Then click on “Submit All Changes” and restart the phone by powering it down and back up.

Cisco SPA501	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_501d/501.xml
Cisco SPA502	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_502d/502.xml

Cisco SPA504	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_504d/504.xml
Cisco SPA509	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_509d/509.xml
Cisco SPA525	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_525d/525.xml
Cisco MPP 8841	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_8841/8841.xml
Cisco MPP 8851	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_8851/8851.xml
Cisco MPP 8861	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_8861/8861.xml
Cicso MPP 7832	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_7832/7832.xml

Following this process the phone will restart a number of times to complete the firmware upgrade, profile download and the initial registration. This takes around 15-20 minutes.

Cisco ATA Profile Rule

Step 1

Use a Laptop/PC to connect to the ATA using an Ethernet cable. Connect one end of the cable into your computer, and the other end into the Ethernet Port on the ATA.




Step 2

On the computer go to Start and Run. Type in "cmd" to load the Command Prompt.

Once the Command Prompt is loaded, type in "ipconfig" and hit enter.

Make a note of the default gateway of the Ethernet port.

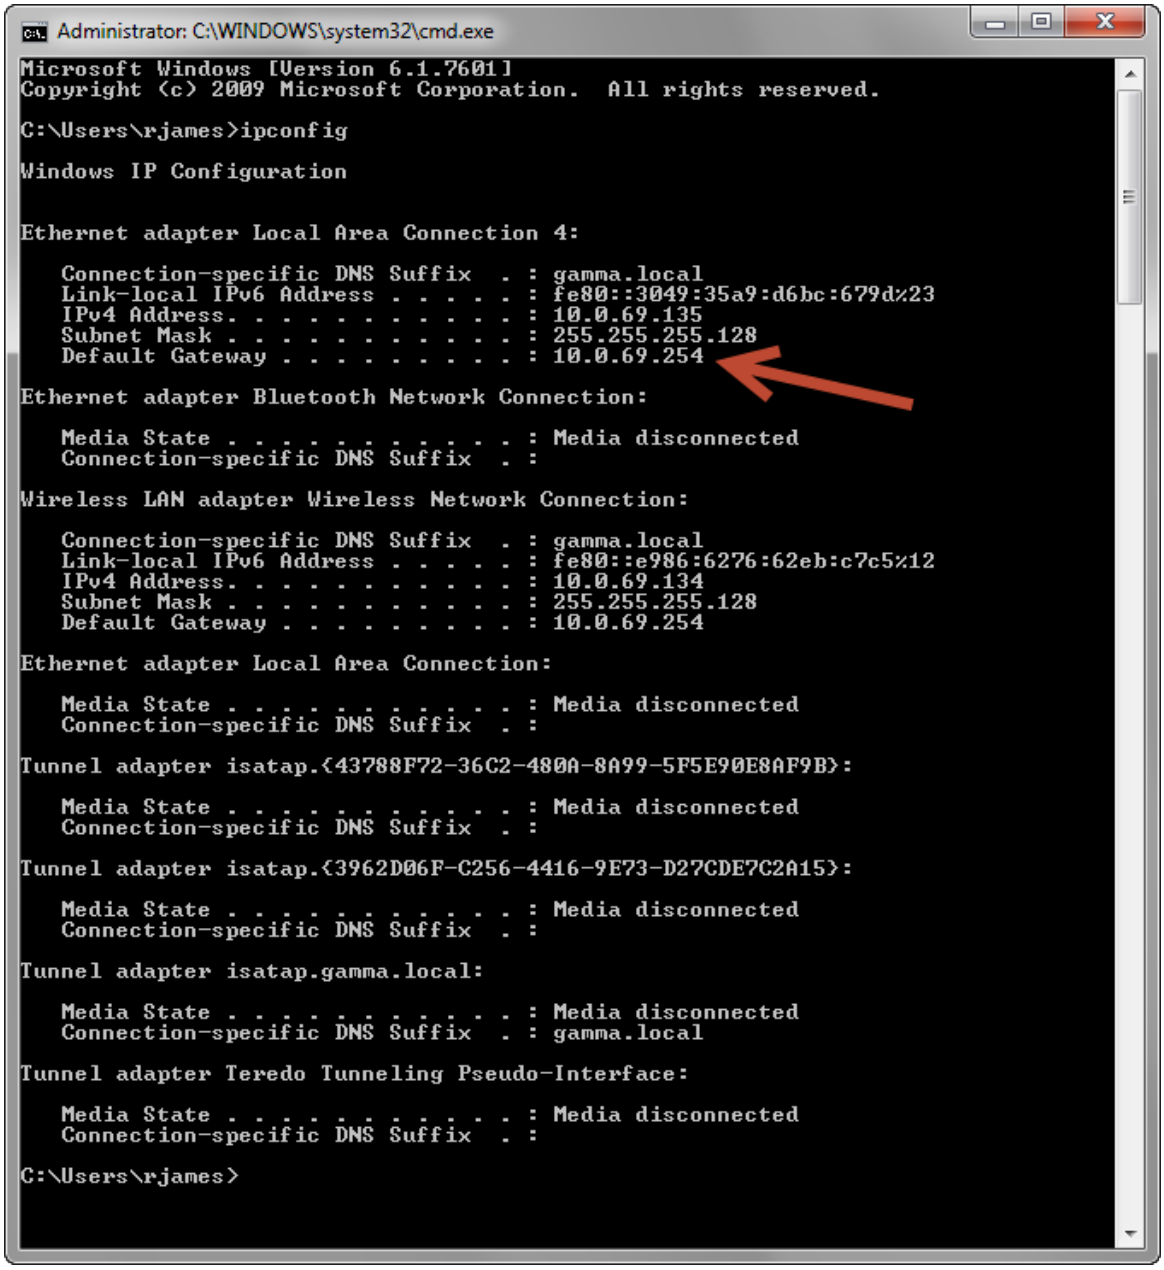

Step 3


Load up your browser and enter the default gateway address into the address bar. Use the below credentials to log in:

Username: admin

Password: admin

Step 4

The Phone Adapter Configuration Utility window will load up. Click "Voice".

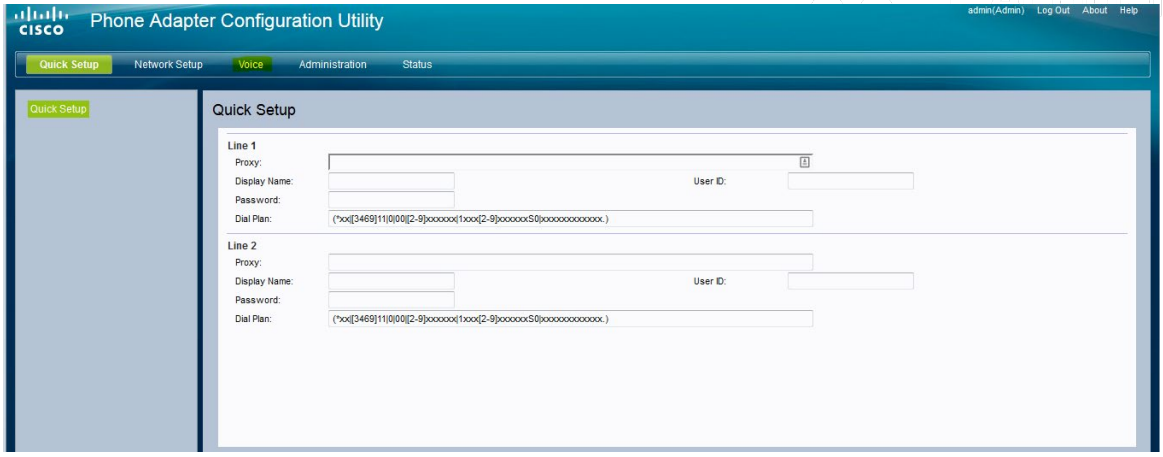


Step 4

Select "Provisioning" and you will see the "Provisioning Rule".

Check if the URL is correct in the “Profile Rule” field, if it is not; replace it with the correct one. Then click on “Submit”, and restart the ATA by powering it down and back up.

Cisco SPA122	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_122/122.xml
Cisco SPA232	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_232/232.xml
Cisco ATA 192	http://xsp.unlimitedhorizon.co.uk/dms/Cisco_192/192.xml

Following clicking "Submit" the ATA will restart a number of times to complete the firmware upgrade, profile download and the initial registration. This takes around 15-20 minutes

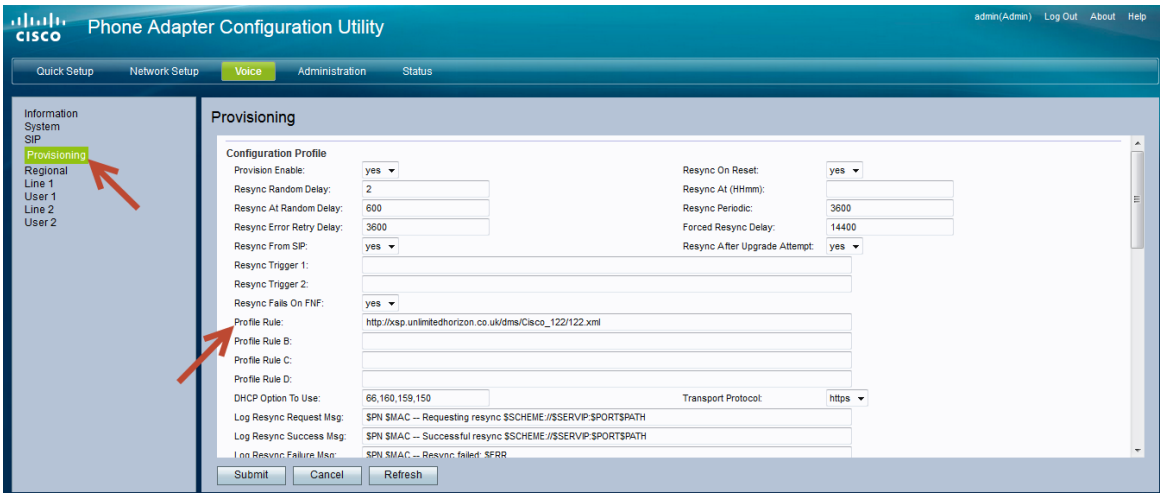

Polycom VVX Profile Rule

Step 1

Use a Laptop/PC to connect to the handset using an Ethernet cable. Connect one end of the cable into your computer, and the other end into the LAN port on the handset.


Step 2

On the handset, click on the Menu and navigate to Home -> Settings -> 4. Status -> 2. Network -> 1. TCP/IP Parameters".

You should see the local IP address of the phone. Put this IP address into a web browser address bar and hit enter.


Step 3

You should now be on the web portal for the phone, make sure Admin option is selected next to the "Login As". Type in the password "DL4DB4JS" (without " ") and click Submit.

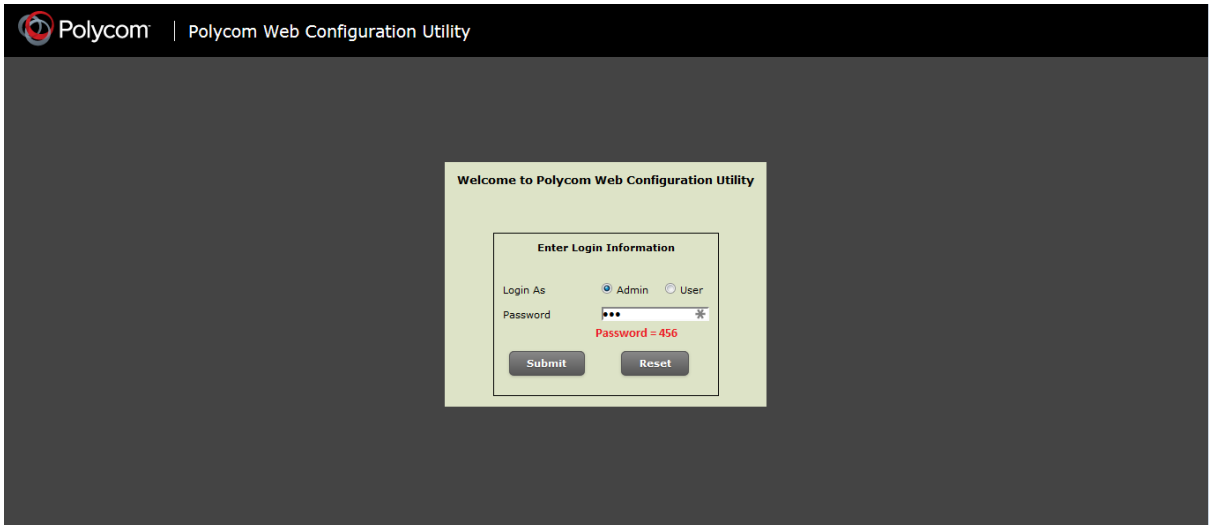

Step 4

On the next page hover over "Settings" and click on "Provisioning Server"

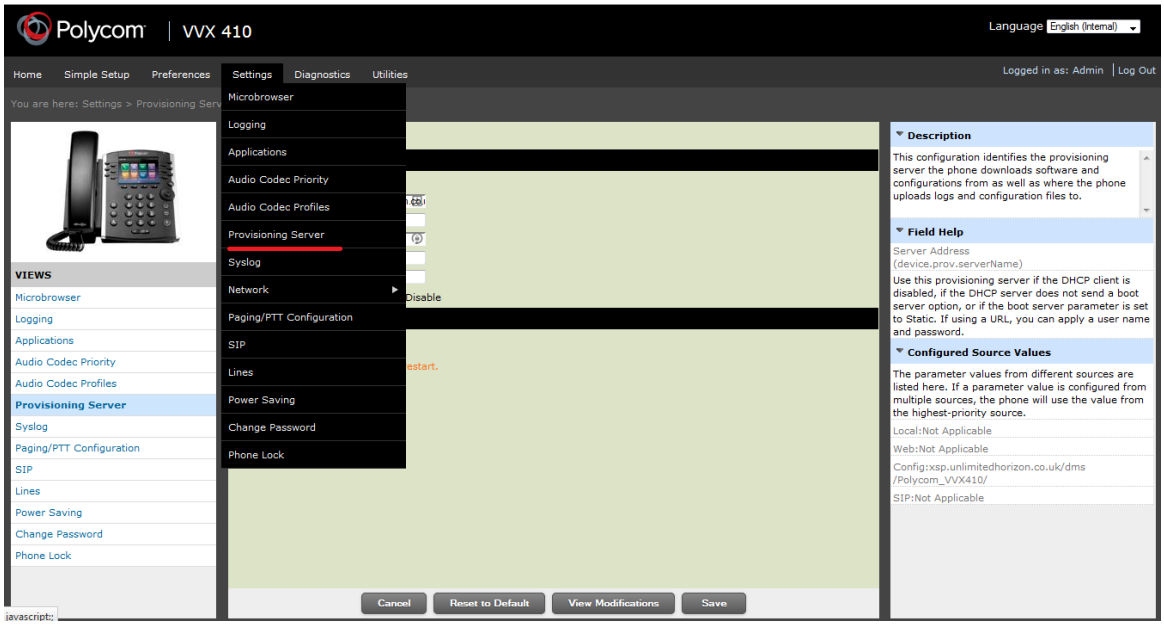

Step 4

This will take you to the screen where the profile URL needs to be checked.

Polycom VVX150	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX150
Polycom VVX250	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX250
Polycom VVX310	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX310
Polycom VVX410	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX410
Polycom VVX411	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX411
Polycom VVX450	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX450
Polycom VVX500	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX500
Polycom VVX600	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX600

Polycom VVX601	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_VVX601
Polycom Trio 8500	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_Trio8500
Polycom Trio 8800	http://xsp.unlimitedhorizon.co.uk/dms/Polycom_Trio8800

Following this process the phone will restart a number of times to complete the firmware upgrade, profile download and the initial registration. This takes around 15-20 minutes.

Yealink Profile Rules

Step 1


You will need to find the IP address of your Yealink handset; to do so pair the handset to the base and press the middle button 4 times. The correct IP should then be displayed.

Step 2

In your web browser search for the IP address of your Yealink handset which will take you to the Yealink log in page.

Username: admin


Password: admin

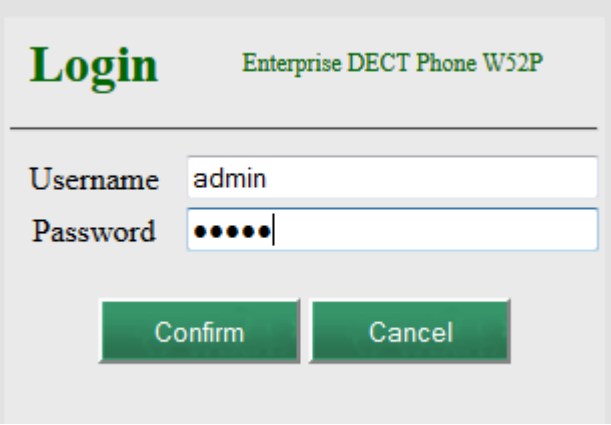

Step 3

Once you're logged in click on the "phone" tab at the top of the page.

When the Phone page loads up, select "Auto Provision" from the left hand menu.

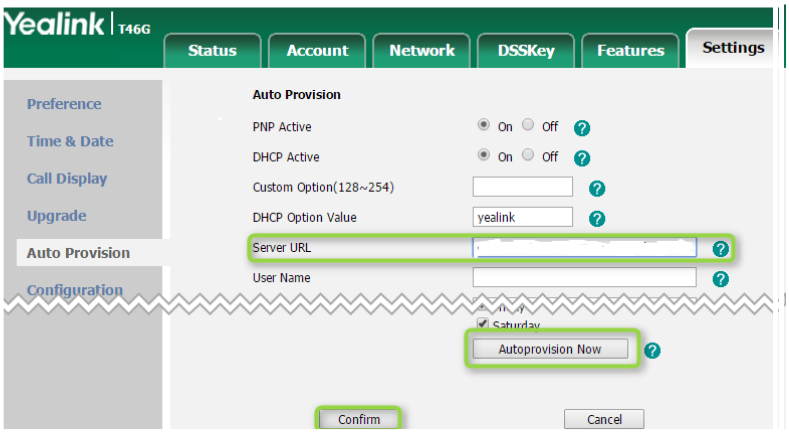

Step 4

In the provisioning server text box enter the following profile rule and click "Confirm".

W52P	http://xsp.unlimitedhorizon.co.uk/dms/Yealink_W52P
W73P	http://xsp.unlimitedhorizon.co.uk/dms/Yealink_W73P
T46U	http://xsp.unlimitedhorizon.co.uk/dms/Yealink_T46U

Following this process the phone will restart a number of times to complete the firmware upgrade, profile download and the initial registration. This takes around 15-20 minutes.

Cisco SOS Recovery Process

If your Cisco handset experiences an interruption of power during a firmware upgrade then the firmware could be unusable. If this happened then the handset will display "SOS phone in recovery mode".

The handset will automatically try to get a valid image from the last source that it can remember. You can however manually recover a handset from this stage using this recovery utility supported by Cisco.

This is Cisco software and Gamma has no input into this.

When the handset attempts to access the "last upgrade URL", it will be unable to handle a recovery request from the PC. When the handset gives up, it will allow you to successfully use the recovery utility.

Step 1

Make sure the default TFTP port (69) is not occupied on the computer. For example, if you have a TFTP server such as Pumpkin or Solar Winds running, shut the TFTP service down.

Step 2

You might have to disable the firewall or other security measures on the PC to allow TFTP to function properly.

Step 3

Run the recovery utility and enter the handset's serial number when prompted. You can use "FFFFFFFFFFF" (12 'F's) instead of the handset's serial number.

Please click here to download the Cisco SPA50x recovery utility

Step 4

The recovery utility should find the handset in recovery mode. Follow the instructions on screen to start the recovery process.

Once the handset has recovered and rebooted, you can upgrade to the desired version of firmware.

Polycom Recovery Process

A subset of Polycom SoundPoint phones are unable to boot as they cannot establish a secure connection to the Horizon provisioning servers due to an expired TLS certificate. The certificate cannot be updated remotely due to an apparent problem in the firmware.

This procedure describes how to configure the phones to communicate with the Horizon provisioning severs via HTTP, bypassing the TLS/HTTPS problem.

Polycom SoundPoint 331 & 335 Recovery

Step 1

Go to the Settings of the handset within the Menu and then press "Advanced" and enter the following password (to change from numbers to letters press the # key on the telephone keypad, and for uppercase use the "Up" arrow key")

Password: DB4JO4IM

Step 2

Select "Admin Settings" and then "Network Config"

Step 3

In the Network Config pages select "Provisioning Server" and select "Server Type". Make sure that this is "HTTP" and not "HTTPS".

Press "OK" and then back twice and "Save Config".

Step 4

Following this process the phone will restart a number of times to complete the firmware upgrade, profile download and the initial registration. This takes around 15-20 minutes.

Polycom SoundPoint 450 & 650 Recovery

Step 1

Go to the Settings of the handset within the Menu and then press "Advanced" and enter the following password (to change from numbers to letters press the # key on the telephone keypad, and for uppercase use the "Up" arrow key")

Password: DB4JO4IM

Step 2

Select "Admin Settings" and then "Network Config"

Step 3

In the Network Config pages select "Prov. Server" and select change the Server Type to HTTP by scrolling right.

Press back twice and "Save Config".

Step 4

Following this process the phone will restart a number of times to complete the firmware upgrade, profile download and the initial registration. This takes around 15-20 minutes.

Polycom 5000 Recovery

Step 1

Go to the Settings of the handset within the Menu and then press "Advanced" and enter the following password (to change from numbers to letters press the # key on the telephone keypad, and for uppercase use the "Up" arrow key")

Password: DB4JO4IM

Step 2

Select "Admin Settings" and then "Network Config"

Step 3

In the Network Config pages select "Prov. Server" and select change the Server Type to HTTP by scrolling left.

Press back twice and "Save Config".

Step 4

Following this process the phone will restart a number of times to complete the firmware upgrade, profile download and the initial registration. This takes around 15-20 minutes.

Handset Returns

There are times where you need to return or exchange your handset(s), whether it is faulty or if there is an issue with the courier, we have some returns information that you need to follow to get the handset returned and exchanged as quickly as possible.

If you have any billing queries about a handset return then please raise a Billing Query on the Gamma Portal by selecting "Billing Home" and selecting "Billing Query". Alternatively you can contact the Billing team using the webchat function on the Billing Home page and clicking "Contact Us".

Faulty Handset

If you have a faulty handset this will require a fault to be raised with our Horizon Faults team. The Service Desk will diagnose if the fault lies with the handset or not. If they determine that the handset is at fault they will send you a template to complete - please ensure this form is completed with the correct information as any incorrect information can result in the exchange/return being rejected by the supplier upon return.

Once the form has been completed and sent back to the Service Desk, this request will then be handled by our Provisioning team to fulfil the exchange/return with the supplier. As part of the exchange/return process a replacement device will be sent out to yourselves by APC Overnight, confirmation of delivery of the replacement and collection of the faulty handset will be issued by the Horizon Provisioning team upon this being arranged.

Please note:

- If the device returned to the supplier does not match the MAC address input on the form, this device will be returned to yourselves
- The exchange/return process has a 2-week window, please communicate with the Horizon Provisioning team to ensure the exchange/return is completed in this timeframe
- It can take up to 48 hours for a replacement device to be arranged

Delivery Issues

On occasion a delivery may go missing with the courier or some other issue may arise. Though rare, we have a process in place for you.

You should first check that the "Void" sticker that is on the box has not been tampered with. If it has then you should let our Service Desk know in the first instance.

Contact the Service Desk with your order number and we'll be able to log an investigation with our supplier and their courier. It is worth noting that these investigations may take up to 10 days to complete.

To get a replacement handset(s) you'll need to place your order again. Gamma will raise the credit on your account once the investigation with the courier and supplier has been completed.

Change of Mind

If you have ordered a device in error or the device you ordered is no longer required, we would advise that in these instances it is best to retain the handsets with yourselves and as/when an alternative customer requests new handsets you are able to send them straight out and transfer the devices to the new account. If you are adamant you wish to return these handsets, you will need to gain authorisation from your Business Development Manager then contact the Service Desk to raise this. The Service Desk will then raise this with the supplier and get back to you with the returns information.

Please note:

- The return is the channel partner responsibility; Gamma will not subsidise any return courier costs.
- The equipment needs to be deemed “re-sellable” condition. This means the box has to remain factory sealed and still be in the condition it was sold in
- If the handsets have been purchased through the hardware incentive, no cash credit will be applied upon the return of the handsets
- If the factory seal has been broken, then you are unable to return the handsets
- If once the handsets have been returned the supplier believes the handsets are not in a “re-sellable” condition the handsets will be returned to yourselves and courier costs will be applied.

SIP ALG

SIP ALG stands for Application Layer Gateway and is common in many commercial routers. It intends to prevent some of the problems caused by router firewalls by inspecting VoIP traffic (packets) and if necessary, modifying it.

Many routers have SIP ALG turned on by default.

How can it affect VoIP?

Even though SIP ALG is intended to assist users who have phones on private IP addresses, in many cases it is implemented poorly and causes more problems than it solves. Gamma and other providers often find that the SIP ALG modifies SIP packets in unexpected ways, corrupting them and making them unreadable. This can give you unexpected behaviour, such as phones not registering and incoming calls failing, One Way Audio/Media issues and calls failing to transfer properly. **SIP ALG must be turned off for Horizon to work off and the service is not supported until SIP ALG is turned off.**

How can I check if SIP ALG is affecting my customers' service?

You can check if SIP ALG is affecting your customer's service by using the Health Check.

How to switch off SIP ALG using Telnet

This guide is going to tell you how to use Telnet (a text-based protocol that allows you to connect to a remote device over the Internet) through command prompt, though there are programs such as SecureCRT that you can use for this.

Gamma offer no further support for using Telnet to switch of SIP ALG other than theses guides. Gamma takes no responsibility for anything that may happen to your router. It may also invalidate your routers warranty so you may want to check this before proceeding. You should only proceed if you are completely happy to do so. You should always speak to your Internet Service Provider or consult your router user guide for further information.

Before you start you should see the Microsoft Help Pages to ensure that you have Telnet enabled in Windows first.

Cisco Routers

Step 1

On your PC go to "Start" and select Run. Type in "cmd" to load up the Command Prompt.

Type into the following to Command Prompt:

"Telnet" followed by the IP address of your router

If you are doing this on the LAN then this will be your Default Gateway in "IPConfig". If you are doing this on an external network then you will need to ask your customer to go to Google and what in "What's My IP". More information can be found at About.com.

Step 2

Type in "enable" and then enter your administrators log in when asked for "Account" and then the password is the password of the router.

Step 3

Type in "Configure terminal".

Step 4

Type in the following commands:

No ip nat service sip tcp port 5060

No ip nat service sip tcp port 5060

Step 5

Exit out of the configuration terminal by pressing "Ctrl+C" together.

Type in "Copy run start" to save the configuration.

Step 6

Type in "Reload" and hit enter which will reboot the router.

Draytek Routers

Step 1

On your PC go to "Start" and select Run. Type in "cmd" to load up the Command Prompt.

Type into the following to Command Prompt:

"Telnet" followed by the IP address of your router

If you are doing this on the LAN then this will be your Default Gateway in "IPConfig". If you are doing this on an external network then you will need to ask your customer to go to Google and what in "What's My IP". More information can be found at About.com.

Step 2

Type in "enable" and then enter your administrators log in when asked for "Account" and then the password is the password of the router.

Step 3

Type in the following commands and hit enter:

sys sip_alg 0

Step 4

Type in the following commands and hit enter:

Sys commit

Step 5

Type in the following commands and hit enter:

Sys reboot

Step 6

Once your router has rebooted you'll need to go into the Firewall settings on your router through the router's GUI and make sure that you "Accept large incoming fragmented UDP or ICMP packets" or something similar is not selected.

Reboot your router again and you're good to go.

Technicolour Routers

Step 1

On your PC go to "Start" and select Run. Type in "cmd" to load up the Command Prompt.

Type into the following to Command Prompt:

"Telnet" followed by the IP address of your router

If you are doing this on the LAN then this will be your Default Gateway in "IPConfig". If you are doing this on an external network then you will need to ask your customer to go to Google and what in "What's My IP". More information can be found at About.com.

Step 2

Type in "enable" and then enter your administrators log in when asked for "Account" and then the password is the password of the router.

Step 3

Type in the following commands and hit enter:

Connection unbind application=SIP port=5060

saveall

Zyxel Routers

Step 1

On your PC go to "Start" and select Run. Type in "cmd" to load up the Command Prompt.

Type into the following to Command Prompt:

"Telnet" followed by the IP address of your router

If you are doing this on the LAN then this will be your Default Gateway in "IPConfig". If you are doing this on an external network then you will need to ask your customer to go to Google and what in "What's My IP". More information can be found at About.com.

Step 2

Type in "enable" and then enter your administrators log in when asked for "Account" and then the password is the password of the router.

Step 3

Go to Menu option "24. System Maintenance" Then select Menu option "8. Command Interpreter Mode". Type in the following command and hit enter:

Ip nat service sip active 0

Step 4

Type in the following commands and hit enter:

Sys commit

Step 5

Type in the following commands and hit enter:

Sys reboot

Switch off SIP ALG on a Netgear Router

Gamma offer no further support to switch of SIP ALG other than theses guides. Gamma takes no responsibility for anything that may happen to your router. You should only proceed if you are completely happy to do so. You should always speak to your Internet Service Provider or consult your router user guide for further information.

Step 1

In your web browser type in "198.168.0.1" and press enter. This will then load up your routers configuration GUI.

Use the following details to log in:

Username: admin

Password: password

If you have confirmed a custom password previously then you should use this instead of "Password". If these combinations don't work you should consult the Netgear router user manual.

Step 2

Select "Advanced" and then "WAN Setup"

On some version of Netgear firmware you may need to select "NAT Filtering".

Step 3

Click on the "Disable SIP ALG" check box and then click "Apply".

I have a problem with call quality

If you are experiencing call quality issues with Horizon, we would recommend that you complete the following checks in this order.

Codecs

If you're experiencing call quality / media issues the first check that you should do is check the codec and your customer's access bandwidth.

G711	Highest quality codec	100kb per second
G722	HD codec	60kb per second
G729	Lowest quality codec	40kb per second

Use the above table and the below calculation to see if you have enough bandwidth for your customer's Horizon Company.

Concurrent calls x Codec kbps = bandwidth required

Access

The next thing you should check after the code is your customers access (i.e. the Broadband or Ethernet connection). The following items are key to check:

- Packet Loss
- Jitter
- Latency

If you are using Gamma Access then see the following guides to help with identifying these issues:

- Assured Technical Support
- Broadband Technical Support
- Converged Broadband Technical Support
- Ethernet Technical Support

Bypass the switch

You should also try and bypass the switch to make sure that it is not the switch causing issues. Do this by plugging a handset directly into the router. If the call quality / media issues stop you know the problem is with the switch.

SIP ALG

All Horizon sites should have SIP ALG disabled.

I have checked all of the above

If you have done all the above checks and are still experiencing issues you should report the fault into the Service Desk using the details in the Customer Service Plan on the Gamma Portal (Help and Support, Support Documentation).

The Service Desk will need a minimum of three call examples with the following details:

- Date & Time of call
- Calling number
- Destination number
- Handset make/model
- Description of what has happened on that call

It is also helpful to let the Service Desk know the outcome of the access investigation and codec details.

I have a problem with call connection / calls are dropping

Some of the most common reasons why calls don't connect are:

- The users handset is not registered
- The user is not in the Call Queue Group or Hunt Group as expected
- Do Not Disturb is enabled
- The user has an Availability Profile setup and active
- SIP ALG is enabled
- The number has previously ported to Gamma and there is an issue with the Range Holder. For these issues you will need to provide call examples to the Service Desk with the following information
    - Date & Time of call
    - Calling number
    - Destination number
    - Handset make/model
    - Description of what has happened on that call

Akixi

Technical support is supplied directly by Akixi. Contact details of Akixi are:


support@akixi.com


01293 853060


Monday to Friday 09:00 - 17:30

I have a problem with a feature

If a feature is missing from the Horizon Portal or Gamma Portal, you should refer to your Gamma Portal Admin. To find out who is your Portal Admin you should go to the Gamma Portal, Help and Support and "Portal Administrator". The Portal Administrator can check you've got the relevant permissions.

If you cannot contact your Portal Administrator, or the permissions are not showing for the Portal Administrator you should contact the Internal Account Management team.

If you are having a problem with a feature you should refer to one of the following guides:

- Call Centre
- Receptionist
- Integrator

For all other features please see our Horizon Features guide.

I have a problem with hardware

If you are having problems with Horizon hardware you should consult the relevant handset user guide on the Gamma Academy.

Local Wireshark Traces

Please see a step by step guide to provide Gamma with a LAN side capture when requested for complex diagnostics.

Files should be less than 20MB in size otherwise they can contain too much data to analyse. You can use View My Support Call to attach your trace.

*Wireshark is a freeware tool and the general use or support of Wireshark is not supported by Gamma.

Step 1

Download the latest version of Wireshark and install on your machine.

Step 2


Ensure port mirroring is setup on the router. If you are using Gamma Assured or Ethernet Access the service desk will set this up for you. You need to mirror the Ethernet port where the phone/switch is connected to another port where you will plug in your computer with Wireshark installed.

Step 3

Depending on the router, you may or may not get an IP address from it for your computer with port mirroring active. Even if you don't however – this is not an issue as long as the port mirroring is correctly setup – Wireshark will capture all the data.


Step 4

Launch Wireshark on your computer. When it's open you need to then click on the icon highlighted in red on this screenshot – "Show the capture options"

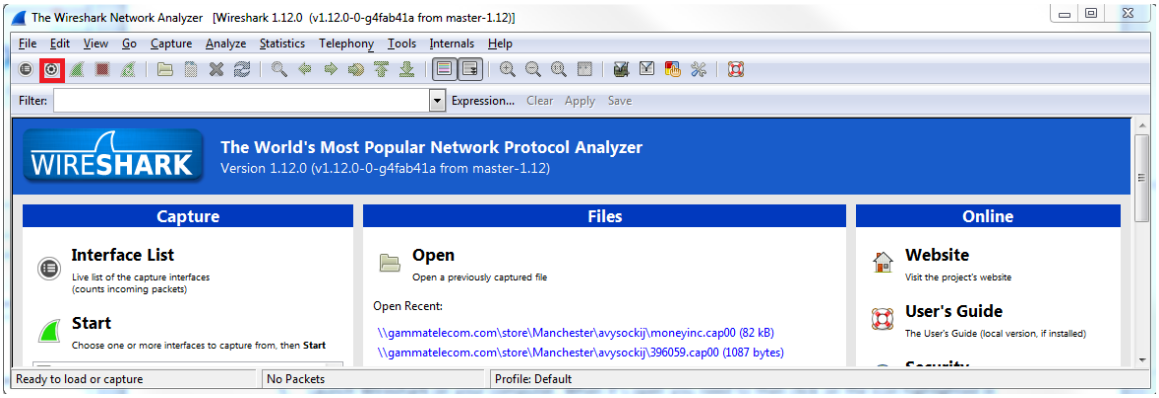

Step 5


In the capture options window, make sure you set the fields highlighted in yellow in the below screenshots. You need to select your Ethernet interface at the top, set the name of the file and the folder in the "Name" field. Make sure you select "Use multiple files" and "Next file every" 10-20 Megabytes.

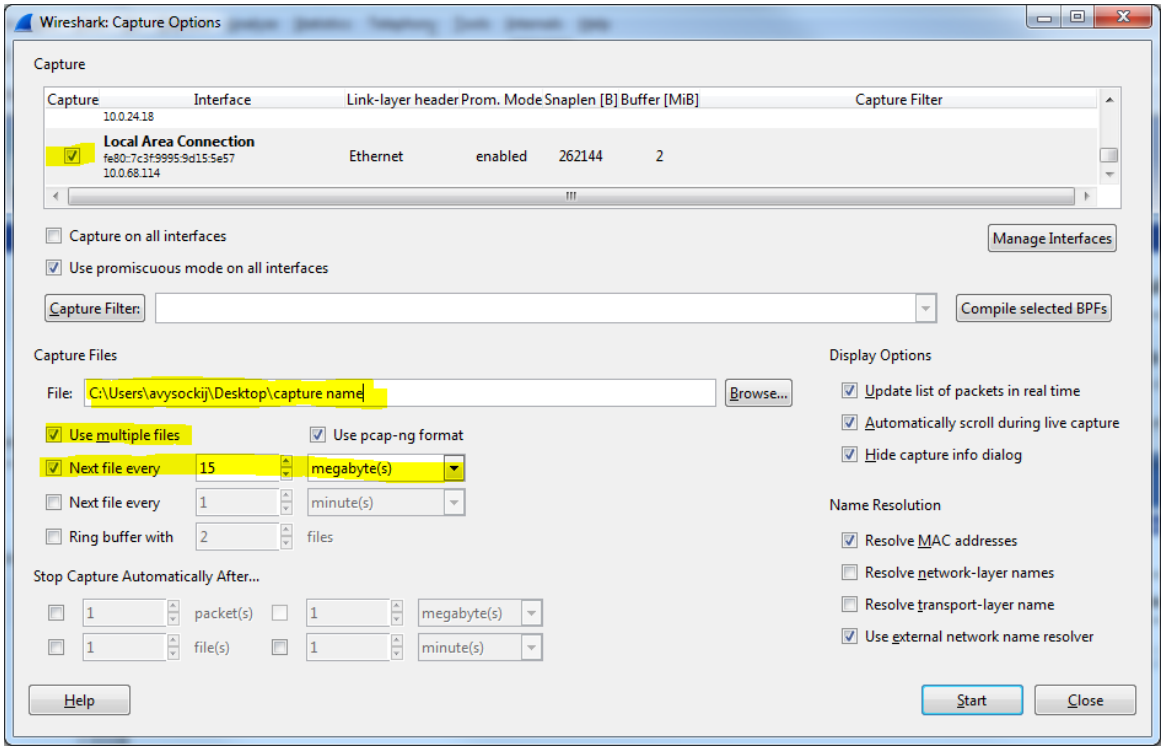

Step 6

Press start and you should now see the packets will start building up in the main window.

If this doesn't happen, you either have not selected the correct network interface or port mirroring has not been setup correctly / you are connected to the wrong port on the router.

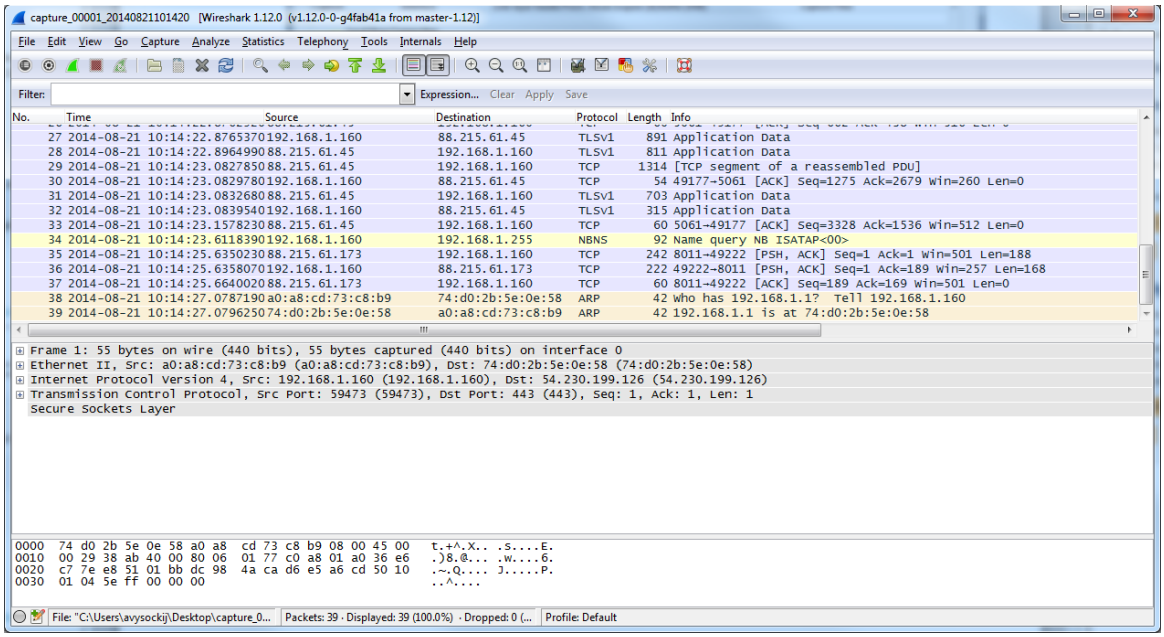

Once you get call examples from your customer you can then select the file that wireshark written to your folder at the time of the call. For example – if there was a call at 10:14, you need to select the file that was created just after that time, like 10:19. If the time of the call and file creation is the same, send us two files – one made before and after the time of the call

Step 8

Locate the ticket on the Gamma Portal by going to Help and Support and Support Calls. From here you can upload your attachment directly to the ticket with a note of the call examples. The ticket owner will then get notified and continue their investigation.

I have a problem with a Soft Phone or Collaborate Clients

For full information on features and instructions, please refer to the following guides on the Academy:

- PC Soft Client User Guide
- Mac Soft Client User Guide
- Android Soft Client User Guide
- iOS Soft Client User Guide (iPhone and iPad devices)

I am unable to download the soft client / Collaborate file to my desktop

If a user is unable to view the download link from the Dashboard in the Horizon Portal, then the user doesn't have a Soft Client or Collaborate bolt on. See the Horizon Provisioning and In Life Guide for information on how to "Add Bolt Ons"

I am unable to install the Soft Client / Collaborate Client to my desktop

Ensure that you have appropriate user privileges on your device to install the software. If not, speak to your IT department.

If the downloaded package will not unzip or load, it may be corrupt and you'll need to re-download the file.

You should also ensure that your system meets the minimum system requirements, which are documented in the PC and Mac Soft Client User Guide

Soft Client / Collaborate does not load on my desktop

If the Soft Client does not load, you should check the Event Viewer (PC) or Console Messages (Mac) to ensure that everything is fine. You should speak to your IT Administrator for help on how to use these as they vary depending on the Operating System and configuration.

I cannot log into any of the Soft Clients / Collaborate (PC, Android and iOS)

You should try and replicate the fault by trying to log in on a machine on the same network that you are on that is known to work with the Soft Client or Collaborate, using the username and password of the user who is having the fault to determine whether it is the client or the user's profile where the problem lays.

Collaborate

Audio

Except for the below regarding headsets, any audio faults in Collaborate are to be treated the same as any audio faults you get with Horizon. Please see the relevant sections within this guide.


Audio Settings / Headsets

Audio Settings will be set to "Use Default" upon installation. The defaults are a user's Windows Communication Device defaults. If you notice that audio is coming through your computer speakers, you can do one of the following.

Right click the speaker icon in your system tray and then select "Playback Devices"



Once here, you can select what you would like your default communication device to be (this will be the device that you use for making and receiving calls).

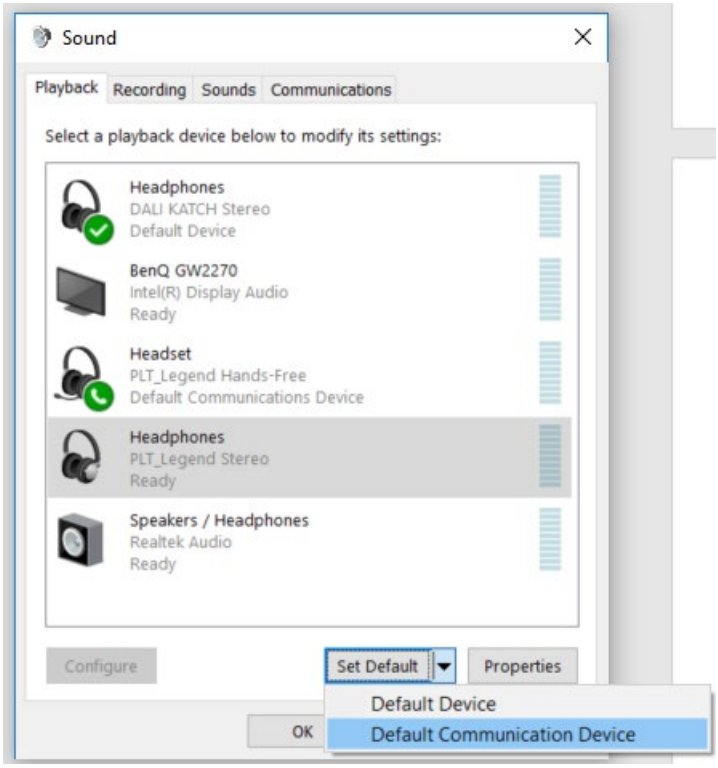

Default Device is what you want all other media to use.

Alternatively, you can set this in the client yourself by selecting Settings → Audio/Video and changing the headset and speaker options to your desired setting.

Video

Collaborate is a video capable service that relies heavily on bandwidth. If someone is experiencing video faults, there are some basic checks that should be completed before reporting a fault into the Gamma Service Desk.


It's worth noting that you can have up to 15 users on a single video call via MyRoom. Another 35 users can join as audio-only.

No Video

Webcam Check

We should get that the user has their video settings set correctly. Check within Settings → Audio/Video that the "Capture device (video)" is set to the correct web cam.

Tip: if the user is using their laptop camera, then this will be "Integrated Webcam". All connected webcams will appear in this drop down.

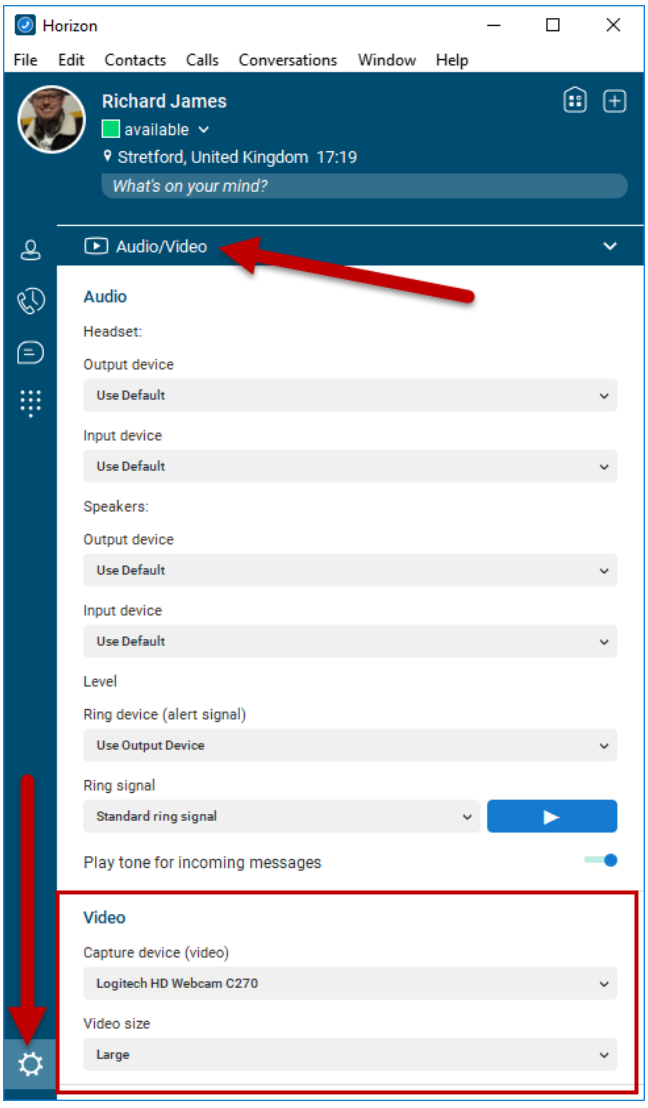


Another handy tip to check if the users webcam is working, and that it isn't the hardware that is faulty is to use the Windows 10 application "Camera". This will use the users integrated webcam and if this is not working or displaying video correctly, the fault will be with the hardware and not Collaborate.

If the "Camera" application is working, however this isn't working in the Collaborate client, the Gamma Service Desk will need the client logs to start diagnosing the issue.

To obtain the logs, ask the user to go to Settings→ Advanced and then "Clear All Logs".

Set "Detailed Logging" to "On" and ask the user to replicate the fault.

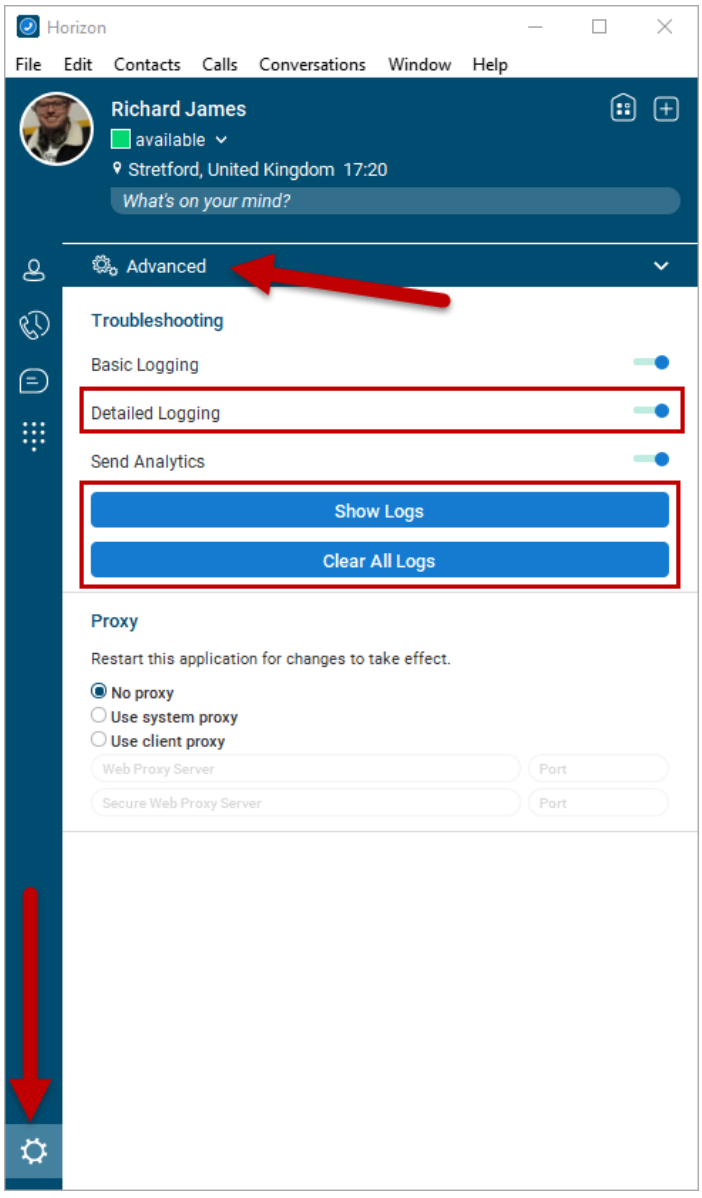

Once the user has replicated the fault, select "Show Logs" and zip up the “UCOneLog”. This should then be sent to the Gamma Service Desk for further investigation.

Poor Video Quality

Poor video quality is usually down to the LAN or bandwidth available on the underlying access, especially when it is affecting one user or multiple users at the same location.

Network Configuration (LAN)

The first check that should always be done is to check that the LAN the user is working on is conforming to the network configuration guidelines document available on the Academy.

If the user is a home worker, then the router settings should match what is in the Network Configuration guidelines, though a lot of residential routers are locked down for administrative changes. The major driver of call quality issues, SIP ALG, is by passed with the new version of the clients, including Collaborate and the Soft Phone Client.

Bandwidth

Bandwidth is something else that needs to be considered, particularly around video quality.

The default setting of the client is set to "Medium", which is deemed suitable video quality for a user.

Video Quality	Maximum Bandwidth
HD	4Mbps
Large	2Mbps
Medium	1Mbps
Small	500Kbps

If an office is experiencing bandwidth constraints, the client will automatically adjust the quality based on available bandwidth, so it may take up to 5 seconds for the call quality to settle down. This may happen a few times throughout the call as the access circuit is being used.

If the call quality is consistently bad, the bandwidth at the users locations may need to be upgraded.


Obtain Client Logs

Once the webcam, LAN and access has been ruled out, the next stage is to prepare to send the fault to the Operational teams. The operational teams will need:

- 3 call examples
- Client logs
-

To obtain the Client Logs, ask the user to go to Settings→ Advanced and then "Clear All Logs".

Set "Detailed Logging" to "On" and ask the user to replicate the fault.

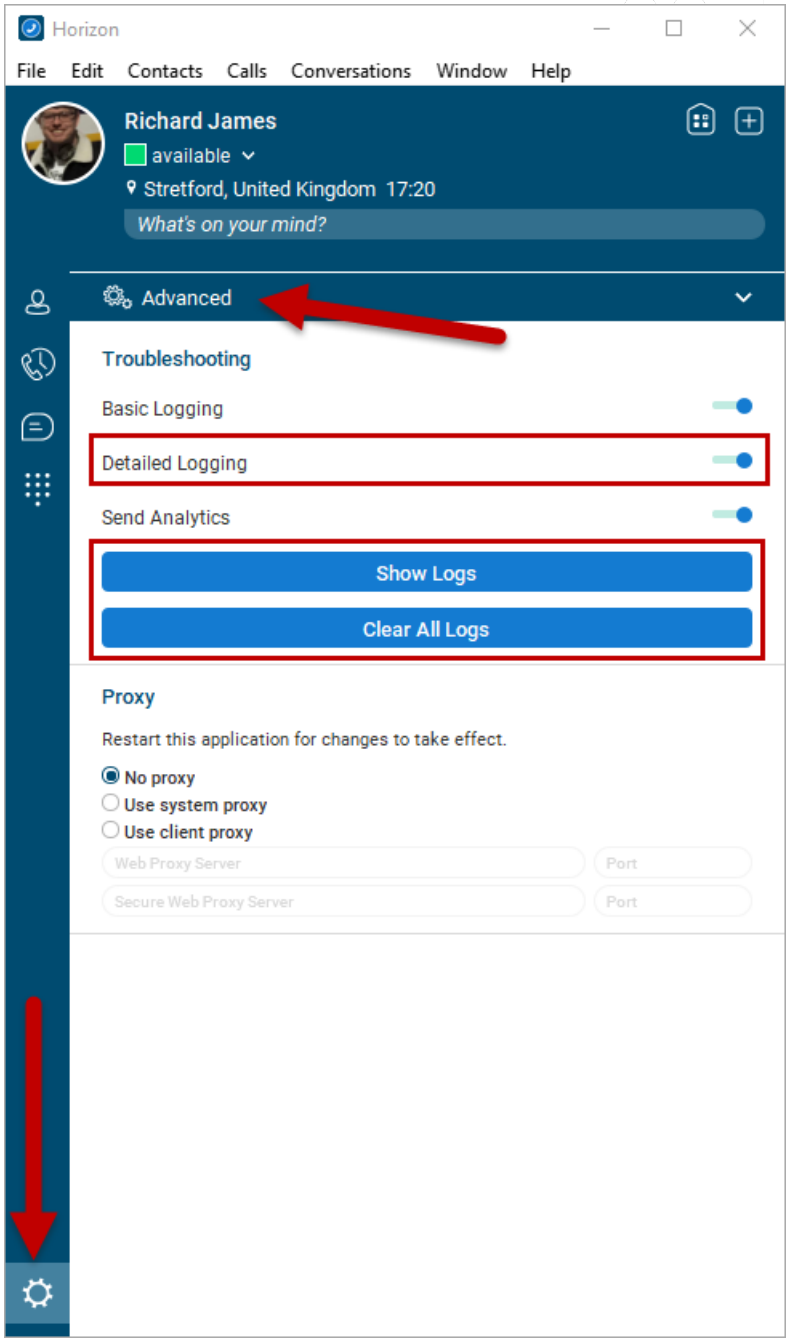

Once the user has replicated the fault, select "Show Logs" and zip the file "UCOneLog" and send to Gamma Service Desk.

Conference (MyRoom)

If the conference is a video conference, please follow the "Video" section of this document.

If the conference is an audio conference, please follow standard voice fault processes. Note, an audio MyRoom conference can hold up to 50 people.


Presence

Presence not updating from Outlook

Extension Settings


The first check if a user is reporting that their presence is not updating in line with their Outlook calendar is to check that this is enabled by a user. This is within Settings → Extensions.

Once here, ensure that the user has "Enable Outlook calendar" set to on. This feature will only work when a user is logged in to the client and has Outlook open. If a user is not logged in, their presence will show "Offline".

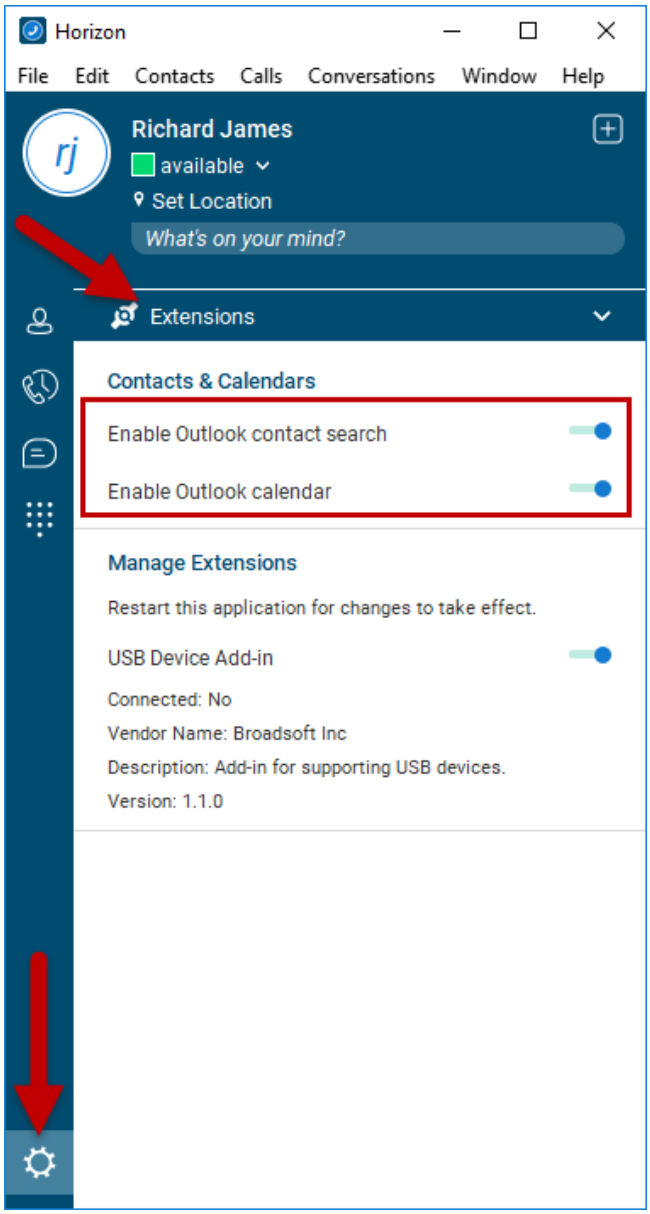

Automatic Presence not updating

In Collaborate, a user can set their Presence manually to whatever they choose. If they do this, this setting will override every other presence setting, including what is set in Outlook. To mirror their Outlook calendar again, make sure that they change the status back to "automatic"

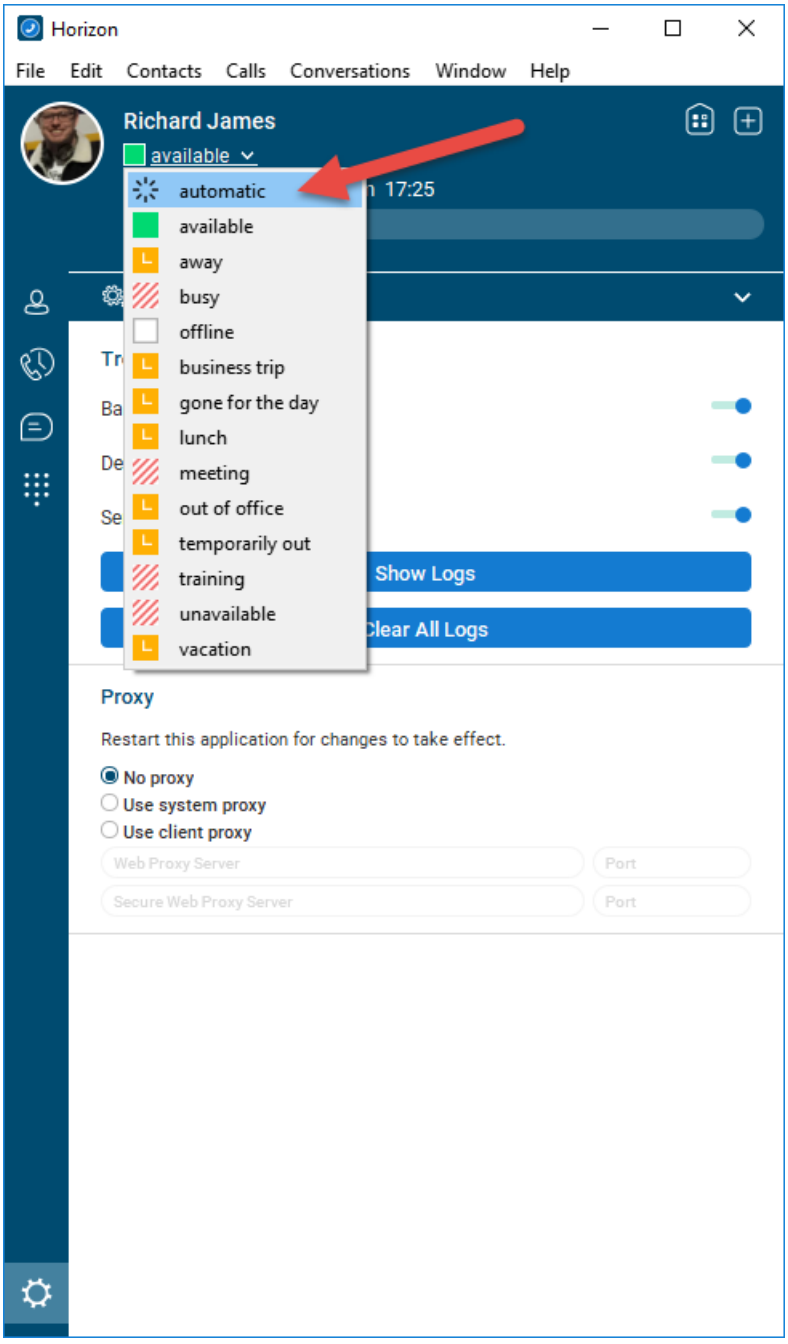


Obtain Client Logs

Once the webcam, LAN and access has been ruled out, the next stage is to prepare to send the fault to the Operational teams. The operational teams will need:

- 3 call examples
- Client logs
-

To obtain the Client Logs, ask the user to go to Settings→ Advanced and then "Clear All Logs".

Set "Detailed Logging" to "On" and ask the user to replicate the fault.

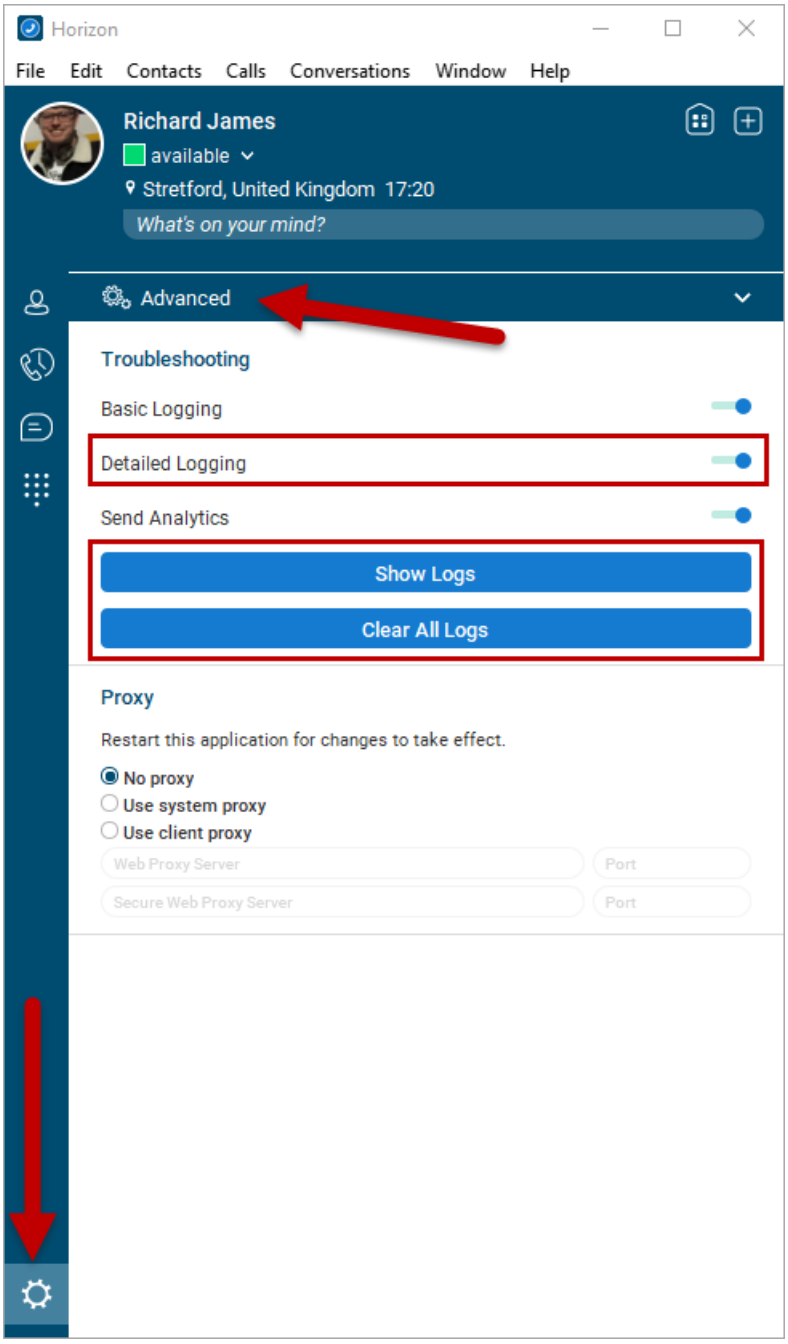

Once the user has replicated the fault, select "Show Logs" and zip the file "UCOneLog" and send to Gamma Service Desk.


Contacts

Contacts not searching Outlook

Extension Settings

The first check if a user is reporting that their presence is not searching their Outlook contacts is to check that this is enabled by a user. This is within Settings → Extensions.


Once here, ensure that the user has "Enable Outlook contact search" set to on. This feature will only work when a user is logged in to the client and has Outlook open.

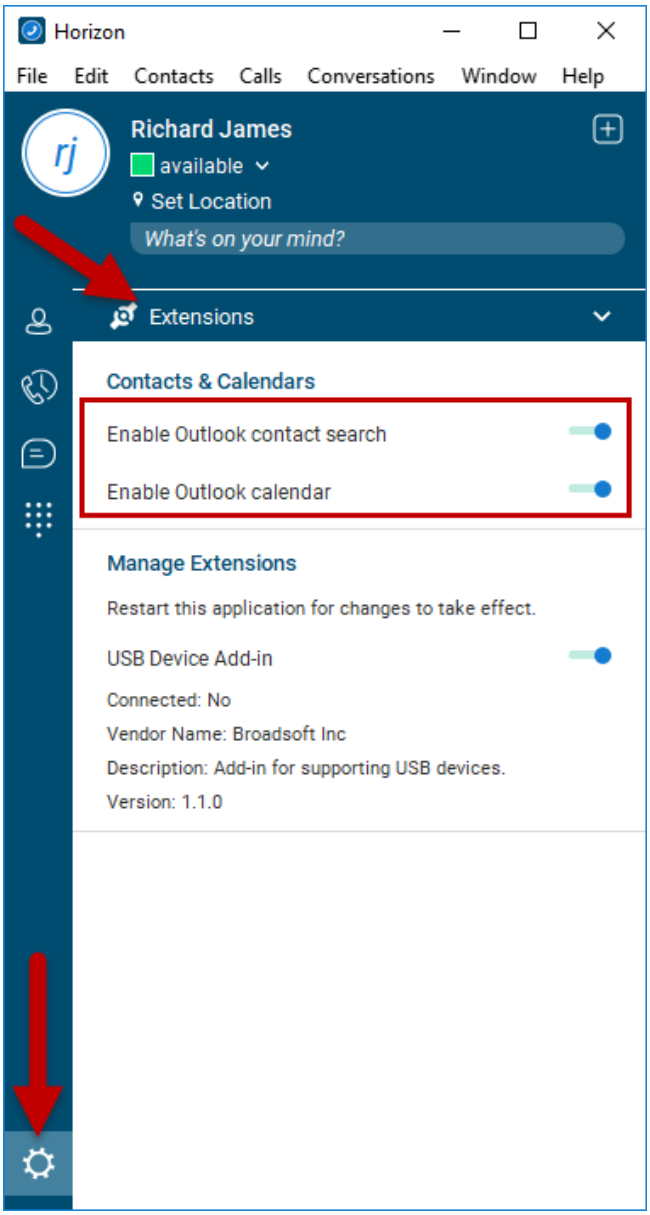

Unable to find the Company Directory

The Company Directory has moved to one consolidated contacts tab, for a user's own contacts, Outlook contacts and the Company Directory.

Using the "Search and Dial" text box will search all directories that the user has access to.

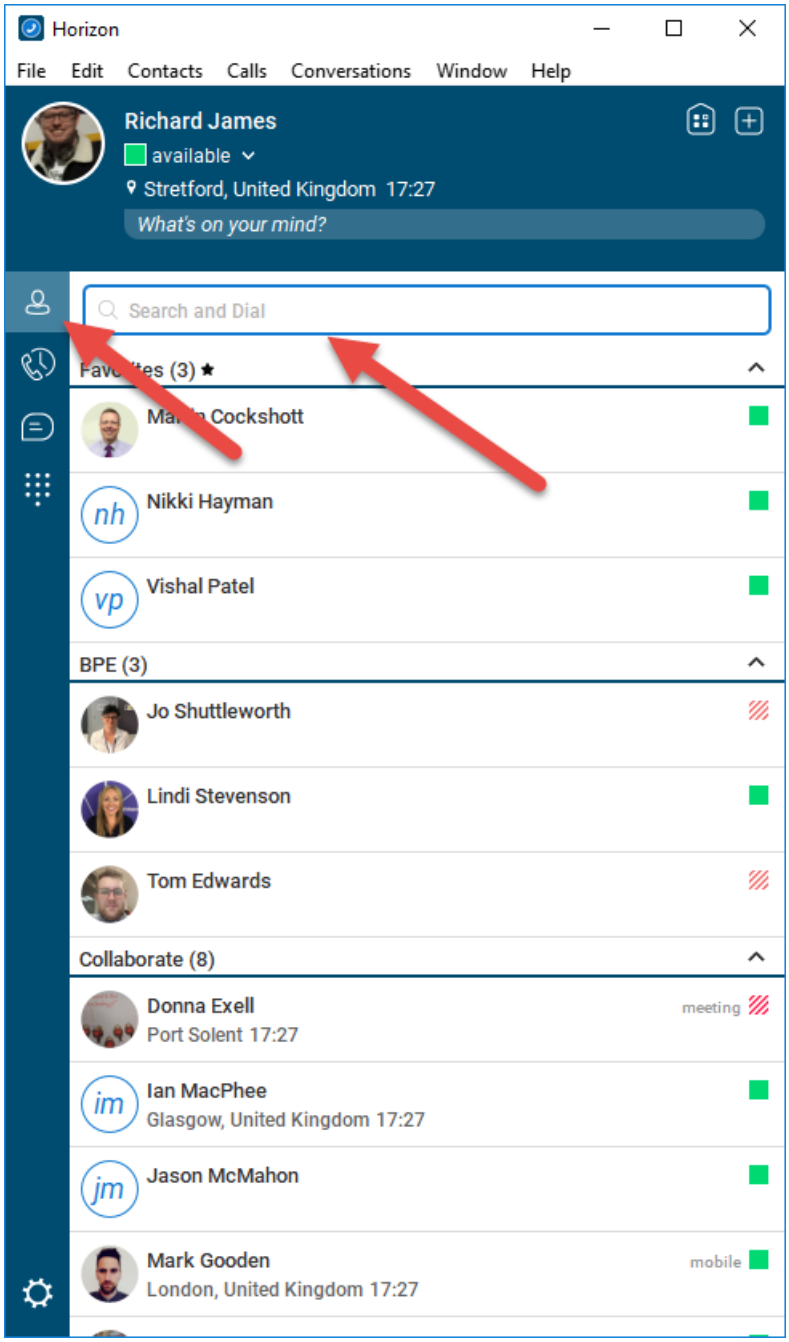


Guest Client

If a user is joining a MyRoom session via the guest client (guest link), then they must use this in Google Chrome. The Guest Client won't work in any other browser.

If a user is using Google Chrome and is having any problems with the guest client, we need to obtain the Google Chrome logs. To do this, get the user to press F12 on their keyboard which will load up the Console.

Get the user to copy and paste all the information from the Console tab into Word, and send this over to Gamma Service Desk to investigate.

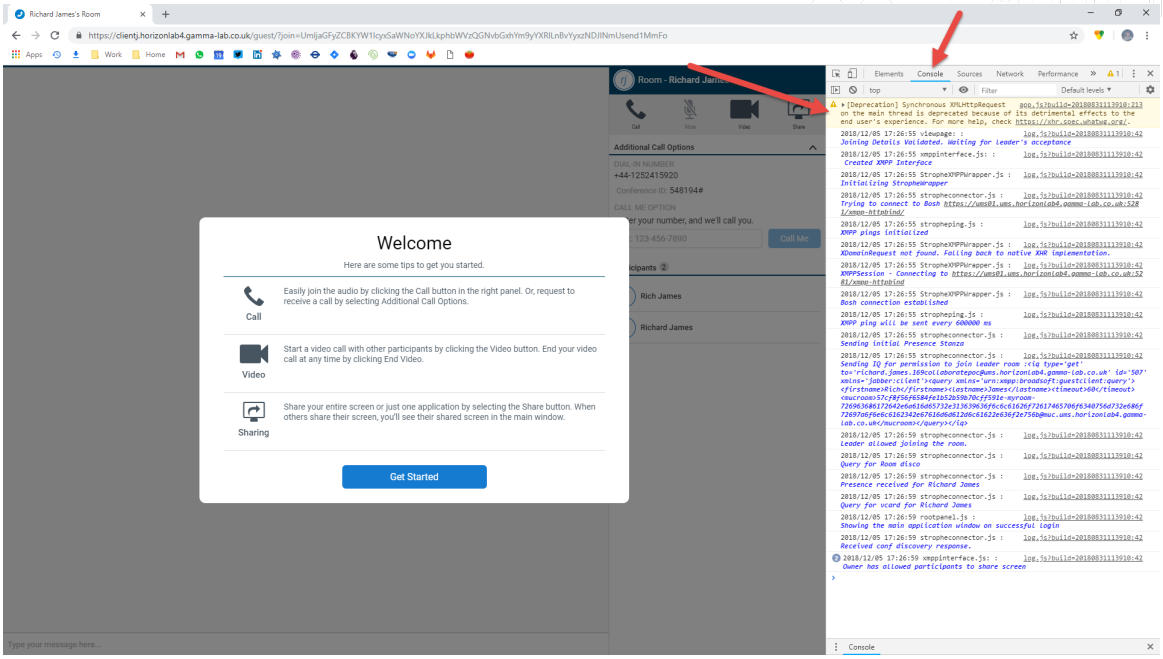
Richard James's Room
https://client.horizonlab4.gamma-lab.co.uk/guest/?join=UmljaGFyZCBKYW1lcyxSaWNoYXJkLkphbWVzQGNvbGxhYm9yYXRlLnBvYyxzNDJlNmUsend1MmFo
Welcome
Here are some tips to get you started.
Call
Easily join the audio by clicking the Call button in the right panel. Or, request to receive a call by selecting Additional Call Options.
Video
Start a video call with other participants by clicking the Video button. End your video call at any time by clicking End Video.
Sharing
Share your entire screen or just one application by selecting the Share button. When others share their screen, you'll see their shared screen in the main window.
Get Started
Room - Richard James
Additional Call Options
+44-1252415920
Conference ID: 548194#
Call Me
Rich James
Richard James
Elements
Console
Sources
Network
Performance

New Call Recording Technical Support

Call Recording Audio Playback Issues

If you are suffering from issues when attempting to play back any of the call recordings then please consider and test the below.

Is the issue affecting playback of all calls or specific calls?

Is the issue affecting a single user or multiple users?

Is the issue affecting specific sites for the company?

Are you having the same issue on other call recording companies?

By answering these question, it will help to narrow down where the fault is impacting. After you have answered these questions the next step will be to raise the fault to the service desk. To do this you need to gather the below information.

Full fault description

Dates of the affected calls

Times of the affected calls

Direction of calls, is it only affecting outbound or inbound calls?

Call from Number

Call to Number

Telephony username

Please try to provide as many examples as possible when raising faults into the service desk.

Can’t Find recording

If you are having issues finding a specific call recording then please consider the below before raising the fault to the service desk.

Is the user enabled for Call Recording on the Horizon Portal?

Is the user enabled but has a On Demand mode set?

Are you searching for the user as recording is on the user not the number.

Did the user have recording enabled at the time of the call?

Try searching with a wider search criteria to locate the call

Is the call beyond the retention period and has been deleted? (You can check the retention policy from the Gamma portal, by finding the Horizon company and use the manage company option to look at the call recording retention period.)

Does the user have permission to see the call recording in question i.e. are they in the right group? Click here to see the policy permissions.

Call Recording Feature not working as expected

If you find that a specific feature isn't working within the call recording portal then please gather as much information before submitting to the service desk. Please consider the below…

Is the feature not working as expected on a single call or multiple call?

Is the feature not working as expected on a single user or multiple users?

Is the feature not working as expected affecting specific sites for the company?

Are you having the same issue on other call recording companies

Before submitting please gather as much information as possible with a full description of the fault.

Policy controls

There are a number of different policy's that can be applied to give users different levels of access.

If the user is reporting they cannot see certain calls then it would be a good starting point to check the policy that they have as this could be restricting their access.

Please use the below to see what controls are available for each policy.

Policy Name	Policy Access
Global User	Global user access is the highest level of access and this user can access the main three areas of the interface. These are Recordings, Users & Reporting. Within each of these sections the global user has full write permissions.
Team User	Team user access allows the user to see the Recordings and Reporting tab. They have access to listen to all the call recordings for all users and run audit and usage reports. This user cannot see the users tab and will not have permissions to manage users. (Please note this policy doesn't allow you to create your own teams, this policy will just give you reduced access vs the Global user)
Staff User	Staff user access allows a user to see the recordings tab only and will only show them

	their own call recordings. This policy is aimed at staff who will need to listen to their calls for training and improvement purposes. They do not have access to the reports tab or the users tab.
Support User	Support user access is used for anyone who isn't in the end user's organisation but may need access to help support. The support user access will show relevant information on the recordings and user tabs to help with any potential issues. There will be a reduced detail to comply with GDPR. You can create a support user directly from the interface or alternatively you can use the Single sign on from the Gamma Portal. See more below on this tool.

Policy control by feature

Policy control by feature

Access Area	Description	Global User (Full access to all features and areas of the CR portal.)	Team User (Team leader role for someone who needs to listen to calls, view comments and run reports. Please note this policy doesn't allow you to create your own teams, this policy will just give you reduced access vs the Global user)	Staff User (Only has access to listen to own recordings, no access to reports or user creation)	Support User (Gamma staff/CP user should have limited view that doesn't breach GDPR)
Help by Topic		Y	Y	Y	Y
Changing Your Password		Y	Y	Y	N
Locked Out (these users will be able to unlock a users account)		Y	N	N	N
Logging Out (these users will have the ability to log out of the call recording portal)		Y	Y	Y	Y
Search Calls Save Search (users will have the ability to save a search)	Ability to search for calls using the search criteria and bookmark and specific searches	Y	Y	Y (but just their own recordings)	Y


Playback Calls Change Playback Speed	Ability to playback recordings and change the playback speed	Y	Y	Y (but just their own recordings)	N
Download Call Recording	Ability to download call recording	Y	N	N	N
Recordings - View Properties Recordings - History	This is to allow the specific user access to look at the properties and history of a call but not allow them to playback the call.	Y	Y	Y (but just their own recordings)	Y
Run Report Audit Report Call Recording Extract	Ability to run reports from the reporting area of the call recoding portal	Y	 N Y	N	N
Create User Edit User Disable User Enable User Unlock User Resend Welcome Email	Ability to manage users from Creating to editing the user information.	Y	N	N	N
Read Only Access toUsers tab		N/A	Y	N	Y

Safe Metadata	Safe Metadata is where the SSO user logs in and they see a restrcted view of the Metadata so not exposing any personal information about the recordings and they shouldn't be able to download or listen to the recording.	N	N	N	Y


Single Sign on

Single sign on access has been created for Gamma Staff and Channel Partner support users. This allows you to sign on to the end users Call Recording interface. One you have signed in you will see a GDPR safe set of detail, you will not be able to playback or download any of the calls to comply with MiFID II compliancy. Please use the Single sign on to check for potential policy issues along with confirming date and time of specific calls that a user may be having issues with playing back.

To access Single Sign on please head over to the Gamma Portal and use the Provisioning & Service Management menu and select Advanced Services

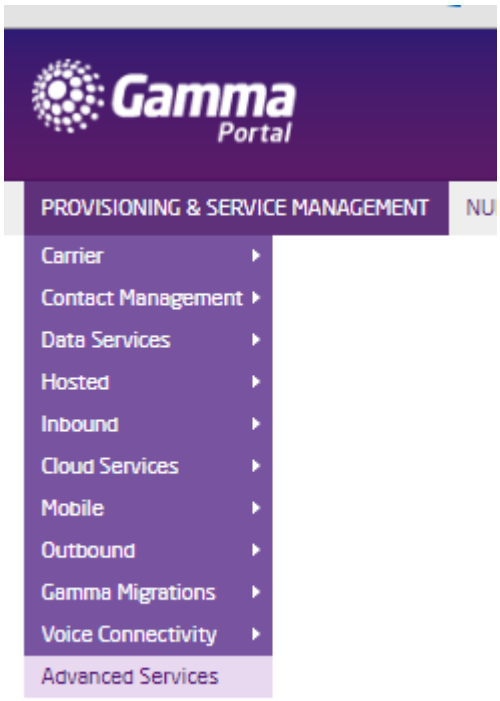



After selecting this, use the option to filter by account and company to find the company you require to sign on to.

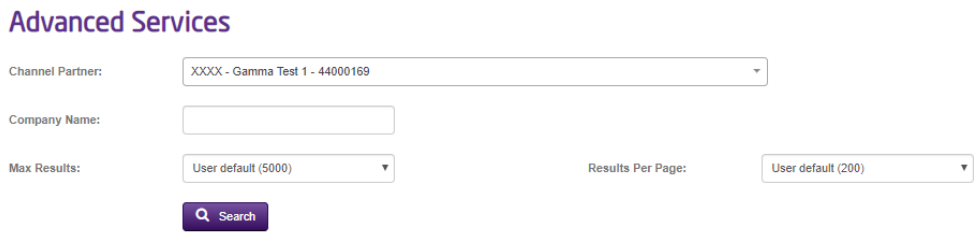

© Gamma. All rights reserved. Confidential.

After this click on the “Login to service“button and you will be taken to the Call recording portal. Please note that when you are logged in you will see a reduced view that complies with GDPR & MiFID II regulations.

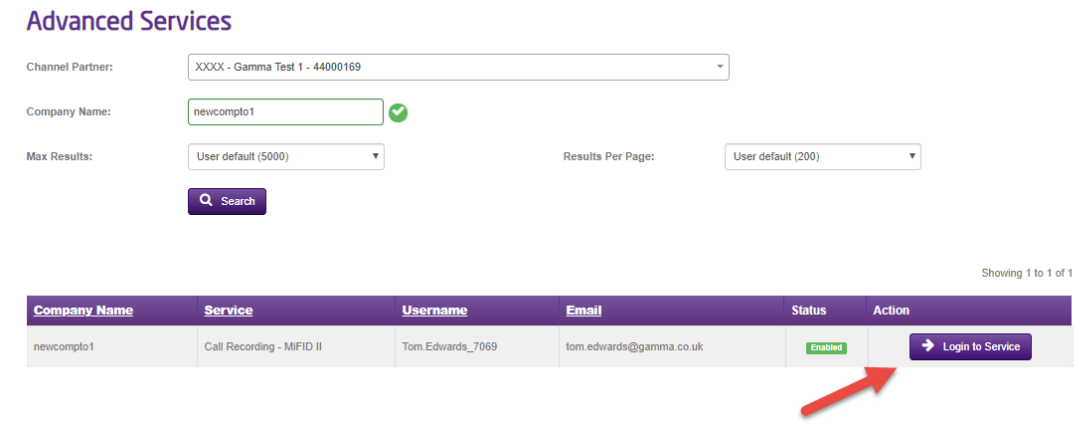

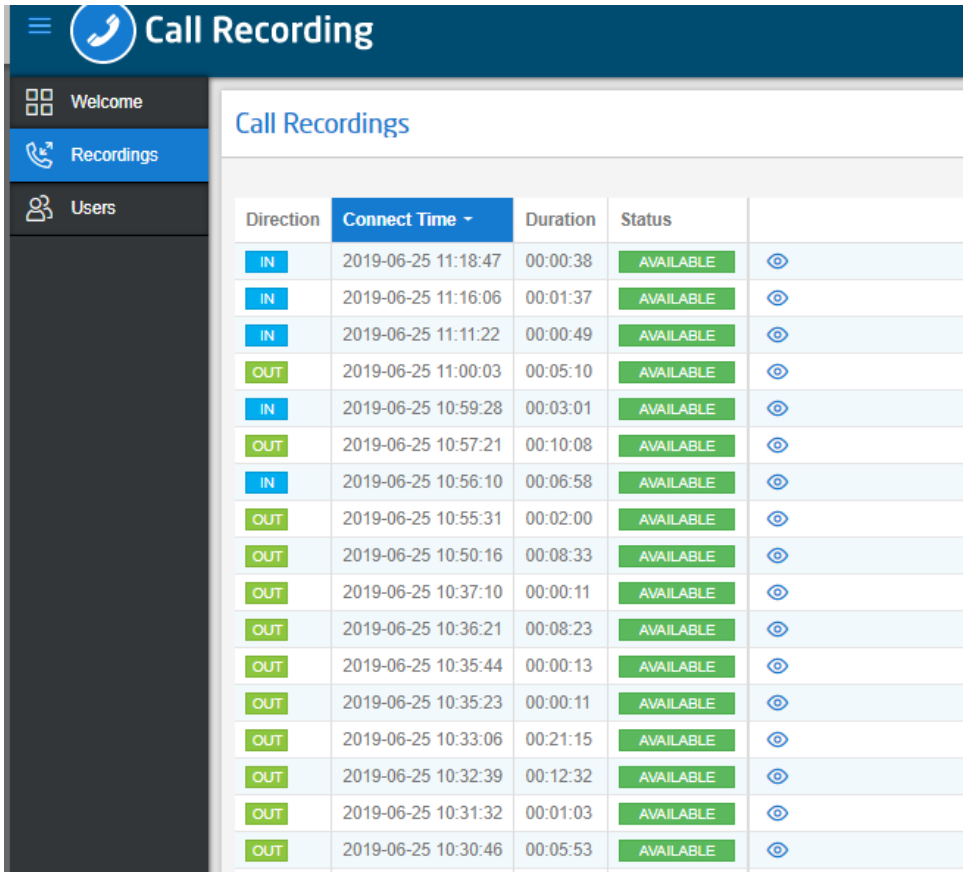

Raising Faults

To raise a fault into Gamma then you can use the existing process via the Horizon Health check to raise the faults. Please remember to include as much detail as possible when raising faults into the service desk.

© Gamma. All rights reserved. Confidential

Service Alerts

Gamma will issue email and/or SMS service alerts to Channel Partners in the event of any planned or emergency service maintenance. Please note that service alerts will be sent to all Gamma Portal administrator users only and it is the responsibility of the Channel Partner to keep Gamma Portal contact details updated and proactively subscribe additional relevant Gamma Portal users as recipients of service alerts.

© Gamma. All rights reserved. Confidential.

I have a problem with the Horizon Portal

If you receive any error messages with the Horizon Portal you should clear your browser cache and cookies and re-try the action that you were trying to complete. If you are able to replicate the issue again you should contact the Service Desk with the following information:


- Date/time
- What action you're trying to complete
- What browser you are using
- When was the last time that it worked

If you are using Horizon Active Directory and having problems with adding, updating or deleting users, please check the Dashboard within the Okta Portal prior to contacting the Service Desk.

To check the Dashboard for troubleshooting please follow the below steps. More details of Setup,


Troubleshooting and Tips, Q & A available in the Horizon AD Config Guide. If you are unable to solve the problems, please contact the Service Desk (please include details of the error messages found within the Okta Portal Dashboard).

Go to the Dashboard Tab on Okta main page:

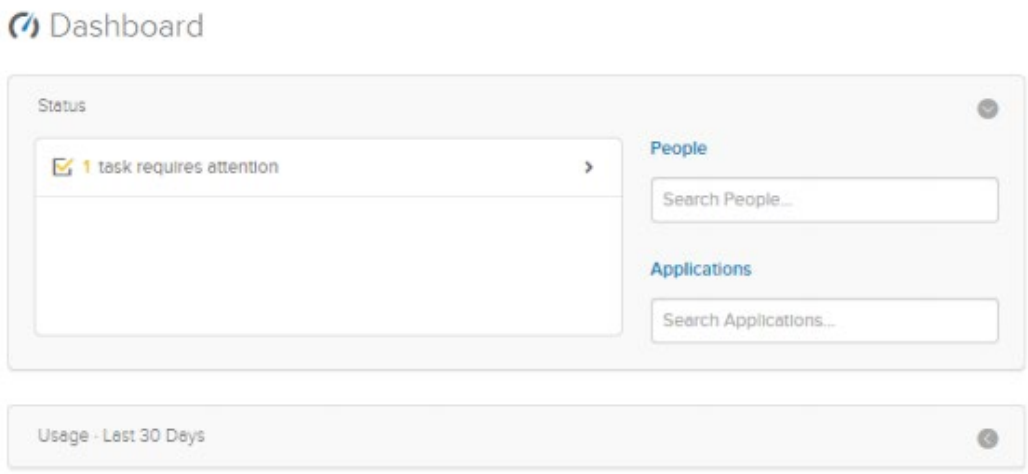


Any alerts will appear withing the Status Window. Click on them to see more information:

© Gamma. All rights reserved. Confidential

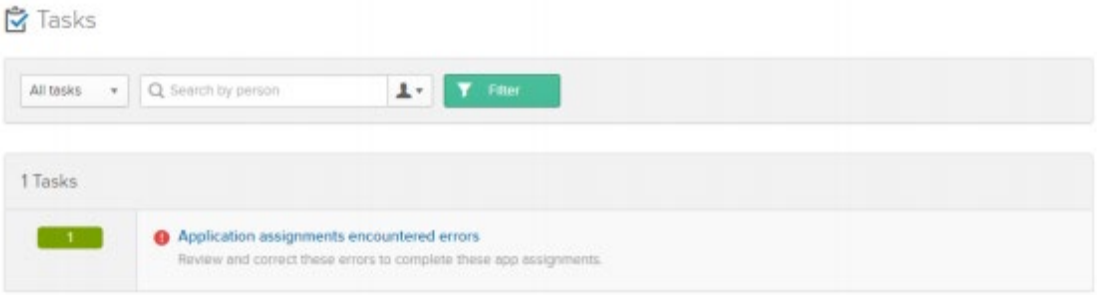

The Okta Portal will then breakdown the Alerts into more details. Please click on them for more information.

The full text of the error will be displayed in the red alert section. Please include the message when raising to the service desk.

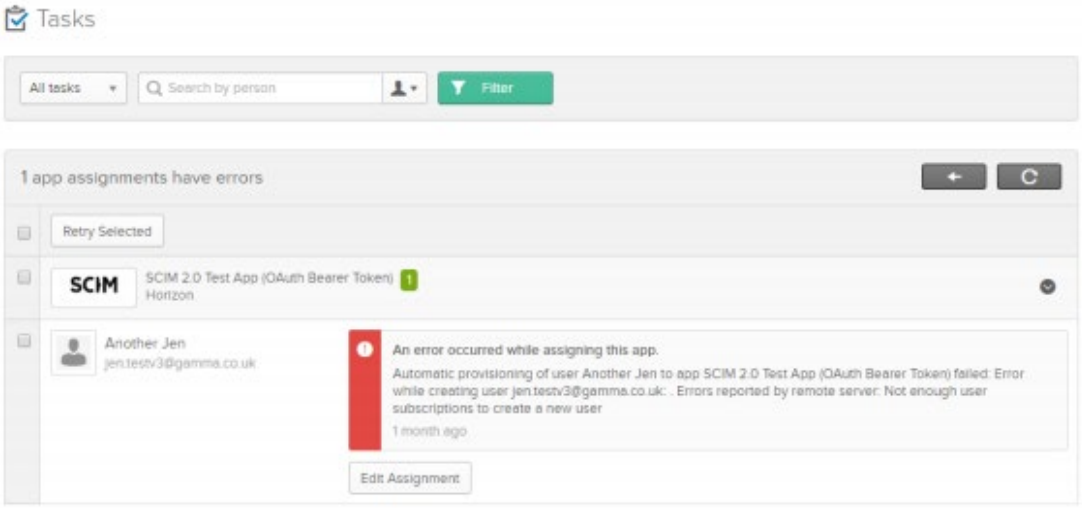

© Gamma. All rights reserved. Confidential.

Feedback



portalfeedback@gamma.co.uk

03332407771

© Gamma. All rights reserved. Confidential

Name

Role







© Gamma. All rights reserved. Confidential.