Spatial capillary correction for driven junctions

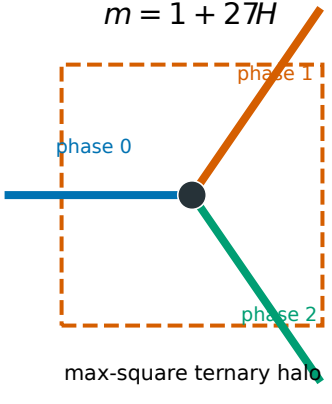

max-square ternary halo

Matched high-drive B2 benchmark

$q = \sqrt{3},\ p = -50$; same grid, dt, warm source

Speed error

16.01% → **0.452%**

Terminal aligned RMS

0.105 W → 0.006 W

OpenPhase: positive transfer, visible limit

Speed error

25.53% → **0.98%**

Halo sampled shape errors (W)

Short: 0.046 W (5/5 ≤ 0.05 W)

Long: 0.059 W (4/5 ≤ 0.05 W)

One late OpenPhase shape sample exceeds 0.05 W