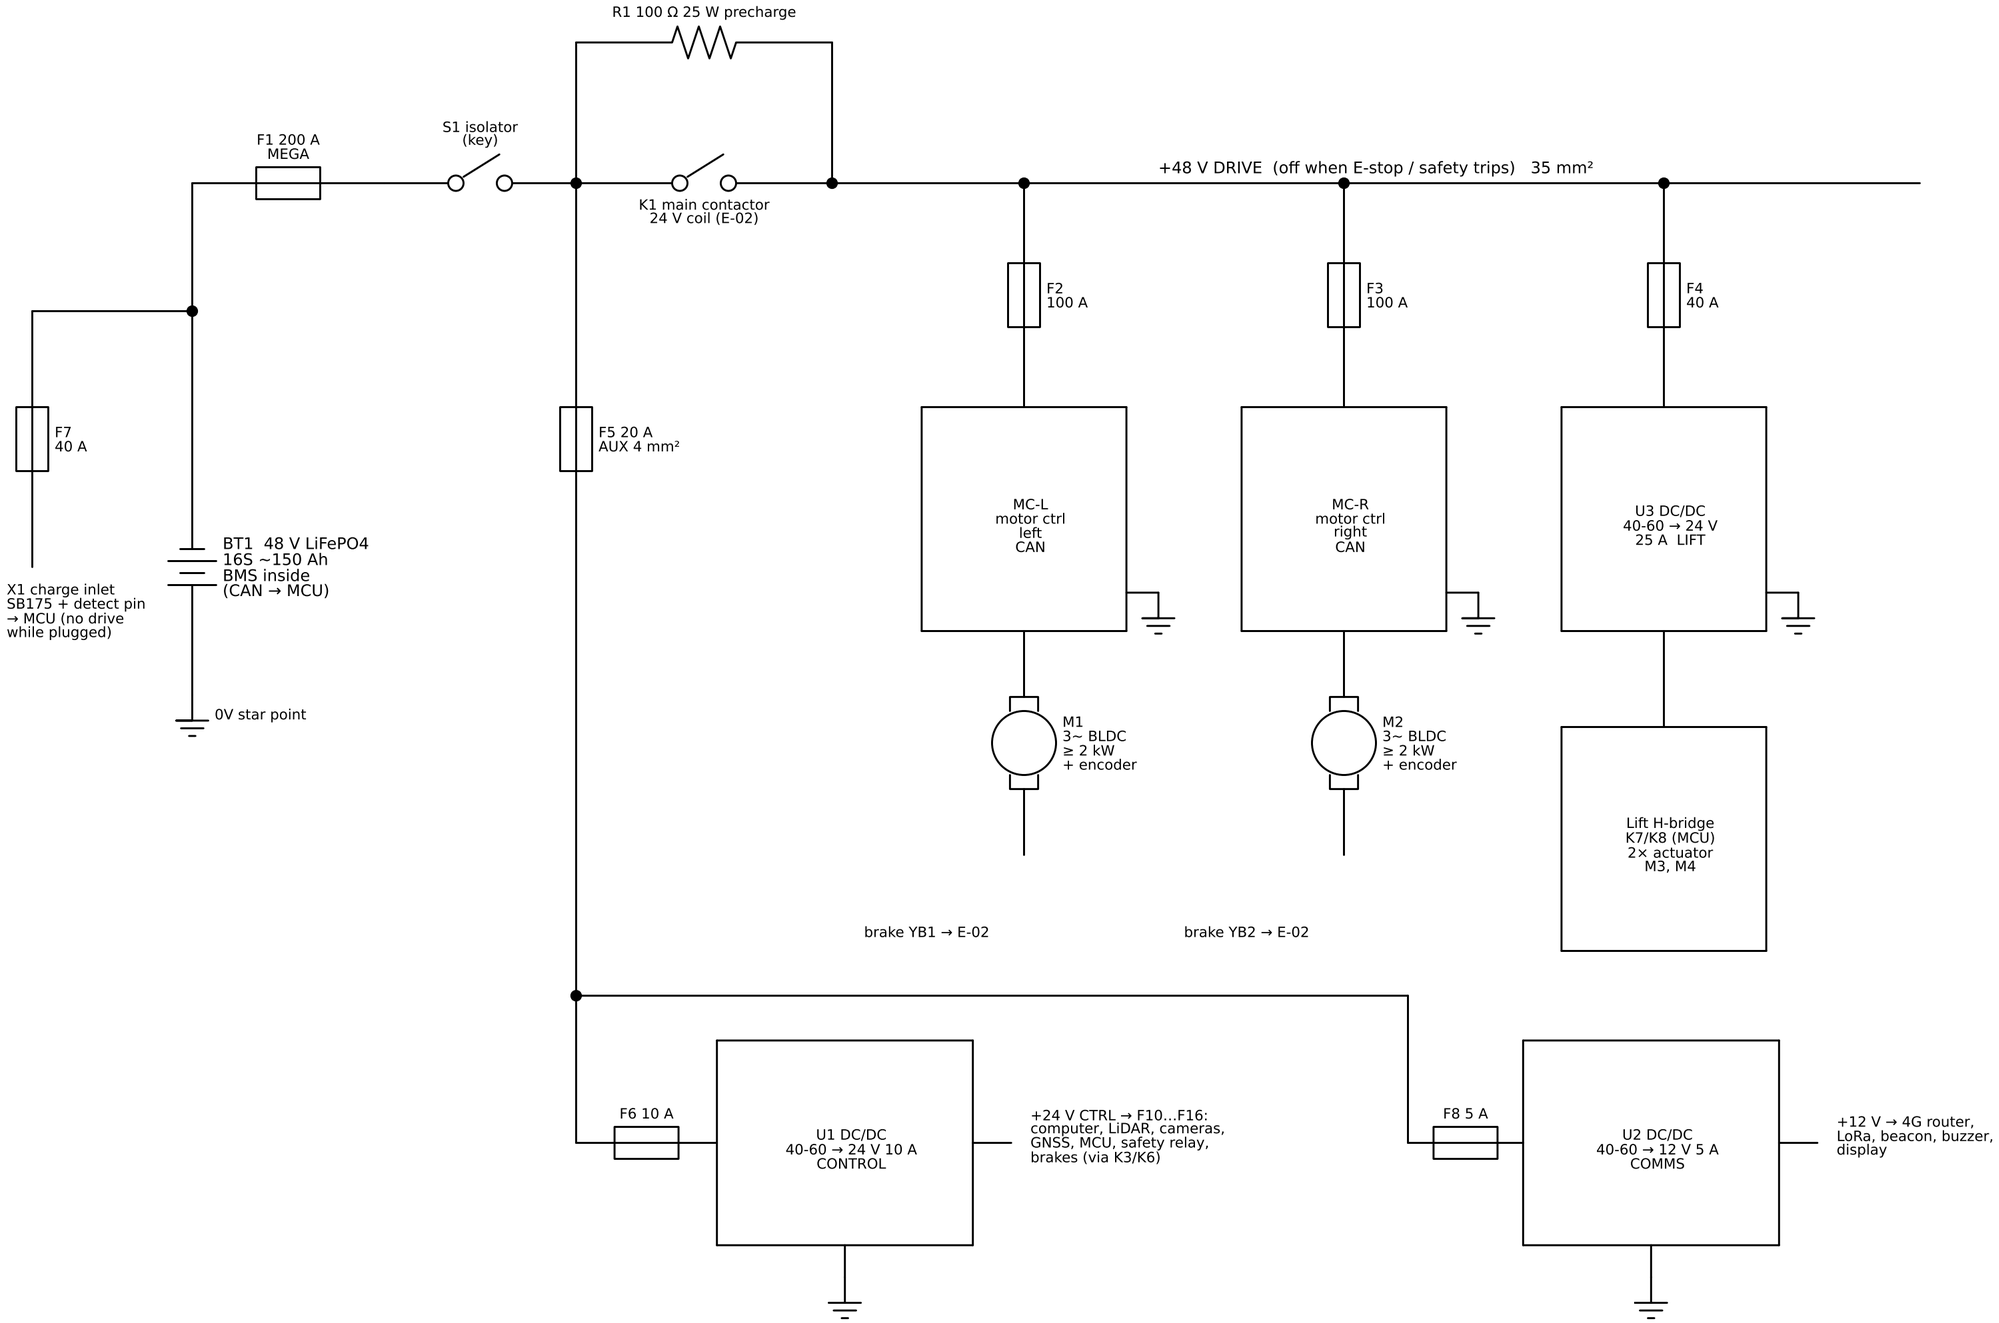

NOTES
1. Battery 16S LiFePO4: 40-58.4 V. All DC/DC inputs rated 36-75 V.
2. K1 is opened by the safety circuit (E-02): drive + lift lose power, brakes apply.
3. R1 keeps controller capacitors charged so K1 does not arc when it closes.
4. Wired 0 V returns to the star point; frame bonded to 0 V at ONE point only.
5. Fuses in IP67 holders in the E-box. Wire: tinned flexible, 105 °C.
6. Aux (computer, sensors, radio) stays on after E-stop so the robot can report.

BINBOT — autonomous olive bin carrier
POWER DISTRIBUTION 48 V
DWG E-01 REV A BP-04 electronics
PRELIMINARY — check against vendor datasheets 2026-10-28