1. OVERVIEW

This document outlines specifications and standards for all cosmetic surface applications of Fetch Robotics.

2. COSMETIC STANDARDS

Cosmetic Class Requirements

All cosmetic finishes will be subject to Class "A" unless stated otherwise in Fetch Robotics engineering drawings, formal specifications, and other reference documents.

Surface Preparation:

- All surfaces must be cleaned to render them free of dust, grease, oil, rust, or other contamination.
- All surface requiring Class A and B finish must be free of nicks, dents, scratches, metal dust and other tool marks before application of coating is applied
- All holes and edges must be deburred using conventional methods to remove sharp edges.

Finish Specifications:

The total thickness of coating and substrate will be within the range of 0.003'' to 0.005''.

Inspection

Class A and Class B cosmetic surface finish shall be subject to a 100% inspection rate.

Time and Viewing Distance:

Classification	Class A	Class B
Viewing Time	8 seconds	2 seconds
Viewing Distance	24"	30"

To be viewed at the specified distance then rotated at 45 degrees for a 0-90 degree viewing angle.

Definition for Category and Class

Category	Surface Description	Class	Frequency
I	External	A	Usually View
II	External	B	Seldom View

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

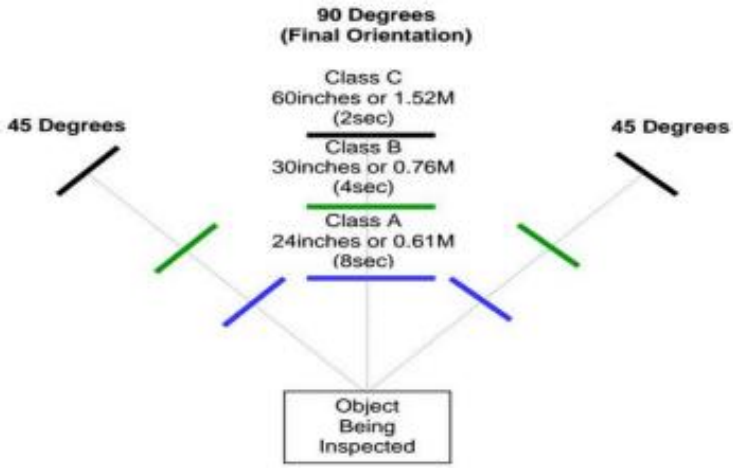

Category **I** is exclusively used for all “critical” areas of clear window of visibility.

Category **II** are “major” surface areas, also an indication of importance, but less so than class I, whereby surface may still be visible.

Class Defects and Acceptance

Defect:	**Class A**	**Class B**
Abrasions	None	Maximum 2 defects .100” long
Blush	None	Minimal acceptable
Chipping	None	None
Contamination/Debris:	Maximum 2 defects 0.03"	Maximum 4 Defects 0.05"x0.05"
Discoloration:	None	Maximum 4 defects .100” long
Color Variation	None	Minimal acceptable
Grease or Oils	None	None
Missing Plating	None	None
Nicks Scratches, Gouge	None	Maximum 2 defects 0.08x0.25"
Non-adhesion defects	None	None
Non-uniform coverage	None	Acceptable (must meet minimum thickness)
Orange Peel	Minimal acceptable	Acceptable
Pitting	Maximum 2 0.05"x0.025" deep	Maximum 4 0.06"x0.025" deep
Run marks	None	Minimal acceptable
Scratches/gouges in base metal under coating	None	Maximum 4 Defects 0.06x0.25"
Stepping	Minimal acceptable	Minimal acceptable
Texture Variation	None	Minimal acceptable
Tool marks	None	None

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

3. References

Document #	Document Title

4. Revision History

The following table lists all revisions (including the original document) to this procedure, the date, and the reason for the revision.

Rev.	Rev. Date	Description of Change	Revised By
01	06/26/23	Original issue	A.Cabrera

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.