1. OVERVIEW

The following document provides a detailed overview of the Outbound Parcel packing process at the Kenosha facility.

2. EQUIPMENT, SUPPLIES AND CONSUMABLES

The following equipment, consumables, and supplies are necessary to perform the function of parcel packing:

Manual or Electric pallet jack, RF scanner, tabletop label printer, 4”x6.5” labels, boxes, tray inserts and separators, Dangerous Goods (DG) labels, 3” tape, tape gun 3”, cover-up labels, Electrostatic Discharged (ESD) pink polybags, ESD silver bags, dunnage paper.

3. DROP ZONE

1. Locate the Pack Consolidation Report (PCR) for delivery; the PCR could be in one of the Outbound printers or on top of the dropped-off cases.
   - ✓ Ensure the PCR does not state, “**Not all lines are staged,**” which means the order is not thoroughly picked.
   - ✓ For Singe LPN – if there is no PCR, there should be a Pick Drop Audit label on the box.
2. Move the material to the processing stations:

   Single LPN to the conveyor belt

   Multi-LPN to the outline pallet spots.

   - ✓ If using an Electric Pallet Jack or Power Industrial Vehicle (PIV), ensure your certification is current.

   <u>Multi-LPN</u>
3. If the product has a stage locator cone, move the cone with the product.
4. Use the manual or electric pallet jack to transport the material.
5. Orders with multiple deliveries on the pallet must be moved altogether.
6. Removed unused empty totes accumulated at the stations from the single line return conveyor and multi-LPN stations and placed them in their designated area.
7. To prevent trip hazards, remove empty pallets that are not being used.
8. Remove locator cones from the multi-LPN stations and place them in their designated station.
   - ✓ Ensure the locator is not tied to an LPN so that it can be reused.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

4. PACKING

1. Verify the SKUs and Qty on the LPN

A. For vendor-sealed cases, confirm the counts from the original carton label.

B. For Loose items, count the material.

C. Each item needs to be properly labeled.

✓ No hand-written labels are allowed.

D. Do not count small items such as pins, screws, nuts, etc...

E. If handling ESD material, ground yourself before performing ESD packaging.

✓ Finger cots are used to prevent bodily oils from transferring to the product, not to prevent an ESD event.

2. Print the Pick Drop Audit Label if a quantity discrepancy is discovered.

Reference WI – Outbound – Label Printing and report the issue to the supervisor or area lead.

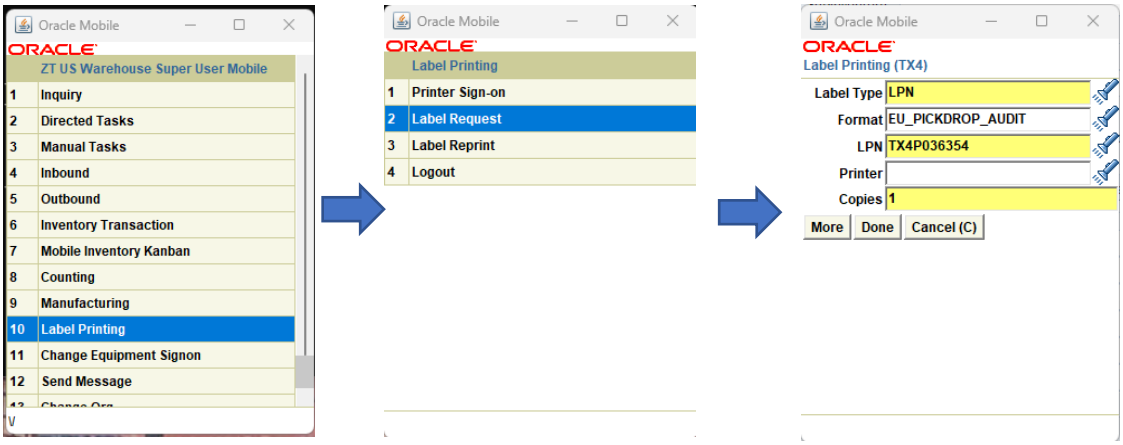

3. If a damaged product or box is discovered, notify the supervisor or area lead immediately.

Reference Visual Packaging Damage Criteria Rev01.pdf.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

✓ Depending on the condition of the material, you might be asked to re-box the material or conceal the damages with brown cover-up labels

4. If the PCR states multi-source, record the country of origin from the actual SKU and write it on the PCR.

5. Perform LPN consolidation and/or LPN Split to ensure each case has its own LPN.
   Reference WI - Outbound - LPN Consolidate v1.0.pdf or WI - Outbound - LPN Split v1.0.pdf

6. If building the boxes, they should be larger than a 107 size.
   ✓ The general rule is to overpack anything smaller than a 107 box.

Don't Overpack

Overpack

7. When shipping DG items, if ground, utilize a 120-size box. If Air, use a 147.
   ✓ Carton size 147 accommodates all the needed labels and documents for Air DG shipments.
   ✓ Carton size 120 accommodates only labels.

Labels on the same side!

Labels on the same side!

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

- ✓ When overpacking DG items, ensure that items with different UN codes (e.g., 3480 and 3481, 3090 and 3091) are not packaged together.

8. When overpacking the items, ensure the box is filled with enough dunnage to prevent product damage in transit.

- ✓ Dunnage should not fill more than 80% of the box.
- ✓ If it fills more than 20%, use a smaller box.
- ✓ We must use dividers for mother boards, no exceptions.
- ✓ If the item is packed in dividers,
  do not remove the dividers to consolidate material.

9. Seal the box using the H-method of Taping.

- ✓ Allow at least 2 inches of tape extension on the sides.
- ✓ Do not reseal vendor-sealed boxes.

- ✓ If the Packer Notes state a Certificate of Conformance (CoC) is needed, leave the box open for a Quality associate to produce the certificate.

10. Apply required DG Labels.

- ✓ All DG Labels must be affixed to the same side of the box and should not overlap or fold over the edges.
- ✓ Do not mix UN codes in the same carton.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

11. Single LPN or multi-LPN station, manually take and record the carton weight by placing the box on a scale and dimensions by manually measuring the box.
12. Multi LPN station records the weight directly into Oracle.
13. For a single LPN, fold and attach the PCR to the box and place it on the conveyor.
14. For multi-LPN orders, once the entire delivery is packed, labeled, dimmed, and weighed, perform a stage move to STL1 or STL6 using the RF gun. Reference WI - Outbound - Stage Move v1.0.pdf
15. Perform a Mass Move to stage every LPN from the STL1 or STL6 to the dock staging lane.
16. Place cones and empty totes in their designated areas.
17. To prevent any safety incidents, clean as you go.

5. REFERENCES

Document #	Document Title
	WI – Outbound – Label Printing
	Visual Packaging Damage Criteria Rev01.pdf.
	WI - Outbound - LPN Consolidate v1.0.pdf
	WI - Outbound - LPN Split v1.0.pdf
	WI - Outbound - Stage Move v1.0.pdf

6. REVISION HISTORY

The following table lists all revisions (including the original document) to this procedure, the date, and the reason for the revision.

Rev.	Rev. Date	Description of Change	Revised By
01	11/09/23	Original issue	A. Cabrera

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.