

This document provides additional assistance with wiring your Extron IP Link Pro Control Processor to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific IP Link Pro Control Processor or the documentation supplied by the manufacturer of the controlled device.

For more information on using Global Scripter Modules, refer to the "[Guide to Using Scripter Modules](#)" document.

Device Specifications

Device Type: Audio Processor
Manufacturer: Extron
Firmware Version: 1.11.0000-b006
Model(s): DMP 64 Plus C, DMP 64 Plus C V, DMP 64 Plus C AT, DMP 64 Plus C V AT

Tested on the Following Software and Firmware Versions

IP Link Pro Control Processor Firmware	Global Scripter Version
3.18.0000-b001	2.22.0.4

Version History

Module Version	Date	Notes
1_4_2_0	10/8/2024	Added Group Meter commands: <ul style="list-style-type: none">Group Meter LevelGroup Meter ModeGroup Meter Response RateGroup Meter Select
1_0_5_0	12/17/2020	Updated Ethernet communication to support SSH. Added the following Dante commands to support NetPA Series: <ul style="list-style-type: none">Dante AT Input Premixer GainDante DC Protection FaultDante Main Power SupplyDante Digital ClipDante Group Mic Line Input GainDante Group Mixpoint gainDante Group MuteDante Group Output Attenuation

Global Scripter Module Communication Sheet

		<ul style="list-style-type: none">• Dante Group Post Mixer Trim• Dante Group Pre-Mixer Gain• Dante Loss of AC• Dante Main Power Supply• Dante Open Circuit• Dante Over Temp Fault• Dante Overload Protect• Dante Premixer Gain• Dante Signal Presence• Dante Dante Thermal Limiting
1_0_0_0	12/3/2019	Initial Version

Module Notes

- Unidirectional variable must be set to 'True' if status is not required. Default value is 'False'.
Example: `InterfaceName.Unidirectional = 'True'`
- connectionCounter variable must be set to the number of queries that will be sent to the device before displaying 'Disconnected' if no response is received. Default value is 15.
Example: `InterfaceName.connectionCounter = 5`
- If login credentials are required, devicePassword and deviceUsername must be set accordingly.
Example: `InterfaceName.devicePassword = 'extron'`
- Group commands control groups are configured in the DSP Configurator software.

Supported Classes and Examples

SerialClass

```
InterfaceName = ModuleName.SerialClass(ProcessorName, 'COM1', Model='DMP 64 Plus C')
```

SerialOverEthernetClass

```
InterfaceName = ModuleName.SerialOverEthernetClass('192.168.254.254', 2001, Model='DMP 64 Plus C')
```

SSHClass


#Password Required

```
InterfaceName = ModuleName.SSHClass('192.168.254.254', 22023, Credentials=('admin', 'extron'), Model='DMP 64 Plus C')
```


#No Password Required

```
InterfaceName = ModuleName.SSHClass('192.168.254.254', 22023, Credentials=('', ''), Model='DMP 64 Plus C')
```


Extron DSP Configurator Labels:

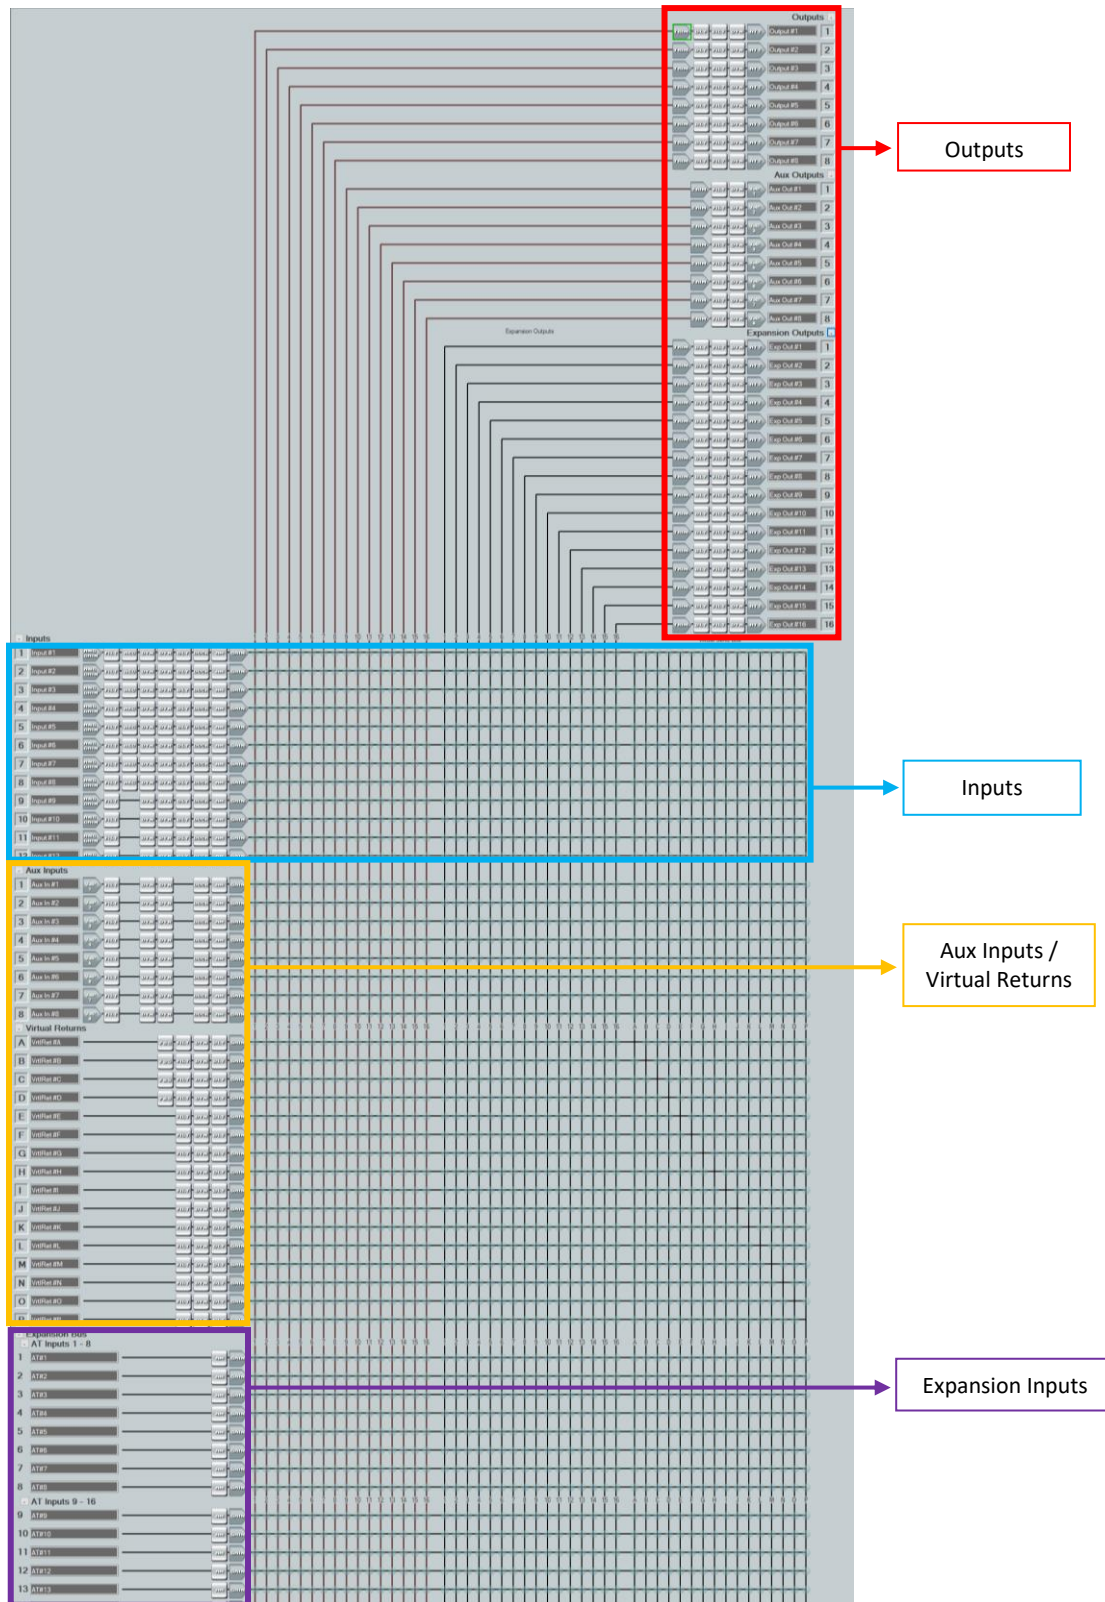


- Input

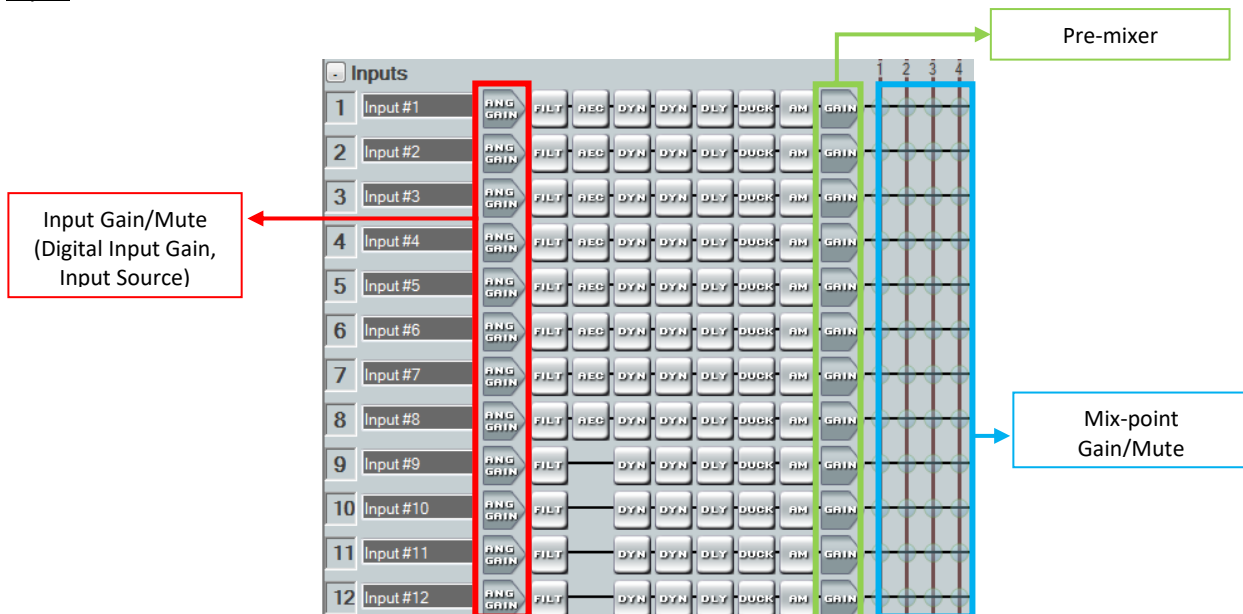


- Aux Inputs / Virtual Returns

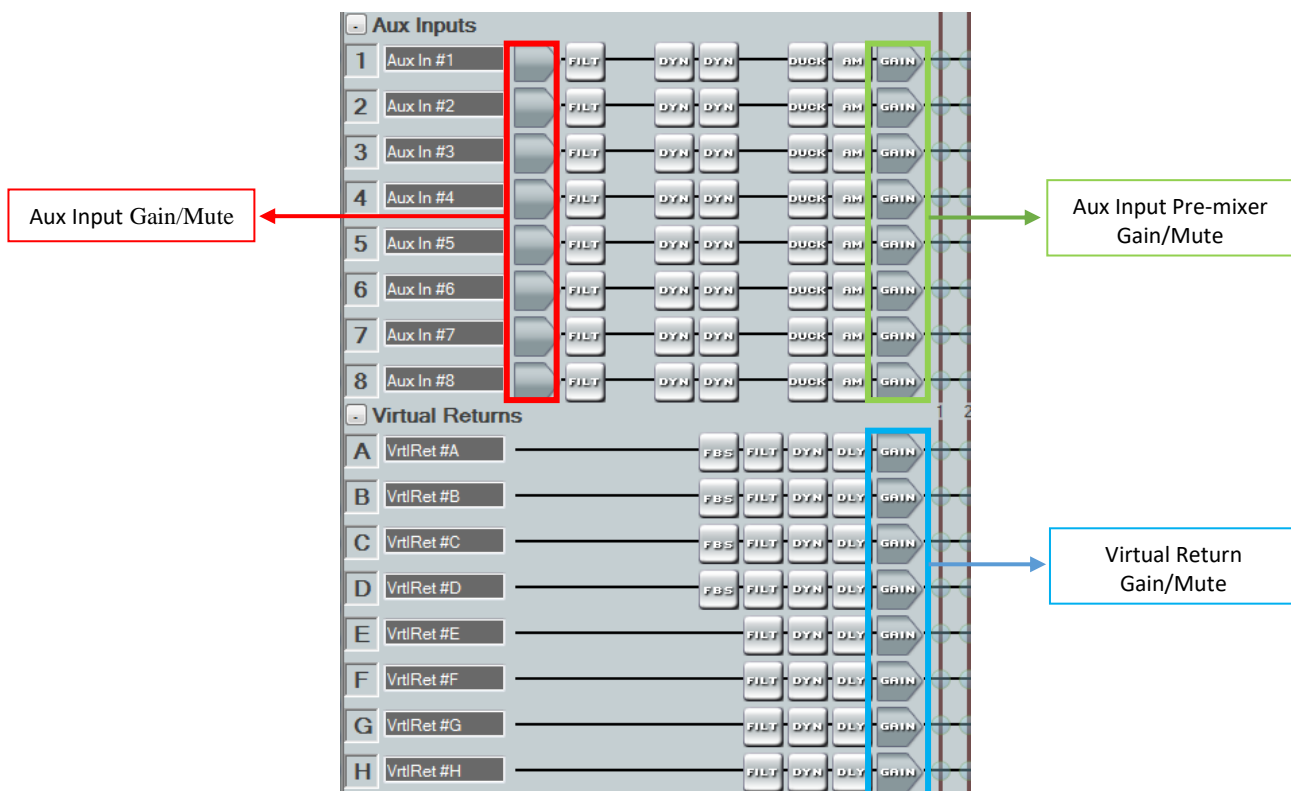

- Expansion Inputs

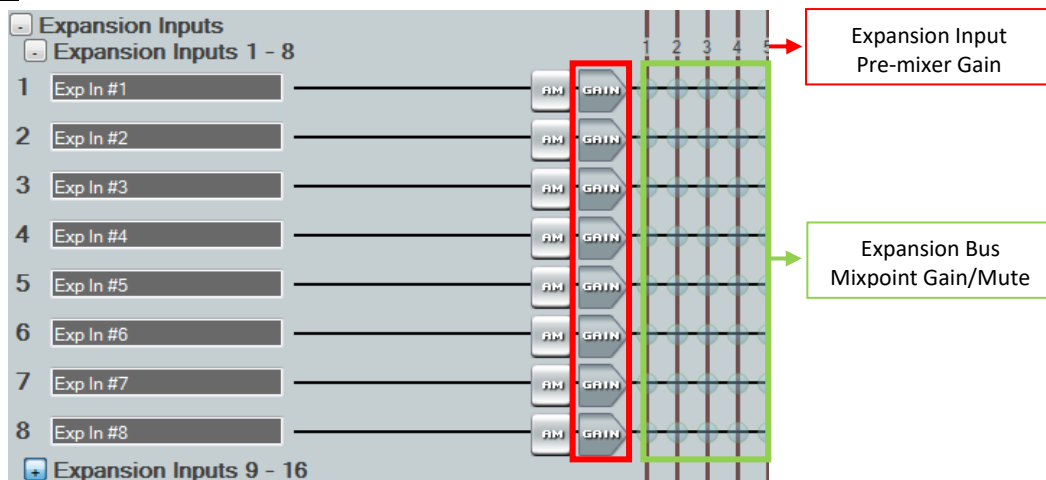

- Outputs

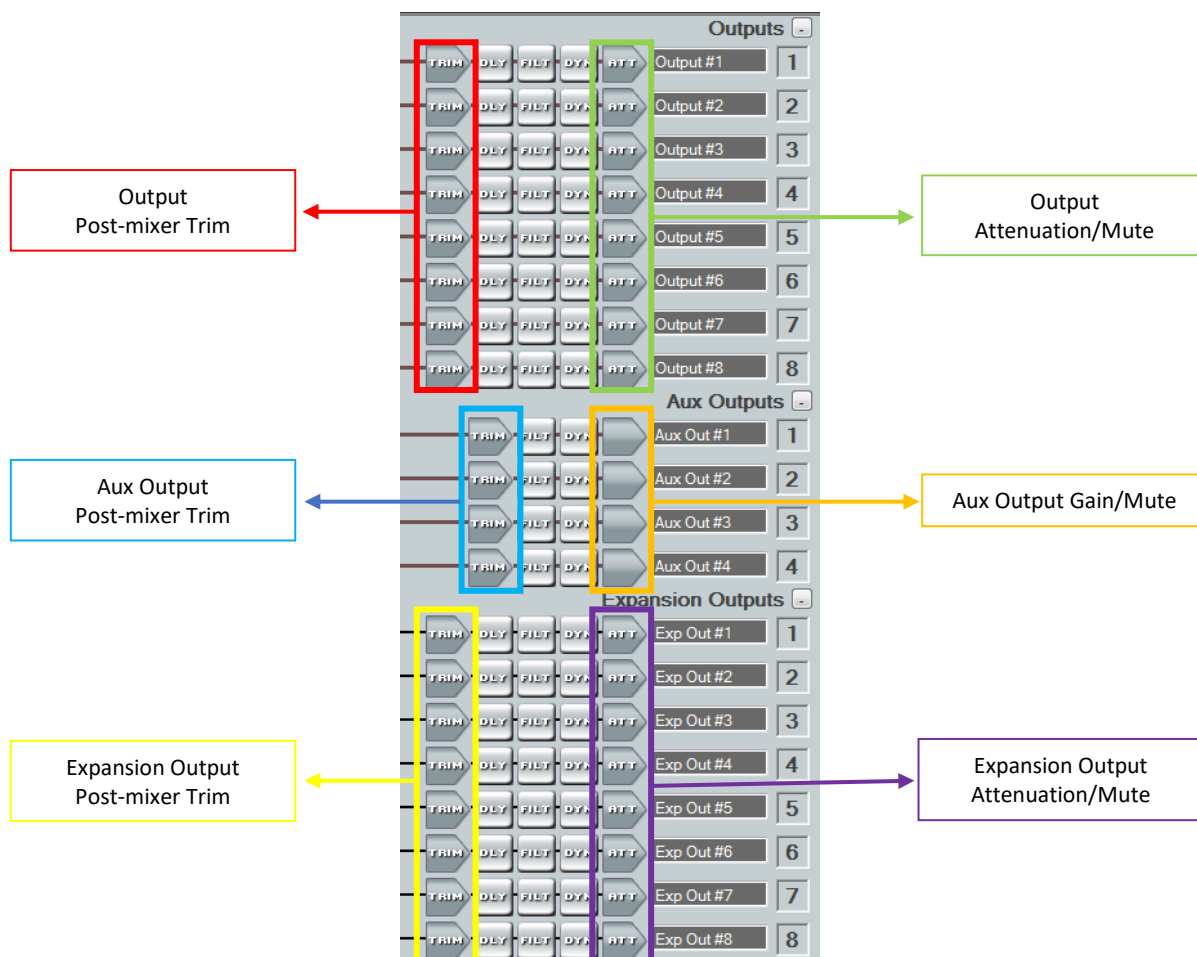

Control Commands

Format with Qualifier:

```
InterfaceName.Set(Command, Value, {'Qualifier Key': 'Qualifier Value'})
```

Format without Qualifier:

```
InterfaceName.Set(Command, Value)
```

Command	Value		
AutoAnswerDelay ⁴	'0' – '30'		
Qualifier Key	Qualifier Value		
'Line'	'1' – '8'		
# AutoAnswerDelay example InterfaceName.Set('AutoAnswerDelay', '0', {'Line': '1'})			
Command	Value	Value	Value
AutoAnswerMode ⁴	'Disable'	'Delay'	'Follow SIP Header'
Qualifier Key	Qualifier Value		
'Line'	'1' – '8'		
# AutoAnswerMode example InterfaceName.Set('AutoAnswerMode', 'Disable', {'Line': '1'})			
Command	Value	Value	
AutomixerGateSet	'Enable'	'Disable'	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Input'	'Aux 1' – 'Aux 8'	'Mic 1' – 'Mic 6'	'Exp. 1' – 'Exp. 48'
# AutomixerGateSet example InterfaceName.Set('AutomixerGateSet', 'Enable', {'Input': 'Aux 1'})			
Command	Value		
AuxInputGain	-18 to 24 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
# AuxInputGain example InterfaceName.Set('AuxInputGain', 24, {'Input': '1'})			
Command	Value	Value	
AuxInputMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
# AuxInputMute example InterfaceName.Set('AuxInputMute', 'On', {'Input': '1'})			
Command	Value		
AuxInputPremixerGain	-100 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
# AuxInputPremixerGain example InterfaceName.Set('AuxInputPremixerGain', 12, {'Input': '1'})			
Command	Value	Value	
AuxInputPremixerMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
# AuxInputPremixerMute example InterfaceName.Set('AuxInputPremixerMute', 'On', {'Input': '1'})			

Command	Value	
AuxOutputGain	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'1' – '8'	
# AuxOutputGain example InterfaceName.Set('AuxOutputGain', 0, {'Output': '1'})		
Command	Value	Value
AuxOutputMute	'On'	'Off'
Qualifier Key	Qualifier Value	
'Output'	'1' – '8'	
# AuxOutputMute example InterfaceName.Set('AuxOutputMute', 'On', {'Output': '1'})		
Command	Value	
AuxOutputPostmixerTrim	-12 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'1' – '8'	
# AuxOutputPostmixerTrim example InterfaceName.Set('AuxOutputPostmixerTrim', 12, {'Output': '1'})		
Command	Value	
DanteATInputPremixerGain ^{9, 10}	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Dante Device'	'String'	
Qualifier Key	Qualifier Value	
'Input'	'1' – '4'	
# DanteATInputPremixerGain example InterfaceName.Set('DanteATInputPremixerGain', 12, {'Dante Device': 'String', 'Input': '1'})		
Command	Value	
DanteGroupMicLineInputGain ^{9, 10}	-18 to 80 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Dante Device'	'String'	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# DanteGroupMicLineInputGain example InterfaceName.Set('DanteGroupMicLineInputGain', 80, {'Dante Device': 'String', 'Group': '1'})		
Command	Value	
DanteGroupMixpointGain ^{9, 10}	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Dante Device'	'String'	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# DanteGroupMixpointGain example InterfaceName.Set('DanteGroupMixpointGain', 12, {'Dante Device': 'String', 'Group': '1'})		
Command	Value	Value
DanteGroupMute ^{9, 10}	'On'	'Off'
Qualifier Key	Qualifier Value	
'Dante Device'	'String'	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# DanteGroupMute example InterfaceName.Set('DanteGroupMute', 'On', {'Dante Device': 'String', 'Group': '1'})		

Command DanteGroupOutputAttenuation ^{9, 10}	Value -100 to 0 in steps of 0.1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupOutputAttenuation example InterfaceName.Set('DanteGroupOutputAttenuation', 0, {'Dante Device': 'String', 'Group': '1'})	
Command DanteGroupPostMixerTrim ^{9, 10}	Value -12 to 12 in steps of 0.1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupPostMixerTrim example InterfaceName.Set('DanteGroupPostMixerTrim', 12, {'Dante Device': 'String', 'Group': '1'})	
Command DanteGroupPreMixerGain ^{9, 10}	Value -100 to 12 in steps of 0.1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupPreMixerGain example InterfaceName.Set('DanteGroupPreMixerGain', 12, {'Dante Device': 'String', 'Group': '1'})	
Command DanteInputGain ^{9, 10}	Value 0 to 42 in steps of 3 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Input'	Qualifier Value '1' – '4'
# DanteInputGain example InterfaceName.Set('DanteInputGain', 42, {'Dante Device': 'String', 'Input': '1'})	
Command DanteInputMute ^{9, 10}	Value 'On' 'Off'
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Input'	Qualifier Value '1' – '4'
# DanteInputMute example InterfaceName.Set('DanteInputMute', 'On', {'Dante Device': 'String', 'Input': '1'})	
Command DanteOutputAttenuation ^{9, 10}	Value -100 to 0 in steps of 1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Output'	Qualifier Value '1' – '4'
# DanteOutputAttenuation example InterfaceName.Set('DanteOutputAttenuation', 0, {'Dante Device': 'String', 'Output': '1'})	

Command DanteOutputMute ^{9, 10}	Value 'On'	Value 'Off'	
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# DanteOutputMute example InterfaceName.Set('DanteOutputMute', 'On', {'Dante Device': 'String', 'Output': '1'})			
Command DantePremixerGain ^{9, 10}	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# DantePremixerGain example InterfaceName.Set('DantePremixerGain', 12, {'Dante Device': 'String', 'Input': '1'})			
Command DantePresetRecall ^{9, 10}	Value '1' – '8'		
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
# DantePresetRecall example InterfaceName.Set('DantePresetRecall', '1', {'Dante Device': 'String'})			
Command Dial ⁴	Value 'Dial' ⁵	Value 'Redial' ⁶	Value 'Clear Redial' ⁷
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Number'	Qualifier Value 'String'		
# Dial example InterfaceName.Set('Dial', 'Dial', {'Line': '1', 'Number': 'String'})			
Command DialDTMF ⁴	Value '0' – '9'	Value '*'	Value '#'
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# DialDTMF example InterfaceName.Set('DialDTMF', '0', {'Line': '1', 'Appearance': '1'})			
Command DigitalInputGain ³	Value -18 to 24 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '6'		
# DigitalInputGain example InterfaceName.Set('DigitalInputGain', 24, {'Input': '1'})			
Command DoNotDisturb ⁴	Value 'Enable'	Value 'Disable'	
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
# DoNotDisturb example InterfaceName.Set('DoNotDisturb', 'Enable', {'Line': '1'})			

Command ExpansionBusMixpointGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '48' ⁸		
Qualifier Key 'Output'	Qualifier Value '1' – '4' 'V. Send A' – 'V. Send P'	Qualifier Value 'Aux 1' – 'Aux 8'	Qualifier Value 'Exp. 1' – 'Exp. 16'
# ExpansionBusMixpointGain example InterfaceName.Set('ExpansionBusMixpointGain', 12, {'Input': '1', 'Output': '1'})			
Command ExpansionBusMixpointMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '48' ⁸		
Qualifier Key 'Output'	Qualifier Value '1' – '4' 'V. Send A' – 'V. Send P'	Qualifier Value 'Aux 1' – 'Aux 8'	Qualifier Value 'Exp. 1' – 'Exp. 16'
# ExpansionBusMixpointMute example InterfaceName.Set('ExpansionBusMixpointMute', 'On', {'Input': '1', 'Output': '1'})			
Command ExpansionInputPremixerGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '48' ⁸		
# ExpansionInputPremixerGain example InterfaceName.Set('ExpansionInputPremixerGain', 12, {'Input': '1'})			
Command ExpansionInputPremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '48' ⁸		
# ExpansionInputPremixerMute example InterfaceName.Set('ExpansionInputPremixerMute', 'On', {'Input': '1'})			
Command ExpansionOutputAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '16'		
# ExpansionOutputAttenuation example InterfaceName.Set('ExpansionOutputAttenuation', 0, {'Output': '1'})			
Command ExpansionOutputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '1' – '16'		
# ExpansionOutputMute example InterfaceName.Set('ExpansionOutputMute', 'On', {'Output': '1'})			

Command ExpansionOutputPostmixerTrim	Value -12 to 12 in steps of 0.1 dB
Qualifier Key 'Output'	Qualifier Value '1' – '16'
# ExpansionOutputPostmixerTrim example InterfaceName.Set('ExpansionOutputPostmixerTrim', 12, {'Output': '1'})	
Command GroupBassInputFilter²	Value -24 to 24 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# GroupBassInputFilter example InterfaceName.Set('GroupBassInputFilter', 24, {'Group': '1'})	
Command GroupBassVirtualReturnFilter²	Value -24 to 24 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# GroupBassVirtualReturnFilter example InterfaceName.Set('GroupBassVirtualReturnFilter', 24, {'Group': '1'})	
Command GroupMeterMode¹¹	Value 'Enable' Value 'Disable'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# GroupMeterMode example InterfaceName.Set('GroupMeterMode', 'Enable', {'Group': '1'})	
Command GroupMeterResponseRate¹¹	Value '1' – '10'
# GroupMeterResponseRate example InterfaceName.Set('GroupMeterResponseRate', '1')	
Command GroupMeterSelect¹¹	Value '1' – '64' Value 'Off'
# GroupMeterSelect example InterfaceName.Set('GroupMeterSelect', '1')	
Command GroupMicLineInputGain	Value -18 to 80 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# GroupMicLineInputGain example InterfaceName.Set('GroupMicLineInputGain', 80, {'Group': '1'})	
Command GroupMixpointGain	Value -100 to 12 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# GroupMixpointGain example InterfaceName.Set('GroupMixpointGain', 12, {'Group': '1'})	
Command GroupMute	Value 'On' Value 'Off'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# GroupMute example InterfaceName.Set('GroupMute', 'On', {'Group': '1'})	

Command GroupOutputAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupOutputAttenuation example InterfaceName.Set('GroupOutputAttenuation', 0, {'Group': '1'})			
Command GroupPostMixerTrim	Value -12 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupPostMixerTrim example InterfaceName.Set('GroupPostMixerTrim', 12, {'Group': '1'})			
Command GroupPreMixerGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupPreMixerGain example InterfaceName.Set('GroupPreMixerGain', 12, {'Group': '1'})			
Command GroupTrebleInputFilter ²	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupTrebleInputFilter example InterfaceName.Set('GroupTrebleInputFilter', 24, {'Group': '1'})			
Command GroupTrebleVirtualReturn Filter ²	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupTrebleVirtualReturnFilter example InterfaceName.Set('GroupTrebleVirtualReturnFilter', 24, {'Group': '1'})			
Command GroupVirtualReturnGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupVirtualReturnGain example InterfaceName.Set('GroupVirtualReturnGain', 12, {'Group': '1'})			
Command Hook ⁴	Value 'End Call' 'Hold On'	Value 'Answer' 'Hold Off'	Value 'Reject'
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# Hook example InterfaceName.Set('Hook', 'End Call', {'Line': '1', 'Appearance': '1'})			
Command InputGain	Value -18 to 80 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '6'		
# InputGain example InterfaceName.Set('InputGain', 80, {'Input': '1'})			

Global Scripter Module
Communication Sheet

Command	Value		
InputMute	'On' 'Off'		
Qualifier Key	Qualifier Value		
'Input'	'1' – '6'		
# InputMute example InterfaceName.Set('InputMute', 'On', {'Input': '1'})			
Command	Value		Value
InputSource ⁸	'Analog'		'AT#1' – 'AT#48'
Qualifier Key	Qualifier Value		
'Input'	'1' – '6'		
# InputSource example InterfaceName.Set('InputSource', 'Analog', {'Input': '1'})			
Command	Value		Value
Macro	'Run'		'Kill'
Qualifier Key	Qualifier Value		
'Macro'	'1' – '64'		
# Macro example InterfaceName.Set('Macro', 'Run', {'Macro': '1'})			
Command	Value		
MixpointGain	-100 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Input'	'1' – '6'	'Aux 1' – 'Aux 8'	'V. Return A' – 'V. Return P'
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Output'	'1' – '4'	'Aux 1' – 'Aux 8'	'V. Send A' – 'V. Send P'
	'Exp. 1' – 'Exp. 15'		
# MixpointGain example InterfaceName.Set('MixpointGain', 12, {'Input': '1', 'Output': '1'})			
Command	Value		Value
MixpointMute	'On'		'Off'
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Input'	'1' – '6'	'Aux 1' – 'Aux 8'	'V. Return A' – 'V. Return P'
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Output'	'1' – '4'	'Aux 1' – 'Aux 8'	'V. Send A' – 'V. Send P'
	'Exp. 1' – 'Exp. 15'		
# MixpointMute example InterfaceName.Set('MixpointMute', 'On', {'Input': '1', 'Output': '1'})			
Command	Value		
OutputAttenuation	-100 to 0 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Output'	'1' – '4'		
# OutputAttenuation example InterfaceName.Set('OutputAttenuation', 0, {'Output': '1'})			
Command	Value		Value
OutputMute	'On'		'Off'
Qualifier Key	Qualifier Value		
'Output'	'1' – '4'		
# OutputMute example InterfaceName.Set('OutputMute', 'On', {'Output': '1'})			

Global Scripter Module
Communication Sheet

Command	Value	
OutputPostmixerTrim	-12 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
# OutputPostmixerTrim example InterfaceName.Set('OutputPostmixerTrim', 12, {'Output': '1'})		
Command	Value	Value
PhantomPower	'Enable'	'Disable'
Qualifier Key	Qualifier Value	
'Input'	'1' – '6'	
# PhantomPower example InterfaceName.Set('PhantomPower', 'Enable', {'Input': '1'})		
Command	Value	Value
PlayerControl	'Start'	'Stop'
Qualifier Key	Qualifier Value	
'Player ID'	'1' – '8'	
# PlayerControl example InterfaceName.Set('PlayerControl', 'Start', {'Player ID': '1'})		
Command	Value	
PlayerFilenameCommand 1	'String'	
Qualifier Key	Qualifier Value	
'Player ID'	'1' – '8'	
# PlayerFilenameCommand example InterfaceName.Set('PlayerFilenameCommand', 'String', {'Player ID': '1'})		
Command	Value	Value
PlayerRepeat	'Play Once'	'Repeat'
Qualifier Key	Qualifier Value	
'Player ID'	'1' – '8'	
# PlayerRepeat example InterfaceName.Set('PlayerRepeat', 'Play Once', {'Player ID': '1'})		
Command	Value	
PremixerGain	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Input'	'1' – '6'	
# PremixerGain example InterfaceName.Set('PremixerGain', 12, {'Input': '1'})		
Command	Value	Value
PremixerMute	'On'	'Off'
Qualifier Key	Qualifier Value	
'Input'	'1' – '6'	
# PremixerMute example InterfaceName.Set('PremixerMute', 'On', {'Input': '1'})		
Command	Value	
PresetRecall	'1' – '32'	
# PresetRecall example InterfaceName.Set('PresetRecall', '1')		
Command	Value	
PresetSave	'1' – '32'	
# PresetSave example InterfaceName.Set('PresetSave', '1')		

Command VirtualReturnGain	Value -100 to 12 in steps of 0.1 dB
Qualifier Key 'Input'	Qualifier Value 'A' – 'P'
# VirtualReturnGain example InterfaceName.Set('VirtualReturnGain', 12, {'Input': 'A'})	
Command VirtualReturnMute	Value 'On' Value 'Off'
Qualifier Key 'Input'	Qualifier Value 'A' – 'P'
# VirtualReturnMute example InterfaceName.Set('VirtualReturnMute', 'On', {'Input': 'A'})	

¹ Player Control state must be 'Stop' for the player to successfully set a file.

² This command requires a Bass & Treble Filter block to be configured on the Extron DSP Configurator.

³ Only available for DMP 64 Plus AT (Dante) models.

⁴ Only available for models: DMP 64 Plus C V and DMP 64 Plus C V AT.

⁵ Dial will dial the number in Dial String and it is used to make a call.

⁶ Redial overwrites the Dial String with the last number that was dialed with the driver. The number is not dialed out; the Dial command must be used after Redial to dial the number

⁷ Clear Redial clears any number that was stored in Redial

⁸ Only supported on AT models.

⁹ Only supported on V models.

¹⁰ Only supported to control AXI series models or NetPA series models via Dante. Please refer to the respective Dante device's user manual for which commands are supported. A 'reboot' of each device may be needed prior to initializing the driver. Dante device may also need to be connected once with the DSP Configurator.

¹¹ Group Meters must be configured within the Extron DSP Configurator for this command to work.

Status Available

For all commands except for AutoAnswerDelay, AutoAnswerMode, AutomixerGateStatus, CallDuration, CallStatus, CallerExtension, CallerID, CallerName, DanteTemperature, DoNotDisturb, and GroupMeterLevel, Update should be called only once since the command's status will be updated automatically as the device's status changes. ConnectionStatus, AutomixerGateSet, AutomixerGateStatus, and CallerID do not support the Update function. ConnectionStatus is triggered by the device providing a successful response to other Update function calls.

Format with Qualifier:

```
InterfaceName.Update(Command, {'Qualifier Key': 'Qualifier Value'})
Value = InterfaceName.ReadStatus(Command, {'Qualifier Key': 'Qualifier Value'})
InterfaceName.SubscribeStatus(Command, {'Qualifier Key': 'Qualifier Value'},
```

FeedbackHandler)

FeedbackHandler will be called only when the specified qualifier gets a new status.

Format without Qualifier:

```
InterfaceName.Update(Command)
Value = InterfaceName.ReadStatus(Command)
InterfaceName.SubscribeStatus(Command, None, FeedbackHandler)
FeedbackHandler will be called when any qualifier gets a new status.
```

Command	Value		
AutoAnswerDelay ⁴	'0' – '30'		
Qualifier Key	Qualifier Value		
'Line'	'1' – '8'		
# AutoAnswerDelay example InterfaceName.Update('AutoAnswerDelay', {'Line': '1'}) Value = InterfaceName.ReadStatus('AutoAnswerDelay', {'Line': '1'}) InterfaceName.SubscribeStatus('AutoAnswerDelay', None, FeedbackHandler)			
Command	Value	Value	Value
AutoAnswerMode ⁴	'Disable'	'Delay'	'Follow SIP Header'
Qualifier Key	Qualifier Value		
'Line'	'1' – '8'		
# AutoAnswerMode example InterfaceName.Update('AutoAnswerMode', {'Line': '1'}) Value = InterfaceName.ReadStatus('AutoAnswerMode', {'Line': '1'}) InterfaceName.SubscribeStatus('AutoAnswerMode', None, FeedbackHandler)			
Command	Value	Value	
AutomixerGateSet	'Enable'	'Disable'	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Input'	'Aux 1' – 'Aux 8'	'Mic 1' – 'Mic 6'	'Exp. 1' – 'Exp. 48'
# AutomixerGateSet example Value = InterfaceName.ReadStatus('AutomixerGateSet', {'Input': 'Aux 1'}) InterfaceName.SubscribeStatus('AutomixerGateSet', None, FeedbackHandler)			
Command	Value	Value	
AutomixerGateStatus ¹	'On'	'Off'	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Input'	'Aux 1' – 'Aux 8'	'Mic 1' – 'Mic 6'	'Exp. 1' – 'Exp. 48'
# AutomixerGateStatus example Value = InterfaceName.ReadStatus('AutomixerGateStatus', {'Input': 'Aux 1'}) InterfaceName.SubscribeStatus('AutomixerGateStatus', None, FeedbackHandler)			

Global Scripter Module
Communication Sheet

Command AuxInputGain	Value -18 to 24 in steps of 0.1 dB
Qualifier Key 'Input'	Qualifier Value '1' – '8'
# AuxInputGain example InterfaceName.Update('AuxInputGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('AuxInputGain', {'Input': '1'}) InterfaceName.SubscribeStatus('AuxInputGain', None, FeedbackHandler)	
Command AuxInputMute	Value 'On' 'Off'
Qualifier Key 'Input'	Qualifier Value '1' – '8'
# AuxInputMute example InterfaceName.Update('AuxInputMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('AuxInputMute', {'Input': '1'}) InterfaceName.SubscribeStatus('AuxInputMute', None, FeedbackHandler)	
Command AuxInputPremixerGain	Value -100 to 12 in steps of 0.1 dB
Qualifier Key 'Input'	Qualifier Value '1' – '8'
# AuxInputPremixerGain example InterfaceName.Update('AuxInputPremixerGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('AuxInputPremixerGain', {'Input': '1'}) InterfaceName.SubscribeStatus('AuxInputPremixerGain', None, FeedbackHandler)	
Command AuxInputPremixerMute	Value 'On' 'Off'
Qualifier Key 'Input'	Qualifier Value '1' – '8'
# AuxInputPremixerMute example InterfaceName.Update('AuxInputPremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('AuxInputPremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('AuxInputPremixerMute', None, FeedbackHandler)	
Command AuxOutputGain	Value -100 to 0 in steps of 0.1 dB
Qualifier Key 'Output'	Qualifier Value '1' – '8'
# AuxOutputGain example InterfaceName.Update('AuxOutputGain', {'Output': '1'}) Value = InterfaceName.ReadStatus('AuxOutputGain', {'Output': '1'}) InterfaceName.SubscribeStatus('AuxOutputGain', None, FeedbackHandler)	
Command AuxOutputMute	Value 'On' 'Off'
Qualifier Key 'Output'	Qualifier Value '1' – '8'
# AuxOutputMute example InterfaceName.Update('AuxOutputMute', {'Output': '1'}) Value = InterfaceName.ReadStatus('AuxOutputMute', {'Output': '1'}) InterfaceName.SubscribeStatus('AuxOutputMute', None, FeedbackHandler)	
Command AuxOutputPostmixerTrim	Value -12 to 12 in steps of 0.1 dB
Qualifier Key 'Output'	Qualifier Value '1' – '8'
# AuxOutputPostmixerTrim example InterfaceName.Update('AuxOutputPostmixerTrim', {'Output': '1'}) Value = InterfaceName.ReadStatus('AuxOutputPostmixerTrim', {'Output': '1'}) InterfaceName.SubscribeStatus('AuxOutputPostmixerTrim', None, FeedbackHandler)	

Global Scripter Module
Communication Sheet

Revision: 10/8/2024

Command CallDuration ⁴	Value 'String'		
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# CallDuration example InterfaceName.Update('CallDuration', {'Line': '1', 'Appearance': '1'}) Value = InterfaceName.ReadStatus('CallDuration', {'Line': '1', 'Appearance': '1'}) InterfaceName.SubscribeStatus('CallDuration', None, FeedbackHandler)			
Command CallStatus ⁴	Value 'N/A' 'On Hold' 'Busy' 'Terminated'	Value 'Inactive' 'Incoming' 'Rejected'	Value 'Active' 'Outgoing' 'Unreachable'
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# CallStatus example InterfaceName.Update('CallStatus', {'Line': '1', 'Appearance': '1'}) Value = InterfaceName.ReadStatus('CallStatus', {'Line': '1', 'Appearance': '1'}) InterfaceName.SubscribeStatus('CallStatus', None, FeedbackHandler)			
Command CallerExtension	Value 'String'		
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# CallerExtension example InterfaceName.Update('CallerExtension', {'Line': '1', 'Appearance': '1'}) Value = InterfaceName.ReadStatus('CallerExtension', {'Line': '1', 'Appearance': '1'}) InterfaceName.SubscribeStatus('CallerExtension', None, FeedbackHandler)			
Command CallerID ⁴	Value 'String'		
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# CallerID example Value = InterfaceName.ReadStatus('CallerID', {'Line': '1', 'Appearance': '1'}) InterfaceName.SubscribeStatus('CallerID', None, FeedbackHandler)			
Command CallerName ⁴	Value 'String'		
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# CallerName example InterfaceName.Update('CallerName', {'Line': '1', 'Appearance': '1'}) Value = InterfaceName.ReadStatus('CallerName', {'Line': '1', 'Appearance': '1'}) InterfaceName.SubscribeStatus('CallerName', None, FeedbackHandler)			

Command	Value	Value
ConnectionStatus	'Connected'	'Disconnected'
# ConnectionStatus example Value = InterfaceName.ReadStatus('ConnectionStatus') InterfaceName.SubscribeStatus('ConnectionStatus', None, FeedbackHandler)		
Command	Value	
DanteATInputPremixerGain ^{9,10}	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Dante Device'	'String'	
Qualifier Key	Qualifier Value	
'Input'	'1' – '4'	
# DanteATInputPremixerGain example InterfaceName.Update('DanteATInputPremixerGain', {'Dante Device': 'String', 'Input': '1'}) Value = InterfaceName.ReadStatus('DanteATInputPremixerGain', {'Dante Device': 'String', 'Input': '1'}) InterfaceName.SubscribeStatus('DanteATInputPremixerGain', None, FeedbackHandler)		
Command	Value	Value
DanteDCProtectionFault ^{9,10}	'Never Faulted'	'Not in Fault State but Has Faulted'
Qualifier Key	Qualifier Value	Value
'Dante Device'	'String'	'Fault'
# DanteDCProtectionFault example InterfaceName.Update('DanteDCProtectionFault', {'Dante Device': 'String'}) Value = InterfaceName.ReadStatus('DanteDCProtectionFault', {'Dante Device': 'String'}) InterfaceName.SubscribeStatus('DanteDCProtectionFault', None, FeedbackHandler)		
Command	Value	Value
DanteDigitalClip ^{9,10}	'Never Faulted'	'Not in Fault State but Has Faulted'
Qualifier Key	Qualifier Value	Value
'Dante Device'	'String'	'Fault'
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
# DanteDigitalClip example InterfaceName.Update('DanteDigitalClip', {'Dante Device': 'String', 'Output': '1'}) Value = InterfaceName.ReadStatus('DanteDigitalClip', {'Dante Device': 'String', 'Output': '1'}) InterfaceName.SubscribeStatus('DanteDigitalClip', None, FeedbackHandler)		
Command	Value	
DanteGroupMicLineInputGain ^{9,10}	-18 to 80 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Dante Device'	'String'	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# DanteGroupMicLineInputGain example InterfaceName.Update('DanteGroupMicLineInputGain', {'Dante Device': 'String', 'Group': '1'}) Value = InterfaceName.ReadStatus('DanteGroupMicLineInputGain', {'Dante Device': 'String', 'Group': '1'}) InterfaceName.SubscribeStatus('DanteGroupMicLineInputGain', None, FeedbackHandler)		

Command DanteGroupMixpointGain 9, 10	Value -100 to 12 in steps of 0.1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupMixpointGain example InterfaceName.Update('DanteGroupMixpointGain', {'Dante Device': 'String', 'Group': '1'}) Value = InterfaceName.ReadStatus('DanteGroupMixpointGain', {'Dante Device': 'String', 'Group': '1'}) InterfaceName.SubscribeStatus('DanteGroupMixpointGain', None, FeedbackHandler)	
Command DanteGroupMute 9, 10	Value 'On' 'Off'
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupMute example InterfaceName.Update('DanteGroupMute', {'Dante Device': 'String', 'Group': '1'}) Value = InterfaceName.ReadStatus('DanteGroupMute', {'Dante Device': 'String', 'Group': '1'}) InterfaceName.SubscribeStatus('DanteGroupMute', None, FeedbackHandler)	
Command DanteGroupOutputAttenuation 9, 10	Value -100 to 0 in steps of 0.1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupOutputAttenuation example InterfaceName.Update('DanteGroupOutputAttenuation', {'Dante Device': 'String', 'Group': '1'}) Value = InterfaceName.ReadStatus('DanteGroupOutputAttenuation', {'Dante Device': 'String', 'Group': '1'}) InterfaceName.SubscribeStatus('DanteGroupOutputAttenuation', None, FeedbackHandler)	
Command DanteGroupPostMixerTrim 9, 10	Value -12 to 12 in steps of 0.1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupPostMixerTrim example InterfaceName.Update('DanteGroupPostMixerTrim', {'Dante Device': 'String', 'Group': '1'}) Value = InterfaceName.ReadStatus('DanteGroupPostMixerTrim', {'Dante Device': 'String', 'Group': '1'}) InterfaceName.SubscribeStatus('DanteGroupPostMixerTrim', None, FeedbackHandler)	
Command DanteGroupPreMixerGain 9, 10	Value -100 to 12 in steps of 0.1 dB
Qualifier Key 'Dante Device'	Qualifier Value 'String'
Qualifier Key 'Group'	Qualifier Value '1' – '64'
# DanteGroupPreMixerGain example InterfaceName.Update('DanteGroupPreMixerGain', {'Dante Device': 'String', 'Group': '1'})	

Value = InterfaceName.ReadStatus('DanteGroupPreMixerGain', {'Dante Device': 'String', 'Group': '1'}) InterfaceName.SubscribeStatus('DanteGroupPreMixerGain', None, FeedbackHandler)			
Command DanteInputGain ^{9,10}	Value 0 to 42 in steps of 3 dB		
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# DanteInputGain example InterfaceName.Update('DanteInputGain', {'Dante Device': 'String', 'Input': '1'}) Value = InterfaceName.ReadStatus('DanteInputGain', {'Dante Device': 'String', 'Input': '1'}) InterfaceName.SubscribeStatus('DanteInputGain', None, FeedbackHandler)			
Command DanteInputMute ^{9,10}	Value 'On'	Value 'Off'	
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# DanteInputMute example InterfaceName.Update('DanteInputMute', {'Dante Device': 'String', 'Input': '1'}) Value = InterfaceName.ReadStatus('DanteInputMute', {'Dante Device': 'String', 'Input': '1'}) InterfaceName.SubscribeStatus('DanteInputMute', None, FeedbackHandler)			
Command DanteLossofAC ^{9,10}	Value 'Never Faulted'	Value 'Not in Fault State but Has Faulted'	Value 'Fault'
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
# DanteLossofAC example InterfaceName.Update('DanteLossofAC', {'Dante Device': 'String'}) Value = InterfaceName.ReadStatus('DanteLossofAC', {'Dante Device': 'String'}) InterfaceName.SubscribeStatus('DanteLossofAC', None, FeedbackHandler)			
Command DanteMainPowerSupply ^{9,10}	Value 'Never Faulted'	Value 'Not in Fault State but Has Faulted'	Value 'Fault'
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
# DanteMainPowerSupply example InterfaceName.Update('DanteMainPowerSupply', {'Dante Device': 'String'}) Value = InterfaceName.ReadStatus('DanteMainPowerSupply', {'Dante Device': 'String'}) InterfaceName.SubscribeStatus('DanteMainPowerSupply', None, FeedbackHandler)			
Command DanteOpenCircuit ^{9,10}	Value 'Never Faulted'	Value 'Not in Fault State but Has Faulted'	Value 'Fault'
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# DanteOpenCircuit example InterfaceName.Update('DanteOpenCircuit', {'Dante Device': 'String', 'Output': '1'}) Value = InterfaceName.ReadStatus('DanteOpenCircuit', {'Dante Device': 'String', 'Output': '1'}) InterfaceName.SubscribeStatus('DanteOpenCircuit', None, FeedbackHandler)			

Command DanteOutputAttenuation 9, 10	Value -100 to 0 in steps of 1 dB		
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# DanteOutputAttenuation example InterfaceName.Update('DanteOutputAttenuation', {'Dante Device': 'String', 'Output': '1'}) Value = InterfaceName.ReadStatus('DanteOutputAttenuation', {'Dante Device': 'String', 'Output': '1'}) InterfaceName.SubscribeStatus('DanteOutputAttenuation', None, FeedbackHandler)			
Command DanteOutputMute 9, 10	Value 'On'	Value 'Off'	
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# DanteOutputMute example InterfaceName.Update('DanteOutputMute', {'Dante Device': 'String', 'Output': '1'}) Value = InterfaceName.ReadStatus('DanteOutputMute', {'Dante Device': 'String', 'Output': '1'}) InterfaceName.SubscribeStatus('DanteOutputMute', None, FeedbackHandler)			
Command DanteOverTempFault 9, 10	Value 'Never Faulted'	Value 'Not in Fault State but Has Faulted'	Value 'Fault'
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
# DanteOverTempFault example InterfaceName.Update('DanteOverTempFault', {'Dante Device': 'String'}) Value = InterfaceName.ReadStatus('DanteOverTempFault', {'Dante Device': 'String'}) InterfaceName.SubscribeStatus('DanteOverTempFault', None, FeedbackHandler)			
Command DanteOverloadProtect 9, 10	Value 'Never Faulted'	Value 'Not in Fault State but Has Faulted'	Value 'Fault'
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# DanteOverloadProtect example InterfaceName.Update('DanteOverloadProtect', {'Dante Device': 'String', 'Output': '1'}) Value = InterfaceName.ReadStatus('DanteOverloadProtect', {'Dante Device': 'String', 'Output': '1'}) InterfaceName.SubscribeStatus('DanteOverloadProtect', None, FeedbackHandler)			
Command DantePremixerGain 9, 10	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Dante Device'	Qualifier Value 'String'		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# DantePremixerGain example InterfaceName.Update('DantePremixerGain', {'Dante Device': 'String', 'Input': '1'}) Value = InterfaceName.ReadStatus('DantePremixerGain', {'Dante Device': 'String', 'Input': '1'}) InterfaceName.SubscribeStatus('DantePremixerGain', None, FeedbackHandler)			

Command DanteSignalPresence ^{9,10}	Value 'Signal'	Value 'No Signal'
Qualifier Key 'Dante Device'	Qualifier Value 'String'	
Qualifier Key 'Output'	Qualifier Value '1' – '4'	
# DanteSignalPresence example InterfaceName.Update('DanteSignalPresence', {'Dante Device': 'String', 'Output': '1'}) Value = InterfaceName.ReadStatus('DanteSignalPresence', {'Dante Device': 'String', 'Output': '1'}) InterfaceName.SubscribeStatus('DanteSignalPresence', None, FeedbackHandler)		
Command DanteTemperature ^{9,10}	Value Number	
Qualifier Key 'Dante Device'	Qualifier Value 'String'	
# DanteTemperature example InterfaceName.Update('DanteTemperature', {'Dante Device': 'String'}) Value = InterfaceName.ReadStatus('DanteTemperature', {'Dante Device': 'String'}) InterfaceName.SubscribeStatus('DanteTemperature', None, FeedbackHandler)		
Command DanteThermalLimiting ^{9,10}	Value 'Never Faulted'	Value 'Not in Fault State but Has Faulted'
Qualifier Key 'Dante Device'	Qualifier Value 'String'	
Qualifier Key 'Output'	Qualifier Value '1' – '4'	
# DanteThermalLimiting example InterfaceName.Update('DanteThermalLimiting', {'Dante Device': 'String', 'Output': '1'}) Value = InterfaceName.ReadStatus('DanteThermalLimiting', {'Dante Device': 'String', 'Output': '1'}) InterfaceName.SubscribeStatus('DanteThermalLimiting', None, FeedbackHandler)		
Command DigitalInputGain ³	Value -18 to 24 in steps of 0.1 dB	
Qualifier Key 'Input'	Qualifier Value '1' – '6'	
# DigitalInputGain example InterfaceName.Update('DigitalInputGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('DigitalInputGain', {'Input': '1'}) InterfaceName.SubscribeStatus('DigitalInputGain', None, FeedbackHandler)		
Command DigitalInputStatus	Value 'Logic Low'	Value 'Logic High'
Qualifier Key 'Input'	Qualifier Value '1' – '6'	
# DigitalInputStatus example InterfaceName.Update('DigitalInputStatus', {'Input': '1'}) Value = InterfaceName.ReadStatus('DigitalInputStatus', {'Input': '1'}) InterfaceName.SubscribeStatus('DigitalInputStatus', None, FeedbackHandler)		
Command DoNotDisturb ⁴	Value 'Enable'	Value 'Disable'
Qualifier Key 'Line'	Qualifier Value '1' – '8'	
# DoNotDisturb example InterfaceName.Update('DoNotDisturb', {'Line': '1'}) Value = InterfaceName.ReadStatus('DoNotDisturb', {'Line': '1'}) InterfaceName.SubscribeStatus('DoNotDisturb', None, FeedbackHandler)		

Command ExpansionBusMixpointGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '48'		
Qualifier Key 'Output'	Qualifier Value '1' – '4' 'V. Send A' – 'V. Send P'	Qualifier Value 'Aux 1' – 'Aux 8'	Qualifier Value 'Exp. 1' – 'Exp. 16'
# ExpansionBusMixpointGain example InterfaceName.Update('ExpansionBusMixpointGain', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('ExpansionBusMixpointGain', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('ExpansionBusMixpointGain', None, FeedbackHandler)			
Command ExpansionBusMixpointMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '48'		
Qualifier Key 'Output'	Qualifier Value '1' – '4' 'V. Send A' – 'V. Send P'	Qualifier Value 'Aux 1' – 'Aux 8'	Qualifier Value 'Exp. 1' – 'Exp. 16'
# ExpansionBusMixpointMute example InterfaceName.Update('ExpansionBusMixpointMute', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('ExpansionBusMixpointMute', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('ExpansionBusMixpointMute', None, FeedbackHandler)			
Command ExpansionInputPremixerGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '48'		
# ExpansionInputPremixerGain example InterfaceName.Update('ExpansionInputPremixerGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('ExpansionInputPremixerGain', {'Input': '1'}) InterfaceName.SubscribeStatus('ExpansionInputPremixerGain', None, FeedbackHandler)			
Command ExpansionInputPremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '48'		
# ExpansionInputPremixerMute example InterfaceName.Update('ExpansionInputPremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('ExpansionInputPremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('ExpansionInputPremixerMute', None, FeedbackHandler)			
Command ExpansionOutputAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '16'		
# ExpansionOutputAttenuation example InterfaceName.Update('ExpansionOutputAttenuation', {'Output': '1'}) Value = InterfaceName.ReadStatus('ExpansionOutputAttenuation', {'Output': '1'}) InterfaceName.SubscribeStatus('ExpansionOutputAttenuation', None, FeedbackHandler)			

Command	Value		
ExpansionOutputMute	'On' 'Off'		
Qualifier Key	Qualifier Value		
'Output'	'1' – '16'		
# ExpansionOutputMute example InterfaceName.Update('ExpansionOutputMute', {'Output': '1'}) Value = InterfaceName.ReadStatus('ExpansionOutputMute', {'Output': '1'}) InterfaceName.SubscribeStatus('ExpansionOutputMute', None, FeedbackHandler)			
Command	Value		
ExpansionOutputPostmixerTrim	-12 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Output'	'1' – '16'		
# ExpansionOutputPostmixerTrim example InterfaceName.Update('ExpansionOutputPostmixerTrim', {'Output': '1'}) Value = InterfaceName.ReadStatus('ExpansionOutputPostmixerTrim', {'Output': '1'}) InterfaceName.SubscribeStatus('ExpansionOutputPostmixerTrim', None, FeedbackHandler)			
Command	Value		
GroupBassInputFilter ²	-24 to 24 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Group'	'1' – '64'		
# GroupBassInputFilter example InterfaceName.Update('GroupBassInputFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupBassInputFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupBassInputFilter', None, FeedbackHandler)			
Command	Value		
GroupBassVirtualReturnFilter ²	-24 to 24 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Group'	'1' – '64'		
# GroupBassVirtualReturnFilter example InterfaceName.Update('GroupBassVirtualReturnFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupBassVirtualReturnFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupBassVirtualReturnFilter', None, FeedbackHandler)			
Command	Value		
GroupMeterLevel ¹²	-150 – 0 dB		
Qualifier Key	Qualifier Value		
'Group'	'1' – '64'		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Channel'	'Input 1' – 'Input 6' 'Aux Out 1' – 'Aux Out 8'	'Aux In 1' – 'Aux In 8' 'Exp Out 1' – 'Exp Out 16'	'Output 1' – 'Output 4'
# GroupMeterLevel example InterfaceName.Update('GroupMeterLevel', {'Group': '1', 'Channel': 'Input 1'}) Value = InterfaceName.ReadStatus('GroupMeterLevel', {'Group': '1', 'Channel': 'Input 1'}) InterfaceName.SubscribeStatus('GroupMeterLevel', None, FeedbackHandler)			
Command	Value		
GroupMeterResponseRate ¹²	'1' – '10'		
# GroupMeterResponseRate example InterfaceName.Update('GroupMeterResponseRate') Value = InterfaceName.ReadStatus('GroupMeterResponseRate') InterfaceName.SubscribeStatus('GroupMeterResponseRate', None, FeedbackHandler)			

Global Scriptor Module
Communication Sheet

Command	Value	Value
GroupMeterSelect	'1' – '64'	'Off'
# GroupMeterSelect example InterfaceName.Update('GroupMeterSelect') Value = InterfaceName.ReadStatus('GroupMeterSelect') InterfaceName.SubscribeStatus('GroupMeterSelect', None, FeedbackHandler)		
Command	Value	
GroupMicLineInputGain	-18 to 80 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# GroupMicLineInputGain example InterfaceName.Update('GroupMicLineInputGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMicLineInputGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMicLineInputGain', None, FeedbackHandler)		
Command	Value	
GroupMixpointGain	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# GroupMixpointGain example InterfaceName.Update('GroupMixpointGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMixpointGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMixpointGain', None, FeedbackHandler)		
Command	Value	Value
GroupMute	'On'	'Off'
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# GroupMute example InterfaceName.Update('GroupMute', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMute', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMute', None, FeedbackHandler)		
Command	Value	
GroupOutputAttenuation	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# GroupOutputAttenuation example InterfaceName.Update('GroupOutputAttenuation', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupOutputAttenuation', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupOutputAttenuation', None, FeedbackHandler)		
Command	Value	
GroupPostMixerTrim	-12 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# GroupPostMixerTrim example InterfaceName.Update('GroupPostMixerTrim', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPostMixerTrim', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPostMixerTrim', None, FeedbackHandler)		
Command	Value	
GroupPreMixerGain	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '64'	
# GroupPreMixerGain example InterfaceName.Update('GroupPreMixerGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPreMixerGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPreMixerGain', None, FeedbackHandler)		

Command GroupTrebleInputFilter ²	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupTrebleInputFilter example InterfaceName.Update('GroupTrebleInputFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupTrebleInputFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupTrebleInputFilter', None, FeedbackHandler)			
Command GroupTrebleVirtualReturn Filter ²	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupTrebleVirtualReturnFilter example InterfaceName.Update('GroupTrebleVirtualReturnFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupTrebleVirtualReturnFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupTrebleVirtualReturnFilter', None, FeedbackHandler)			
Command GroupVirtualReturnGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '64'		
# GroupVirtualReturnGain example InterfaceName.Update('GroupVirtualReturnGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupVirtualReturnGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupVirtualReturnGain', None, FeedbackHandler)			
Command Hook ⁴	Value 'End Call' 'Hold On'	Value 'Answer' 'Hold Off'	Value 'Reject'
Qualifier Key 'Line'	Qualifier Value '1' – '8'		
Qualifier Key 'Appearance'	Qualifier Value '1' – '8'		
# Hook example InterfaceName.Update('Hook', {'Group': '1'}) Value = InterfaceName.ReadStatus('Hook', {'Line': '1', 'Appearance': '1'}) InterfaceName.SubscribeStatus('Hook', None, FeedbackHandler)			
Qualifier Key 'Input'	Qualifier Value '1' – '6'		
# InputGain example InterfaceName.Update('InputGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputGain', {'Input': '1'}) InterfaceName.SubscribeStatus('InputGain', None, FeedbackHandler)			
Command InputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '6'		
# InputMute example InterfaceName.Update('InputMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputMute', {'Input': '1'}) InterfaceName.SubscribeStatus('InputMute', None, FeedbackHandler)			

Command InputSignalLevelMonitor ²	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '6'	Qualifier Value 'Aux 1' – 'Aux 8'	
Qualifier Key 'Monitoring Threshold'	Qualifier Value -150 – 0 dB		
# InputSignalLevelMonitor example InterfaceName.Update('InputSignalLevelMonitor', {'Input': '1', 'Monitoring Threshold': 0}) Value = InterfaceName.ReadStatus('InputSignalLevelMonitor', {'Input': '1', 'Monitoring Threshold': 0}) InterfaceName.SubscribeStatus('InputSignalLevelMonitor', None, FeedbackHandler)			
Command InputSource ⁸	Value 'Analog'	Value 'AT#1' – 'AT#48'	
Qualifier Key 'Input'	Qualifier Value '1' – '6'		
# InputSource example InterfaceName.Update('InputSource', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputSource', {'Input': '1'}) InterfaceName.SubscribeStatus('InputSource', None, FeedbackHandler)			
Command MixpointGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '6'	Qualifier Value 'Aux 1' – 'Aux 8'	Qualifier Value 'V. Return A' – 'V. Return P'
Qualifier Key 'Output'	Qualifier Value '1' – '4' 'Exp. 1' – 'Exp. 15'	Qualifier Value 'Aux 1' – 'Aux 8'	Qualifier Value 'V. Send A' – 'V. Send P'
# MixpointGain example InterfaceName.Update('MixpointGain', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('MixpointGain', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('MixpointGain', None, FeedbackHandler)			
Command MixpointMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '6'	Qualifier Value 'Aux 1' – 'Aux 8'	Qualifier Value 'V. Return A' – 'V. Return P'
# MixpointMute example InterfaceName.Update('MixpointMute', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('MixpointMute', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('MixpointMute', None, FeedbackHandler)			
Command OutputAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# OutputAttenuation example InterfaceName.Update('OutputAttenuation', {'Output': '1'}) Value = InterfaceName.ReadStatus('OutputAttenuation', {'Output': '1'}) InterfaceName.SubscribeStatus('OutputAttenuation', None, FeedbackHandler)			
Command OutputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# OutputMute example InterfaceName.Update('OutputMute', {'Output': '1'}) Value = InterfaceName.ReadStatus('OutputMute', {'Output': '1'})			

InterfaceName.SubscribeStatus('OutputMute', None, FeedbackHandler)		
Command OutputPostmixerTrim	Value -12 to 12 in steps of 0.1 dB	
Qualifier Key 'Output'	Qualifier Value '1' – '4'	
# OutputPostmixerTrim example InterfaceName.Update('OutputPostmixerTrim', {'Output': '1'}) Value = InterfaceName.ReadStatus('OutputPostmixerTrim', {'Output': '1'}) InterfaceName.SubscribeStatus('OutputPostmixerTrim', None, FeedbackHandler)		
Command PartNumber	Value 'String'	
# PartNumber example InterfaceName.Update('PartNumber') Value = InterfaceName.ReadStatus('PartNumber') InterfaceName.SubscribeStatus('PartNumber', None, FeedbackHandler)		
Command PhantomPower	Value 'Enable'	Value 'Disable'
Qualifier Key 'Input'	Qualifier Value '1' – '6'	
# PhantomPower example InterfaceName.Update('PhantomPower', {'Input': '1'}) Value = InterfaceName.ReadStatus('PhantomPower', {'Input': '1'}) InterfaceName.SubscribeStatus('PhantomPower', None, FeedbackHandler)		
Command PlayerControl	Value 'Start'	Value 'Stop'
Qualifier Key 'Player ID'	Qualifier Value '1' – '8'	
# PlayerControl example InterfaceName.Update('PlayerControl', {'Player ID': '1'}) Value = InterfaceName.ReadStatus('PlayerControl', {'Player ID': '1'}) InterfaceName.SubscribeStatus('PlayerControl', None, FeedbackHandler)		
Command PlayerFilenameStatus	Value 'String'	
Qualifier Key 'Player ID'	Qualifier Value '1' – '8'	
# PlayerFilenameStatus example InterfaceName.Update('PlayerFilenameStatus', {'Player ID': '1'}) Value = InterfaceName.ReadStatus('PlayerFilenameStatus', {'Player ID': '1'}) InterfaceName.SubscribeStatus('PlayerFilenameStatus', None, FeedbackHandler)		
Command PlayerRepeat	Value 'Play Once'	Value 'Repeat'
Qualifier Key 'Player ID'	Qualifier Value '1' – '8'	
# PlayerRepeat example InterfaceName.Update('PlayerRepeat', {'Player ID': '1'}) Value = InterfaceName.ReadStatus('PlayerRepeat', {'Player ID': '1'}) InterfaceName.SubscribeStatus('PlayerRepeat', None, FeedbackHandler)		
Command PremixerGain	Value -100 to 12 in steps of 0.1	
Qualifier Key 'Input'	Qualifier Value '1' – '6'	
# PremixerGain example InterfaceName.Update('PremixerGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerGain', {'Input': '1'}) InterfaceName.SubscribeStatus('PremixerGain', None, FeedbackHandler)		

Global Scripter Module Communication Sheet

Command	Value	Value	
PremixerMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Input'	'1' – '6'		
# PremixerMute example InterfaceName.Update('PremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('PremixerMute', None, FeedbackHandler)			
Command	Value	Value	Value
RegistrationStatus ⁴	'Unregistered'	'Registered to 1st Proxy'	'Registered to 2nd Proxy'
	'None'	'Not Registered'	
Qualifier Key	Qualifier Value		
'Line'	'1' – '8'		
# RegistrationStatus example InterfaceName.Update('RegistrationStatus', {'Line': '1'}) Value = InterfaceName.ReadStatus('RegistrationStatus', {'Line': '1'}) InterfaceName.SubscribeStatus('RegistrationStatus', None, FeedbackHandler)			
Command	Value	Value	
USBCallStatus ¹¹	'Active'	'Inactive'	
# USBCallStatus example InterfaceName.Update('USBCallStatus') Value = InterfaceName.ReadStatus('USBCallStatus') InterfaceName.SubscribeStatus('USBCallStatus', None, FeedbackHandler)			
Command	Value		
VirtualReturnGain	-100 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Input'	'A' – 'P'		
# VirtualReturnGain example InterfaceName.Update('VirtualReturnGain', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnGain', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnGain', None, FeedbackHandler)			
Command	Value	Value	
VirtualReturnMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Input'	'A' – 'P'		
# VirtualReturnMute example InterfaceName.Update('VirtualReturnMute', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnMute', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnMute', None, FeedbackHandler)			

¹ Threshold should be set properly while using this command. Status will be available only when Auto-Mixer Gate Set is Enabled.

² This command requires a Bass & Treble Filter block to be configured on the Extron DSP Configurator.

³ Only available for model DMP 64 Plus AT (Dante).

⁴ Only available for models: DMP 64 Plus C V and DMP 64 Plus C V AT.

⁶ Status is displayed in hh:mm:ss time format.

⁷ This command will provide 'On' status whenever the meter level passes the threshold or 'Off' status whenever the meter level is below the threshold or if '0' is configured as the value. This command is supported for Inputs 1 – 12 and Aux 1 – 8. For Aux 1 – 8 to work, a Player or USB input must be configured.

⁸ Only supported on AT models.

⁹ Only supported on V models.

¹⁰ Only supported to control AXI series models or NetPA series models via Dante. Please refer to the respective Dante device's user manual for which commands are supported. A 'reboot' of each device may be needed prior to initializing the driver. Dante device may also need to be connected once with the DSP Configurator.

¹¹The DMP device must be configured within the Microsoft Teams or Zoom settings for this command to work and ensure USB#1 is selected as the device. USB Audio must also be configured on the Extron DSP Configurator: Tools → Configure USB Audio → USB Audio Control.

¹²Group Meters must be configured within the Extron DSP Configurator for this command to work.

Cable and Adapter Requirements

Captive Screw to Captive Screw

Notes for the Device

Serial communication

Port Type: RS-232

Baud Rate: 38400


Data Bits: 8

Parity: None

Stop Bits: One

Flow Control: None

Pin Assignments Diagram

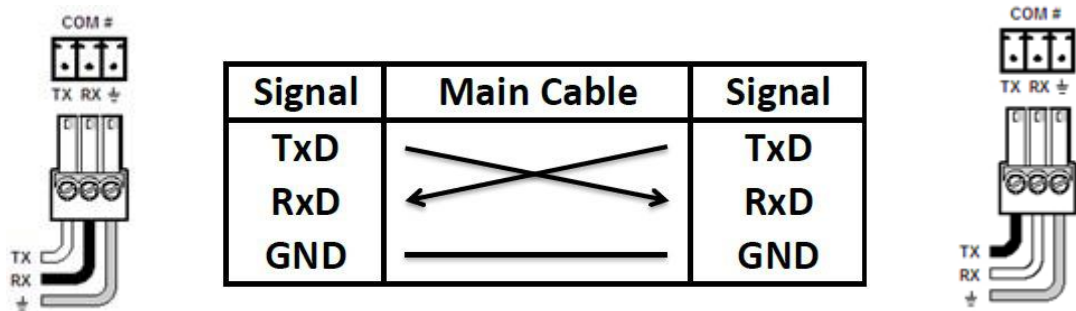

Network communication

When configuring the Ethernet module, be sure device settings match those of the Global Scripter ethernet interface.

Port Type: Ethernet (SSH)

Default Port: 22023

Logon Credentials Supported: Yes

Default Username: admin

Multi-Connection: Yes

Capabilities:

Port Changeability: No

Ethernet Module Configuration Description

Please refer to user manual for settings and changes to the network communication parameters. If logging in as User, the control of the device may be limited.

Notes for the Device

- Please refer to user manual for settings and changes to the network communication parameters such as: Password and Port Number.
- Default Username is “admin” but can be changed to “user”
 - If User password is used for authentication, control of the device may be limited.

Appendix A. Set Commands

Auto Answer Delay 0 Line 1	\x1BAD1,0VOIP\x0D\x0A
Auto Answer Delay 0 Line 8	\x1BAD8,0VOIP\x0D\x0A
Auto Answer Delay 30 Line 1	\x1BAD1,30VOIP\x0D\x0A
Auto Answer Delay 30 Line 8	\x1BAD8,30VOIP\x0D\x0A
Auto Answer Mode Delay Line 1	\x1BAA1,1VOIP\x0D\x0A
Auto Answer Mode Delay Line 8	\x1BAA8,1VOIP\x0D\x0A
Auto Answer Mode Disable Line 1	\x1BAA1,0VOIP\x0D\x0A
Auto Answer Mode Disable Line 8	\x1BAA8,0VOIP\x0D\x0A
Auto Answer Mode Follow SIP Header Line 1	\x1BAA1,2VOIP\x0D\x0A
Auto Answer Mode Follow SIP Header Line 8	\x1BAA8,2VOIP\x0D\x0A
Auto-mixer Gate Set Disable Input Aux 1	wj59012*0Au\x0D
Auto-mixer Gate Set Disable Input Aux 2	wj59013*0Au\x0D
Auto-mixer Gate Set Disable Input Aux 3	wj59014*0Au\x0D
Auto-mixer Gate Set Disable Input Aux 4	wj59015*0Au\x0D
Auto-mixer Gate Set Disable Input Aux 5	wj59016*0Au\x0D
Auto-mixer Gate Set Disable Input Aux 6	wj59017*0Au\x0D
Auto-mixer Gate Set Disable Input Aux 7	wj59018*0Au\x0D
Auto-mixer Gate Set Disable Input Aux 8	wj59019*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 1	wj59020*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 10	wj59029*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 11	wj59030*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 12	wj59031*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 13	wj59032*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 14	wj59033*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 15	wj59034*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 16	wj59035*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 17	wj59036*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 18	wj59037*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 19	wj59038*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 2	wj59021*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 20	wj59039*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 21	wj59040*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 22	wj59041*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 23	wj59042*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 24	wj59043*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 25	wj59044*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 26	wj59045*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 27	wj59046*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 28	wj59047*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 29	wj59048*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 3	wj59022*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 30	wj59049*0Au\x0D

**Global Scripter Module
Communication Sheet**

Auto-mixer Gate Set Disable Input Exp. 31	wj59050*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 32	wj59051*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 33	wj59052*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 34	wj59053*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 35	wj59054*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 36	wj59055*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 37	wj59056*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 38	wj59057*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 39	wj59058*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 4	wj59023*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 40	wj59059*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 41	wj59060*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 42	wj59061*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 43	wj59062*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 44	wj59063*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 45	wj59064*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 46	wj59065*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 47	wj59066*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 48	wj59067*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 5	wj59024*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 6	wj59025*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 7	wj59026*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 8	wj59027*0Au\x0D
Auto-mixer Gate Set Disable Input Exp. 9	wj59028*0Au\x0D
Auto-mixer Gate Set Disable Input Mic 1	wj59000*0Au\x0D
Auto-mixer Gate Set Disable Input Mic 2	wj59001*0Au\x0D
Auto-mixer Gate Set Disable Input Mic 3	wj59002*0Au\x0D
Auto-mixer Gate Set Disable Input Mic 4	wj59003*0Au\x0D
Auto-mixer Gate Set Disable Input Mic 5	wj59004*0Au\x0D
Auto-mixer Gate Set Disable Input Mic 6	wj59005*0Au\x0D
Auto-mixer Gate Set Enable Input Aux 1	wj59012*1024Au\x0D
Auto-mixer Gate Set Enable Input Aux 2	wj59013*1024Au\x0D
Auto-mixer Gate Set Enable Input Aux 3	wj59014*1024Au\x0D
Auto-mixer Gate Set Enable Input Aux 4	wj59015*1024Au\x0D
Auto-mixer Gate Set Enable Input Aux 5	wj59016*1024Au\x0D
Auto-mixer Gate Set Enable Input Aux 6	wj59017*1024Au\x0D
Auto-mixer Gate Set Enable Input Aux 7	wj59018*1024Au\x0D
Auto-mixer Gate Set Enable Input Aux 8	wj59019*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 1	wj59020*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 10	wj59029*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 11	wj59030*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 12	wj59031*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 13	wj59032*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 14	wj59033*1024Au\x0D

Global Scriptor Module Communication Sheet

Auto-mixer Gate Set Enable Input Exp. 15	wj59034*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 16	wj59035*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 17	wj59036*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 18	wj59037*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 19	wj59038*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 2	wj59021*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 20	wj59039*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 21	wj59040*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 22	wj59041*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 23	wj59042*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 24	wj59043*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 25	wj59044*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 26	wj59045*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 27	wj59046*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 28	wj59047*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 29	wj59048*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 3	wj59022*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 30	wj59049*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 31	wj59050*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 32	wj59051*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 33	wj59052*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 34	wj59053*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 35	wj59054*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 36	wj59055*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 37	wj59056*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 38	wj59057*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 39	wj59058*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 4	wj59023*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 40	wj59059*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 41	wj59060*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 42	wj59061*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 43	wj59062*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 44	wj59063*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 45	wj59064*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 46	wj59065*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 47	wj59066*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 48	wj59067*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 5	wj59024*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 6	wj59025*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 7	wj59026*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 8	wj59027*1024Au\x0D
Auto-mixer Gate Set Enable Input Exp. 9	wj59028*1024Au\x0D
Auto-mixer Gate Set Enable Input Mic 1	wj59000*1024Au\x0D
Auto-mixer Gate Set Enable Input Mic 2	wj59001*1024Au\x0D

Global Scriptor Module
Communication Sheet

Auto-mixer Gate Set Enable Input Mic 3	wj59002*1024Au\x0D
Auto-mixer Gate Set Enable Input Mic 4	wj59003*1024Au\x0D
Auto-mixer Gate Set Enable Input Mic 5	wj59004*1024Au\x0D
Auto-mixer Gate Set Enable Input Mic 6	wj59005*1024Au\x0D
Aux Input Gain -18 Input 1	wG40012*-0180AU\x0D\x0A
Aux Input Gain -18 Input 8	wG40019*-0180AU\x0D\x0A
Aux Input Gain 24 Input 1	wG40012*00240AU\x0D\x0A
Aux Input Gain 24 Input 8	wG40019*00240AU\x0D\x0A
Aux Input Mute Off Input 1	wM40012*0AU\x0D\x0A
Aux Input Mute Off Input 8	wM40019*0AU\x0D\x0A
Aux Input Mute On Input 1	wM40012*1AU\x0D\x0A
Aux Input Mute On Input 8	wM40019*1AU\x0D\x0A
Aux Input Pre-mixer Gain -100 Input 1	wG40112*-1000AU\x0D\x0A
Aux Input Pre-mixer Gain -100 Input 8	wG40119*-1000AU\x0D\x0A
Aux Input Pre-mixer Gain 12 Input 1	wG40112*00120AU\x0D\x0A
Aux Input Pre-mixer Gain 12 Input 8	wG40119*00120AU\x0D\x0A
Aux Input Pre-mixer Mute Off Input 1	wM40112*0AU\x0D\x0A
Aux Input Pre-mixer Mute Off Input 8	wM40119*0AU\x0D\x0A
Aux Input Pre-mixer Mute On Input 1	wM40112*1AU\x0D\x0A
Aux Input Pre-mixer Mute On Input 8	wM40119*1AU\x0D\x0A
Aux Output Gain 0 Output 1	wG60008*00000AU\x0D\x0A
Aux Output Gain 0 Output 8	wG60015*00000AU\x0D\x0A
Aux Output Gain -100 Output 1	wG60008*-1000AU\x0D\x0A
Aux Output Gain -100 Output 8	wG60015*-1000AU\x0D\x0A
Aux Output Mute Off Output 1	wM60008*0AU\x0D\x0A
Aux Output Mute Off Output 8	wM60015*0AU\x0D\x0A
Aux Output Mute On Output 1	wM60008*1AU\x0D\x0A
Aux Output Mute On Output 8	wM60015*1AU\x0D\x0A
Aux Output Post-mixer Trim 12 Output 1	wG60108*00120AU\x0D\x0A
Aux Output Post-mixer Trim -12 Output 1	wG60108*-0120AU\x0D\x0A
Aux Output Post-mixer Trim 12 Output 8	wG60115*00120AU\x0D\x0A
Aux Output Post-mixer Trim -12 Output 8	wG60115*-0120AU\x0D\x0A
Dial Dial Line 1	\x1BDIAL1,StringVOIP\x0D\x0A
Dial Dial Line 8	\x1BDIAL8,StringVOIP\x0D\x0A
Dial DTMF # Line 1 Appearance 1	\x1BDD1,1,#VOIP\x0D\x0A
Dial DTMF # Line 1 Appearance 8	\x1BDD1,8,#VOIP\x0D\x0A
Dial DTMF # Line 8 Appearance 1	\x1BDD8,1,#VOIP\x0D\x0A
Dial DTMF # Line 8 Appearance 8	\x1BDD8,8,#VOIP\x0D\x0A
Dial DTMF * Line 1 Appearance 1	\x1BDD1,1,*VOIP\x0D\x0A
Dial DTMF * Line 1 Appearance 8	\x1BDD1,8,*VOIP\x0D\x0A
Dial DTMF * Line 8 Appearance 1	\x1BDD8,1,*VOIP\x0D\x0A
Dial DTMF * Line 8 Appearance 8	\x1BDD8,8,*VOIP\x0D\x0A
Dial DTMF 0 Line 1 Appearance 1	\x1BDD1,1,0VOIP\x0D\x0A
Dial DTMF 0 Line 1 Appearance 8	\x1BDD1,8,0VOIP\x0D\x0A

**Global Scripter Module
Communication Sheet**

Dial DTMF 0 Line 8 Appearance 1	\x1BDD8,1,0VOIP\x0D\x0A
Dial DTMF 0 Line 8 Appearance 8	\x1BDD8,8,0VOIP\x0D\x0A
Dial DTMF 9 Line 1 Appearance 1	\x1BDD1,1,9VOIP\x0D\x0A
Dial DTMF 9 Line 1 Appearance 8	\x1BDD1,8,9VOIP\x0D\x0A
Dial DTMF 9 Line 8 Appearance 1	\x1BDD8,1,9VOIP\x0D\x0A
Dial DTMF 9 Line 8 Appearance 8	\x1BDD8,8,9VOIP\x0D\x0A
Digital Input Gain -18 Input 1	wH4000*-0180AU\x0D\x0A
Digital Input Gain -18 Input 6	wH40005*-0180AU\x0D\x0A
Digital Input Gain 24 Input 1	wH40000*00240AU\x0D\x0A
Digital Input Gain 24 Input 6	wH40005*00240AU\x0D\x0A
Do Not Disturb Disable Line 1	\x1BDND1,0VOIP\x0D\x0A
Do Not Disturb Disable Line 8	\x1BDND8,0VOIP\x0D\x0A
Do Not Disturb Enable Line 1	\x1BDND1,1VOIP\x0D\x0A
Do Not Disturb Enable Line 8	\x1BDND8,1VOIP\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output 1	wG23600*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output 4	wG23603*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 1	wG23608*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 2	wG23609*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 3	wG23610*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 4	wG23611*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 5	wG23612*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 6	wG23613*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 7	wG23614*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Aux 8	wG23615*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 1	wG23632*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 10	wG23641*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 11	wG23642*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 12	wG23643*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 13	wG23644*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 14	wG23645*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 15	wG23646*-1000AU\x0D\x0A

Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 16	wG23647*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 2	wG23633*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 3	wG23634*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 4	wG23635*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 5	wG23636*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 6	wG23637*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 7	wG23638*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 8	wG23639*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output Exp. 9	wG23640*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send A	wG23616*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send B	wG23617*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send C	wG23618*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send D	wG23619*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send E	wG23620*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send F	wG23621*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send G	wG23622*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send H	wG23623*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send I	wG23624*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send J	wG23625*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send K	wG23626*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send L	wG23627*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send M	wG23628*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send N	wG23629*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 1 Output V.	wG23630*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Send O	
Expansion Bus Mix-point Gain -100 Input 1 Output V. Send P	wG23631*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output 1	wG25100*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output 4	wG25103*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 1	wG25108*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 2	wG25109*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 3	wG25110*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 4	wG25111*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 5	wG25112*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 6	wG25113*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 7	wG25114*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Aux 8	wG25115*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 1	wG25132*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 10	wG25141*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 11	wG25142*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 12	wG25143*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 13	wG25144*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 14	wG25145*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 15	wG25146*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 16	wG25147*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 2	wG25133*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 3	wG25134*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 4	wG25135*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 5	wG25136*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 6	wG25137*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 7	wG25138*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 8	wG25139*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output Exp. 9	wG25140*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send A	wG25116*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send B	wG25117*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send C	wG25118*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send D	wG25119*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send E	wG25120*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send F	wG25121*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send G	wG25122*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send H	wG25123*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send I	wG25124*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send J	wG25125*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send K	wG25126*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send L	wG25127*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send M	wG25128*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send N	wG25129*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send O	wG25130*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 16 Output V. Send P	wG25131*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output 1	wG28300*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output 4	wG28303*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Aux 1	wG28308*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output	wG28309*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Aux 2	
Expansion Bus Mix-point Gain -100 Input 48 Output Aux 3	wG28310*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Aux 4	wG28311*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Aux 5	wG28312*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Aux 6	wG28313*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Aux 7	wG28314*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Aux 8	wG28315*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 1	wG28332*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 10	wG28341*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 11	wG28342*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 12	wG28343*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 13	wG28344*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 14	wG28345*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 15	wG28346*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 16	wG28347*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 2	wG28333*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 3	wG28334*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 4	wG28335*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 5	wG28336*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 6	wG28337*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 7	wG28338*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 8	wG28339*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output Exp. 9	wG28340*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send A	wG28316*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Gain -100 Input 48 Output V. Send B	wG28317*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send C	wG28318*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send D	wG28319*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send E	wG28320*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send F	wG28321*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send G	wG28322*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send H	wG28323*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send I	wG28324*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send J	wG28325*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send K	wG28326*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send L	wG28327*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send M	wG28328*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send N	wG28329*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send O	wG28330*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain -100 Input 48 Output V. Send P	wG28331*-1000AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output 1	wG23600*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output 4	wG23603*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux 1	wG23608*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux 2	wG23609*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux 3	wG23610*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux 4	wG23611*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux 5	wG23612*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux 6	wG23613*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux 7	wG23614*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Aux	wG23615*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

8	
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 1	wG23632*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 10	wG23641*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 11	wG23642*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 12	wG23643*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 13	wG23644*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 14	wG23645*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 15	wG23646*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 16	wG23647*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 2	wG23633*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 3	wG23634*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 4	wG23635*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 5	wG23636*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 6	wG23637*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 7	wG23638*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 8	wG23639*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output Exp. 9	wG23640*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send A	wG23616*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send B	wG23617*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send C	wG23618*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send D	wG23619*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send E	wG23620*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send F	wG23621*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send G	wG23622*00120AU\x0D\x0A

Global Scripter Module Communication Sheet

Expansion Bus Mix-point Gain 12 Input 1 Output V. Send H	wG23623*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send I	wG23624*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send J	wG23625*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send K	wG23626*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send L	wG23627*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send M	wG23628*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send N	wG23629*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send O	wG23630*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 1 Output V. Send P	wG23631*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output 1	wG25100*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output 4	wG25103*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 1	wG25108*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 2	wG25109*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 3	wG25110*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 4	wG25111*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 5	wG25112*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 6	wG25113*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 7	wG25114*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Aux 8	wG25115*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 1	wG25132*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 10	wG25141*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 11	wG25142*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 12	wG25143*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 13	wG25144*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output	wG25145*00120AU\x0D\x0A

Exp. 14	
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 15	wG25146*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 16	wG25147*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 2	wG25133*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 3	wG25134*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 4	wG25135*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 5	wG25136*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 6	wG25137*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 7	wG25138*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 8	wG25139*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output Exp. 9	wG25140*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send A	wG25116*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send B	wG25117*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send C	wG25118*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send D	wG25119*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send E	wG25120*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send F	wG25121*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send G	wG25122*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send H	wG25123*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send I	wG25124*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send J	wG25125*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send K	wG25126*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send L	wG25127*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send M	wG25128*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Gain 12 Input 16 Output V. Send N	wG25129*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send O	wG25130*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 16 Output V. Send P	wG25131*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output 1	wG28300*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output 4	wG28303*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 1	wG28308*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 2	wG28309*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 3	wG28310*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 4	wG28311*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 5	wG28312*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 6	wG28313*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 7	wG28314*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Aux 8	wG28315*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 1	wG28332*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 10	wG28341*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 11	wG28342*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 12	wG28343*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 13	wG28344*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 14	wG28345*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 15	wG28346*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 16	wG28347*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 2	wG28333*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 3	wG28334*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 4	wG28335*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output	wG28336*00120AU\x0D\x0A

Exp. 5	
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 6	wG28337*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 7	wG28338*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 8	wG28339*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output Exp. 9	wG28340*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send A	wG28316*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send B	wG28317*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send C	wG28318*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send D	wG28319*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send E	wG28320*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send F	wG28321*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send G	wG28322*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send H	wG28323*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send I	wG28324*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send J	wG28325*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send K	wG28326*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send L	wG28327*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send M	wG28328*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send N	wG28329*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send O	wG28330*00120AU\x0D\x0A
Expansion Bus Mix-point Gain 12 Input 48 Output V. Send P	wG28331*00120AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output 1	wM23600*00AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output 4	wM23603*00AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Aux 1	wM23608*00AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Aux 2	wM23609*00AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Mute Off Input 1 Output Aux 3	wM23610*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Aux 4	wM23611*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Aux 5	wM23612*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Aux 6	wM23613*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Aux 7	wM23614*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Aux 8	wM23615*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 1	wM23632*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 10	wM23641*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 11	wM23642*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 12	wM23643*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 13	wM23644*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 14	wM23645*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 15	wM23646*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 16	wM23647*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 2	wM23633*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 3	wM23634*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 4	wM23635*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 5	wM23636*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 6	wM23637*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 7	wM23638*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 8	wM23639*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output Exp. 9	wM23640*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send A	wM23616*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V.	wM23617*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Send B	
Expansion Bus Mix-point Mute Off Input 1 Output V. Send C	wM23618*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send D	wM23619*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send E	wM23620*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send F	wM23621*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send G	wM23622*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send H	wM23623*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send I	wM23624*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send J	wM23625*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send K	wM23626*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send L	wM23627*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send M	wM23628*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send N	wM23629*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send O	wM23630*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 1 Output V. Send P	wM23631*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output 1	wM25100*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output 4	wM25103*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 1	wM25108*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 2	wM25109*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 3	wM25110*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 4	wM25111*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 5	wM25112*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 6	wM25113*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 7	wM25114*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Aux 8	wM25115*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Mute Off Input 16 Output Exp. 1	wM25132*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 10	wM25141*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 11	wM25142*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 12	wM25143*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 13	wM25144*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 14	wM25145*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 15	wM25146*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 16	wM25147*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 2	wM25133*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 3	wM25134*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 4	wM25135*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 5	wM25136*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 6	wM25137*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 7	wM25138*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 8	wM25139*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output Exp. 9	wM25140*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send A	wM25116*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send B	wM25117*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send C	wM25118*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send D	wM25119*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send E	wM25120*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send F	wM25121*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send G	wM25122*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output	wM25123*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

V. Send H	
Expansion Bus Mix-point Mute Off Input 16 Output V. Send I	wM25124*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send J	wM25125*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send K	wM25126*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send L	wM25127*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send M	wM25128*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send N	wM25129*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send O	wM25130*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 16 Output V. Send P	wM25131*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output 1	wM28300*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output 4	wM28303*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 1	wM28308*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 2	wM28309*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 3	wM28310*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 4	wM28311*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 5	wM28312*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 6	wM28313*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 7	wM28314*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Aux 8	wM28315*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 1	wM28332*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 10	wM28341*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 11	wM28342*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 12	wM28343*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 13	wM28344*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 14	wM28345*0AU\x0D\x0A

Expansion Bus Mix-point Mute Off Input 48 Output Exp. 15	wM28346*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 16	wM28347*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 2	wM28333*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 3	wM28334*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 4	wM28335*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 5	wM28336*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 6	wM28337*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 7	wM28338*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 8	wM28339*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output Exp. 9	wM28340*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send A	wM28316*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send B	wM28317*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send C	wM28318*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send D	wM28319*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send E	wM28320*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send F	wM28321*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send G	wM28322*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send H	wM28323*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send I	wM28324*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send J	wM28325*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send K	wM28326*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send L	wM28327*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send M	wM28328*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output	wM28329*0AU\x0D\x0A

V. Send N	
Expansion Bus Mix-point Mute Off Input 48 Output V. Send O	wM28330*0AU\x0D\x0A
Expansion Bus Mix-point Mute Off Input 48 Output V. Send P	wM28331*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output 1	wM23600*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output 4	wM23603*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 1	wM23608*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 2	wM23609*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 3	wM23610*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 4	wM23611*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 5	wM23612*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 6	wM23613*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 7	wM23614*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Aux 8	wM23615*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 1	wM23632*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 10	wM23641*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 11	wM23642*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 12	wM23643*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 13	wM23644*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 14	wM23645*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 15	wM23646*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 16	wM23647*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 2	wM23633*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 3	wM23634*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 4	wM23635*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 5	wM23636*1AU\x0D\x0A

Expansion Bus Mix-point Mute On Input 1 Output Exp. 6	wM23637*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 7	wM23638*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 8	wM23639*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output Exp. 9	wM23640*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send A	wM23616*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send B	wM23617*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send C	wM23618*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send D	wM23619*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send E	wM23620*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send F	wM23621*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send G	wM23622*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send H	wM23623*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send I	wM23624*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send J	wM23625*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send K	wM23626*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send L	wM23627*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send M	wM23628*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send N	wM23629*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send O	wM23630*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 1 Output V. Send P	wM23631*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output 1	wM25100*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output 4	wM25103*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Aux 1	wM25108*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Aux 2	wM25109*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output	wM25110*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Aux 3	
Expansion Bus Mix-point Mute On Input 16 Output Aux 4	wM25111*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Aux 5	wM25112*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Aux 6	wM25113*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Aux 7	wM25114*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Aux 8	wM25115*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 1	wM25132*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 10	wM25141*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 11	wM25142*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 12	wM25143*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 13	wM25144*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 14	wM25145*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 15	wM25146*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 16	wM25147*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 2	wM25133*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 3	wM25134*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 4	wM25135*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 5	wM25136*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 6	wM25137*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 7	wM25138*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 8	wM25139*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output Exp. 9	wM25140*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send A	wM25116*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send B	wM25117*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Expansion Bus Mix-point Mute On Input 16 Output V. Send C	wM25118*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send D	wM25119*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send E	wM25120*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send F	wM25121*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send G	wM25122*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send H	wM25123*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send I	wM25124*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send J	wM25125*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send K	wM25126*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send L	wM25127*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send M	wM25128*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send N	wM25129*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send O	wM25130*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 16 Output V. Send P	wM25131*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output 1	wM28300*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output 4	wM28303*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 1	wM28308*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 2	wM28309*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 3	wM28310*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 4	wM28311*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 5	wM28312*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 6	wM28313*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 7	wM28314*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Aux 8	wM28315*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output	wM28332*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Exp. 1	
Expansion Bus Mix-point Mute On Input 48 Output Exp. 10	wM28341*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 11	wM28342*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 12	wM28343*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 13	wM28344*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 14	wM28345*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 15	wM28346*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 16	wM28347*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 2	wM28333*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 3	wM28334*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 4	wM28335*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 5	wM28336*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 6	wM28337*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 7	wM28338*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 8	wM28339*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output Exp. 9	wM28340*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send A	wM28316*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send B	wM28317*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send C	wM28318*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send D	wM28319*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send E	wM28320*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send F	wM28321*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send G	wM28322*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send H	wM28323*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Expansion Bus Mix-point Mute On Input 48 Output V. Send I	wM28324*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send J	wM28325*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send K	wM28326*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send L	wM28327*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send M	wM28328*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send N	wM28329*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send O	wM28330*1AU\x0D\x0A
Expansion Bus Mix-point Mute On Input 48 Output V. Send P	wM28331*1AU\x0D\x0A
Expansion Input Pre-mixer Gain -100 Input 1	wG50200*-1000AU\x0D\x0A
Expansion Input Pre-mixer Gain -100 Input 16	wG50215*-1000AU\x0D\x0A
Expansion Input Pre-mixer Gain -100 Input 48	wG50247*-1000AU\x0D\x0A
Expansion Input Pre-mixer Gain 12 Input 1	wG50200*00120AU\x0D\x0A
Expansion Input Pre-mixer Gain 12 Input 16	wG50215*00120AU\x0D\x0A
Expansion Input Pre-mixer Gain 12 Input 48	wG50247*00120AU\x0D\x0A
Expansion Input Pre-mixer Mute Off Input 1	wM50200*0AU\x0D\x0A
Expansion Input Pre-mixer Mute Off Input 16	wM50215*0AU\x0D\x0A
Expansion Input Pre-mixer Mute Off Input 48	wM50247*0AU\x0D\x0A
Expansion Input Pre-mixer Mute On Input 1	wM50200*1AU\x0D\x0A
Expansion Input Pre-mixer Mute On Input 16	wM50215*1AU\x0D\x0A
Expansion Input Pre-mixer Mute On Input 48	wM50247*1AU\x0D\x0A
Expansion Output Attenuation 0 Output 1	wG60016*00000AU\x0D\x0A
Expansion Output Attenuation 0 Output 16	wG60031*00000AU\x0D\x0A
Expansion Output Attenuation -100 Output 1	wG60016*-1000AU\x0D\x0A
Expansion Output Attenuation -100 Output 16	wG60031*-1000AU\x0D\x0A
Expansion Output Mute Off Output 1	wM60016*0AU\x0D\x0A
Expansion Output Mute Off Output 16	wM60031*0AU\x0D\x0A
Expansion Output Mute On Output 1	wM60016*1AU\x0D\x0A
Expansion Output Mute On Output 16	wM60031*1AU\x0D\x0A
Expansion Output Post-mixer Trim 12 Output 1	wG60116*00120AU\x0D\x0A
Expansion Output Post-mixer Trim -12 Output 1	wG60116*-0120AU\x0D\x0A
Expansion Output Post-mixer Trim 12 Output 16	wG60131*00120AU\x0D\x0A
Expansion Output Post-mixer Trim -12 Output 16	wG60131*-0120AU\x0D\x0A
Group Bass Input Filter 24 Group 1	wd1*+00240grpm\x0D\x0A
Group Bass Input Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Bass Input Filter 24 Group 64	wd64*+00240grpm\x0D\x0A
Group Bass Input Filter -24 Group 64	wd64*-00240grpm\x0D\x0A
Group Bass Virtual Return Filter 24 Group 1	wd1*+00240grpm\x0D\x0A

**Global Scripter Module
Communication Sheet**

Group Bass Virtual Return Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Bass Virtual Return Filter 24 Group 64	wd64*+00240grpm\x0D\x0A
Group Bass Virtual Return Filter -24 Group 64	wd64*-00240grpm\x0D\x0A
Group Meter Mode Disable Group 1	wd1*0GRPM\x0D
Group Meter Mode Disable Group 64	wd64*0GRPM\x0D
Group Meter Mode Enable Group 1	wd1*1GRPM\x0D
Group Meter Mode Enable Group 64	wd64*1GRPM\x0D
Group Meter Response Rate 1	wR1GRPU\x0D
Group Meter Response Rate 10	wR10GRPU\x0D
Group Meter Select 1	wG01GRPU\x0D
Group Meter Select 64	wG64GRPU\x0D
Group Meter Select Off	wG00GRPU\x0D
Group Mic/Line Input Gain -18 Group 1	wd1*-00180grpm\x0D\x0A
Group Mic/Line Input Gain -18 Group 64	wd64*-00180grpm\x0D\x0A
Group Mic/Line Input Gain 80 Group 1	wd1*+00800grpm\x0D\x0A
Group Mic/Line Input Gain 80 Group 64	wd64*+00800grpm\x0D\x0A
Group Mix-point Gain -100 Group 1	wd1*-01000grpm\x0D\x0A
Group Mix-point Gain -100 Group 64	wd64*-01000grpm\x0D\x0A
Group Mix-point Gain 12 Group 1	wd1*+00120grpm\x0D\x0A
Group Mix-point Gain 12 Group 64	wd64*+00120grpm\x0D\x0A
Group Mute Off Group 1	wd1*0grpm\x0D\x0A
Group Mute Off Group 64	wd64*0grpm\x0D\x0A
Group Mute On Group 1	wd1*1grpm\x0D\x0A
Group Mute On Group 64	wd64*1grpm\x0D\x0A
Group Output Attenuation 0 Group 1	wd1*+00000grpm\x0D\x0A
Group Output Attenuation 0 Group 64	wd64*+00000grpm\x0D\x0A
Group Output Attenuation -100 Group 1	wd1*-01000grpm\x0D\x0A
Group Output Attenuation -100 Group 64	wd64*-01000grpm\x0D\x0A
Group Post-mixer Trim 12 Group 1	wd1*+00120grpm\x0D\x0A
Group Post-mixer Trim -12 Group 1	wd1*-00120grpm\x0D\x0A
Group Post-mixer Trim 12 Group 64	wd64*+00120grpm\x0D\x0A
Group Post-mixer Trim -12 Group 64	wd64*-00120grpm\x0D\x0A
Group Pre-mixer Gain -100 Group 1	wd1*-01000grpm\x0D\x0A
Group Pre-mixer Gain -100 Group 64	wd64*-01000grpm\x0D\x0A
Group Pre-mixer Gain 12 Group 1	wd1*+00120grpm\x0D\x0A
Group Pre-mixer Gain 12 Group 64	wd64*+00120grpm\x0D\x0A
Group Treble Input Filter 24 Group 1	wd1*+00240grpm\x0D\x0A
Group Treble Input Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Treble Input Filter 24 Group 64	wd64*+00240grpm\x0D\x0A
Group Treble Input Filter -24 Group 64	wd64*-00240grpm\x0D\x0A
Group Treble Virtual Return Filter 24 Group 1	wd1*+00240grpm\x0D\x0A
Group Treble Virtual Return Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Treble Virtual Return Filter 24 Group 64	wd64*+00240grpm\x0D\x0A
Group Treble Virtual Return Filter -24 Group 64	wd64*-00240grpm\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Group Virtual Return Gain -100 Group 1	wd1*-01000grpm\x0D\x0A
Group Virtual Return Gain -100 Group 64	wd64*-01000grpm\x0D\x0A
Group Virtual Return Gain 12 Group 1	wd1*+00120grpm\x0D\x0A
Group Virtual Return Gain 12 Group 64	wd64*+00120grpm\x0D\x0A
Hook Hold Off Line 1 Appearance 1	\x1BHOLD1,1,0VOIP\x0D\x0A
Hook Hold Off Line 1 Appearance 8	\x1BHOLD1,8,0VOIP\x0D\x0A
Hook Hold Off Line 8 Appearance 1	\x1BHOLD8,1,0VOIP\x0D\x0A
Hook Hold Off Line 8 Appearance 8	\x1BHOLD8,8,0VOIP\x0D\x0A
Hook Hold On Line 1 Appearance 1	\x1BHOLD1,1,1VOIP\x0D\x0A
Hook Hold On Line 1 Appearance 8	\x1BHOLD1,8,1VOIP\x0D\x0A
Hook Hold On Line 8 Appearance 1	\x1BHOLD8,1,1VOIP\x0D\x0A
Hook Hold On Line 8 Appearance 8	\x1BHOLD8,8,1VOIP\x0D\x0A
Input Gain -18 Input 1	wG40000*-0180AU\x0D\x0A
Input Gain -18 Input 6	wG40005*-0180AU\x0D\x0A
Input Gain 80 Input 1	wG40000*00800AU\x0D\x0A
Input Gain 80 Input 6	wG40005*00800AU\x0D\x0A
Input Mute Off Input 1	wM40000*0AU\x0D\x0A
Input Mute Off Input 6	wM40005*0AU\x0D\x0A
Input Mute On Input 1	wM40000*1AU\x0D\x0A
Input Mute On Input 6	wM40005*1AU\x0D\x0A
Input Source Analog Input 1	wD40000*0AU\x0D
Input Source Analog Input 6	wD40005*0AU\x0D
Input Source AT#1 Input 1	wD40000*1AU\x0D
Input Source AT#1 Input 6	wD40005*1AU\x0D
Input Source AT#10 Input 1	wD40000*10AU\x0D
Input Source AT#10 Input 6	wD40005*10AU\x0D
Input Source AT#11 Input 1	wD40000*11AU\x0D
Input Source AT#11 Input 6	wD40005*11AU\x0D
Input Source AT#12 Input 1	wD40000*12AU\x0D
Input Source AT#12 Input 6	wD40005*12AU\x0D
Input Source AT#13 Input 1	wD40000*13AU\x0D
Input Source AT#13 Input 6	wD40005*13AU\x0D
Input Source AT#14 Input 1	wD40000*14AU\x0D
Input Source AT#14 Input 6	wD40005*14AU\x0D
Input Source AT#15 Input 1	wD40000*15AU\x0D
Input Source AT#15 Input 6	wD40005*15AU\x0D
Input Source AT#16 Input 1	wD40000*16AU\x0D
Input Source AT#16 Input 6	wD40005*16AU\x0D
Input Source AT#17 Input 1	wD40000*17AU\x0D
Input Source AT#17 Input 6	wD40005*17AU\x0D
Input Source AT#18 Input 1	wD40000*18AU\x0D
Input Source AT#18 Input 6	wD40005*18AU\x0D
Input Source AT#19 Input 1	wD40000*19AU\x0D
Input Source AT#19 Input 6	wD40005*19AU\x0D

Global Scriptor Module Communication Sheet

Input Source AT#2 Input 1	wD40000*2AU\x0D
Input Source AT#2 Input 6	wD40005*2AU\x0D
Input Source AT#20 Input 1	wD40000*20AU\x0D
Input Source AT#20 Input 6	wD40005*20AU\x0D
Input Source AT#21 Input 1	wD40000*21AU\x0D
Input Source AT#21 Input 6	wD40005*21AU\x0D
Input Source AT#22 Input 1	wD40000*22AU\x0D
Input Source AT#22 Input 6	wD40005*22AU\x0D
Input Source AT#23 Input 1	wD40000*23AU\x0D
Input Source AT#23 Input 6	wD40005*23AU\x0D
Input Source AT#24 Input 1	wD40000*24AU\x0D
Input Source AT#24 Input 6	wD40005*24AU\x0D
Input Source AT#25 Input 1	wD40000*25AU\x0D
Input Source AT#25 Input 6	wD40005*25AU\x0D
Input Source AT#26 Input 1	wD40000*26AU\x0D
Input Source AT#26 Input 6	wD40005*26AU\x0D
Input Source AT#27 Input 1	wD40000*27AU\x0D
Input Source AT#27 Input 6	wD40005*27AU\x0D
Input Source AT#28 Input 1	wD40000*28AU\x0D
Input Source AT#28 Input 6	wD40005*28AU\x0D
Input Source AT#29 Input 1	wD40000*29AU\x0D
Input Source AT#29 Input 6	wD40005*29AU\x0D
Input Source AT#3 Input 1	wD40000*3AU\x0D
Input Source AT#3 Input 6	wD40005*3AU\x0D
Input Source AT#30 Input 1	wD40000*30AU\x0D
Input Source AT#30 Input 6	wD40005*30AU\x0D
Input Source AT#31 Input 1	wD40000*31AU\x0D
Input Source AT#31 Input 6	wD40005*31AU\x0D
Input Source AT#32 Input 1	wD40000*32AU\x0D
Input Source AT#32 Input 6	wD40005*32AU\x0D
Input Source AT#33 Input 1	wD40000*33AU\x0D
Input Source AT#33 Input 6	wD40005*33AU\x0D
Input Source AT#34 Input 1	wD40000*34AU\x0D
Input Source AT#34 Input 6	wD40005*34AU\x0D
Input Source AT#35 Input 1	wD40000*35AU\x0D
Input Source AT#35 Input 6	wD40005*35AU\x0D
Input Source AT#36 Input 1	wD40000*36AU\x0D
Input Source AT#36 Input 6	wD40005*36AU\x0D
Input Source AT#37 Input 1	wD40000*37AU\x0D
Input Source AT#37 Input 6	wD40005*37AU\x0D
Input Source AT#38 Input 1	wD40000*38AU\x0D
Input Source AT#38 Input 6	wD40005*38AU\x0D
Input Source AT#39 Input 1	wD40000*39AU\x0D
Input Source AT#39 Input 6	wD40005*39AU\x0D

**Global Scripter Module
Communication Sheet**

Input Source AT#4 Input 1	wD40000*4AU\x0D
Input Source AT#4 Input 6	wD40005*4AU\x0D
Input Source AT#40 Input 1	wD40000*40AU\x0D
Input Source AT#40 Input 6	wD40005*40AU\x0D
Input Source AT#41 Input 1	wD40000*41AU\x0D
Input Source AT#41 Input 6	wD40005*41AU\x0D
Input Source AT#42 Input 1	wD40000*42AU\x0D
Input Source AT#42 Input 6	wD40005*42AU\x0D
Input Source AT#43 Input 1	wD40000*43AU\x0D
Input Source AT#43 Input 6	wD40005*43AU\x0D
Input Source AT#44 Input 1	wD40000*44AU\x0D
Input Source AT#44 Input 6	wD40005*44AU\x0D
Input Source AT#45 Input 1	wD40000*45AU\x0D
Input Source AT#45 Input 6	wD40005*45AU\x0D
Input Source AT#46 Input 1	wD40000*46AU\x0D
Input Source AT#46 Input 6	wD40005*46AU\x0D
Input Source AT#47 Input 1	wD40000*47AU\x0D
Input Source AT#47 Input 6	wD40005*47AU\x0D
Input Source AT#48 Input 1	wD40000*48AU\x0D
Input Source AT#48 Input 6	wD40005*48AU\x0D
Input Source AT#5 Input 1	wD40000*5AU\x0D
Input Source AT#5 Input 6	wD40005*5AU\x0D
Input Source AT#6 Input 1	wD40000*6AU\x0D
Input Source AT#6 Input 6	wD40005*6AU\x0D
Input Source AT#7 Input 1	wD40000*7AU\x0D
Input Source AT#7 Input 6	wD40005*7AU\x0D
Input Source AT#8 Input 1	wD40000*8AU\x0D
Input Source AT#8 Input 6	wD40005*8AU\x0D
Input Source AT#9 Input 1	wD40000*9AU\x0D
Input Source AT#9 Input 6	wD40005*9AU\x0D
Macro Kill Macro 1	\x1BK1MCRO\x0D\x0A
Macro Kill Macro 64	\x1BK64MCRO\x0D\x0A
Macro Run Macro 1	\x1BR1MCRO\x0D\x0A
Macro Run Macro 64	\x1BR64MCRO\x0D\x0A
Mix-point Gain -100 Input 1 Output 1	wG20000*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output 4	wG20003*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 1	wG20008*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 2	wG20009*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 3	wG20010*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 4	wG20011*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 5	wG20012*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 6	wG20013*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 7	wG20014*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Aux 8	wG20015*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input 1 Output Exp. 1	wG20032*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 10	wG20041*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 11	wG20042*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 12	wG20043*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 13	wG20044*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 14	wG20045*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 15	wG20046*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 16	wG20047*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 2	wG20033*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 3	wG20034*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 4	wG20035*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 5	wG20036*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 6	wG20037*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 7	wG20038*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 8	wG20039*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output Exp. 9	wG20040*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send A	wG20016*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send B	wG20017*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send C	wG20018*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send D	wG20019*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send E	wG20020*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send F	wG20021*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send G	wG20022*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send H	wG20023*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send I	wG20024*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send J	wG20025*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send K	wG20026*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send L	wG20027*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send M	wG20028*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send N	wG20029*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send O	wG20030*-1000AU\x0D\x0A
Mix-point Gain -100 Input 1 Output V. Send P	wG20031*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output 1	wG20500*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output 4	wG20503*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 1	wG20508*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 2	wG20509*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 3	wG20510*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 4	wG20511*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 5	wG20512*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 6	wG20513*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 7	wG20514*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Aux 8	wG20515*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 1	wG20532*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 10	wG20541*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input 6 Output Exp. 11	wG20542*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 12	wG20543*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 13	wG20544*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 14	wG20545*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 15	wG20546*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 16	wG20547*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 2	wG20533*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 3	wG20534*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 4	wG20535*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 5	wG20536*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 6	wG20537*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 7	wG20538*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 8	wG20539*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output Exp. 9	wG20540*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send A	wG20516*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send B	wG20517*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send C	wG20518*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send D	wG20519*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send E	wG20520*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send F	wG20521*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send G	wG20522*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send H	wG20523*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send I	wG20524*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send J	wG20525*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send K	wG20526*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send L	wG20527*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send M	wG20528*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send N	wG20529*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send O	wG20530*-1000AU\x0D\x0A
Mix-point Gain -100 Input 6 Output V. Send P	wG20531*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output 1	wG21200*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output 4	wG21203*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 1	wG21208*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 2	wG21209*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 3	wG21210*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 4	wG21211*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 5	wG21212*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 6	wG21213*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 7	wG21214*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Aux 8	wG21215*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 1	wG21232*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 10	wG21241*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 11	wG21242*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 12	wG21243*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 1 Output Exp. 13	wG21244*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 14	wG21245*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 15	wG21246*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 16	wG21247*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 2	wG21233*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 3	wG21234*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 4	wG21235*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 5	wG21236*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 6	wG21237*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 7	wG21238*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 8	wG21239*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output Exp. 9	wG21240*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send A	wG21216*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send B	wG21217*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send C	wG21218*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send D	wG21219*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send E	wG21220*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send F	wG21221*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send G	wG21222*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send H	wG21223*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send I	wG21224*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send J	wG21225*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send K	wG21226*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send L	wG21227*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send M	wG21228*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send N	wG21229*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send O	wG21230*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 1 Output V. Send P	wG21231*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output 1	wG21300*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output 4	wG21303*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 1	wG21308*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 2	wG21309*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 3	wG21310*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 4	wG21311*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 5	wG21312*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 6	wG21313*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 7	wG21314*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Aux 8	wG21315*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 1	wG21332*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 10	wG21341*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 11	wG21342*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 12	wG21343*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 13	wG21344*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 14	wG21345*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 2 Output Exp. 15	wG21346*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 16	wG21347*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 2	wG21333*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 3	wG21334*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 4	wG21335*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 5	wG21336*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 6	wG21337*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 7	wG21338*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 8	wG21339*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output Exp. 9	wG21340*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send A	wG21316*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send B	wG21317*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send C	wG21318*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send D	wG21319*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send E	wG21320*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send F	wG21321*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send G	wG21322*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send H	wG21323*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send I	wG21324*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send J	wG21325*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send K	wG21326*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send L	wG21327*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send M	wG21328*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send N	wG21329*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send O	wG21330*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 2 Output V. Send P	wG21331*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output 1	wG21400*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output 4	wG21403*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 1	wG21408*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 2	wG21409*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 3	wG21410*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 4	wG21411*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 5	wG21412*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 6	wG21413*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 7	wG21414*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Aux 8	wG21415*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 1	wG21432*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 10	wG21441*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 11	wG21442*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 12	wG21443*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 13	wG21444*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 14	wG21445*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 15	wG21446*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 16	wG21447*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 3 Output Exp. 2	wG21433*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 3	wG21434*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 4	wG21435*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 5	wG21436*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 6	wG21437*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 7	wG21438*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 8	wG21439*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output Exp. 9	wG21440*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send A	wG21416*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send B	wG21417*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send C	wG21418*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send D	wG21419*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send E	wG21420*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send F	wG21421*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send G	wG21422*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send H	wG21423*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send I	wG21424*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send J	wG21425*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send K	wG21426*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send L	wG21427*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send M	wG21428*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send N	wG21429*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send O	wG21430*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 3 Output V. Send P	wG21431*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output 1	wG21500*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output 4	wG21503*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 1	wG21508*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 2	wG21509*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 3	wG21510*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 4	wG21511*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 5	wG21512*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 6	wG21513*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 7	wG21514*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Aux 8	wG21515*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 1	wG21532*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 10	wG21541*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 11	wG21542*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 12	wG21543*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 13	wG21544*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 14	wG21545*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 15	wG21546*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 16	wG21547*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 2	wG21533*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 3	wG21534*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 4 Output Exp. 4	wG21535*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 5	wG21536*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 6	wG21537*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 7	wG21538*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 8	wG21539*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output Exp. 9	wG21540*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send A	wG21516*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send B	wG21517*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send C	wG21518*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send D	wG21519*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send E	wG21520*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send F	wG21521*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send G	wG21522*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send H	wG21523*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send I	wG21524*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send J	wG21525*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send K	wG21526*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send L	wG21527*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send M	wG21528*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send N	wG21529*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send O	wG21530*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 4 Output V. Send P	wG21531*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output 1	wG21600*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output 4	wG21603*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 1	wG21608*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 2	wG21609*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 3	wG21610*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 4	wG21611*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 5	wG21612*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 6	wG21613*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 7	wG21614*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Aux 8	wG21615*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 1	wG21632*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 10	wG21641*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 11	wG21642*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 12	wG21643*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 13	wG21644*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 14	wG21645*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 15	wG21646*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 16	wG21647*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 2	wG21633*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 3	wG21634*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 4	wG21635*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 5	wG21636*-1000AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 5 Output Exp. 6	wG21637*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 7	wG21638*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 8	wG21639*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output Exp. 9	wG21640*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send A	wG21616*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send B	wG21617*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send C	wG21618*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send D	wG21619*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send E	wG21620*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send F	wG21621*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send G	wG21622*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send H	wG21623*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send I	wG21624*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send J	wG21625*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send K	wG21626*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send L	wG21627*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send M	wG21628*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send N	wG21629*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send O	wG21630*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 5 Output V. Send P	wG21631*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output 1	wG21700*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output 4	wG21703*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 1	wG21708*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 2	wG21709*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 3	wG21710*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 4	wG21711*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 5	wG21712*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 6	wG21713*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 7	wG21714*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Aux 8	wG21715*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 1	wG21732*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 10	wG21741*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 11	wG21742*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 12	wG21743*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 13	wG21744*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 14	wG21745*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 15	wG21746*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 16	wG21747*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 2	wG21733*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 3	wG21734*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 4	wG21735*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 5	wG21736*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 6	wG21737*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 7	wG21738*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 6 Output Exp. 8	wG21739*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output Exp. 9	wG21740*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send A	wG21716*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send B	wG21717*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send C	wG21718*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send D	wG21719*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send E	wG21720*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send F	wG21721*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send G	wG21722*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send H	wG21723*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send I	wG21724*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send J	wG21725*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send K	wG21726*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send L	wG21727*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send M	wG21728*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send N	wG21729*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send O	wG21730*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 6 Output V. Send P	wG21731*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output 1	wG21800*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output 4	wG21803*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 1	wG21808*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 2	wG21809*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 3	wG21810*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 4	wG21811*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 5	wG21812*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 6	wG21813*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 7	wG21814*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Aux 8	wG21815*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 1	wG21832*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 10	wG21841*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 11	wG21842*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 12	wG21843*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 13	wG21844*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 14	wG21845*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 15	wG21846*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 16	wG21847*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 2	wG21833*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 3	wG21834*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 4	wG21835*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 5	wG21836*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 6	wG21837*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 7	wG21838*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 8	wG21839*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output Exp. 9	wG21840*-1000AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 7 Output V. Send A	wG21816*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send B	wG21817*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send C	wG21818*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send D	wG21819*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send E	wG21820*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send F	wG21821*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send G	wG21822*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send H	wG21823*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send I	wG21824*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send J	wG21825*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send K	wG21826*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send L	wG21827*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send M	wG21828*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send N	wG21829*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send O	wG21830*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 7 Output V. Send P	wG21831*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output 1	wG21900*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output 4	wG21903*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 1	wG21908*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 2	wG21909*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 3	wG21910*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 4	wG21911*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 5	wG21912*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 6	wG21913*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 7	wG21914*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Aux 8	wG21915*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 1	wG21932*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 10	wG21941*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 11	wG21942*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 12	wG21943*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 13	wG21944*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 14	wG21945*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 15	wG21946*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 16	wG21947*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 2	wG21933*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 3	wG21934*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 4	wG21935*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 5	wG21936*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 6	wG21937*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 7	wG21938*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 8	wG21939*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output Exp. 9	wG21940*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send A	wG21916*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send B	wG21917*-1000AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain -100 Input Aux 8 Output V. Send C	wG21918*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send D	wG21919*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send E	wG21920*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send F	wG21921*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send G	wG21922*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send H	wG21923*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send I	wG21924*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send J	wG21925*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send K	wG21926*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send L	wG21927*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send M	wG21928*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send N	wG21929*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send O	wG21930*-1000AU\x0D\x0A
Mix-point Gain -100 Input Aux 8 Output V. Send P	wG21931*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output 1	wG22000*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output 4	wG22003*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 1	wG22008*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 2	wG22009*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 3	wG22010*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 4	wG22011*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 5	wG22012*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 6	wG22013*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 7	wG22014*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Aux 8	wG22015*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 1	wG22032*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 10	wG22041*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 11	wG22042*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 12	wG22043*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 13	wG22044*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 14	wG22045*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 15	wG22046*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 16	wG22047*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 2	wG22033*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 3	wG22034*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 4	wG22035*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 5	wG22036*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 6	wG22037*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 7	wG22038*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return A Output Exp. 8	wG22039*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output Exp. 9	wG22040*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send A	wG22016*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send B	wG22017*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send C	wG22018*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send D	wG22019*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send E	wG22020*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send F	wG22021*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send G	wG22022*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send H	wG22023*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send I	wG22024*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send J	wG22025*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send K	wG22026*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send L	wG22027*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send M	wG22028*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send N	wG22029*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send O	wG22030*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return A Output V. Send P	wG22031*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output 1	wG22100*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output 4	wG22103*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 1	wG22108*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 2	wG22109*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 3	wG22110*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 4	wG22111*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 5	wG22112*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 6	wG22113*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 7	wG22114*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Aux 8	wG22115*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 1	wG22132*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp.	wG22141*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

10	
Mix-point Gain -100 Input V. Return B Output Exp. 11	wG22142*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 12	wG22143*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 13	wG22144*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 14	wG22145*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 15	wG22146*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 16	wG22147*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 2	wG22133*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 3	wG22134*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 4	wG22135*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 5	wG22136*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 6	wG22137*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 7	wG22138*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 8	wG22139*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output Exp. 9	wG22140*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send A	wG22116*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send B	wG22117*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send C	wG22118*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send D	wG22119*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send E	wG22120*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send F	wG22121*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send G	wG22122*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send H	wG22123*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send I	wG22124*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send J	wG22125*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send K	wG22126*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send L	wG22127*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V.	wG22128*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Send M	
Mix-point Gain -100 Input V. Return B Output V. Send N	wG22129*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send O	wG22130*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return B Output V. Send P	wG22131*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output 1	wG22200*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output 4	wG22203*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 1	wG22208*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 2	wG22209*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 3	wG22210*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 4	wG22211*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 5	wG22212*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 6	wG22213*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 7	wG22214*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Aux 8	wG22215*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 1	wG22232*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 10	wG22241*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 11	wG22242*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 12	wG22243*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 13	wG22244*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 14	wG22245*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 15	wG22246*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 16	wG22247*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 2	wG22233*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 3	wG22234*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 4	wG22235*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 5	wG22236*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 6	wG22237*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 7	wG22238*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 8	wG22239*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output Exp. 9	wG22240*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send A	wG22216*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send B	wG22217*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send C	wG22218*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return C Output V. Send D	wG22219*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send E	wG22220*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send F	wG22221*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send G	wG22222*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send H	wG22223*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send I	wG22224*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send J	wG22225*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send K	wG22226*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send L	wG22227*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send M	wG22228*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send N	wG22229*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send O	wG22230*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return C Output V. Send P	wG22231*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output 1	wG22300*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output 4	wG22303*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 1	wG22308*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 2	wG22309*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 3	wG22310*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 4	wG22311*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 5	wG22312*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 6	wG22313*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 7	wG22314*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Aux 8	wG22315*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 1	wG22332*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 10	wG22341*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 11	wG22342*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 12	wG22343*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 13	wG22344*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp.	wG22345*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

14	
Mix-point Gain -100 Input V. Return D Output Exp. 15	wG22346*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 16	wG22347*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 2	wG22333*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 3	wG22334*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 4	wG22335*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 5	wG22336*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 6	wG22337*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 7	wG22338*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 8	wG22339*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output Exp. 9	wG22340*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send A	wG22316*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send B	wG22317*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send C	wG22318*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send D	wG22319*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send E	wG22320*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send F	wG22321*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send G	wG22322*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send H	wG22323*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send I	wG22324*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send J	wG22325*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send K	wG22326*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send L	wG22327*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send M	wG22328*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send N	wG22329*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send O	wG22330*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return D Output V. Send P	wG22331*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output 1	wG22400*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return E Output 4	wG22403*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 1	wG22408*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 2	wG22409*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 3	wG22410*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 4	wG22411*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 5	wG22412*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 6	wG22413*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 7	wG22414*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Aux 8	wG22415*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 1	wG22432*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 10	wG22441*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 11	wG22442*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 12	wG22443*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 13	wG22444*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 14	wG22445*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 15	wG22446*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 16	wG22447*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 2	wG22433*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 3	wG22434*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 4	wG22435*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 5	wG22436*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 6	wG22437*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 7	wG22438*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 8	wG22439*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output Exp. 9	wG22440*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send A	wG22416*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send B	wG22417*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send C	wG22418*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send D	wG22419*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send E	wG22420*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send F	wG22421*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send G	wG22422*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send H	wG22423*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send I	wG22424*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send J	wG22425*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return E Output V. Send K	wG22426*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send L	wG22427*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send M	wG22428*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send N	wG22429*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send O	wG22430*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return E Output V. Send P	wG22431*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output 1	wG22500*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output 4	wG22503*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 1	wG22508*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 2	wG22509*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 3	wG22510*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 4	wG22511*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 5	wG22512*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 6	wG22513*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 7	wG22514*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Aux 8	wG22515*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 1	wG22532*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 10	wG22541*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 11	wG22542*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 12	wG22543*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 13	wG22544*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 14	wG22545*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 15	wG22546*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 16	wG22547*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 2	wG22533*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 3	wG22534*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 4	wG22535*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 5	wG22536*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 6	wG22537*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 7	wG22538*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 8	wG22539*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output Exp. 9	wG22540*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send A	wG22516*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send B	wG22517*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send C	wG22518*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V.	wG22519*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Send D	
Mix-point Gain -100 Input V. Return F Output V. Send E	wG22520*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send F	wG22521*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send G	wG22522*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send H	wG22523*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send I	wG22524*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send J	wG22525*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send K	wG22526*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send L	wG22527*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send M	wG22528*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send N	wG22529*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send O	wG22530*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return F Output V. Send P	wG22531*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output 1	wG22600*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output 4	wG22603*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 1	wG22608*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 2	wG22609*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 3	wG22610*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 4	wG22611*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 5	wG22612*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 6	wG22613*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 7	wG22614*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Aux 8	wG22615*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 1	wG22632*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 10	wG22641*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 11	wG22642*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 12	wG22643*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 13	wG22644*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 14	wG22645*-1000AU\x0D\x0A

Global Scripter Module
Communication Sheet

Mix-point Gain -100 Input V. Return G Output Exp. 15	wG22646*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 16	wG22647*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 2	wG22633*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 3	wG22634*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 4	wG22635*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 5	wG22636*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 6	wG22637*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 7	wG22638*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 8	wG22639*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output Exp. 9	wG22640*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send A	wG22616*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send B	wG22617*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send C	wG22618*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send D	wG22619*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send E	wG22620*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send F	wG22621*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send G	wG22622*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send H	wG22623*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send I	wG22624*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send J	wG22625*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send K	wG22626*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send L	wG22627*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send M	wG22628*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send N	wG22629*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send O	wG22630*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return G Output V. Send P	wG22631*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output 1	wG22700*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output 4	wG22703*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return H Output Aux 1	wG22708*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Aux 2	wG22709*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Aux 3	wG22710*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Aux 4	wG22711*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Aux 5	wG22712*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Aux 6	wG22713*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Aux 7	wG22714*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Aux 8	wG22715*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 1	wG22732*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 10	wG22741*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 11	wG22742*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 12	wG22743*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 13	wG22744*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 14	wG22745*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 15	wG22746*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 16	wG22747*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 2	wG22733*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 3	wG22734*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 4	wG22735*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 5	wG22736*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 6	wG22737*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 7	wG22738*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 8	wG22739*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output Exp. 9	wG22740*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send A	wG22716*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send B	wG22717*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send C	wG22718*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send D	wG22719*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send E	wG22720*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send F	wG22721*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send G	wG22722*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V.	wG22723*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Send H	
Mix-point Gain -100 Input V. Return H Output V. Send I	wG22724*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send J	wG22725*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send K	wG22726*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send L	wG22727*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send M	wG22728*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send N	wG22729*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send O	wG22730*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return H Output V. Send P	wG22731*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output 1	wG22800*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output 4	wG22803*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 1	wG22808*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 2	wG22809*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 3	wG22810*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 4	wG22811*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 5	wG22812*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 6	wG22813*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 7	wG22814*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Aux 8	wG22815*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 1	wG22832*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 10	wG22841*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 11	wG22842*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 12	wG22843*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 13	wG22844*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 14	wG22845*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 15	wG22846*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 16	wG22847*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 2	wG22833*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 3	wG22834*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 4	wG22835*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 5	wG22836*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 6	wG22837*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 7	wG22838*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 8	wG22839*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output Exp. 9	wG22840*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send A	wG22816*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return I Output V. Send B	wG22817*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send C	wG22818*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send D	wG22819*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send E	wG22820*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send F	wG22821*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send G	wG22822*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send H	wG22823*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send I	wG22824*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send J	wG22825*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send K	wG22826*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send L	wG22827*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send M	wG22828*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send N	wG22829*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send O	wG22830*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return I Output V. Send P	wG22831*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output 1	wG22900*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output 4	wG22903*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 1	wG22908*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 2	wG22909*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 3	wG22910*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 4	wG22911*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 5	wG22912*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 6	wG22913*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 7	wG22914*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Aux 8	wG22915*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 1	wG22932*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 10	wG22941*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 11	wG22942*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 12	wG22943*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 13	wG22944*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 14	wG22945*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return J Output Exp. 15	wG22946*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 16	wG22947*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 2	wG22933*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 3	wG22934*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 4	wG22935*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 5	wG22936*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 6	wG22937*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 7	wG22938*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 8	wG22939*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output Exp. 9	wG22940*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send A	wG22916*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send B	wG22917*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send C	wG22918*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send D	wG22919*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send E	wG22920*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send F	wG22921*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send G	wG22922*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send H	wG22923*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send I	wG22924*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send J	wG22925*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send K	wG22926*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send L	wG22927*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send M	wG22928*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send N	wG22929*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send O	wG22930*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return J Output V. Send P	wG22931*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output 1	wG23000*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output 4	wG23003*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Aux 1	wG23008*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Aux 2	wG23009*-1000AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Gain -100 Input V. Return K Output Aux 3	wG23010*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Aux 4	wG23011*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Aux 5	wG23012*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Aux 6	wG23013*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Aux 7	wG23014*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Aux 8	wG23015*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 1	wG23032*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 10	wG23041*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 11	wG23042*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 12	wG23043*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 13	wG23044*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 14	wG23045*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 15	wG23046*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 16	wG23047*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 2	wG23033*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 3	wG23034*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 4	wG23035*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 5	wG23036*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 6	wG23037*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 7	wG23038*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 8	wG23039*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output Exp. 9	wG23040*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send A	wG23016*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send B	wG23017*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send C	wG23018*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send D	wG23019*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send E	wG23020*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send F	wG23021*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send G	wG23022*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send H	wG23023*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V.	wG23024*-1000AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Send I	
Mix-point Gain -100 Input V. Return K Output V. Send J	wG23025*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send K	wG23026*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send L	wG23027*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send M	wG23028*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send N	wG23029*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send O	wG23030*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return K Output V. Send P	wG23031*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output 1	wG23100*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output 4	wG23103*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 1	wG23108*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 2	wG23109*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 3	wG23110*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 4	wG23111*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 5	wG23112*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 6	wG23113*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 7	wG23114*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Aux 8	wG23115*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 1	wG23132*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 10	wG23141*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 11	wG23142*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 12	wG23143*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 13	wG23144*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 14	wG23145*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 15	wG23146*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 16	wG23147*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 2	wG23133*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 3	wG23134*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 4	wG23135*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 5	wG23136*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 6	wG23137*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 7	wG23138*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 8	wG23139*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output Exp. 9	wG23140*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send A	wG23116*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send B	wG23117*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return L Output V. Send C	wG23118*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send D	wG23119*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send E	wG23120*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send F	wG23121*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send G	wG23122*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send H	wG23123*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send I	wG23124*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send J	wG23125*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send K	wG23126*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send L	wG23127*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send M	wG23128*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send N	wG23129*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send O	wG23130*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return L Output V. Send P	wG23131*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output 1	wG23200*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output 4	wG23203*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 1	wG23208*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 2	wG23209*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 3	wG23210*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 4	wG23211*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 5	wG23212*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 6	wG23213*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 7	wG23214*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Aux 8	wG23215*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 1	wG23232*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 10	wG23241*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 11	wG23242*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 12	wG23243*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp.	wG23244*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

13	
Mix-point Gain -100 Input V. Return M Output Exp. 14	wG23245*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 15	wG23246*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 16	wG23247*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 2	wG23233*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 3	wG23234*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 4	wG23235*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 5	wG23236*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 6	wG23237*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 7	wG23238*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 8	wG23239*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output Exp. 9	wG23240*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send A	wG23216*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send B	wG23217*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send C	wG23218*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send D	wG23219*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send E	wG23220*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send F	wG23221*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send G	wG23222*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send H	wG23223*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send I	wG23224*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send J	wG23225*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send K	wG23226*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send L	wG23227*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send M	wG23228*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send N	wG23229*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V. Send O	wG23230*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return M Output V.	wG23231*-1000AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Send P	
Mix-point Gain -100 Input V. Return N Output 1	wG23300*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output 4	wG23303*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 1	wG23308*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 2	wG23309*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 3	wG23310*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 4	wG23311*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 5	wG23312*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 6	wG23313*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 7	wG23314*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Aux 8	wG23315*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 1	wG23332*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 10	wG23341*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 11	wG23342*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 12	wG23343*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 13	wG23344*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 14	wG23345*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 15	wG23346*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 16	wG23347*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 2	wG23333*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 3	wG23334*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 4	wG23335*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 5	wG23336*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 6	wG23337*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 7	wG23338*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 8	wG23339*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output Exp. 9	wG23340*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send A	wG23316*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send B	wG23317*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send C	wG23318*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send D	wG23319*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send E	wG23320*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send F	wG23321*-1000AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return N Output V. Send G	wG23322*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send H	wG23323*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send I	wG23324*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send J	wG23325*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send K	wG23326*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send L	wG23327*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send M	wG23328*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send N	wG23329*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send O	wG23330*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return N Output V. Send P	wG23331*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output 1	wG23400*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output 4	wG23403*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 1	wG23408*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 2	wG23409*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 3	wG23410*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 4	wG23411*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 5	wG23412*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 6	wG23413*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 7	wG23414*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Aux 8	wG23415*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 1	wG23432*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 10	wG23441*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 11	wG23442*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 12	wG23443*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 13	wG23444*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 14	wG23445*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 15	wG23446*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 16	wG23447*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 2	wG23433*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return O Output Exp. 3	wG23434*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 4	wG23435*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 5	wG23436*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 6	wG23437*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 7	wG23438*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 8	wG23439*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output Exp. 9	wG23440*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send A	wG23416*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send B	wG23417*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send C	wG23418*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send D	wG23419*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send E	wG23420*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send F	wG23421*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send G	wG23422*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send H	wG23423*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send I	wG23424*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send J	wG23425*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send K	wG23426*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send L	wG23427*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send M	wG23428*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send N	wG23429*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send O	wG23430*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return O Output V. Send P	wG23431*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output 1	wG23500*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output 4	wG23503*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Aux 1	wG23508*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Aux 2	wG23509*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Aux 3	wG23510*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Aux 4	wG23511*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Aux 5	wG23512*-1000AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return P Output Aux 6	wG23513*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Aux 7	wG23514*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Aux 8	wG23515*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 1	wG23532*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 10	wG23541*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 11	wG23542*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 12	wG23543*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 13	wG23544*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 14	wG23545*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 15	wG23546*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 16	wG23547*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 2	wG23533*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 3	wG23534*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 4	wG23535*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 5	wG23536*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 6	wG23537*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 7	wG23538*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 8	wG23539*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output Exp. 9	wG23540*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send A	wG23516*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send B	wG23517*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send C	wG23518*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send D	wG23519*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send E	wG23520*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send F	wG23521*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send G	wG23522*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send H	wG23523*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send I	wG23524*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send J	wG23525*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain -100 Input V. Return P Output V. Send K	wG23526*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send L	wG23527*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send M	wG23528*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send N	wG23529*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send O	wG23530*-1000AU\x0D\x0A
Mix-point Gain -100 Input V. Return P Output V. Send P	wG23531*-1000AU\x0D\x0A
Mix-point Gain 12 Input 1 Output 1	wG20000*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output 4	wG20003*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 1	wG20008*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 2	wG20009*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 3	wG20010*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 4	wG20011*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 5	wG20012*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 6	wG20013*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 7	wG20014*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Aux 8	wG20015*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 1	wG20032*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 10	wG20041*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 11	wG20042*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 12	wG20043*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 13	wG20044*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 14	wG20045*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 15	wG20046*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 16	wG20047*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 2	wG20033*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 3	wG20034*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 4	wG20035*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 5	wG20036*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 6	wG20037*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 7	wG20038*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 8	wG20039*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output Exp. 9	wG20040*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send A	wG20016*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send B	wG20017*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send C	wG20018*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send D	wG20019*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send E	wG20020*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send F	wG20021*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send G	wG20022*00120AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain 12 Input 1 Output V. Send H	wG20023*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send I	wG20024*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send J	wG20025*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send K	wG20026*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send L	wG20027*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send M	wG20028*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send N	wG20029*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send O	wG20030*00120AU\x0D\x0A
Mix-point Gain 12 Input 1 Output V. Send P	wG20031*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output 1	wG20500*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output 4	wG20503*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 1	wG20508*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 2	wG20509*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 3	wG20510*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 4	wG20511*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 5	wG20512*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 6	wG20513*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 7	wG20514*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Aux 8	wG20515*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 1	wG20532*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 10	wG20541*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 11	wG20542*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 12	wG20543*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 13	wG20544*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 14	wG20545*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 15	wG20546*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 16	wG20547*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 2	wG20533*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 3	wG20534*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 4	wG20535*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 5	wG20536*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 6	wG20537*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 7	wG20538*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 8	wG20539*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output Exp. 9	wG20540*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send A	wG20516*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send B	wG20517*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send C	wG20518*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send D	wG20519*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send E	wG20520*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send F	wG20521*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send G	wG20522*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send H	wG20523*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send I	wG20524*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain 12 Input 6 Output V. Send J	wG20525*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send K	wG20526*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send L	wG20527*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send M	wG20528*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send N	wG20529*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send O	wG20530*00120AU\x0D\x0A
Mix-point Gain 12 Input 6 Output V. Send P	wG20531*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output 1	wG21200*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output 4	wG21203*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 1	wG21208*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 2	wG21209*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 3	wG21210*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 4	wG21211*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 5	wG21212*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 6	wG21213*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 7	wG21214*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Aux 8	wG21215*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 1	wG21232*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 10	wG21241*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 11	wG21242*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 12	wG21243*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 13	wG21244*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 14	wG21245*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 15	wG21246*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 16	wG21247*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 2	wG21233*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 3	wG21234*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 4	wG21235*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 5	wG21236*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 6	wG21237*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 7	wG21238*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 8	wG21239*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output Exp. 9	wG21240*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send A	wG21216*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send B	wG21217*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send C	wG21218*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send D	wG21219*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send E	wG21220*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send F	wG21221*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send G	wG21222*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send H	wG21223*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send I	wG21224*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send J	wG21225*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send K	wG21226*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input Aux 1 Output V. Send L	wG21227*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send M	wG21228*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send N	wG21229*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send O	wG21230*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 1 Output V. Send P	wG21231*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output 1	wG21300*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output 4	wG21303*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 1	wG21308*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 2	wG21309*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 3	wG21310*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 4	wG21311*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 5	wG21312*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 6	wG21313*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 7	wG21314*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Aux 8	wG21315*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 1	wG21332*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 10	wG21341*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 11	wG21342*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 12	wG21343*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 13	wG21344*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 14	wG21345*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 15	wG21346*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 16	wG21347*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 2	wG21333*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 3	wG21334*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 4	wG21335*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 5	wG21336*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 6	wG21337*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 7	wG21338*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 8	wG21339*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output Exp. 9	wG21340*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send A	wG21316*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send B	wG21317*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send C	wG21318*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send D	wG21319*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send E	wG21320*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send F	wG21321*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send G	wG21322*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send H	wG21323*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send I	wG21324*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send J	wG21325*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send K	wG21326*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send L	wG21327*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send M	wG21328*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input Aux 2 Output V. Send N	wG21329*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send O	wG21330*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 2 Output V. Send P	wG21331*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output 1	wG21400*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output 4	wG21403*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 1	wG21408*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 2	wG21409*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 3	wG21410*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 4	wG21411*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 5	wG21412*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 6	wG21413*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 7	wG21414*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Aux 8	wG21415*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 1	wG21432*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 10	wG21441*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 11	wG21442*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 12	wG21443*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 13	wG21444*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 14	wG21445*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 15	wG21446*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 16	wG21447*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 2	wG21433*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 3	wG21434*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 4	wG21435*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 5	wG21436*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 6	wG21437*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 7	wG21438*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 8	wG21439*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output Exp. 9	wG21440*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send A	wG21416*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send B	wG21417*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send C	wG21418*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send D	wG21419*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send E	wG21420*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send F	wG21421*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send G	wG21422*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send H	wG21423*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send I	wG21424*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send J	wG21425*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send K	wG21426*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send L	wG21427*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send M	wG21428*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send N	wG21429*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 3 Output V. Send O	wG21430*00120AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain 12 Input Aux 3 Output V. Send P	wG21431*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output 1	wG21500*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output 4	wG21503*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 1	wG21508*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 2	wG21509*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 3	wG21510*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 4	wG21511*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 5	wG21512*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 6	wG21513*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 7	wG21514*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Aux 8	wG21515*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 1	wG21532*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 10	wG21541*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 11	wG21542*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 12	wG21543*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 13	wG21544*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 14	wG21545*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 15	wG21546*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 16	wG21547*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 2	wG21533*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 3	wG21534*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 4	wG21535*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 5	wG21536*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 6	wG21537*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 7	wG21538*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 8	wG21539*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output Exp. 9	wG21540*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send A	wG21516*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send B	wG21517*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send C	wG21518*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send D	wG21519*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send E	wG21520*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send F	wG21521*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send G	wG21522*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send H	wG21523*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send I	wG21524*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send J	wG21525*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send K	wG21526*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send L	wG21527*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send M	wG21528*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send N	wG21529*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send O	wG21530*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 4 Output V. Send P	wG21531*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output 1	wG21600*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input Aux 5 Output 4	wG21603*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 1	wG21608*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 2	wG21609*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 3	wG21610*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 4	wG21611*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 5	wG21612*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 6	wG21613*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 7	wG21614*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Aux 8	wG21615*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 1	wG21632*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 10	wG21641*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 11	wG21642*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 12	wG21643*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 13	wG21644*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 14	wG21645*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 15	wG21646*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 16	wG21647*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 2	wG21633*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 3	wG21634*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 4	wG21635*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 5	wG21636*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 6	wG21637*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 7	wG21638*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 8	wG21639*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output Exp. 9	wG21640*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send A	wG21616*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send B	wG21617*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send C	wG21618*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send D	wG21619*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send E	wG21620*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send F	wG21621*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send G	wG21622*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send H	wG21623*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send I	wG21624*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send J	wG21625*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send K	wG21626*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send L	wG21627*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send M	wG21628*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send N	wG21629*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send O	wG21630*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 5 Output V. Send P	wG21631*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output 1	wG21700*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output 4	wG21703*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Aux 1	wG21708*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input Aux 6 Output Aux 2	wG21709*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Aux 3	wG21710*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Aux 4	wG21711*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Aux 5	wG21712*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Aux 6	wG21713*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Aux 7	wG21714*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Aux 8	wG21715*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 1	wG21732*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 10	wG21741*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 11	wG21742*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 12	wG21743*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 13	wG21744*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 14	wG21745*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 15	wG21746*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 16	wG21747*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 2	wG21733*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 3	wG21734*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 4	wG21735*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 5	wG21736*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 6	wG21737*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 7	wG21738*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 8	wG21739*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output Exp. 9	wG21740*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send A	wG21716*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send B	wG21717*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send C	wG21718*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send D	wG21719*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send E	wG21720*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send F	wG21721*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send G	wG21722*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send H	wG21723*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send I	wG21724*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send J	wG21725*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send K	wG21726*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send L	wG21727*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send M	wG21728*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send N	wG21729*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send O	wG21730*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 6 Output V. Send P	wG21731*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output 1	wG21800*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output 4	wG21803*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Aux 1	wG21808*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Aux 2	wG21809*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Aux 3	wG21810*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input Aux 7 Output Aux 4	wG21811*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Aux 5	wG21812*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Aux 6	wG21813*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Aux 7	wG21814*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Aux 8	wG21815*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 1	wG21832*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 10	wG21841*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 11	wG21842*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 12	wG21843*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 13	wG21844*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 14	wG21845*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 15	wG21846*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 16	wG21847*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 2	wG21833*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 3	wG21834*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 4	wG21835*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 5	wG21836*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 6	wG21837*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 7	wG21838*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 8	wG21839*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output Exp. 9	wG21840*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send A	wG21816*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send B	wG21817*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send C	wG21818*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send D	wG21819*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send E	wG21820*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send F	wG21821*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send G	wG21822*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send H	wG21823*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send I	wG21824*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send J	wG21825*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send K	wG21826*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send L	wG21827*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send M	wG21828*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send N	wG21829*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send O	wG21830*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 7 Output V. Send P	wG21831*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output 1	wG21900*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output 4	wG21903*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Aux 1	wG21908*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Aux 2	wG21909*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Aux 3	wG21910*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Aux 4	wG21911*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Aux 5	wG21912*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input Aux 8 Output Aux 6	wG21913*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Aux 7	wG21914*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Aux 8	wG21915*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 1	wG21932*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 10	wG21941*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 11	wG21942*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 12	wG21943*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 13	wG21944*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 14	wG21945*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 15	wG21946*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 16	wG21947*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 2	wG21933*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 3	wG21934*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 4	wG21935*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 5	wG21936*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 6	wG21937*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 7	wG21938*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 8	wG21939*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output Exp. 9	wG21940*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send A	wG21916*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send B	wG21917*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send C	wG21918*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send D	wG21919*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send E	wG21920*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send F	wG21921*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send G	wG21922*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send H	wG21923*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send I	wG21924*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send J	wG21925*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send K	wG21926*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send L	wG21927*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send M	wG21928*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send N	wG21929*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send O	wG21930*00120AU\x0D\x0A
Mix-point Gain 12 Input Aux 8 Output V. Send P	wG21931*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output 1	wG22000*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output 4	wG22003*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Aux 1	wG22008*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Aux 2	wG22009*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Aux 3	wG22010*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Aux 4	wG22011*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Aux 5	wG22012*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Aux 6	wG22013*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Aux 7	wG22014*00120AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return A Output Aux 8	wG22015*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 1	wG22032*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 10	wG22041*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 11	wG22042*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 12	wG22043*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 13	wG22044*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 14	wG22045*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 15	wG22046*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 16	wG22047*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 2	wG22033*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 3	wG22034*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 4	wG22035*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 5	wG22036*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 6	wG22037*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 7	wG22038*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 8	wG22039*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output Exp. 9	wG22040*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send A	wG22016*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send B	wG22017*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send C	wG22018*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send D	wG22019*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send E	wG22020*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send F	wG22021*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send G	wG22022*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send H	wG22023*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send I	wG22024*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send J	wG22025*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send K	wG22026*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send L	wG22027*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send M	wG22028*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send N	wG22029*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return A Output V. Send O	wG22030*00120AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return A Output V. Send P	wG22031*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output 1	wG22100*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output 4	wG22103*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 1	wG22108*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 2	wG22109*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 3	wG22110*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 4	wG22111*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 5	wG22112*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 6	wG22113*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 7	wG22114*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Aux 8	wG22115*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 1	wG22132*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 10	wG22141*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 11	wG22142*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 12	wG22143*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 13	wG22144*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 14	wG22145*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 15	wG22146*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 16	wG22147*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 2	wG22133*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 3	wG22134*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 4	wG22135*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 5	wG22136*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 6	wG22137*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 7	wG22138*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 8	wG22139*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output Exp. 9	wG22140*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send A	wG22116*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send B	wG22117*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send C	wG22118*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send D	wG22119*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send E	wG22120*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send F	wG22121*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send G	wG22122*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send H	wG22123*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send I	wG22124*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return B Output V. Send J	wG22125*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send K	wG22126*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send L	wG22127*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send M	wG22128*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send N	wG22129*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send O	wG22130*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return B Output V. Send P	wG22131*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output 1	wG22200*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output 4	wG22203*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 1	wG22208*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 2	wG22209*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 3	wG22210*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 4	wG22211*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 5	wG22212*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 6	wG22213*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 7	wG22214*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Aux 8	wG22215*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 1	wG22232*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 10	wG22241*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 11	wG22242*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 12	wG22243*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 13	wG22244*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 14	wG22245*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 15	wG22246*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 16	wG22247*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 2	wG22233*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 3	wG22234*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 4	wG22235*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 5	wG22236*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 6	wG22237*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 7	wG22238*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 8	wG22239*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output Exp. 9	wG22240*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send A	wG22216*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send B	wG22217*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send C	wG22218*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return C Output V. Send D	wG22219*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send E	wG22220*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send F	wG22221*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send G	wG22222*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send H	wG22223*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send I	wG22224*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send J	wG22225*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send K	wG22226*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send L	wG22227*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send M	wG22228*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send N	wG22229*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send O	wG22230*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return C Output V. Send P	wG22231*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output 1	wG22300*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output 4	wG22303*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 1	wG22308*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 2	wG22309*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 3	wG22310*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 4	wG22311*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 5	wG22312*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 6	wG22313*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 7	wG22314*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Aux 8	wG22315*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 1	wG22332*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 10	wG22341*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 11	wG22342*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 12	wG22343*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 13	wG22344*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 14	wG22345*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 15	wG22346*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 16	wG22347*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 2	wG22333*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 3	wG22334*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 4	wG22335*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 5	wG22336*00120AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return D Output Exp. 6	wG22337*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 7	wG22338*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 8	wG22339*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output Exp. 9	wG22340*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send A	wG22316*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send B	wG22317*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send C	wG22318*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send D	wG22319*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send E	wG22320*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send F	wG22321*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send G	wG22322*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send H	wG22323*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send I	wG22324*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send J	wG22325*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send K	wG22326*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send L	wG22327*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send M	wG22328*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send N	wG22329*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send O	wG22330*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return D Output V. Send P	wG22331*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output 1	wG22400*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output 4	wG22403*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 1	wG22408*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 2	wG22409*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 3	wG22410*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 4	wG22411*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 5	wG22412*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 6	wG22413*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 7	wG22414*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Aux 8	wG22415*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 1	wG22432*00120AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return E Output Exp. 10	wG22441*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 11	wG22442*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 12	wG22443*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 13	wG22444*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 14	wG22445*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 15	wG22446*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 16	wG22447*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 2	wG22433*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 3	wG22434*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 4	wG22435*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 5	wG22436*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 6	wG22437*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 7	wG22438*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 8	wG22439*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output Exp. 9	wG22440*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send A	wG22416*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send B	wG22417*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send C	wG22418*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send D	wG22419*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send E	wG22420*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send F	wG22421*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send G	wG22422*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send H	wG22423*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send I	wG22424*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send J	wG22425*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send K	wG22426*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send L	wG22427*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send M	wG22428*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send N	wG22429*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send O	wG22430*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return E Output V. Send P	wG22431*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output 1	wG22500*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output 4	wG22503*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return F Output Aux 1	wG22508*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Aux 2	wG22509*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Aux 3	wG22510*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Aux 4	wG22511*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Aux 5	wG22512*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Aux 6	wG22513*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Aux 7	wG22514*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Aux 8	wG22515*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 1	wG22532*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 10	wG22541*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 11	wG22542*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 12	wG22543*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 13	wG22544*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 14	wG22545*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 15	wG22546*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 16	wG22547*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 2	wG22533*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 3	wG22534*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 4	wG22535*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 5	wG22536*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 6	wG22537*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 7	wG22538*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 8	wG22539*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output Exp. 9	wG22540*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send A	wG22516*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send B	wG22517*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send C	wG22518*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send D	wG22519*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send E	wG22520*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send F	wG22521*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send G	wG22522*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send H	wG22523*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send I	wG22524*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send J	wG22525*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send K	wG22526*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send L	wG22527*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send	wG22528*00120AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

M	
Mix-point Gain 12 Input V. Return F Output V. Send N	wG22529*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send O	wG22530*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return F Output V. Send P	wG22531*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output 1	wG22600*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output 4	wG22603*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 1	wG22608*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 2	wG22609*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 3	wG22610*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 4	wG22611*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 5	wG22612*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 6	wG22613*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 7	wG22614*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Aux 8	wG22615*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 1	wG22632*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 10	wG22641*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 11	wG22642*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 12	wG22643*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 13	wG22644*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 14	wG22645*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 15	wG22646*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 16	wG22647*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 2	wG22633*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 3	wG22634*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 4	wG22635*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 5	wG22636*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 6	wG22637*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 7	wG22638*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 8	wG22639*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output Exp. 9	wG22640*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send A	wG22616*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send B	wG22617*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send C	wG22618*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send D	wG22619*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send E	wG22620*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send F	wG22621*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return G Output V. Send G	wG22622*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send H	wG22623*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send I	wG22624*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send J	wG22625*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send K	wG22626*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send L	wG22627*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send M	wG22628*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send N	wG22629*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send O	wG22630*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return G Output V. Send P	wG22631*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output 1	wG22700*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output 4	wG22703*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 1	wG22708*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 2	wG22709*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 3	wG22710*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 4	wG22711*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 5	wG22712*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 6	wG22713*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 7	wG22714*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Aux 8	wG22715*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 1	wG22732*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 10	wG22741*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 11	wG22742*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 12	wG22743*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 13	wG22744*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 14	wG22745*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 15	wG22746*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 16	wG22747*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 2	wG22733*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 3	wG22734*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 4	wG22735*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 5	wG22736*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 6	wG22737*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 7	wG22738*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 8	wG22739*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output Exp. 9	wG22740*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return H Output V. Send A	wG22716*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send B	wG22717*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send C	wG22718*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send D	wG22719*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send E	wG22720*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send F	wG22721*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send G	wG22722*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send H	wG22723*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send I	wG22724*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send J	wG22725*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send K	wG22726*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send L	wG22727*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send M	wG22728*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send N	wG22729*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send O	wG22730*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return H Output V. Send P	wG22731*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output 1	wG22800*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output 4	wG22803*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 1	wG22808*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 2	wG22809*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 3	wG22810*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 4	wG22811*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 5	wG22812*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 6	wG22813*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 7	wG22814*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Aux 8	wG22815*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 1	wG22832*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 10	wG22841*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 11	wG22842*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 12	wG22843*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 13	wG22844*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return I Output Exp. 14	wG22845*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 15	wG22846*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 16	wG22847*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 2	wG22833*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 3	wG22834*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 4	wG22835*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 5	wG22836*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 6	wG22837*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 7	wG22838*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 8	wG22839*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output Exp. 9	wG22840*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send A	wG22816*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send B	wG22817*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send C	wG22818*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send D	wG22819*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send E	wG22820*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send F	wG22821*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send G	wG22822*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send H	wG22823*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send I	wG22824*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send J	wG22825*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send K	wG22826*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send L	wG22827*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send M	wG22828*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send N	wG22829*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send O	wG22830*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return I Output V. Send P	wG22831*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output 1	wG22900*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output 4	wG22903*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 1	wG22908*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 2	wG22909*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 3	wG22910*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 4	wG22911*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 5	wG22912*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 6	wG22913*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 7	wG22914*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Aux 8	wG22915*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 1	wG22932*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 10	wG22941*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 11	wG22942*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 12	wG22943*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 13	wG22944*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 14	wG22945*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return J Output Exp. 15	wG22946*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 16	wG22947*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 2	wG22933*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 3	wG22934*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 4	wG22935*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 5	wG22936*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 6	wG22937*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 7	wG22938*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 8	wG22939*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output Exp. 9	wG22940*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send A	wG22916*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send B	wG22917*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send C	wG22918*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send D	wG22919*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send E	wG22920*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send F	wG22921*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send G	wG22922*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send H	wG22923*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send I	wG22924*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send J	wG22925*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send K	wG22926*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send L	wG22927*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send M	wG22928*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send N	wG22929*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send O	wG22930*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return J Output V. Send P	wG22931*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output 1	wG23000*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output 4	wG23003*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 1	wG23008*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 2	wG23009*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 3	wG23010*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 4	wG23011*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 5	wG23012*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 6	wG23013*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 7	wG23014*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Aux 8	wG23015*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 1	wG23032*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 10	wG23041*00120AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Gain 12 Input V. Return K Output Exp. 11	wG23042*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 12	wG23043*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 13	wG23044*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 14	wG23045*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 15	wG23046*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 16	wG23047*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 2	wG23033*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 3	wG23034*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 4	wG23035*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 5	wG23036*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 6	wG23037*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 7	wG23038*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 8	wG23039*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output Exp. 9	wG23040*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send A	wG23016*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send B	wG23017*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send C	wG23018*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send D	wG23019*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send E	wG23020*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send F	wG23021*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send G	wG23022*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send H	wG23023*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send I	wG23024*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send J	wG23025*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send K	wG23026*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send L	wG23027*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send M	wG23028*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send N	wG23029*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send O	wG23030*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return K Output V. Send P	wG23031*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output 1	wG23100*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output 4	wG23103*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return L Output Aux 1	wG23108*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Aux 2	wG23109*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Aux 3	wG23110*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Aux 4	wG23111*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Aux 5	wG23112*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Aux 6	wG23113*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Aux 7	wG23114*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Aux 8	wG23115*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 1	wG23132*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 10	wG23141*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 11	wG23142*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 12	wG23143*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 13	wG23144*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 14	wG23145*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 15	wG23146*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 16	wG23147*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 2	wG23133*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 3	wG23134*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 4	wG23135*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 5	wG23136*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 6	wG23137*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 7	wG23138*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 8	wG23139*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output Exp. 9	wG23140*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send A	wG23116*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send B	wG23117*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send C	wG23118*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send D	wG23119*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send E	wG23120*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send F	wG23121*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send G	wG23122*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send H	wG23123*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send I	wG23124*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send J	wG23125*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send K	wG23126*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send L	wG23127*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send M	wG23128*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return L Output V. Send N	wG23129*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send O	wG23130*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return L Output V. Send P	wG23131*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output 1	wG23200*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output 4	wG23203*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 1	wG23208*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 2	wG23209*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 3	wG23210*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 4	wG23211*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 5	wG23212*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 6	wG23213*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 7	wG23214*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Aux 8	wG23215*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 1	wG23232*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 10	wG23241*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 11	wG23242*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 12	wG23243*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 13	wG23244*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 14	wG23245*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 15	wG23246*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 16	wG23247*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 2	wG23233*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 3	wG23234*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 4	wG23235*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 5	wG23236*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 6	wG23237*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 7	wG23238*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 8	wG23239*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output Exp. 9	wG23240*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send A	wG23216*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send B	wG23217*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send C	wG23218*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send D	wG23219*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send E	wG23220*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send F	wG23221*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send	wG23222*00120AU\x0D\x0A

Global Scripter Module
Communication Sheet

Revision: 10/8/2024

G	
Mix-point Gain 12 Input V. Return M Output V. Send H	wG23223*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send I	wG23224*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send J	wG23225*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send K	wG23226*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send L	wG23227*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send M	wG23228*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send N	wG23229*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send O	wG23230*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return M Output V. Send P	wG23231*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output 1	wG23300*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output 4	wG23303*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 1	wG23308*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 2	wG23309*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 3	wG23310*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 4	wG23311*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 5	wG23312*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 6	wG23313*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 7	wG23314*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Aux 8	wG23315*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 1	wG23332*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 10	wG23341*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 11	wG23342*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 12	wG23343*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 13	wG23344*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 14	wG23345*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 15	wG23346*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 16	wG23347*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 2	wG23333*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 3	wG23334*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 4	wG23335*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 5	wG23336*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 6	wG23337*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 7	wG23338*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 8	wG23339*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output Exp. 9	wG23340*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return N Output V. Send A	wG23316*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send B	wG23317*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send C	wG23318*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send D	wG23319*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send E	wG23320*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send F	wG23321*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send G	wG23322*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send H	wG23323*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send I	wG23324*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send J	wG23325*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send K	wG23326*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send L	wG23327*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send M	wG23328*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send N	wG23329*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send O	wG23330*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return N Output V. Send P	wG23331*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output 1	wG23400*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output 4	wG23403*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 1	wG23408*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 2	wG23409*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 3	wG23410*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 4	wG23411*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 5	wG23412*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 6	wG23413*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 7	wG23414*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Aux 8	wG23415*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 1	wG23432*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 10	wG23441*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 11	wG23442*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 12	wG23443*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 13	wG23444*00120AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return O Output Exp. 14	wG23445*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 15	wG23446*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 16	wG23447*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 2	wG23433*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 3	wG23434*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 4	wG23435*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 5	wG23436*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 6	wG23437*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 7	wG23438*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 8	wG23439*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output Exp. 9	wG23440*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send A	wG23416*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send B	wG23417*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send C	wG23418*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send D	wG23419*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send E	wG23420*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send F	wG23421*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send G	wG23422*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send H	wG23423*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send I	wG23424*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send J	wG23425*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send K	wG23426*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send L	wG23427*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send M	wG23428*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send N	wG23429*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send O	wG23430*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return O Output V. Send P	wG23431*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output 1	wG23500*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output 4	wG23503*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Aux 1	wG23508*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return P Output Aux 2	wG23509*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Aux 3	wG23510*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Aux 4	wG23511*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Aux 5	wG23512*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Aux 6	wG23513*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Aux 7	wG23514*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Aux 8	wG23515*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 1	wG23532*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 10	wG23541*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 11	wG23542*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 12	wG23543*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 13	wG23544*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 14	wG23545*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 15	wG23546*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 16	wG23547*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 2	wG23533*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 3	wG23534*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 4	wG23535*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 5	wG23536*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 6	wG23537*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 7	wG23538*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 8	wG23539*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output Exp. 9	wG23540*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send A	wG23516*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send B	wG23517*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send C	wG23518*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send D	wG23519*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send E	wG23520*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send F	wG23521*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send G	wG23522*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send H	wG23523*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send I	wG23524*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send J	wG23525*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send K	wG23526*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send L	wG23527*00120AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain 12 Input V. Return P Output V. Send M	wG23528*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send N	wG23529*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send O	wG23530*00120AU\x0D\x0A
Mix-point Gain 12 Input V. Return P Output V. Send P	wG23531*00120AU\x0D\x0A
Mix-point Mute Off Input 1 Output 1	wM20000*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output 4	wM20003*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 1	wM20008*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 2	wM20009*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 3	wM20010*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 4	wM20011*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 5	wM20012*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 6	wM20013*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 7	wM20014*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Aux 8	wM20015*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 1	wM20032*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 10	wM20041*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 11	wM20042*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 12	wM20043*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 13	wM20044*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 14	wM20045*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 15	wM20046*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 16	wM20047*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 2	wM20033*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 3	wM20034*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 4	wM20035*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 5	wM20036*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 6	wM20037*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 7	wM20038*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 8	wM20039*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output Exp. 9	wM20040*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send A	wM20016*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send B	wM20017*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send C	wM20018*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send D	wM20019*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send E	wM20020*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send F	wM20021*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send G	wM20022*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send H	wM20023*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send I	wM20024*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send J	wM20025*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send K	wM20026*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input 1 Output V. Send L	wM20027*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send M	wM20028*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send N	wM20029*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send O	wM20030*0AU\x0D\x0A
Mix-point Mute Off Input 1 Output V. Send P	wM20031*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output 1	wM20500*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output 4	wM20503*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 1	wM20508*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 2	wM20509*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 3	wM20510*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 4	wM20511*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 5	wM20512*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 6	wM20513*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 7	wM20514*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Aux 8	wM20515*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 1	wM20532*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 10	wM20541*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 11	wM20542*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 12	wM20543*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 13	wM20544*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 14	wM20545*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 15	wM20546*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 16	wM20547*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 2	wM20533*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 3	wM20534*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 4	wM20535*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 5	wM20536*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 6	wM20537*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 7	wM20538*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 8	wM20539*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output Exp. 9	wM20540*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send A	wM20516*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send B	wM20517*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send C	wM20518*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send D	wM20519*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send E	wM20520*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send F	wM20521*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send G	wM20522*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send H	wM20523*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send I	wM20524*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send J	wM20525*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send K	wM20526*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send L	wM20527*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send M	wM20528*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input 6 Output V. Send N	wM20529*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send O	wM20530*0AU\x0D\x0A
Mix-point Mute Off Input 6 Output V. Send P	wM20531*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output 1	wM21200*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output 4	wM21203*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 1	wM21208*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 2	wM21209*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 3	wM21210*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 4	wM21211*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 5	wM21212*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 6	wM21213*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 7	wM21214*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Aux 8	wM21215*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 1	wM21232*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 10	wM21241*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 11	wM21242*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 12	wM21243*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 13	wM21244*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 14	wM21245*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 15	wM21246*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 16	wM21247*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 2	wM21233*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 3	wM21234*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 4	wM21235*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 5	wM21236*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 6	wM21237*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 7	wM21238*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 8	wM21239*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output Exp. 9	wM21240*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send A	wM21216*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send B	wM21217*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send C	wM21218*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send D	wM21219*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send E	wM21220*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send F	wM21221*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send G	wM21222*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send H	wM21223*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send I	wM21224*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send J	wM21225*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send K	wM21226*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send L	wM21227*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send M	wM21228*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send N	wM21229*0AU\x0D\x0A
Mix-point Mute Off Input Aux 1 Output V. Send O	wM21230*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input Aux 1 Output V. Send P	wM21231*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output 1	wM21300*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output 4	wM21303*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 1	wM21308*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 2	wM21309*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 3	wM21310*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 4	wM21311*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 5	wM21312*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 6	wM21313*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 7	wM21314*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Aux 8	wM21315*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 1	wM21332*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 10	wM21341*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 11	wM21342*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 12	wM21343*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 13	wM21344*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 14	wM21345*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 15	wM21346*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 16	wM21347*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 2	wM21333*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 3	wM21334*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 4	wM21335*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 5	wM21336*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 6	wM21337*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 7	wM21338*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 8	wM21339*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output Exp. 9	wM21340*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send A	wM21316*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send B	wM21317*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send C	wM21318*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send D	wM21319*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send E	wM21320*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send F	wM21321*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send G	wM21322*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send H	wM21323*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send I	wM21324*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send J	wM21325*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send K	wM21326*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send L	wM21327*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send M	wM21328*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send N	wM21329*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send O	wM21330*0AU\x0D\x0A
Mix-point Mute Off Input Aux 2 Output V. Send P	wM21331*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output 1	wM21400*0AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input Aux 3 Output 4	wM21403*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 1	wM21408*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 2	wM21409*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 3	wM21410*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 4	wM21411*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 5	wM21412*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 6	wM21413*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 7	wM21414*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Aux 8	wM21415*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 1	wM21432*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 10	wM21441*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 11	wM21442*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 12	wM21443*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 13	wM21444*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 14	wM21445*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 15	wM21446*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 16	wM21447*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 2	wM21433*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 3	wM21434*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 4	wM21435*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 5	wM21436*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 6	wM21437*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 7	wM21438*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 8	wM21439*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output Exp. 9	wM21440*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send A	wM21416*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send B	wM21417*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send C	wM21418*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send D	wM21419*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send E	wM21420*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send F	wM21421*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send G	wM21422*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send H	wM21423*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send I	wM21424*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send J	wM21425*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send K	wM21426*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send L	wM21427*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send M	wM21428*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send N	wM21429*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send O	wM21430*0AU\x0D\x0A
Mix-point Mute Off Input Aux 3 Output V. Send P	wM21431*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output 1	wM21500*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output 4	wM21503*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Aux 1	wM21508*0AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input Aux 4 Output Aux 2	wM21509*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Aux 3	wM21510*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Aux 4	wM21511*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Aux 5	wM21512*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Aux 6	wM21513*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Aux 7	wM21514*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Aux 8	wM21515*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 1	wM21532*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 10	wM21541*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 11	wM21542*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 12	wM21543*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 13	wM21544*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 14	wM21545*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 15	wM21546*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 16	wM21547*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 2	wM21533*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 3	wM21534*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 4	wM21535*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 5	wM21536*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 6	wM21537*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 7	wM21538*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 8	wM21539*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output Exp. 9	wM21540*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send A	wM21516*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send B	wM21517*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send C	wM21518*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send D	wM21519*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send E	wM21520*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send F	wM21521*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send G	wM21522*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send H	wM21523*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send I	wM21524*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send J	wM21525*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send K	wM21526*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send L	wM21527*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send M	wM21528*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send N	wM21529*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send O	wM21530*0AU\x0D\x0A
Mix-point Mute Off Input Aux 4 Output V. Send P	wM21531*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output 1	wM21600*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output 4	wM21603*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Aux 1	wM21608*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Aux 2	wM21609*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Aux 3	wM21610*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input Aux 5 Output Aux 4	wM21611*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Aux 5	wM21612*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Aux 6	wM21613*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Aux 7	wM21614*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Aux 8	wM21615*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 1	wM21632*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 10	wM21641*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 11	wM21642*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 12	wM21643*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 13	wM21644*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 14	wM21645*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 15	wM21646*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 16	wM21647*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 2	wM21633*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 3	wM21634*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 4	wM21635*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 5	wM21636*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 6	wM21637*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 7	wM21638*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 8	wM21639*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output Exp. 9	wM21640*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send A	wM21616*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send B	wM21617*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send C	wM21618*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send D	wM21619*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send E	wM21620*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send F	wM21621*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send G	wM21622*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send H	wM21623*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send I	wM21624*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send J	wM21625*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send K	wM21626*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send L	wM21627*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send M	wM21628*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send N	wM21629*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send O	wM21630*0AU\x0D\x0A
Mix-point Mute Off Input Aux 5 Output V. Send P	wM21631*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output 1	wM21700*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output 4	wM21703*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Aux 1	wM21708*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Aux 2	wM21709*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Aux 3	wM21710*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Aux 4	wM21711*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Aux 5	wM21712*0AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute Off Input Aux 6 Output Aux 6	wM21713*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Aux 7	wM21714*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Aux 8	wM21715*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 1	wM21732*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 10	wM21741*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 11	wM21742*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 12	wM21743*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 13	wM21744*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 14	wM21745*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 15	wM21746*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 16	wM21747*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 2	wM21733*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 3	wM21734*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 4	wM21735*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 5	wM21736*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 6	wM21737*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 7	wM21738*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 8	wM21739*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output Exp. 9	wM21740*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send A	wM21716*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send B	wM21717*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send C	wM21718*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send D	wM21719*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send E	wM21720*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send F	wM21721*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send G	wM21722*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send H	wM21723*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send I	wM21724*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send J	wM21725*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send K	wM21726*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send L	wM21727*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send M	wM21728*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send N	wM21729*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send O	wM21730*0AU\x0D\x0A
Mix-point Mute Off Input Aux 6 Output V. Send P	wM21731*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output 1	wM21800*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output 4	wM21803*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Aux 1	wM21808*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Aux 2	wM21809*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Aux 3	wM21810*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Aux 4	wM21811*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Aux 5	wM21812*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Aux 6	wM21813*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Aux 7	wM21814*0AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input Aux 7 Output Aux 8	wM21815*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 1	wM21832*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 10	wM21841*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 11	wM21842*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 12	wM21843*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 13	wM21844*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 14	wM21845*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 15	wM21846*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 16	wM21847*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 2	wM21833*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 3	wM21834*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 4	wM21835*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 5	wM21836*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 6	wM21837*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 7	wM21838*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 8	wM21839*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output Exp. 9	wM21840*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send A	wM21816*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send B	wM21817*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send C	wM21818*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send D	wM21819*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send E	wM21820*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send F	wM21821*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send G	wM21822*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send H	wM21823*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send I	wM21824*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send J	wM21825*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send K	wM21826*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send L	wM21827*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send M	wM21828*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send N	wM21829*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send O	wM21830*0AU\x0D\x0A
Mix-point Mute Off Input Aux 7 Output V. Send P	wM21831*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output 1	wM21900*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output 4	wM21903*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 1	wM21908*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 2	wM21909*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 3	wM21910*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 4	wM21911*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 5	wM21912*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 6	wM21913*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 7	wM21914*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Aux 8	wM21915*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 1	wM21932*0AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute Off Input Aux 8 Output Exp. 10	wM21941*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 11	wM21942*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 12	wM21943*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 13	wM21944*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 14	wM21945*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 15	wM21946*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 16	wM21947*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 2	wM21933*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 3	wM21934*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 4	wM21935*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 5	wM21936*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 6	wM21937*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 7	wM21938*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 8	wM21939*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output Exp. 9	wM21940*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send A	wM21916*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send B	wM21917*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send C	wM21918*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send D	wM21919*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send E	wM21920*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send F	wM21921*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send G	wM21922*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send H	wM21923*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send I	wM21924*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send J	wM21925*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send K	wM21926*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send L	wM21927*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send M	wM21928*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send N	wM21929*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send O	wM21930*0AU\x0D\x0A
Mix-point Mute Off Input Aux 8 Output V. Send P	wM21931*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output 1	wM22000*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output 4	wM22003*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 1	wM22008*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 2	wM22009*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 3	wM22010*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 4	wM22011*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 5	wM22012*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 6	wM22013*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 7	wM22014*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Aux 8	wM22015*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 1	wM22032*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 10	wM22041*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 11	wM22042*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Off Input V. Return A Output Exp. 12	wM22043*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 13	wM22044*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 14	wM22045*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 15	wM22046*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 16	wM22047*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 2	wM22033*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 3	wM22034*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 4	wM22035*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 5	wM22036*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 6	wM22037*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 7	wM22038*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 8	wM22039*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output Exp. 9	wM22040*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send A	wM22016*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send B	wM22017*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send C	wM22018*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send D	wM22019*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send E	wM22020*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send F	wM22021*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send G	wM22022*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send H	wM22023*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send I	wM22024*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send J	wM22025*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send K	wM22026*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send L	wM22027*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send M	wM22028*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send N	wM22029*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send O	wM22030*0AU\x0D\x0A
Mix-point Mute Off Input V. Return A Output V. Send P	wM22031*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output 1	wM22100*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute Off Input V. Return B Output 4	wM22103*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 1	wM22108*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 2	wM22109*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 3	wM22110*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 4	wM22111*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 5	wM22112*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 6	wM22113*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 7	wM22114*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Aux 8	wM22115*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 1	wM22132*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 10	wM22141*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 11	wM22142*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 12	wM22143*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 13	wM22144*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 14	wM22145*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 15	wM22146*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 16	wM22147*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 2	wM22133*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 3	wM22134*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 4	wM22135*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 5	wM22136*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 6	wM22137*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 7	wM22138*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 8	wM22139*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output Exp. 9	wM22140*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send A	wM22116*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send B	wM22117*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send C	wM22118*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send D	wM22119*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send E	wM22120*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send F	wM22121*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send G	wM22122*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send H	wM22123*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send I	wM22124*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send J	wM22125*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input V. Return B Output V. Send K	wM22126*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send L	wM22127*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send M	wM22128*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send N	wM22129*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send O	wM22130*0AU\x0D\x0A
Mix-point Mute Off Input V. Return B Output V. Send P	wM22131*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output 1	wM22200*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output 4	wM22203*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 1	wM22208*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 2	wM22209*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 3	wM22210*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 4	wM22211*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 5	wM22212*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 6	wM22213*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 7	wM22214*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Aux 8	wM22215*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 1	wM22232*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 10	wM22241*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 11	wM22242*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 12	wM22243*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 13	wM22244*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 14	wM22245*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 15	wM22246*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 16	wM22247*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 2	wM22233*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 3	wM22234*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 4	wM22235*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 5	wM22236*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 6	wM22237*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 7	wM22238*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 8	wM22239*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output Exp. 9	wM22240*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send A	wM22216*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send B	wM22217*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send C	wM22218*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V.	wM22219*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Send D	
Mix-point Mute Off Input V. Return C Output V. Send E	wM22220*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send F	wM22221*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send G	wM22222*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send H	wM22223*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send I	wM22224*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send J	wM22225*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send K	wM22226*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send L	wM22227*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send M	wM22228*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send N	wM22229*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send O	wM22230*0AU\x0D\x0A
Mix-point Mute Off Input V. Return C Output V. Send P	wM22231*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output 1	wM22300*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output 4	wM22303*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 1	wM22308*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 2	wM22309*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 3	wM22310*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 4	wM22311*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 5	wM22312*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 6	wM22313*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 7	wM22314*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Aux 8	wM22315*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 1	wM22332*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 10	wM22341*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 11	wM22342*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 12	wM22343*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 13	wM22344*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 14	wM22345*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 15	wM22346*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 16	wM22347*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 2	wM22333*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 3	wM22334*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 4	wM22335*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Mute Off Input V. Return D Output Exp. 5	wM22336*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 6	wM22337*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 7	wM22338*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 8	wM22339*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output Exp. 9	wM22340*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send A	wM22316*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send B	wM22317*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send C	wM22318*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send D	wM22319*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send E	wM22320*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send F	wM22321*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send G	wM22322*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send H	wM22323*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send I	wM22324*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send J	wM22325*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send K	wM22326*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send L	wM22327*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send M	wM22328*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send N	wM22329*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send O	wM22330*0AU\x0D\x0A
Mix-point Mute Off Input V. Return D Output V. Send P	wM22331*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output 1	wM22400*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output 4	wM22403*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Aux 1	wM22408*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Aux 2	wM22409*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Aux 3	wM22410*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Aux 4	wM22411*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Aux 5	wM22412*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Aux 6	wM22413*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Aux 7	wM22414*0AU\x0D\x0A

Global Scripter Module
Communication Sheet

Mix-point Mute Off Input V. Return E Output Aux 8	wM22415*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 1	wM22432*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 10	wM22441*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 11	wM22442*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 12	wM22443*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 13	wM22444*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 14	wM22445*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 15	wM22446*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 16	wM22447*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 2	wM22433*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 3	wM22434*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 4	wM22435*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 5	wM22436*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 6	wM22437*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 7	wM22438*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 8	wM22439*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output Exp. 9	wM22440*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send A	wM22416*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send B	wM22417*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send C	wM22418*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send D	wM22419*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send E	wM22420*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send F	wM22421*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send G	wM22422*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send H	wM22423*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send I	wM22424*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send J	wM22425*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send K	wM22426*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send L	wM22427*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send M	wM22428*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send N	wM22429*0AU\x0D\x0A
Mix-point Mute Off Input V. Return E Output V. Send	wM22430*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

O	
Mix-point Mute Off Input V. Return E Output V. Send P	wM22431*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output 1	wM22500*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output 4	wM22503*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 1	wM22508*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 2	wM22509*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 3	wM22510*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 4	wM22511*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 5	wM22512*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 6	wM22513*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 7	wM22514*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Aux 8	wM22515*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 1	wM22532*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 10	wM22541*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 11	wM22542*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 12	wM22543*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 13	wM22544*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 14	wM22545*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 15	wM22546*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 16	wM22547*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 2	wM22533*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 3	wM22534*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 4	wM22535*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 5	wM22536*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 6	wM22537*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 7	wM22538*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 8	wM22539*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output Exp. 9	wM22540*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send A	wM22516*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send B	wM22517*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send C	wM22518*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send D	wM22519*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send E	wM22520*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send F	wM22521*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send G	wM22522*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send H	wM22523*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute Off Input V. Return F Output V. Send I	wM22524*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send J	wM22525*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send K	wM22526*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send L	wM22527*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send M	wM22528*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send N	wM22529*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send O	wM22530*0AU\x0D\x0A
Mix-point Mute Off Input V. Return F Output V. Send P	wM22531*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output 1	wM22600*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output 4	wM22603*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 1	wM22608*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 2	wM22609*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 3	wM22610*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 4	wM22611*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 5	wM22612*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 6	wM22613*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 7	wM22614*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Aux 8	wM22615*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 1	wM22632*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 10	wM22641*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 11	wM22642*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 12	wM22643*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 13	wM22644*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 14	wM22645*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 15	wM22646*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 16	wM22647*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 2	wM22633*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 3	wM22634*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 4	wM22635*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 5	wM22636*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 6	wM22637*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 7	wM22638*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 8	wM22639*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output Exp. 9	wM22640*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send A	wM22616*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V.	wM22617*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Send B	
Mix-point Mute Off Input V. Return G Output V. Send C	wM22618*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send D	wM22619*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send E	wM22620*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send F	wM22621*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send G	wM22622*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send H	wM22623*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send I	wM22624*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send J	wM22625*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send K	wM22626*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send L	wM22627*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send M	wM22628*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send N	wM22629*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send O	wM22630*0AU\x0D\x0A
Mix-point Mute Off Input V. Return G Output V. Send P	wM22631*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output 1	wM22700*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output 4	wM22703*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 1	wM22708*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 2	wM22709*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 3	wM22710*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 4	wM22711*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 5	wM22712*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 6	wM22713*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 7	wM22714*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Aux 8	wM22715*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 1	wM22732*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 10	wM22741*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 11	wM22742*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 12	wM22743*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 13	wM22744*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 14	wM22745*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 15	wM22746*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Mute Off Input V. Return H Output Exp. 16	wM22747*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 2	wM22733*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 3	wM22734*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 4	wM22735*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 5	wM22736*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 6	wM22737*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 7	wM22738*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 8	wM22739*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output Exp. 9	wM22740*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send A	wM22716*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send B	wM22717*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send C	wM22718*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send D	wM22719*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send E	wM22720*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send F	wM22721*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send G	wM22722*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send H	wM22723*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send I	wM22724*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send J	wM22725*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send K	wM22726*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send L	wM22727*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send M	wM22728*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send N	wM22729*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send O	wM22730*0AU\x0D\x0A
Mix-point Mute Off Input V. Return H Output V. Send P	wM22731*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output 1	wM22800*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output 4	wM22803*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Aux 1	wM22808*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Aux 2	wM22809*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Aux 3	wM22810*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Off Input V. Return I Output Aux 4	wM22811*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Aux 5	wM22812*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Aux 6	wM22813*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Aux 7	wM22814*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Aux 8	wM22815*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 1	wM22832*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 10	wM22841*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 11	wM22842*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 12	wM22843*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 13	wM22844*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 14	wM22845*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 15	wM22846*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 16	wM22847*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 2	wM22833*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 3	wM22834*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 4	wM22835*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 5	wM22836*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 6	wM22837*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 7	wM22838*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 8	wM22839*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output Exp. 9	wM22840*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send A	wM22816*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send B	wM22817*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send C	wM22818*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send D	wM22819*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send E	wM22820*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send F	wM22821*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send G	wM22822*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send H	wM22823*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send I	wM22824*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send J	wM22825*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send K	wM22826*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send L	wM22827*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send	wM22828*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

M	
Mix-point Mute Off Input V. Return I Output V. Send N	wM22829*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send O	wM22830*0AU\x0D\x0A
Mix-point Mute Off Input V. Return I Output V. Send P	wM22831*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output 1	wM22900*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output 4	wM22903*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 1	wM22908*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 2	wM22909*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 3	wM22910*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 4	wM22911*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 5	wM22912*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 6	wM22913*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 7	wM22914*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Aux 8	wM22915*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 1	wM22932*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 10	wM22941*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 11	wM22942*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 12	wM22943*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 13	wM22944*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 14	wM22945*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 15	wM22946*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 16	wM22947*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 2	wM22933*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 3	wM22934*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 4	wM22935*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 5	wM22936*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 6	wM22937*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 7	wM22938*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 8	wM22939*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output Exp. 9	wM22940*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send A	wM22916*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send B	wM22917*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send C	wM22918*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send D	wM22919*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send E	wM22920*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send F	wM22921*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input V. Return J Output V. Send G	wM22922*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send H	wM22923*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send I	wM22924*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send J	wM22925*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send K	wM22926*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send L	wM22927*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send M	wM22928*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send N	wM22929*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send O	wM22930*0AU\x0D\x0A
Mix-point Mute Off Input V. Return J Output V. Send P	wM22931*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output 1	wM23000*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output 4	wM23003*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 1	wM23008*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 2	wM23009*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 3	wM23010*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 4	wM23011*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 5	wM23012*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 6	wM23013*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 7	wM23014*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Aux 8	wM23015*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 1	wM23032*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 10	wM23041*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 11	wM23042*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 12	wM23043*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 13	wM23044*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 14	wM23045*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 15	wM23046*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 16	wM23047*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 2	wM23033*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 3	wM23034*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 4	wM23035*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 5	wM23036*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 6	wM23037*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 7	wM23038*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output Exp. 8	wM23039*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input V. Return K Output Exp. 9	wM23040*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send A	wM23016*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send B	wM23017*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send C	wM23018*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send D	wM23019*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send E	wM23020*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send F	wM23021*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send G	wM23022*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send H	wM23023*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send I	wM23024*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send J	wM23025*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send K	wM23026*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send L	wM23027*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send M	wM23028*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send N	wM23029*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send O	wM23030*0AU\x0D\x0A
Mix-point Mute Off Input V. Return K Output V. Send P	wM23031*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output 1	wM23100*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output 4	wM23103*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 1	wM23108*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 2	wM23109*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 3	wM23110*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 4	wM23111*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 5	wM23112*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 6	wM23113*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 7	wM23114*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Aux 8	wM23115*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 1	wM23132*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 10	wM23141*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 11	wM23142*0AU\x0D\x0A

Global Scripter Module
Communication Sheet

Mix-point Mute Off Input V. Return L Output Exp. 12	wM23143*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 13	wM23144*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 14	wM23145*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 15	wM23146*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 16	wM23147*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 2	wM23133*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 3	wM23134*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 4	wM23135*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 5	wM23136*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 6	wM23137*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 7	wM23138*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 8	wM23139*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output Exp. 9	wM23140*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send A	wM23116*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send B	wM23117*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send C	wM23118*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send D	wM23119*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send E	wM23120*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send F	wM23121*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send G	wM23122*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send H	wM23123*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send I	wM23124*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send J	wM23125*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send K	wM23126*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send L	wM23127*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send M	wM23128*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send N	wM23129*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send O	wM23130*0AU\x0D\x0A
Mix-point Mute Off Input V. Return L Output V. Send P	wM23131*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output 1	wM23200*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Off Input V. Return M Output 4	wM23203*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 1	wM23208*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 2	wM23209*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 3	wM23210*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 4	wM23211*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 5	wM23212*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 6	wM23213*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 7	wM23214*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Aux 8	wM23215*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 1	wM23232*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 10	wM23241*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 11	wM23242*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 12	wM23243*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 13	wM23244*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 14	wM23245*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 15	wM23246*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 16	wM23247*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 2	wM23233*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 3	wM23234*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 4	wM23235*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 5	wM23236*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 6	wM23237*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 7	wM23238*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 8	wM23239*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output Exp. 9	wM23240*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send A	wM23216*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send B	wM23217*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send C	wM23218*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send D	wM23219*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send E	wM23220*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send F	wM23221*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send G	wM23222*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Off Input V. Return M Output V. Send H	wM23223*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send I	wM23224*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send J	wM23225*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send K	wM23226*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send L	wM23227*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send M	wM23228*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send N	wM23229*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send O	wM23230*0AU\x0D\x0A
Mix-point Mute Off Input V. Return M Output V. Send P	wM23231*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output 1	wM23300*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output 4	wM23303*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 1	wM23308*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 2	wM23309*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 3	wM23310*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 4	wM23311*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 5	wM23312*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 6	wM23313*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 7	wM23314*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Aux 8	wM23315*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 1	wM23332*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 10	wM23341*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 11	wM23342*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 12	wM23343*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 13	wM23344*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 14	wM23345*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 15	wM23346*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 16	wM23347*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 2	wM23333*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 3	wM23334*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 4	wM23335*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 5	wM23336*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 6	wM23337*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 7	wM23338*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 8	wM23339*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output Exp. 9	wM23340*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V.	wM23316*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Send A	
Mix-point Mute Off Input V. Return N Output V. Send B	wM23317*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send C	wM23318*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send D	wM23319*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send E	wM23320*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send F	wM23321*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send G	wM23322*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send H	wM23323*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send I	wM23324*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send J	wM23325*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send K	wM23326*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send L	wM23327*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send M	wM23328*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send N	wM23329*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send O	wM23330*0AU\x0D\x0A
Mix-point Mute Off Input V. Return N Output V. Send P	wM23331*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output 1	wM23400*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output 4	wM23403*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 1	wM23408*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 2	wM23409*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 3	wM23410*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 4	wM23411*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 5	wM23412*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 6	wM23413*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 7	wM23414*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Aux 8	wM23415*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 1	wM23432*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 10	wM23441*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 11	wM23442*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute Off Input V. Return O Output Exp. 12	wM23443*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 13	wM23444*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 14	wM23445*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 15	wM23446*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 16	wM23447*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 2	wM23433*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 3	wM23434*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 4	wM23435*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 5	wM23436*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 6	wM23437*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 7	wM23438*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 8	wM23439*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output Exp. 9	wM23440*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send A	wM23416*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send B	wM23417*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send C	wM23418*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send D	wM23419*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send E	wM23420*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send F	wM23421*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send G	wM23422*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send H	wM23423*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send I	wM23424*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send J	wM23425*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send K	wM23426*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send L	wM23427*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send M	wM23428*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send N	wM23429*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute Off Input V. Return O Output V. Send O	wM23430*0AU\x0D\x0A
Mix-point Mute Off Input V. Return O Output V. Send P	wM23431*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output 1	wM23500*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output 4	wM23503*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 1	wM23508*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 2	wM23509*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 3	wM23510*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 4	wM23511*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 5	wM23512*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 6	wM23513*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 7	wM23514*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Aux 8	wM23515*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 1	wM23532*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 10	wM23541*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 11	wM23542*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 12	wM23543*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 13	wM23544*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 14	wM23545*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 15	wM23546*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 16	wM23547*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 2	wM23533*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 3	wM23534*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 4	wM23535*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 5	wM23536*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 6	wM23537*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 7	wM23538*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 8	wM23539*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output Exp. 9	wM23540*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send A	wM23516*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send B	wM23517*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send C	wM23518*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send D	wM23519*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send E	wM23520*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send F	wM23521*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send G	wM23522*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V.	wM23523*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Send H	
Mix-point Mute Off Input V. Return P Output V. Send I	wM23524*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send J	wM23525*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send K	wM23526*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send L	wM23527*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send M	wM23528*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send N	wM23529*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send O	wM23530*0AU\x0D\x0A
Mix-point Mute Off Input V. Return P Output V. Send P	wM23531*0AU\x0D\x0A
Mix-point Mute On Input 1 Output 1	wM20000*1AU\x0D\x0A
Mix-point Mute On Input 1 Output 4	wM20003*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 1	wM20008*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 2	wM20009*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 3	wM20010*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 4	wM20011*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 5	wM20012*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 6	wM20013*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 7	wM20014*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Aux 8	wM20015*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 1	wM20032*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 10	wM20041*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 11	wM20042*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 12	wM20043*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 13	wM20044*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 14	wM20045*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 15	wM20046*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 16	wM20047*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 2	wM20033*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 3	wM20034*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 4	wM20035*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 5	wM20036*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 6	wM20037*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 7	wM20038*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 8	wM20039*1AU\x0D\x0A
Mix-point Mute On Input 1 Output Exp. 9	wM20040*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send A	wM20016*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send B	wM20017*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input 1 Output V. Send C	wM20018*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send D	wM20019*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send E	wM20020*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send F	wM20021*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send G	wM20022*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send H	wM20023*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send I	wM20024*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send J	wM20025*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send K	wM20026*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send L	wM20027*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send M	wM20028*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send N	wM20029*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send O	wM20030*1AU\x0D\x0A
Mix-point Mute On Input 1 Output V. Send P	wM20031*1AU\x0D\x0A
Mix-point Mute On Input 6 Output 1	wM20500*1AU\x0D\x0A
Mix-point Mute On Input 6 Output 4	wM20503*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 1	wM20508*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 2	wM20509*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 3	wM20510*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 4	wM20511*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 5	wM20512*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 6	wM20513*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 7	wM20514*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Aux 8	wM20515*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 1	wM20532*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 10	wM20541*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 11	wM20542*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 12	wM20543*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 13	wM20544*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 14	wM20545*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 15	wM20546*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 16	wM20547*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 2	wM20533*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 3	wM20534*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 4	wM20535*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 5	wM20536*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 6	wM20537*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 7	wM20538*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 8	wM20539*1AU\x0D\x0A
Mix-point Mute On Input 6 Output Exp. 9	wM20540*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send A	wM20516*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send B	wM20517*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send C	wM20518*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send D	wM20519*1AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute On Input 6 Output V. Send E	wM20520*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send F	wM20521*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send G	wM20522*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send H	wM20523*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send I	wM20524*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send J	wM20525*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send K	wM20526*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send L	wM20527*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send M	wM20528*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send N	wM20529*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send O	wM20530*1AU\x0D\x0A
Mix-point Mute On Input 6 Output V. Send P	wM20531*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output 1	wM21200*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output 4	wM21203*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 1	wM21208*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 2	wM21209*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 3	wM21210*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 4	wM21211*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 5	wM21212*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 6	wM21213*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 7	wM21214*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Aux 8	wM21215*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 1	wM21232*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 10	wM21241*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 11	wM21242*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 12	wM21243*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 13	wM21244*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 14	wM21245*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 15	wM21246*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 16	wM21247*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 2	wM21233*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 3	wM21234*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 4	wM21235*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 5	wM21236*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 6	wM21237*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 7	wM21238*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 8	wM21239*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output Exp. 9	wM21240*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send A	wM21216*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send B	wM21217*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send C	wM21218*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send D	wM21219*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send E	wM21220*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send F	wM21221*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input Aux 1 Output V. Send G	wM21222*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send H	wM21223*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send I	wM21224*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send J	wM21225*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send K	wM21226*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send L	wM21227*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send M	wM21228*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send N	wM21229*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send O	wM21230*1AU\x0D\x0A
Mix-point Mute On Input Aux 1 Output V. Send P	wM21231*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output 1	wM21300*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output 4	wM21303*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 1	wM21308*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 2	wM21309*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 3	wM21310*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 4	wM21311*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 5	wM21312*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 6	wM21313*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 7	wM21314*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Aux 8	wM21315*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 1	wM21332*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 10	wM21341*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 11	wM21342*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 12	wM21343*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 13	wM21344*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 14	wM21345*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 15	wM21346*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 16	wM21347*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 2	wM21333*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 3	wM21334*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 4	wM21335*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 5	wM21336*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 6	wM21337*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 7	wM21338*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 8	wM21339*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output Exp. 9	wM21340*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send A	wM21316*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send B	wM21317*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send C	wM21318*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send D	wM21319*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send E	wM21320*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send F	wM21321*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send G	wM21322*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send H	wM21323*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input Aux 2 Output V. Send I	wM21324*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send J	wM21325*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send K	wM21326*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send L	wM21327*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send M	wM21328*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send N	wM21329*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send O	wM21330*1AU\x0D\x0A
Mix-point Mute On Input Aux 2 Output V. Send P	wM21331*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output 1	wM21400*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output 4	wM21403*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 1	wM21408*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 2	wM21409*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 3	wM21410*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 4	wM21411*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 5	wM21412*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 6	wM21413*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 7	wM21414*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Aux 8	wM21415*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 1	wM21432*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 10	wM21441*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 11	wM21442*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 12	wM21443*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 13	wM21444*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 14	wM21445*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 15	wM21446*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 16	wM21447*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 2	wM21433*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 3	wM21434*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 4	wM21435*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 5	wM21436*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 6	wM21437*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 7	wM21438*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 8	wM21439*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output Exp. 9	wM21440*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send A	wM21416*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send B	wM21417*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send C	wM21418*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send D	wM21419*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send E	wM21420*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send F	wM21421*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send G	wM21422*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send H	wM21423*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send I	wM21424*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send J	wM21425*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input Aux 3 Output V. Send K	wM21426*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send L	wM21427*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send M	wM21428*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send N	wM21429*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send O	wM21430*1AU\x0D\x0A
Mix-point Mute On Input Aux 3 Output V. Send P	wM21431*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output 1	wM21500*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output 4	wM21503*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 1	wM21508*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 2	wM21509*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 3	wM21510*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 4	wM21511*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 5	wM21512*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 6	wM21513*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 7	wM21514*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Aux 8	wM21515*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 1	wM21532*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 10	wM21541*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 11	wM21542*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 12	wM21543*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 13	wM21544*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 14	wM21545*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 15	wM21546*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 16	wM21547*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 2	wM21533*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 3	wM21534*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 4	wM21535*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 5	wM21536*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 6	wM21537*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 7	wM21538*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 8	wM21539*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output Exp. 9	wM21540*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send A	wM21516*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send B	wM21517*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send C	wM21518*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send D	wM21519*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send E	wM21520*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send F	wM21521*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send G	wM21522*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send H	wM21523*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send I	wM21524*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send J	wM21525*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send K	wM21526*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send L	wM21527*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute On Input Aux 4 Output V. Send M	wM21528*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send N	wM21529*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send O	wM21530*1AU\x0D\x0A
Mix-point Mute On Input Aux 4 Output V. Send P	wM21531*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output 1	wM21600*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output 4	wM21603*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 1	wM21608*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 2	wM21609*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 3	wM21610*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 4	wM21611*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 5	wM21612*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 6	wM21613*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 7	wM21614*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Aux 8	wM21615*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 1	wM21632*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 10	wM21641*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 11	wM21642*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 12	wM21643*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 13	wM21644*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 14	wM21645*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 15	wM21646*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 16	wM21647*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 2	wM21633*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 3	wM21634*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 4	wM21635*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 5	wM21636*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 6	wM21637*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 7	wM21638*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 8	wM21639*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output Exp. 9	wM21640*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send A	wM21616*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send B	wM21617*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send C	wM21618*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send D	wM21619*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send E	wM21620*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send F	wM21621*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send G	wM21622*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send H	wM21623*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send I	wM21624*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send J	wM21625*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send K	wM21626*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send L	wM21627*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send M	wM21628*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send N	wM21629*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input Aux 5 Output V. Send O	wM21630*1AU\x0D\x0A
Mix-point Mute On Input Aux 5 Output V. Send P	wM21631*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output 1	wM21700*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output 4	wM21703*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 1	wM21708*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 2	wM21709*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 3	wM21710*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 4	wM21711*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 5	wM21712*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 6	wM21713*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 7	wM21714*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Aux 8	wM21715*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 1	wM21732*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 10	wM21741*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 11	wM21742*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 12	wM21743*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 13	wM21744*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 14	wM21745*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 15	wM21746*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 16	wM21747*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 2	wM21733*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 3	wM21734*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 4	wM21735*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 5	wM21736*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 6	wM21737*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 7	wM21738*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 8	wM21739*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output Exp. 9	wM21740*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send A	wM21716*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send B	wM21717*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send C	wM21718*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send D	wM21719*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send E	wM21720*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send F	wM21721*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send G	wM21722*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send H	wM21723*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send I	wM21724*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send J	wM21725*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send K	wM21726*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send L	wM21727*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send M	wM21728*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send N	wM21729*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send O	wM21730*1AU\x0D\x0A
Mix-point Mute On Input Aux 6 Output V. Send P	wM21731*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input Aux 7 Output 1	wM21800*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output 4	wM21803*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 1	wM21808*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 2	wM21809*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 3	wM21810*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 4	wM21811*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 5	wM21812*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 6	wM21813*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 7	wM21814*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Aux 8	wM21815*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 1	wM21832*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 10	wM21841*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 11	wM21842*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 12	wM21843*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 13	wM21844*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 14	wM21845*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 15	wM21846*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 16	wM21847*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 2	wM21833*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 3	wM21834*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 4	wM21835*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 5	wM21836*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 6	wM21837*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 7	wM21838*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 8	wM21839*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output Exp. 9	wM21840*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send A	wM21816*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send B	wM21817*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send C	wM21818*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send D	wM21819*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send E	wM21820*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send F	wM21821*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send G	wM21822*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send H	wM21823*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send I	wM21824*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send J	wM21825*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send K	wM21826*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send L	wM21827*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send M	wM21828*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send N	wM21829*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send O	wM21830*1AU\x0D\x0A
Mix-point Mute On Input Aux 7 Output V. Send P	wM21831*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output 1	wM21900*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output 4	wM21903*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input Aux 8 Output Aux 1	wM21908*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Aux 2	wM21909*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Aux 3	wM21910*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Aux 4	wM21911*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Aux 5	wM21912*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Aux 6	wM21913*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Aux 7	wM21914*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Aux 8	wM21915*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 1	wM21932*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 10	wM21941*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 11	wM21942*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 12	wM21943*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 13	wM21944*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 14	wM21945*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 15	wM21946*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 16	wM21947*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 2	wM21933*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 3	wM21934*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 4	wM21935*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 5	wM21936*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 6	wM21937*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 7	wM21938*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 8	wM21939*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output Exp. 9	wM21940*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send A	wM21916*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send B	wM21917*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send C	wM21918*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send D	wM21919*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send E	wM21920*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send F	wM21921*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send G	wM21922*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send H	wM21923*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send I	wM21924*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send J	wM21925*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send K	wM21926*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send L	wM21927*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send M	wM21928*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send N	wM21929*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send O	wM21930*1AU\x0D\x0A
Mix-point Mute On Input Aux 8 Output V. Send P	wM21931*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output 1	wM22000*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output 4	wM22003*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Aux 1	wM22008*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Aux 2	wM22009*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute On Input V. Return A Output Aux 3	wM22010*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Aux 4	wM22011*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Aux 5	wM22012*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Aux 6	wM22013*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Aux 7	wM22014*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Aux 8	wM22015*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 1	wM22032*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 10	wM22041*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 11	wM22042*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 12	wM22043*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 13	wM22044*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 14	wM22045*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 15	wM22046*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 16	wM22047*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 2	wM22033*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 3	wM22034*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 4	wM22035*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 5	wM22036*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 6	wM22037*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 7	wM22038*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 8	wM22039*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output Exp. 9	wM22040*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send A	wM22016*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send B	wM22017*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send C	wM22018*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send D	wM22019*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send E	wM22020*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send F	wM22021*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send G	wM22022*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send H	wM22023*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send I	wM22024*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send J	wM22025*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send K	wM22026*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send L	wM22027*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input V. Return A Output V. Send M	wM22028*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send N	wM22029*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send O	wM22030*1AU\x0D\x0A
Mix-point Mute On Input V. Return A Output V. Send P	wM22031*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output 1	wM22100*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output 4	wM22103*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 1	wM22108*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 2	wM22109*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 3	wM22110*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 4	wM22111*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 5	wM22112*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 6	wM22113*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 7	wM22114*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Aux 8	wM22115*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 1	wM22132*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 10	wM22141*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 11	wM22142*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 12	wM22143*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 13	wM22144*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 14	wM22145*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 15	wM22146*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 16	wM22147*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 2	wM22133*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 3	wM22134*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 4	wM22135*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 5	wM22136*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 6	wM22137*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 7	wM22138*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 8	wM22139*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output Exp. 9	wM22140*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send A	wM22116*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send B	wM22117*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send C	wM22118*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send D	wM22119*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send E	wM22120*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send	wM22121*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

F	
Mix-point Mute On Input V. Return B Output V. Send G	wM22122*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send H	wM22123*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send I	wM22124*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send J	wM22125*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send K	wM22126*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send L	wM22127*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send M	wM22128*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send N	wM22129*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send O	wM22130*1AU\x0D\x0A
Mix-point Mute On Input V. Return B Output V. Send P	wM22131*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output 1	wM22200*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output 4	wM22203*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 1	wM22208*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 2	wM22209*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 3	wM22210*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 4	wM22211*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 5	wM22212*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 6	wM22213*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 7	wM22214*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Aux 8	wM22215*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 1	wM22232*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 10	wM22241*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 11	wM22242*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 12	wM22243*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 13	wM22244*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 14	wM22245*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 15	wM22246*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 16	wM22247*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 2	wM22233*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 3	wM22234*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 4	wM22235*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 5	wM22236*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 6	wM22237*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 7	wM22238*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input V. Return C Output Exp. 8	wM22239*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output Exp. 9	wM22240*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send A	wM22216*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send B	wM22217*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send C	wM22218*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send D	wM22219*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send E	wM22220*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send F	wM22221*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send G	wM22222*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send H	wM22223*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send I	wM22224*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send J	wM22225*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send K	wM22226*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send L	wM22227*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send M	wM22228*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send N	wM22229*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send O	wM22230*1AU\x0D\x0A
Mix-point Mute On Input V. Return C Output V. Send P	wM22231*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output 1	wM22300*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output 4	wM22303*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 1	wM22308*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 2	wM22309*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 3	wM22310*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 4	wM22311*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 5	wM22312*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 6	wM22313*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 7	wM22314*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Aux 8	wM22315*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 1	wM22332*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 10	wM22341*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute On Input V. Return D Output Exp. 11	wM22342*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 12	wM22343*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 13	wM22344*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 14	wM22345*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 15	wM22346*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 16	wM22347*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 2	wM22333*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 3	wM22334*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 4	wM22335*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 5	wM22336*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 6	wM22337*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 7	wM22338*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 8	wM22339*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output Exp. 9	wM22340*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send A	wM22316*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send B	wM22317*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send C	wM22318*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send D	wM22319*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send E	wM22320*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send F	wM22321*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send G	wM22322*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send H	wM22323*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send I	wM22324*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send J	wM22325*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send K	wM22326*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send L	wM22327*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send M	wM22328*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send N	wM22329*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send O	wM22330*1AU\x0D\x0A
Mix-point Mute On Input V. Return D Output V. Send P	wM22331*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input V. Return E Output 1	wM22400*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output 4	wM22403*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 1	wM22408*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 2	wM22409*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 3	wM22410*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 4	wM22411*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 5	wM22412*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 6	wM22413*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 7	wM22414*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Aux 8	wM22415*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 1	wM22432*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 10	wM22441*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 11	wM22442*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 12	wM22443*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 13	wM22444*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 14	wM22445*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 15	wM22446*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 16	wM22447*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 2	wM22433*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 3	wM22434*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 4	wM22435*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 5	wM22436*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 6	wM22437*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 7	wM22438*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 8	wM22439*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output Exp. 9	wM22440*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send A	wM22416*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send B	wM22417*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send C	wM22418*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send D	wM22419*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send E	wM22420*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send F	wM22421*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send G	wM22422*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send H	wM22423*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send I	wM22424*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send	wM22425*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

J	
Mix-point Mute On Input V. Return E Output V. Send K	wM22426*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send L	wM22427*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send M	wM22428*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send N	wM22429*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send O	wM22430*1AU\x0D\x0A
Mix-point Mute On Input V. Return E Output V. Send P	wM22431*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output 1	wM22500*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output 4	wM22503*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 1	wM22508*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 2	wM22509*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 3	wM22510*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 4	wM22511*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 5	wM22512*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 6	wM22513*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 7	wM22514*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Aux 8	wM22515*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 1	wM22532*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 10	wM22541*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 11	wM22542*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 12	wM22543*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 13	wM22544*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 14	wM22545*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 15	wM22546*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 16	wM22547*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 2	wM22533*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 3	wM22534*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 4	wM22535*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 5	wM22536*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 6	wM22537*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 7	wM22538*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 8	wM22539*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output Exp. 9	wM22540*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send A	wM22516*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send B	wM22517*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send C	wM22518*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input V. Return F Output V. Send D	wM22519*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send E	wM22520*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send F	wM22521*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send G	wM22522*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send H	wM22523*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send I	wM22524*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send J	wM22525*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send K	wM22526*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send L	wM22527*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send M	wM22528*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send N	wM22529*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send O	wM22530*1AU\x0D\x0A
Mix-point Mute On Input V. Return F Output V. Send P	wM22531*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output 1	wM22600*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output 4	wM22603*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 1	wM22608*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 2	wM22609*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 3	wM22610*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 4	wM22611*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 5	wM22612*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 6	wM22613*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 7	wM22614*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Aux 8	wM22615*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 1	wM22632*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 10	wM22641*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 11	wM22642*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 12	wM22643*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 13	wM22644*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 14	wM22645*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 15	wM22646*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 16	wM22647*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 2	wM22633*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 3	wM22634*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return G Output Exp. 4	wM22635*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 5	wM22636*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 6	wM22637*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 7	wM22638*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 8	wM22639*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output Exp. 9	wM22640*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send A	wM22616*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send B	wM22617*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send C	wM22618*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send D	wM22619*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send E	wM22620*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send F	wM22621*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send G	wM22622*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send H	wM22623*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send I	wM22624*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send J	wM22625*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send K	wM22626*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send L	wM22627*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send M	wM22628*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send N	wM22629*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send O	wM22630*1AU\x0D\x0A
Mix-point Mute On Input V. Return G Output V. Send P	wM22631*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output 1	wM22700*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output 4	wM22703*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Aux 1	wM22708*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Aux 2	wM22709*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Aux 3	wM22710*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Aux 4	wM22711*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Aux 5	wM22712*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Aux 6	wM22713*1AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Mute On Input V. Return H Output Aux 7	wM22714*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Aux 8	wM22715*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 1	wM22732*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 10	wM22741*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 11	wM22742*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 12	wM22743*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 13	wM22744*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 14	wM22745*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 15	wM22746*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 16	wM22747*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 2	wM22733*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 3	wM22734*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 4	wM22735*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 5	wM22736*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 6	wM22737*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 7	wM22738*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 8	wM22739*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output Exp. 9	wM22740*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send A	wM22716*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send B	wM22717*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send C	wM22718*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send D	wM22719*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send E	wM22720*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send F	wM22721*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send G	wM22722*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send H	wM22723*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send I	wM22724*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send J	wM22725*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send K	wM22726*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send L	wM22727*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send M	wM22728*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send N	wM22729*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute On Input V. Return H Output V. Send O	wM22730*1AU\x0D\x0A
Mix-point Mute On Input V. Return H Output V. Send P	wM22731*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output 1	wM22800*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output 4	wM22803*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 1	wM22808*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 2	wM22809*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 3	wM22810*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 4	wM22811*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 5	wM22812*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 6	wM22813*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 7	wM22814*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Aux 8	wM22815*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 1	wM22832*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 10	wM22841*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 11	wM22842*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 12	wM22843*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 13	wM22844*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 14	wM22845*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 15	wM22846*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 16	wM22847*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 2	wM22833*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 3	wM22834*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 4	wM22835*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 5	wM22836*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 6	wM22837*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 7	wM22838*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 8	wM22839*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output Exp. 9	wM22840*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send A	wM22816*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send B	wM22817*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send C	wM22818*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send D	wM22819*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send E	wM22820*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send F	wM22821*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send G	wM22822*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send	wM22823*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

H	
Mix-point Mute On Input V. Return I Output V. Send I	wM22824*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send J	wM22825*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send K	wM22826*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send L	wM22827*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send M	wM22828*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send N	wM22829*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send O	wM22830*1AU\x0D\x0A
Mix-point Mute On Input V. Return I Output V. Send P	wM22831*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output 1	wM22900*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output 4	wM22903*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 1	wM22908*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 2	wM22909*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 3	wM22910*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 4	wM22911*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 5	wM22912*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 6	wM22913*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 7	wM22914*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Aux 8	wM22915*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 1	wM22932*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 10	wM22941*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 11	wM22942*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 12	wM22943*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 13	wM22944*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 14	wM22945*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 15	wM22946*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 16	wM22947*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 2	wM22933*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 3	wM22934*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 4	wM22935*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 5	wM22936*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 6	wM22937*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 7	wM22938*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 8	wM22939*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output Exp. 9	wM22940*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send A	wM22916*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Mute On Input V. Return J Output V. Send B	wM22917*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send C	wM22918*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send D	wM22919*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send E	wM22920*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send F	wM22921*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send G	wM22922*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send H	wM22923*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send I	wM22924*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send J	wM22925*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send K	wM22926*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send L	wM22927*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send M	wM22928*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send N	wM22929*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send O	wM22930*1AU\x0D\x0A
Mix-point Mute On Input V. Return J Output V. Send P	wM22931*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output 1	wM23000*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output 4	wM23003*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 1	wM23008*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 2	wM23009*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 3	wM23010*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 4	wM23011*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 5	wM23012*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 6	wM23013*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 7	wM23014*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Aux 8	wM23015*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 1	wM23032*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 10	wM23041*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 11	wM23042*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 12	wM23043*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 13	wM23044*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 14	wM23045*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input V. Return K Output Exp. 15	wM23046*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 16	wM23047*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 2	wM23033*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 3	wM23034*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 4	wM23035*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 5	wM23036*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 6	wM23037*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 7	wM23038*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 8	wM23039*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output Exp. 9	wM23040*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send A	wM23016*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send B	wM23017*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send C	wM23018*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send D	wM23019*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send E	wM23020*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send F	wM23021*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send G	wM23022*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send H	wM23023*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send I	wM23024*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send J	wM23025*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send K	wM23026*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send L	wM23027*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send M	wM23028*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send N	wM23029*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send O	wM23030*1AU\x0D\x0A
Mix-point Mute On Input V. Return K Output V. Send P	wM23031*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output 1	wM23100*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output 4	wM23103*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Aux 1	wM23108*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Aux 2	wM23109*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute On Input V. Return L Output Aux 3	wM23110*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Aux 4	wM23111*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Aux 5	wM23112*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Aux 6	wM23113*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Aux 7	wM23114*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Aux 8	wM23115*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 1	wM23132*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 10	wM23141*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 11	wM23142*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 12	wM23143*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 13	wM23144*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 14	wM23145*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 15	wM23146*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 16	wM23147*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 2	wM23133*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 3	wM23134*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 4	wM23135*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 5	wM23136*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 6	wM23137*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 7	wM23138*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 8	wM23139*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output Exp. 9	wM23140*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send A	wM23116*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send B	wM23117*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send C	wM23118*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send D	wM23119*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send E	wM23120*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send F	wM23121*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send G	wM23122*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send H	wM23123*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send I	wM23124*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send J	wM23125*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send K	wM23126*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send L	wM23127*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute On Input V. Return L Output V. Send M	wM23128*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send N	wM23129*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send O	wM23130*1AU\x0D\x0A
Mix-point Mute On Input V. Return L Output V. Send P	wM23131*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output 1	wM23200*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output 4	wM23203*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 1	wM23208*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 2	wM23209*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 3	wM23210*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 4	wM23211*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 5	wM23212*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 6	wM23213*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 7	wM23214*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Aux 8	wM23215*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 1	wM23232*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 10	wM23241*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 11	wM23242*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 12	wM23243*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 13	wM23244*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 14	wM23245*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 15	wM23246*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 16	wM23247*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 2	wM23233*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 3	wM23234*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 4	wM23235*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 5	wM23236*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 6	wM23237*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 7	wM23238*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 8	wM23239*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output Exp. 9	wM23240*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send A	wM23216*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send B	wM23217*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V.	wM23218*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Send C	
Mix-point Mute On Input V. Return M Output V. Send D	wM23219*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send E	wM23220*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send F	wM23221*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send G	wM23222*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send H	wM23223*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send I	wM23224*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send J	wM23225*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send K	wM23226*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send L	wM23227*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send M	wM23228*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send N	wM23229*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send O	wM23230*1AU\x0D\x0A
Mix-point Mute On Input V. Return M Output V. Send P	wM23231*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output 1	wM23300*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output 4	wM23303*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 1	wM23308*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 2	wM23309*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 3	wM23310*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 4	wM23311*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 5	wM23312*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 6	wM23313*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 7	wM23314*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Aux 8	wM23315*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 1	wM23332*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 10	wM23341*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 11	wM23342*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 12	wM23343*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 13	wM23344*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 14	wM23345*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 15	wM23346*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 16	wM23347*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 2	wM23333*1AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Mute On Input V. Return N Output Exp. 3	wM23334*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 4	wM23335*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 5	wM23336*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 6	wM23337*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 7	wM23338*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 8	wM23339*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output Exp. 9	wM23340*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send A	wM23316*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send B	wM23317*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send C	wM23318*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send D	wM23319*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send E	wM23320*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send F	wM23321*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send G	wM23322*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send H	wM23323*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send I	wM23324*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send J	wM23325*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send K	wM23326*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send L	wM23327*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send M	wM23328*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send N	wM23329*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send O	wM23330*1AU\x0D\x0A
Mix-point Mute On Input V. Return N Output V. Send P	wM23331*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output 1	wM23400*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output 4	wM23403*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Aux 1	wM23408*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Aux 2	wM23409*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Aux 3	wM23410*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Aux 4	wM23411*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Aux 5	wM23412*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute On Input V. Return O Output Aux 6	wM23413*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Aux 7	wM23414*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Aux 8	wM23415*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 1	wM23432*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 10	wM23441*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 11	wM23442*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 12	wM23443*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 13	wM23444*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 14	wM23445*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 15	wM23446*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 16	wM23447*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 2	wM23433*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 3	wM23434*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 4	wM23435*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 5	wM23436*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 6	wM23437*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 7	wM23438*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 8	wM23439*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output Exp. 9	wM23440*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send A	wM23416*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send B	wM23417*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send C	wM23418*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send D	wM23419*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send E	wM23420*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send F	wM23421*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send G	wM23422*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send H	wM23423*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send I	wM23424*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send J	wM23425*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send K	wM23426*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send L	wM23427*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send M	wM23428*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V.	wM23429*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Send N	
Mix-point Mute On Input V. Return O Output V. Send O	wM23430*1AU\x0D\x0A
Mix-point Mute On Input V. Return O Output V. Send P	wM23431*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output 1	wM23500*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output 4	wM23503*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 1	wM23508*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 2	wM23509*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 3	wM23510*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 4	wM23511*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 5	wM23512*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 6	wM23513*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 7	wM23514*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Aux 8	wM23515*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 1	wM23532*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 10	wM23541*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 11	wM23542*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 12	wM23543*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 13	wM23544*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 14	wM23545*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 15	wM23546*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 16	wM23547*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 2	wM23533*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 3	wM23534*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 4	wM23535*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 5	wM23536*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 6	wM23537*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 7	wM23538*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 8	wM23539*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output Exp. 9	wM23540*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send A	wM23516*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send B	wM23517*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send C	wM23518*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send D	wM23519*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send E	wM23520*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send F	wM23521*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send G	wM23522*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute On Input V. Return P Output V. Send H	wM23523*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send I	wM23524*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send J	wM23525*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send K	wM23526*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send L	wM23527*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send M	wM23528*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send N	wM23529*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send O	wM23530*1AU\x0D\x0A
Mix-point Mute On Input V. Return P Output V. Send P	wM23531*1AU\x0D\x0A
Output Attenuation 0 Output 1	wG60000*00000AU\x0D\x0A
Output Attenuation 0 Output 4	wG60003*00000AU\x0D\x0A
Output Attenuation -100 Output 1	wG60000*-1000AU\x0D\x0A
Output Attenuation -100 Output 4	wG60003*-1000AU\x0D\x0A
Output Mute Off Output 1	wM60000*0AU\x0D\x0A
Output Mute Off Output 4	wM60003*0AU\x0D\x0A
Output Mute On Output 1	wM60000*1AU\x0D\x0A
Output Mute On Output 4	wM60003*1AU\x0D\x0A
Output Post-mixer Trim 12 Output 1	wG60100*00120AU\x0D\x0A
Output Post-mixer Trim -12 Output 1	wG60100*-0120AU\x0D\x0A
Output Post-mixer Trim 12 Output 4	wG60103*00120AU\x0D\x0A
Output Post-mixer Trim -12 Output 4	wG60103*-0120AU\x0D\x0A
Phantom Power Disable Input 1	wZ40000*0AU\x0D
Phantom Power Disable Input 6	wZ40005*0AU\x0D
Phantom Power Enable Input 1	wZ40000*1AU\x0D
Phantom Power Enable Input 6	wZ40005*1AU\x0D
Player Control Start Player ID 1	w1*1PLAY\x0D
Player Control Start Player ID 8	w8*1PLAY\x0D
Player Control Stop Player ID 1	w1*0PLAY\x0D
Player Control Stop Player ID 8	w8*0PLAY\x0D
Player Filename Command None Player ID 1	wA1*StringCPLY\x0D
Player Filename Command None Player ID 8	wA8*StringCPLY\x0D
Player Repeat Play Once Player ID 1	wM1*0CPLY\x0D
Player Repeat Play Once Player ID 8	wM8*0CPLY\x0D
Player Repeat Repeat Player ID 1	wM1*1CPLY\x0D
Player Repeat Repeat Player ID 8	wM8*1CPLY\x0D
Pre-mixer Gain -100 Input 1	wG40100*-1000AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Pre-mixer Gain -100 Input 6	wG40105*-1000AU\x0D\x0A
Pre-mixer Gain 12 Input 1	wG40100*00120AU\x0D\x0A
Pre-mixer Gain 12 Input 6	wG40105*00120AU\x0D\x0A
Pre-mixer Mute Off Input 1	wM40100*0AU\x0D\x0A
Pre-mixer Mute Off Input 6	wM40105*0AU\x0D\x0A
Pre-mixer Mute On Input 1	wM40100*1AU\x0D\x0A
Pre-mixer Mute On Input 6	wM40105*1AU\x0D\x0A
Preset Recall 1	1.
Preset Recall 32	32.
Preset Save 1	\x1B[1*AU\x0D1*0*0*0,
Preset Save 32	\x1B[1*AU\x0D32*0*0*0,
Virtual Return Gain -100 Input A	wG50100*-1000AU\x0D\x0A
Virtual Return Gain -100 Input B	wG50101*-1000AU\x0D\x0A
Virtual Return Gain -100 Input C	wG50102*-1000AU\x0D\x0A
Virtual Return Gain -100 Input D	wG50103*-1000AU\x0D\x0A
Virtual Return Gain -100 Input E	wG50104*-1000AU\x0D\x0A
Virtual Return Gain -100 Input F	wG50105*-1000AU\x0D\x0A
Virtual Return Gain -100 Input G	wG50106*-1000AU\x0D\x0A
Virtual Return Gain -100 Input H	wG50107*-1000AU\x0D\x0A
Virtual Return Gain -100 Input I	wG50108*-1000AU\x0D\x0A
Virtual Return Gain -100 Input J	wG50109*-1000AU\x0D\x0A
Virtual Return Gain -100 Input K	wG50110*-1000AU\x0D\x0A
Virtual Return Gain -100 Input L	wG50111*-1000AU\x0D\x0A
Virtual Return Gain -100 Input M	wG50112*-1000AU\x0D\x0A
Virtual Return Gain -100 Input N	wG50113*-1000AU\x0D\x0A
Virtual Return Gain -100 Input O	wG50114*-1000AU\x0D\x0A
Virtual Return Gain -100 Input P	wG50115*-1000AU\x0D\x0A
Virtual Return Gain 12 Input A	wG50100*00120AU\x0D\x0A
Virtual Return Gain 12 Input B	wG50101*00120AU\x0D\x0A
Virtual Return Gain 12 Input C	wG50102*00120AU\x0D\x0A
Virtual Return Gain 12 Input D	wG50103*00120AU\x0D\x0A
Virtual Return Gain 12 Input E	wG50104*00120AU\x0D\x0A
Virtual Return Gain 12 Input F	wG50105*00120AU\x0D\x0A
Virtual Return Gain 12 Input G	wG50106*00120AU\x0D\x0A
Virtual Return Gain 12 Input H	wG50107*00120AU\x0D\x0A
Virtual Return Gain 12 Input I	wG50108*00120AU\x0D\x0A
Virtual Return Gain 12 Input J	wG50109*00120AU\x0D\x0A
Virtual Return Gain 12 Input K	wG50110*00120AU\x0D\x0A
Virtual Return Gain 12 Input L	wG50111*00120AU\x0D\x0A
Virtual Return Gain 12 Input M	wG50112*00120AU\x0D\x0A
Virtual Return Gain 12 Input N	wG50113*00120AU\x0D\x0A
Virtual Return Gain 12 Input O	wG50114*00120AU\x0D\x0A
Virtual Return Gain 12 Input P	wG50115*00120AU\x0D\x0A
Virtual Return Mute Off Input A	wM50100*0AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Virtual Return Mute Off Input B	wM50101*0AU\x0D\x0A
Virtual Return Mute Off Input C	wM50102*0AU\x0D\x0A
Virtual Return Mute Off Input D	wM50103*0AU\x0D\x0A
Virtual Return Mute Off Input E	wM50104*0AU\x0D\x0A
Virtual Return Mute Off Input F	wM50105*0AU\x0D\x0A
Virtual Return Mute Off Input G	wM50106*0AU\x0D\x0A
Virtual Return Mute Off Input H	wM50107*0AU\x0D\x0A
Virtual Return Mute Off Input I	wM50108*0AU\x0D\x0A
Virtual Return Mute Off Input J	wM50109*0AU\x0D\x0A
Virtual Return Mute Off Input K	wM50110*0AU\x0D\x0A
Virtual Return Mute Off Input L	wM50111*0AU\x0D\x0A
Virtual Return Mute Off Input M	wM50112*0AU\x0D\x0A
Virtual Return Mute Off Input N	wM50113*0AU\x0D\x0A
Virtual Return Mute Off Input O	wM50114*0AU\x0D\x0A
Virtual Return Mute Off Input P	wM50115*0AU\x0D\x0A
Virtual Return Mute On Input A	wM50100*1AU\x0D\x0A
Virtual Return Mute On Input B	wM50101*1AU\x0D\x0A
Virtual Return Mute On Input C	wM50102*1AU\x0D\x0A
Virtual Return Mute On Input D	wM50103*1AU\x0D\x0A
Virtual Return Mute On Input E	wM50104*1AU\x0D\x0A
Virtual Return Mute On Input F	wM50105*1AU\x0D\x0A
Virtual Return Mute On Input G	wM50106*1AU\x0D\x0A
Virtual Return Mute On Input H	wM50107*1AU\x0D\x0A
Virtual Return Mute On Input I	wM50108*1AU\x0D\x0A
Virtual Return Mute On Input J	wM50109*1AU\x0D\x0A
Virtual Return Mute On Input K	wM50110*1AU\x0D\x0A
Virtual Return Mute On Input L	wM50111*1AU\x0D\x0A
Virtual Return Mute On Input M	wM50112*1AU\x0D\x0A
Virtual Return Mute On Input N	wM50113*1AU\x0D\x0A
Virtual Return Mute On Input O	wM50114*1AU\x0D\x0A
Virtual Return Mute On Input P	wM50115*1AU\x0D\x0A

Appendix B. Update Commands

Auto Answer Delay Line 1	\x1BAD1VOIP\x0D\x0A
Auto Answer Delay Line 8	\x1BAD8VOIP\x0D\x0A
Auto Answer Mode Line 1	\x1BAA1VOIP\x0D\x0A
Auto Answer Mode Line 8	\x1BAA8VOIP\x0D\x0A
Aux Input Gain Input 1	wG40012AU\x0D\x0A
Aux Input Gain Input 8	wG40019AU\x0D\x0A
Aux Input Mute Input 1	wM40012AU\x0D\x0A
Aux Input Mute Input 8	wM40019AU\x0D\x0A
Aux Input Pre-mixer Gain Input 1	wG40112AU\x0D\x0A
Aux Input Pre-mixer Gain Input 8	wG40119AU\x0D\x0A
Aux Input Pre-mixer Mute Input 1	wM40112AU\x0D\x0A
Aux Input Pre-mixer Mute Input 8	wM40119AU\x0D\x0A
Aux Output Gain Output 1	wG60008AU\x0D\x0A
Aux Output Gain Output 8	wG60015AU\x0D\x0A
Aux Output Mute Output 1	wM60008AU\x0D\x0A
Aux Output Mute Output 8	wM60015AU\x0D\x0A
Aux Output Post-mixer Trim Output 1	wG60108AU\x0D\x0A
Aux Output Post-mixer Trim Output 8	wG60115AU\x0D\x0A
Call Duration Line 1 Appearance 1	\x1BDUR1,1VOIP\x0D\x0A
Call Duration Line 1 Appearance 8	\x1BDUR1,8VOIP\x0D\x0A
Call Duration Line 8 Appearance 1	\x1BDUR8,1VOIP\x0D\x0A
Call Duration Line 8 Appearance 8	\x1BDUR8,8VOIP\x0D\x0A
Call Status Line 1 Appearance 1	\x1BLS1VOIP\x0D\x0A
Call Status Line 1 Appearance 8	\x1BLS1VOIP\x0D\x0A
Call Status Line 8 Appearance 1	\x1BLS8VOIP\x0D\x0A
Call Status Line 8 Appearance 8	\x1BLS8VOIP\x0D\x0A
Caller Name Line 1 Appearance 1	\x1BNAME1,1VOIP\x0D\x0A
Caller Name Line 1 Appearance 8	\x1BNAME1,8VOIP\x0D\x0A
Caller Name Line 8 Appearance 1	\x1BNAME8,1VOIP\x0D\x0A
Caller Name Line 8 Appearance 8	\x1BNAME8,8VOIP\x0D\x0A
Digital Input Gain Input 1	wH40000AU\x0D\x0A
Digital Input Gain Input 6	wH40005AU\x0D\x0A
Digital Input Status Input 1	\x1B1GPI\x0D\x0A
Digital Input Status Input 6	\x1B6GPI\x0D\x0A
Do Not Disturb Line 1	\x1BDND1VOIP\x0D\x0A
Do Not Disturb Line 8	\x1BDND8VOIP\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output 1	wG23600AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output 4	wG23603AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Aux 1	wG23608AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Aux 2	wG23609AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Aux 3	wG23610AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Aux 4	wG23611AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Gain Input 1 Output Aux 5	wG23612AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Aux 6	wG23613AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Aux 7	wG23614AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Aux 8	wG23615AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 1	wG23632AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 10	wG23641AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 11	wG23642AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 12	wG23643AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 13	wG23644AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 14	wG23645AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 15	wG23646AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 16	wG23647AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 2	wG23633AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 3	wG23634AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 4	wG23635AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 5	wG23636AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 6	wG23637AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 7	wG23638AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 8	wG23639AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output Exp. 9	wG23640AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send A	wG23616AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send B	wG23617AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send C	wG23618AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send D	wG23619AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send E	wG23620AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send F	wG23621AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send G	wG23622AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send H	wG23623AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send I	wG23624AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send J	wG23625AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send K	wG23626AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send L	wG23627AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send M	wG23628AU\x0D\x0A

Global Scripter Module Communication Sheet

Expansion Bus Mix-point Gain Input 1 Output V. Send N	wG23629AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send O	wG23630AU\x0D\x0A
Expansion Bus Mix-point Gain Input 1 Output V. Send P	wG23631AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output 1	wG25100AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output 4	wG25103AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 1	wG25108AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 2	wG25109AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 3	wG25110AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 4	wG25111AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 5	wG25112AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 6	wG25113AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 7	wG25114AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Aux 8	wG25115AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 1	wG25132AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 10	wG25141AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 11	wG25142AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 12	wG25143AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 13	wG25144AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 14	wG25145AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 15	wG25146AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 16	wG25147AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 2	wG25133AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 3	wG25134AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 4	wG25135AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 5	wG25136AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 6	wG25137AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 7	wG25138AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 8	wG25139AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output Exp. 9	wG25140AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send A	wG25116AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send B	wG25117AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send C	wG25118AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V.	wG25119AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Send D	
Expansion Bus Mix-point Gain Input 16 Output V. Send E	wG25120AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send F	wG25121AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send G	wG25122AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send H	wG25123AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send I	wG25124AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send J	wG25125AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send K	wG25126AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send L	wG25127AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send M	wG25128AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send N	wG25129AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send O	wG25130AU\x0D\x0A
Expansion Bus Mix-point Gain Input 16 Output V. Send P	wG25131AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output 1	wG28300AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output 4	wG28303AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 1	wG28308AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 2	wG28309AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 3	wG28310AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 4	wG28311AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 5	wG28312AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 6	wG28313AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 7	wG28314AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Aux 8	wG28315AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 1	wG28332AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 10	wG28341AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 11	wG28342AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 12	wG28343AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 13	wG28344AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 14	wG28345AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Gain Input 48 Output Exp. 15	wG28346AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 16	wG28347AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 2	wG28333AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 3	wG28334AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 4	wG28335AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 5	wG28336AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 6	wG28337AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 7	wG28338AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 8	wG28339AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output Exp. 9	wG28340AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send A	wG28316AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send B	wG28317AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send C	wG28318AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send D	wG28319AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send E	wG28320AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send F	wG28321AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send G	wG28322AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send H	wG28323AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send I	wG28324AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send J	wG28325AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send K	wG28326AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send L	wG28327AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send M	wG28328AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send N	wG28329AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send O	wG28330AU\x0D\x0A
Expansion Bus Mix-point Gain Input 48 Output V. Send P	wG28331AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output 1	wM23600AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output 4	wM23603AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Mute Input 1 Output Aux 1	wM23608AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Aux 2	wM23609AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Aux 3	wM23610AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Aux 4	wM23611AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Aux 5	wM23612AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Aux 6	wM23613AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Aux 7	wM23614AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Aux 8	wM23615AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 1	wM23632AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 10	wM23641AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 11	wM23642AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 12	wM23643AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 13	wM23644AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 14	wM23645AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 15	wM23646AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 16	wM23647AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 2	wM23633AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 3	wM23634AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 4	wM23635AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 5	wM23636AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 6	wM23637AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 7	wM23638AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 8	wM23639AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output Exp. 9	wM23640AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send A	wM23616AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send B	wM23617AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send C	wM23618AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send D	wM23619AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send E	wM23620AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send F	wM23621AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send G	wM23622AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V.	wM23623AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Send H	
Expansion Bus Mix-point Mute Input 1 Output V. Send I	wM23624AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send J	wM23625AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send K	wM23626AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send L	wM23627AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send M	wM23628AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send N	wM23629AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send O	wM23630AU\x0D\x0A
Expansion Bus Mix-point Mute Input 1 Output V. Send P	wM23631AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output 1	wM25100AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output 4	wM25103AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 1	wM25108AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 2	wM25109AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 3	wM25110AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 4	wM25111AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 5	wM25112AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 6	wM25113AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 7	wM25114AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Aux 8	wM25115AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 1	wM25132AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 10	wM25141AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 11	wM25142AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 12	wM25143AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 13	wM25144AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 14	wM25145AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Mute Input 16 Output Exp. 15	wM25146AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 16	wM25147AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 2	wM25133AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 3	wM25134AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 4	wM25135AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 5	wM25136AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 6	wM25137AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 7	wM25138AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 8	wM25139AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output Exp. 9	wM25140AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send A	wM25116AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send B	wM25117AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send C	wM25118AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send D	wM25119AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send E	wM25120AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send F	wM25121AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send G	wM25122AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send H	wM25123AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send I	wM25124AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send J	wM25125AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send K	wM25126AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send L	wM25127AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send M	wM25128AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V.	wM25129AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Send N	
Expansion Bus Mix-point Mute Input 16 Output V. Send O	wM25130AU\x0D\x0A
Expansion Bus Mix-point Mute Input 16 Output V. Send P	wM25131AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output 1	wM28300AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output 4	wM28303AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 1	wM28308AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 2	wM28309AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 3	wM28310AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 4	wM28311AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 5	wM28312AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 6	wM28313AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 7	wM28314AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Aux 8	wM28315AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 1	wM28332AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 10	wM28341AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 11	wM28342AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 12	wM28343AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 13	wM28344AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 14	wM28345AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 15	wM28346AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 16	wM28347AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 2	wM28333AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 3	wM28334AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 4	wM28335AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 5	wM28336AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Mute Input 48 Output Exp. 6	wM28337AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 7	wM28338AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 8	wM28339AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output Exp. 9	wM28340AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send A	wM28316AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send B	wM28317AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send C	wM28318AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send D	wM28319AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send E	wM28320AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send F	wM28321AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send G	wM28322AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send H	wM28323AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send I	wM28324AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send J	wM28325AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send K	wM28326AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send L	wM28327AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send M	wM28328AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send N	wM28329AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send O	wM28330AU\x0D\x0A
Expansion Bus Mix-point Mute Input 48 Output V. Send P	wM28331AU\x0D\x0A
Expansion Input Pre-mixer Gain Input 1	wG50200AU\x0D\x0A
Expansion Input Pre-mixer Gain Input 16	wG50215AU\x0D\x0A
Expansion Input Pre-mixer Gain Input 48	wG50247AU\x0D\x0A
Expansion Input Pre-mixer Mute Input 1	wM50200AU\x0D\x0A
Expansion Input Pre-mixer Mute Input 16	wM50215AU\x0D\x0A
Expansion Input Pre-mixer Mute Input 48	wM50247AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Output Attenuation Output 1	wG60016AU\x0D\x0A
Expansion Output Attenuation Output 16	wG60031AU\x0D\x0A
Expansion Output Mute Output 1	wM60016AU\x0D\x0A
Expansion Output Mute Output 16	wM60031AU\x0D\x0A
Expansion Output Post-mixer Trim Output 1	wG60116AU\x0D\x0A
Expansion Output Post-mixer Trim Output 16	wG60131AU\x0D\x0A
Group Bass Input Filter Group 1	wd1grpm\x0D\x0A
Group Bass Input Filter Group 64	wd64grpm\x0D\x0A
Group Bass Virtual Return Filter Group 1	wd1grpm\x0D\x0A
Group Bass Virtual Return Filter Group 64	wd64grpm\x0D\x0A
Group Meter Level Group 1 Channel Aux In 1	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux In 2	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux In 3	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux In 4	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux In 5	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux In 6	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux In 7	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux In 8	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 1	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 2	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 3	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 4	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 5	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 6	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 7	wO1GRPM\x0D
Group Meter Level Group 1 Channel Aux Out 8	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 1	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 10	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 11	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 12	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 13	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 14	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 15	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 16	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 2	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 3	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 4	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 5	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 6	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 7	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 8	wO1GRPM\x0D
Group Meter Level Group 1 Channel Exp Out 9	wO1GRPM\x0D
Group Meter Level Group 1 Channel Input 1	wO1GRPM\x0D
Group Meter Level Group 1 Channel Input 2	wO1GRPM\x0D

Global Scriptor Module Communication Sheet

Group Meter Level Group 1 Channel Input 3	wO1GRPM\x0D
Group Meter Level Group 1 Channel Input 4	wO1GRPM\x0D
Group Meter Level Group 1 Channel Input 5	wO1GRPM\x0D
Group Meter Level Group 1 Channel Input 6	wO1GRPM\x0D
Group Meter Level Group 1 Channel Output 1	wO1GRPM\x0D
Group Meter Level Group 1 Channel Output 2	wO1GRPM\x0D
Group Meter Level Group 1 Channel Output 3	wO1GRPM\x0D
Group Meter Level Group 1 Channel Output 4	wO1GRPM\x0D
Group Meter Level Group 64 Channel Aux In 1	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux In 2	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux In 3	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux In 4	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux In 5	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux In 6	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux In 7	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux In 8	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 1	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 2	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 3	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 4	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 5	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 6	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 7	wO64GRPM\x0D
Group Meter Level Group 64 Channel Aux Out 8	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 1	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 10	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 11	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 12	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 13	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 14	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 15	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 16	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 2	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 3	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 4	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 5	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 6	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 7	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 8	wO64GRPM\x0D
Group Meter Level Group 64 Channel Exp Out 9	wO64GRPM\x0D
Group Meter Level Group 64 Channel Input 1	wO64GRPM\x0D
Group Meter Level Group 64 Channel Input 2	wO64GRPM\x0D
Group Meter Level Group 64 Channel Input 3	wO64GRPM\x0D
Group Meter Level Group 64 Channel Input 4	wO64GRPM\x0D

**Global Scripter Module
Communication Sheet**

Group Meter Level Group 64 Channel Input 5	wO64GRPM\x0D
Group Meter Level Group 64 Channel Input 6	wO64GRPM\x0D
Group Meter Level Group 64 Channel Output 1	wO64GRPM\x0D
Group Meter Level Group 64 Channel Output 2	wO64GRPM\x0D
Group Meter Level Group 64 Channel Output 3	wO64GRPM\x0D
Group Meter Level Group 64 Channel Output 4	wO64GRPM\x0D
Group Meter Response Rate	wRGRPU\x0D
Group Meter Select	wGGRPU\x0D
Group Mic/Line Input Gain Group 1	wd1grpm\x0D\x0A
Group Mic/Line Input Gain Group 64	wd64grpm\x0D\x0A
Group Mix-point Gain Group 1	wd1grpm\x0D\x0A
Group Mix-point Gain Group 64	wd64grpm\x0D\x0A
Group Mute Group 1	wd1grpm\x0D\x0A
Group Mute Group 64	wd64grpm\x0D\x0A
Group Output Attenuation Group 1	wd1grpm\x0D\x0A
Group Output Attenuation Group 64	wd64grpm\x0D\x0A
Group Post-mixer Trim Group 1	wd1grpm\x0D\x0A
Group Post-mixer Trim Group 64	wd64grpm\x0D\x0A
Group Pre-mixer Gain Group 1	wd1grpm\x0D\x0A
Group Pre-mixer Gain Group 64	wd64grpm\x0D\x0A
Group Treble Input Filter Group 1	wd1grpm\x0D\x0A
Group Treble Input Filter Group 64	wd64grpm\x0D\x0A
Group Treble Virtual Return Filter Group 1	wd1grpm\x0D\x0A
Group Treble Virtual Return Filter Group 64	wd64grpm\x0D\x0A
Group Virtual Return Gain Group 1	wd1grpm\x0D\x0A
Group Virtual Return Gain Group 64	wd64grpm\x0D\x0A
Input Gain Input 1	wG40000AU\x0D\x0A
Input Gain Input 6	wG40005AU\x0D\x0A
Input Mute Input 1	wM40000AU\x0D\x0A
Input Mute Input 6	wM40005AU\x0D\x0A
Input Source Input 1	wD40000AU\x0D
Input Source Input 6	wD40005AU\x0D
Mix-point Gain Input 1 Output 1	wG20000AU\x0D\x0A
Mix-point Gain Input 1 Output 4	wG20003AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 1	wG20008AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 2	wG20009AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 3	wG20010AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 4	wG20011AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 5	wG20012AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 6	wG20013AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 7	wG20014AU\x0D\x0A
Mix-point Gain Input 1 Output Aux 8	wG20015AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 1	wG20032AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 10	wG20041AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Gain Input 1 Output Exp. 11	wG20042AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 12	wG20043AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 13	wG20044AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 14	wG20045AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 15	wG20046AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 16	wG20047AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 2	wG20033AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 3	wG20034AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 4	wG20035AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 5	wG20036AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 6	wG20037AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 7	wG20038AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 8	wG20039AU\x0D\x0A
Mix-point Gain Input 1 Output Exp. 9	wG20040AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send A	wG20016AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send B	wG20017AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send C	wG20018AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send D	wG20019AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send E	wG20020AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send F	wG20021AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send G	wG20022AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send H	wG20023AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send I	wG20024AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send J	wG20025AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send K	wG20026AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send L	wG20027AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send M	wG20028AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send N	wG20029AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send O	wG20030AU\x0D\x0A
Mix-point Gain Input 1 Output V. Send P	wG20031AU\x0D\x0A
Mix-point Gain Input 6 Output 1	wG20500AU\x0D\x0A
Mix-point Gain Input 6 Output 4	wG20503AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 1	wG20508AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 2	wG20509AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 3	wG20510AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 4	wG20511AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 5	wG20512AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 6	wG20513AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 7	wG20514AU\x0D\x0A
Mix-point Gain Input 6 Output Aux 8	wG20515AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 1	wG20532AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 10	wG20541AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 11	wG20542AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 12	wG20543AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Gain Input 6 Output Exp. 13	wG20544AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 14	wG20545AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 15	wG20546AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 16	wG20547AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 2	wG20533AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 3	wG20534AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 4	wG20535AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 5	wG20536AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 6	wG20537AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 7	wG20538AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 8	wG20539AU\x0D\x0A
Mix-point Gain Input 6 Output Exp. 9	wG20540AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send A	wG20516AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send B	wG20517AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send C	wG20518AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send D	wG20519AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send E	wG20520AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send F	wG20521AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send G	wG20522AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send H	wG20523AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send I	wG20524AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send J	wG20525AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send K	wG20526AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send L	wG20527AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send M	wG20528AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send N	wG20529AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send O	wG20530AU\x0D\x0A
Mix-point Gain Input 6 Output V. Send P	wG20531AU\x0D\x0A
Mix-point Gain Input Aux 1 Output 1	wG21200AU\x0D\x0A
Mix-point Gain Input Aux 1 Output 4	wG21203AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 1	wG21208AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 2	wG21209AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 3	wG21210AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 4	wG21211AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 5	wG21212AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 6	wG21213AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 7	wG21214AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Aux 8	wG21215AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 1	wG21232AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 10	wG21241AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 11	wG21242AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 12	wG21243AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 13	wG21244AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 14	wG21245AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Gain Input Aux 1 Output Exp. 15	wG21246AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 16	wG21247AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 2	wG21233AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 3	wG21234AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 4	wG21235AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 5	wG21236AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 6	wG21237AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 7	wG21238AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 8	wG21239AU\x0D\x0A
Mix-point Gain Input Aux 1 Output Exp. 9	wG21240AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send A	wG21216AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send B	wG21217AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send C	wG21218AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send D	wG21219AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send E	wG21220AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send F	wG21221AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send G	wG21222AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send H	wG21223AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send I	wG21224AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send J	wG21225AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send K	wG21226AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send L	wG21227AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send M	wG21228AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send N	wG21229AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send O	wG21230AU\x0D\x0A
Mix-point Gain Input Aux 1 Output V. Send P	wG21231AU\x0D\x0A
Mix-point Gain Input Aux 2 Output 1	wG21300AU\x0D\x0A
Mix-point Gain Input Aux 2 Output 4	wG21303AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 1	wG21308AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 2	wG21309AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 3	wG21310AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 4	wG21311AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 5	wG21312AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 6	wG21313AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 7	wG21314AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Aux 8	wG21315AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 1	wG21332AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 10	wG21341AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 11	wG21342AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 12	wG21343AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 13	wG21344AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 14	wG21345AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 15	wG21346AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 16	wG21347AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain Input Aux 2 Output Exp. 2	wG21333AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 3	wG21334AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 4	wG21335AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 5	wG21336AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 6	wG21337AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 7	wG21338AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 8	wG21339AU\x0D\x0A
Mix-point Gain Input Aux 2 Output Exp. 9	wG21340AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send A	wG21316AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send B	wG21317AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send C	wG21318AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send D	wG21319AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send E	wG21320AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send F	wG21321AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send G	wG21322AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send H	wG21323AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send I	wG21324AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send J	wG21325AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send K	wG21326AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send L	wG21327AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send M	wG21328AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send N	wG21329AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send O	wG21330AU\x0D\x0A
Mix-point Gain Input Aux 2 Output V. Send P	wG21331AU\x0D\x0A
Mix-point Gain Input Aux 3 Output 1	wG21400AU\x0D\x0A
Mix-point Gain Input Aux 3 Output 4	wG21403AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 1	wG21408AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 2	wG21409AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 3	wG21410AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 4	wG21411AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 5	wG21412AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 6	wG21413AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 7	wG21414AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Aux 8	wG21415AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 1	wG21432AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 10	wG21441AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 11	wG21442AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 12	wG21443AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 13	wG21444AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 14	wG21445AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 15	wG21446AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 16	wG21447AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 2	wG21433AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 3	wG21434AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain Input Aux 3 Output Exp. 4	wG21435AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 5	wG21436AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 6	wG21437AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 7	wG21438AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 8	wG21439AU\x0D\x0A
Mix-point Gain Input Aux 3 Output Exp. 9	wG21440AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send A	wG21416AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send B	wG21417AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send C	wG21418AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send D	wG21419AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send E	wG21420AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send F	wG21421AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send G	wG21422AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send H	wG21423AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send I	wG21424AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send J	wG21425AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send K	wG21426AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send L	wG21427AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send M	wG21428AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send N	wG21429AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send O	wG21430AU\x0D\x0A
Mix-point Gain Input Aux 3 Output V. Send P	wG21431AU\x0D\x0A
Mix-point Gain Input Aux 4 Output 1	wG21500AU\x0D\x0A
Mix-point Gain Input Aux 4 Output 4	wG21503AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 1	wG21508AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 2	wG21509AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 3	wG21510AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 4	wG21511AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 5	wG21512AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 6	wG21513AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 7	wG21514AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Aux 8	wG21515AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 1	wG21532AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 10	wG21541AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 11	wG21542AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 12	wG21543AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 13	wG21544AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 14	wG21545AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 15	wG21546AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 16	wG21547AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 2	wG21533AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 3	wG21534AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 4	wG21535AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 5	wG21536AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Gain Input Aux 4 Output Exp. 6	wG21537AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 7	wG21538AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 8	wG21539AU\x0D\x0A
Mix-point Gain Input Aux 4 Output Exp. 9	wG21540AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send A	wG21516AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send B	wG21517AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send C	wG21518AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send D	wG21519AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send E	wG21520AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send F	wG21521AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send G	wG21522AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send H	wG21523AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send I	wG21524AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send J	wG21525AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send K	wG21526AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send L	wG21527AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send M	wG21528AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send N	wG21529AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send O	wG21530AU\x0D\x0A
Mix-point Gain Input Aux 4 Output V. Send P	wG21531AU\x0D\x0A
Mix-point Gain Input Aux 5 Output 1	wG21600AU\x0D\x0A
Mix-point Gain Input Aux 5 Output 4	wG21603AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 1	wG21608AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 2	wG21609AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 3	wG21610AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 4	wG21611AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 5	wG21612AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 6	wG21613AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 7	wG21614AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Aux 8	wG21615AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 1	wG21632AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 10	wG21641AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 11	wG21642AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 12	wG21643AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 13	wG21644AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 14	wG21645AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 15	wG21646AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 16	wG21647AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 2	wG21633AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 3	wG21634AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 4	wG21635AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 5	wG21636AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 6	wG21637AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 7	wG21638AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Gain Input Aux 5 Output Exp. 8	wG21639AU\x0D\x0A
Mix-point Gain Input Aux 5 Output Exp. 9	wG21640AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send A	wG21616AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send B	wG21617AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send C	wG21618AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send D	wG21619AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send E	wG21620AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send F	wG21621AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send G	wG21622AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send H	wG21623AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send I	wG21624AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send J	wG21625AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send K	wG21626AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send L	wG21627AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send M	wG21628AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send N	wG21629AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send O	wG21630AU\x0D\x0A
Mix-point Gain Input Aux 5 Output V. Send P	wG21631AU\x0D\x0A
Mix-point Gain Input Aux 6 Output 1	wG21700AU\x0D\x0A
Mix-point Gain Input Aux 6 Output 4	wG21703AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 1	wG21708AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 2	wG21709AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 3	wG21710AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 4	wG21711AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 5	wG21712AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 6	wG21713AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 7	wG21714AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Aux 8	wG21715AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 1	wG21732AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 10	wG21741AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 11	wG21742AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 12	wG21743AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 13	wG21744AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 14	wG21745AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 15	wG21746AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 16	wG21747AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 2	wG21733AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 3	wG21734AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 4	wG21735AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 5	wG21736AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 6	wG21737AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 7	wG21738AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 8	wG21739AU\x0D\x0A
Mix-point Gain Input Aux 6 Output Exp. 9	wG21740AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Gain Input Aux 6 Output V. Send A	wG21716AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send B	wG21717AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send C	wG21718AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send D	wG21719AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send E	wG21720AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send F	wG21721AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send G	wG21722AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send H	wG21723AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send I	wG21724AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send J	wG21725AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send K	wG21726AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send L	wG21727AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send M	wG21728AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send N	wG21729AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send O	wG21730AU\x0D\x0A
Mix-point Gain Input Aux 6 Output V. Send P	wG21731AU\x0D\x0A
Mix-point Gain Input Aux 7 Output 1	wG21800AU\x0D\x0A
Mix-point Gain Input Aux 7 Output 4	wG21803AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 1	wG21808AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 2	wG21809AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 3	wG21810AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 4	wG21811AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 5	wG21812AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 6	wG21813AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 7	wG21814AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Aux 8	wG21815AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 1	wG21832AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 10	wG21841AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 11	wG21842AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 12	wG21843AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 13	wG21844AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 14	wG21845AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 15	wG21846AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 16	wG21847AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 2	wG21833AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 3	wG21834AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 4	wG21835AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 5	wG21836AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 6	wG21837AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 7	wG21838AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 8	wG21839AU\x0D\x0A
Mix-point Gain Input Aux 7 Output Exp. 9	wG21840AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send A	wG21816AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send B	wG21817AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain Input Aux 7 Output V. Send C	wG21818AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send D	wG21819AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send E	wG21820AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send F	wG21821AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send G	wG21822AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send H	wG21823AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send I	wG21824AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send J	wG21825AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send K	wG21826AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send L	wG21827AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send M	wG21828AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send N	wG21829AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send O	wG21830AU\x0D\x0A
Mix-point Gain Input Aux 7 Output V. Send P	wG21831AU\x0D\x0A
Mix-point Gain Input Aux 8 Output 1	wG21900AU\x0D\x0A
Mix-point Gain Input Aux 8 Output 4	wG21903AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 1	wG21908AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 2	wG21909AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 3	wG21910AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 4	wG21911AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 5	wG21912AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 6	wG21913AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 7	wG21914AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Aux 8	wG21915AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 1	wG21932AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 10	wG21941AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 11	wG21942AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 12	wG21943AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 13	wG21944AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 14	wG21945AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 15	wG21946AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 16	wG21947AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 2	wG21933AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 3	wG21934AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 4	wG21935AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 5	wG21936AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 6	wG21937AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 7	wG21938AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 8	wG21939AU\x0D\x0A
Mix-point Gain Input Aux 8 Output Exp. 9	wG21940AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send A	wG21916AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send B	wG21917AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send C	wG21918AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send D	wG21919AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Gain Input Aux 8 Output V. Send E	wG21920AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send F	wG21921AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send G	wG21922AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send H	wG21923AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send I	wG21924AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send J	wG21925AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send K	wG21926AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send L	wG21927AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send M	wG21928AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send N	wG21929AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send O	wG21930AU\x0D\x0A
Mix-point Gain Input Aux 8 Output V. Send P	wG21931AU\x0D\x0A
Mix-point Gain Input V. Return A Output 1	wG22000AU\x0D\x0A
Mix-point Gain Input V. Return A Output 4	wG22003AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 1	wG22008AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 2	wG22009AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 3	wG22010AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 4	wG22011AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 5	wG22012AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 6	wG22013AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 7	wG22014AU\x0D\x0A
Mix-point Gain Input V. Return A Output Aux 8	wG22015AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 1	wG22032AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 10	wG22041AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 11	wG22042AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 12	wG22043AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 13	wG22044AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 14	wG22045AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 15	wG22046AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 16	wG22047AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 2	wG22033AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 3	wG22034AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 4	wG22035AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 5	wG22036AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 6	wG22037AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 7	wG22038AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 8	wG22039AU\x0D\x0A
Mix-point Gain Input V. Return A Output Exp. 9	wG22040AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send A	wG22016AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send B	wG22017AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send C	wG22018AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send D	wG22019AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send E	wG22020AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send F	wG22021AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain Input V. Return A Output V. Send G	wG22022AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send H	wG22023AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send I	wG22024AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send J	wG22025AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send K	wG22026AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send L	wG22027AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send M	wG22028AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send N	wG22029AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send O	wG22030AU\x0D\x0A
Mix-point Gain Input V. Return A Output V. Send P	wG22031AU\x0D\x0A
Mix-point Gain Input V. Return B Output 1	wG22100AU\x0D\x0A
Mix-point Gain Input V. Return B Output 4	wG22103AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 1	wG22108AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 2	wG22109AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 3	wG22110AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 4	wG22111AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 5	wG22112AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 6	wG22113AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 7	wG22114AU\x0D\x0A
Mix-point Gain Input V. Return B Output Aux 8	wG22115AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 1	wG22132AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 10	wG22141AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 11	wG22142AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 12	wG22143AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 13	wG22144AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 14	wG22145AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 15	wG22146AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 16	wG22147AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 2	wG22133AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 3	wG22134AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 4	wG22135AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 5	wG22136AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 6	wG22137AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 7	wG22138AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 8	wG22139AU\x0D\x0A
Mix-point Gain Input V. Return B Output Exp. 9	wG22140AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send A	wG22116AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send B	wG22117AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send C	wG22118AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send D	wG22119AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send E	wG22120AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send F	wG22121AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send G	wG22122AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send H	wG22123AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Gain Input V. Return B Output V. Send I	wG22124AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send J	wG22125AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send K	wG22126AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send L	wG22127AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send M	wG22128AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send N	wG22129AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send O	wG22130AU\x0D\x0A
Mix-point Gain Input V. Return B Output V. Send P	wG22131AU\x0D\x0A
Mix-point Gain Input V. Return C Output 1	wG22200AU\x0D\x0A
Mix-point Gain Input V. Return C Output 4	wG22203AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 1	wG22208AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 2	wG22209AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 3	wG22210AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 4	wG22211AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 5	wG22212AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 6	wG22213AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 7	wG22214AU\x0D\x0A
Mix-point Gain Input V. Return C Output Aux 8	wG22215AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 1	wG22232AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 10	wG22241AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 11	wG22242AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 12	wG22243AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 13	wG22244AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 14	wG22245AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 15	wG22246AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 16	wG22247AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 2	wG22233AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 3	wG22234AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 4	wG22235AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 5	wG22236AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 6	wG22237AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 7	wG22238AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 8	wG22239AU\x0D\x0A
Mix-point Gain Input V. Return C Output Exp. 9	wG22240AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send A	wG22216AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send B	wG22217AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send C	wG22218AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send D	wG22219AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send E	wG22220AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send F	wG22221AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send G	wG22222AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send H	wG22223AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send I	wG22224AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send J	wG22225AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain Input V. Return C Output V. Send K	wG22226AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send L	wG22227AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send M	wG22228AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send N	wG22229AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send O	wG22230AU\x0D\x0A
Mix-point Gain Input V. Return C Output V. Send P	wG22231AU\x0D\x0A
Mix-point Gain Input V. Return D Output 1	wG22300AU\x0D\x0A
Mix-point Gain Input V. Return D Output 4	wG22303AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 1	wG22308AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 2	wG22309AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 3	wG22310AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 4	wG22311AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 5	wG22312AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 6	wG22313AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 7	wG22314AU\x0D\x0A
Mix-point Gain Input V. Return D Output Aux 8	wG22315AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 1	wG22332AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 10	wG22341AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 11	wG22342AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 12	wG22343AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 13	wG22344AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 14	wG22345AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 15	wG22346AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 16	wG22347AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 2	wG22333AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 3	wG22334AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 4	wG22335AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 5	wG22336AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 6	wG22337AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 7	wG22338AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 8	wG22339AU\x0D\x0A
Mix-point Gain Input V. Return D Output Exp. 9	wG22340AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send A	wG22316AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send B	wG22317AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send C	wG22318AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send D	wG22319AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send E	wG22320AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send F	wG22321AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send G	wG22322AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send H	wG22323AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send I	wG22324AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send J	wG22325AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send K	wG22326AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send L	wG22327AU\x0D\x0A

Global Scripter Module
Communication Sheet

Mix-point Gain Input V. Return D Output V. Send M	wG22328AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send N	wG22329AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send O	wG22330AU\x0D\x0A
Mix-point Gain Input V. Return D Output V. Send P	wG22331AU\x0D\x0A
Mix-point Gain Input V. Return E Output 1	wG22400AU\x0D\x0A
Mix-point Gain Input V. Return E Output 4	wG22403AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 1	wG22408AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 2	wG22409AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 3	wG22410AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 4	wG22411AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 5	wG22412AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 6	wG22413AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 7	wG22414AU\x0D\x0A
Mix-point Gain Input V. Return E Output Aux 8	wG22415AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 1	wG22432AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 10	wG22441AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 11	wG22442AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 12	wG22443AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 13	wG22444AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 14	wG22445AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 15	wG22446AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 16	wG22447AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 2	wG22433AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 3	wG22434AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 4	wG22435AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 5	wG22436AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 6	wG22437AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 7	wG22438AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 8	wG22439AU\x0D\x0A
Mix-point Gain Input V. Return E Output Exp. 9	wG22440AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send A	wG22416AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send B	wG22417AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send C	wG22418AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send D	wG22419AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send E	wG22420AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send F	wG22421AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send G	wG22422AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send H	wG22423AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send I	wG22424AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send J	wG22425AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send K	wG22426AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send L	wG22427AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send M	wG22428AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send N	wG22429AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain Input V. Return E Output V. Send O	wG22430AU\x0D\x0A
Mix-point Gain Input V. Return E Output V. Send P	wG22431AU\x0D\x0A
Mix-point Gain Input V. Return F Output 1	wG22500AU\x0D\x0A
Mix-point Gain Input V. Return F Output 4	wG22503AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 1	wG22508AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 2	wG22509AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 3	wG22510AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 4	wG22511AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 5	wG22512AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 6	wG22513AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 7	wG22514AU\x0D\x0A
Mix-point Gain Input V. Return F Output Aux 8	wG22515AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 1	wG22532AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 10	wG22541AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 11	wG22542AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 12	wG22543AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 13	wG22544AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 14	wG22545AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 15	wG22546AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 16	wG22547AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 2	wG22533AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 3	wG22534AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 4	wG22535AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 5	wG22536AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 6	wG22537AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 7	wG22538AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 8	wG22539AU\x0D\x0A
Mix-point Gain Input V. Return F Output Exp. 9	wG22540AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send A	wG22516AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send B	wG22517AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send C	wG22518AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send D	wG22519AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send E	wG22520AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send F	wG22521AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send G	wG22522AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send H	wG22523AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send I	wG22524AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send J	wG22525AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send K	wG22526AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send L	wG22527AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send M	wG22528AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send N	wG22529AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send O	wG22530AU\x0D\x0A
Mix-point Gain Input V. Return F Output V. Send P	wG22531AU\x0D\x0A

Global Scriptor Module
Communication Sheet

Mix-point Gain Input V. Return G Output 1	wG22600AU\x0D\x0A
Mix-point Gain Input V. Return G Output 4	wG22603AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 1	wG22608AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 2	wG22609AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 3	wG22610AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 4	wG22611AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 5	wG22612AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 6	wG22613AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 7	wG22614AU\x0D\x0A
Mix-point Gain Input V. Return G Output Aux 8	wG22615AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 1	wG22632AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 10	wG22641AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 11	wG22642AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 12	wG22643AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 13	wG22644AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 14	wG22645AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 15	wG22646AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 16	wG22647AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 2	wG22633AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 3	wG22634AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 4	wG22635AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 5	wG22636AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 6	wG22637AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 7	wG22638AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 8	wG22639AU\x0D\x0A
Mix-point Gain Input V. Return G Output Exp. 9	wG22640AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send A	wG22616AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send B	wG22617AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send C	wG22618AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send D	wG22619AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send E	wG22620AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send F	wG22621AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send G	wG22622AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send H	wG22623AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send I	wG22624AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send J	wG22625AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send K	wG22626AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send L	wG22627AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send M	wG22628AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send N	wG22629AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send O	wG22630AU\x0D\x0A
Mix-point Gain Input V. Return G Output V. Send P	wG22631AU\x0D\x0A
Mix-point Gain Input V. Return H Output 1	wG22700AU\x0D\x0A
Mix-point Gain Input V. Return H Output 4	wG22703AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Gain Input V. Return H Output Aux 1	wG22708AU\x0D\x0A
Mix-point Gain Input V. Return H Output Aux 2	wG22709AU\x0D\x0A
Mix-point Gain Input V. Return H Output Aux 3	wG22710AU\x0D\x0A
Mix-point Gain Input V. Return H Output Aux 4	wG22711AU\x0D\x0A
Mix-point Gain Input V. Return H Output Aux 5	wG22712AU\x0D\x0A
Mix-point Gain Input V. Return H Output Aux 6	wG22713AU\x0D\x0A
Mix-point Gain Input V. Return H Output Aux 7	wG22714AU\x0D\x0A
Mix-point Gain Input V. Return H Output Aux 8	wG22715AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 1	wG22732AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 10	wG22741AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 11	wG22742AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 12	wG22743AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 13	wG22744AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 14	wG22745AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 15	wG22746AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 16	wG22747AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 2	wG22733AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 3	wG22734AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 4	wG22735AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 5	wG22736AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 6	wG22737AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 7	wG22738AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 8	wG22739AU\x0D\x0A
Mix-point Gain Input V. Return H Output Exp. 9	wG22740AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send A	wG22716AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send B	wG22717AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send C	wG22718AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send D	wG22719AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send E	wG22720AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send F	wG22721AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send G	wG22722AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send H	wG22723AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send I	wG22724AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send J	wG22725AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send K	wG22726AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send L	wG22727AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send M	wG22728AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send N	wG22729AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send O	wG22730AU\x0D\x0A
Mix-point Gain Input V. Return H Output V. Send P	wG22731AU\x0D\x0A
Mix-point Gain Input V. Return I Output 1	wG22800AU\x0D\x0A
Mix-point Gain Input V. Return I Output 4	wG22803AU\x0D\x0A
Mix-point Gain Input V. Return I Output Aux 1	wG22808AU\x0D\x0A
Mix-point Gain Input V. Return I Output Aux 2	wG22809AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain Input V. Return I Output Aux 3	wG22810AU\x0D\x0A
Mix-point Gain Input V. Return I Output Aux 4	wG22811AU\x0D\x0A
Mix-point Gain Input V. Return I Output Aux 5	wG22812AU\x0D\x0A
Mix-point Gain Input V. Return I Output Aux 6	wG22813AU\x0D\x0A
Mix-point Gain Input V. Return I Output Aux 7	wG22814AU\x0D\x0A
Mix-point Gain Input V. Return I Output Aux 8	wG22815AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 1	wG22832AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 10	wG22841AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 11	wG22842AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 12	wG22843AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 13	wG22844AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 14	wG22845AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 15	wG22846AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 16	wG22847AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 2	wG22833AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 3	wG22834AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 4	wG22835AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 5	wG22836AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 6	wG22837AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 7	wG22838AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 8	wG22839AU\x0D\x0A
Mix-point Gain Input V. Return I Output Exp. 9	wG22840AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send A	wG22816AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send B	wG22817AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send C	wG22818AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send D	wG22819AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send E	wG22820AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send F	wG22821AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send G	wG22822AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send H	wG22823AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send I	wG22824AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send J	wG22825AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send K	wG22826AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send L	wG22827AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send M	wG22828AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send N	wG22829AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send O	wG22830AU\x0D\x0A
Mix-point Gain Input V. Return I Output V. Send P	wG22831AU\x0D\x0A
Mix-point Gain Input V. Return J Output 1	wG22900AU\x0D\x0A
Mix-point Gain Input V. Return J Output 4	wG22903AU\x0D\x0A
Mix-point Gain Input V. Return J Output Aux 1	wG22908AU\x0D\x0A
Mix-point Gain Input V. Return J Output Aux 2	wG22909AU\x0D\x0A
Mix-point Gain Input V. Return J Output Aux 3	wG22910AU\x0D\x0A
Mix-point Gain Input V. Return J Output Aux 4	wG22911AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Gain Input V. Return J Output Aux 5	wG22912AU\x0D\x0A
Mix-point Gain Input V. Return J Output Aux 6	wG22913AU\x0D\x0A
Mix-point Gain Input V. Return J Output Aux 7	wG22914AU\x0D\x0A
Mix-point Gain Input V. Return J Output Aux 8	wG22915AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 1	wG22932AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 10	wG22941AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 11	wG22942AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 12	wG22943AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 13	wG22944AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 14	wG22945AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 15	wG22946AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 16	wG22947AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 2	wG22933AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 3	wG22934AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 4	wG22935AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 5	wG22936AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 6	wG22937AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 7	wG22938AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 8	wG22939AU\x0D\x0A
Mix-point Gain Input V. Return J Output Exp. 9	wG22940AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send A	wG22916AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send B	wG22917AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send C	wG22918AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send D	wG22919AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send E	wG22920AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send F	wG22921AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send G	wG22922AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send H	wG22923AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send I	wG22924AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send J	wG22925AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send K	wG22926AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send L	wG22927AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send M	wG22928AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send N	wG22929AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send O	wG22930AU\x0D\x0A
Mix-point Gain Input V. Return J Output V. Send P	wG22931AU\x0D\x0A
Mix-point Gain Input V. Return K Output 1	wG23000AU\x0D\x0A
Mix-point Gain Input V. Return K Output 4	wG23003AU\x0D\x0A
Mix-point Gain Input V. Return K Output Aux 1	wG23008AU\x0D\x0A
Mix-point Gain Input V. Return K Output Aux 2	wG23009AU\x0D\x0A
Mix-point Gain Input V. Return K Output Aux 3	wG23010AU\x0D\x0A
Mix-point Gain Input V. Return K Output Aux 4	wG23011AU\x0D\x0A
Mix-point Gain Input V. Return K Output Aux 5	wG23012AU\x0D\x0A
Mix-point Gain Input V. Return K Output Aux 6	wG23013AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 10/8/2024

Mix-point Gain Input V. Return K Output Aux 7	wG23014AU\x0D\x0A
Mix-point Gain Input V. Return K Output Aux 8	wG23015AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 1	wG23032AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 10	wG23041AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 11	wG23042AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 12	wG23043AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 13	wG23044AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 14	wG23045AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 15	wG23046AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 16	wG23047AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 2	wG23033AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 3	wG23034AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 4	wG23035AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 5	wG23036AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 6	wG23037AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 7	wG23038AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 8	wG23039AU\x0D\x0A
Mix-point Gain Input V. Return K Output Exp. 9	wG23040AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send A	wG23016AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send B	wG23017AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send C	wG23018AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send D	wG23019AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send E	wG23020AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send F	wG23021AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send G	wG23022AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send H	wG23023AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send I	wG23024AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send J	wG23025AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send K	wG23026AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send L	wG23027AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send M	wG23028AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send N	wG23029AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send O	wG23030AU\x0D\x0A
Mix-point Gain Input V. Return K Output V. Send P	wG23031AU\x0D\x0A
Mix-point Gain Input V. Return L Output 1	wG23100AU\x0D\x0A
Mix-point Gain Input V. Return L Output 4	wG23103AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 1	wG23108AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 2	wG23109AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 3	wG23110AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 4	wG23111AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 5	wG23112AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 6	wG23113AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 7	wG23114AU\x0D\x0A
Mix-point Gain Input V. Return L Output Aux 8	wG23115AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Gain Input V. Return L Output Exp. 1	wG23132AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 10	wG23141AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 11	wG23142AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 12	wG23143AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 13	wG23144AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 14	wG23145AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 15	wG23146AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 16	wG23147AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 2	wG23133AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 3	wG23134AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 4	wG23135AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 5	wG23136AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 6	wG23137AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 7	wG23138AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 8	wG23139AU\x0D\x0A
Mix-point Gain Input V. Return L Output Exp. 9	wG23140AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send A	wG23116AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send B	wG23117AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send C	wG23118AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send D	wG23119AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send E	wG23120AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send F	wG23121AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send G	wG23122AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send H	wG23123AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send I	wG23124AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send J	wG23125AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send K	wG23126AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send L	wG23127AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send M	wG23128AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send N	wG23129AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send O	wG23130AU\x0D\x0A
Mix-point Gain Input V. Return L Output V. Send P	wG23131AU\x0D\x0A
Mix-point Gain Input V. Return M Output 1	wG23200AU\x0D\x0A
Mix-point Gain Input V. Return M Output 4	wG23203AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 1	wG23208AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 2	wG23209AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 3	wG23210AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 4	wG23211AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 5	wG23212AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 6	wG23213AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 7	wG23214AU\x0D\x0A
Mix-point Gain Input V. Return M Output Aux 8	wG23215AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 1	wG23232AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 10	wG23241AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain Input V. Return M Output Exp. 11	wG23242AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 12	wG23243AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 13	wG23244AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 14	wG23245AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 15	wG23246AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 16	wG23247AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 2	wG23233AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 3	wG23234AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 4	wG23235AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 5	wG23236AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 6	wG23237AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 7	wG23238AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 8	wG23239AU\x0D\x0A
Mix-point Gain Input V. Return M Output Exp. 9	wG23240AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send A	wG23216AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send B	wG23217AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send C	wG23218AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send D	wG23219AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send E	wG23220AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send F	wG23221AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send G	wG23222AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send H	wG23223AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send I	wG23224AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send J	wG23225AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send K	wG23226AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send L	wG23227AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send M	wG23228AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send N	wG23229AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send O	wG23230AU\x0D\x0A
Mix-point Gain Input V. Return M Output V. Send P	wG23231AU\x0D\x0A
Mix-point Gain Input V. Return N Output 1	wG23300AU\x0D\x0A
Mix-point Gain Input V. Return N Output 4	wG23303AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 1	wG23308AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 2	wG23309AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 3	wG23310AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 4	wG23311AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 5	wG23312AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 6	wG23313AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 7	wG23314AU\x0D\x0A
Mix-point Gain Input V. Return N Output Aux 8	wG23315AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 1	wG23332AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 10	wG23341AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 11	wG23342AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 12	wG23343AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain Input V. Return N Output Exp. 13	wG23344AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 14	wG23345AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 15	wG23346AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 16	wG23347AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 2	wG23333AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 3	wG23334AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 4	wG23335AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 5	wG23336AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 6	wG23337AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 7	wG23338AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 8	wG23339AU\x0D\x0A
Mix-point Gain Input V. Return N Output Exp. 9	wG23340AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send A	wG23316AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send B	wG23317AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send C	wG23318AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send D	wG23319AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send E	wG23320AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send F	wG23321AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send G	wG23322AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send H	wG23323AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send I	wG23324AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send J	wG23325AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send K	wG23326AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send L	wG23327AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send M	wG23328AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send N	wG23329AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send O	wG23330AU\x0D\x0A
Mix-point Gain Input V. Return N Output V. Send P	wG23331AU\x0D\x0A
Mix-point Gain Input V. Return O Output 1	wG23400AU\x0D\x0A
Mix-point Gain Input V. Return O Output 4	wG23403AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 1	wG23408AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 2	wG23409AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 3	wG23410AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 4	wG23411AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 5	wG23412AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 6	wG23413AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 7	wG23414AU\x0D\x0A
Mix-point Gain Input V. Return O Output Aux 8	wG23415AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 1	wG23432AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 10	wG23441AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 11	wG23442AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 12	wG23443AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 13	wG23444AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 14	wG23445AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain Input V. Return O Output Exp. 15	wG23446AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 16	wG23447AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 2	wG23433AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 3	wG23434AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 4	wG23435AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 5	wG23436AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 6	wG23437AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 7	wG23438AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 8	wG23439AU\x0D\x0A
Mix-point Gain Input V. Return O Output Exp. 9	wG23440AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send A	wG23416AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send B	wG23417AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send C	wG23418AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send D	wG23419AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send E	wG23420AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send F	wG23421AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send G	wG23422AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send H	wG23423AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send I	wG23424AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send J	wG23425AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send K	wG23426AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send L	wG23427AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send M	wG23428AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send N	wG23429AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send O	wG23430AU\x0D\x0A
Mix-point Gain Input V. Return O Output V. Send P	wG23431AU\x0D\x0A
Mix-point Gain Input V. Return P Output 1	wG23500AU\x0D\x0A
Mix-point Gain Input V. Return P Output 4	wG23503AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 1	wG23508AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 2	wG23509AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 3	wG23510AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 4	wG23511AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 5	wG23512AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 6	wG23513AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 7	wG23514AU\x0D\x0A
Mix-point Gain Input V. Return P Output Aux 8	wG23515AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 1	wG23532AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 10	wG23541AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 11	wG23542AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 12	wG23543AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 13	wG23544AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 14	wG23545AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 15	wG23546AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 16	wG23547AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain Input V. Return P Output Exp. 2	wG23533AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 3	wG23534AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 4	wG23535AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 5	wG23536AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 6	wG23537AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 7	wG23538AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 8	wG23539AU\x0D\x0A
Mix-point Gain Input V. Return P Output Exp. 9	wG23540AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send A	wG23516AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send B	wG23517AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send C	wG23518AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send D	wG23519AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send E	wG23520AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send F	wG23521AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send G	wG23522AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send H	wG23523AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send I	wG23524AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send J	wG23525AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send K	wG23526AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send L	wG23527AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send M	wG23528AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send N	wG23529AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send O	wG23530AU\x0D\x0A
Mix-point Gain Input V. Return P Output V. Send P	wG23531AU\x0D\x0A
Mix-point Mute Input 1 Output 1	wM20000AU\x0D\x0A
Mix-point Mute Input 1 Output 4	wM20003AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 1	wM20008AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 2	wM20009AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 3	wM20010AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 4	wM20011AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 5	wM20012AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 6	wM20013AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 7	wM20014AU\x0D\x0A
Mix-point Mute Input 1 Output Aux 8	wM20015AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 1	wM20032AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 10	wM20041AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 11	wM20042AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 12	wM20043AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 13	wM20044AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 14	wM20045AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 15	wM20046AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 16	wM20047AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 2	wM20033AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 3	wM20034AU\x0D\x0A

Global Scripser Module Communication Sheet

Mix-point Mute Input 1 Output Exp. 4	wM20035AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 5	wM20036AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 6	wM20037AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 7	wM20038AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 8	wM20039AU\x0D\x0A
Mix-point Mute Input 1 Output Exp. 9	wM20040AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send A	wM20016AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send B	wM20017AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send C	wM20018AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send D	wM20019AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send E	wM20020AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send F	wM20021AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send G	wM20022AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send H	wM20023AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send I	wM20024AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send J	wM20025AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send K	wM20026AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send L	wM20027AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send M	wM20028AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send N	wM20029AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send O	wM20030AU\x0D\x0A
Mix-point Mute Input 1 Output V. Send P	wM20031AU\x0D\x0A
Mix-point Mute Input 6 Output 1	wM20500AU\x0D\x0A
Mix-point Mute Input 6 Output 4	wM20503AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 1	wM20508AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 2	wM20509AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 3	wM20510AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 4	wM20511AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 5	wM20512AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 6	wM20513AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 7	wM20514AU\x0D\x0A
Mix-point Mute Input 6 Output Aux 8	wM20515AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 1	wM20532AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 10	wM20541AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 11	wM20542AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 12	wM20543AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 13	wM20544AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 14	wM20545AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 15	wM20546AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 16	wM20547AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 2	wM20533AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 3	wM20534AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 4	wM20535AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 5	wM20536AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Mute Input 6 Output Exp. 6	wM20537AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 7	wM20538AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 8	wM20539AU\x0D\x0A
Mix-point Mute Input 6 Output Exp. 9	wM20540AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send A	wM20516AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send B	wM20517AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send C	wM20518AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send D	wM20519AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send E	wM20520AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send F	wM20521AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send G	wM20522AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send H	wM20523AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send I	wM20524AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send J	wM20525AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send K	wM20526AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send L	wM20527AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send M	wM20528AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send N	wM20529AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send O	wM20530AU\x0D\x0A
Mix-point Mute Input 6 Output V. Send P	wM20531AU\x0D\x0A
Mix-point Mute Input Aux 1 Output 1	wM21200AU\x0D\x0A
Mix-point Mute Input Aux 1 Output 4	wM21203AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 1	wM21208AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 2	wM21209AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 3	wM21210AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 4	wM21211AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 5	wM21212AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 6	wM21213AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 7	wM21214AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Aux 8	wM21215AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 1	wM21232AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 10	wM21241AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 11	wM21242AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 12	wM21243AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 13	wM21244AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 14	wM21245AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 15	wM21246AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 16	wM21247AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 2	wM21233AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 3	wM21234AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 4	wM21235AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 5	wM21236AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 6	wM21237AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 7	wM21238AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input Aux 1 Output Exp. 8	wM21239AU\x0D\x0A
Mix-point Mute Input Aux 1 Output Exp. 9	wM21240AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send A	wM21216AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send B	wM21217AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send C	wM21218AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send D	wM21219AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send E	wM21220AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send F	wM21221AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send G	wM21222AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send H	wM21223AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send I	wM21224AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send J	wM21225AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send K	wM21226AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send L	wM21227AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send M	wM21228AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send N	wM21229AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send O	wM21230AU\x0D\x0A
Mix-point Mute Input Aux 1 Output V. Send P	wM21231AU\x0D\x0A
Mix-point Mute Input Aux 2 Output 1	wM21300AU\x0D\x0A
Mix-point Mute Input Aux 2 Output 4	wM21303AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 1	wM21308AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 2	wM21309AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 3	wM21310AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 4	wM21311AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 5	wM21312AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 6	wM21313AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 7	wM21314AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Aux 8	wM21315AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 1	wM21332AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 10	wM21341AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 11	wM21342AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 12	wM21343AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 13	wM21344AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 14	wM21345AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 15	wM21346AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 16	wM21347AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 2	wM21333AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 3	wM21334AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 4	wM21335AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 5	wM21336AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 6	wM21337AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 7	wM21338AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 8	wM21339AU\x0D\x0A
Mix-point Mute Input Aux 2 Output Exp. 9	wM21340AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input Aux 2 Output V. Send A	wM21316AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send B	wM21317AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send C	wM21318AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send D	wM21319AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send E	wM21320AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send F	wM21321AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send G	wM21322AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send H	wM21323AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send I	wM21324AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send J	wM21325AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send K	wM21326AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send L	wM21327AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send M	wM21328AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send N	wM21329AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send O	wM21330AU\x0D\x0A
Mix-point Mute Input Aux 2 Output V. Send P	wM21331AU\x0D\x0A
Mix-point Mute Input Aux 3 Output 1	wM21400AU\x0D\x0A
Mix-point Mute Input Aux 3 Output 4	wM21403AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 1	wM21408AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 2	wM21409AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 3	wM21410AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 4	wM21411AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 5	wM21412AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 6	wM21413AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 7	wM21414AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Aux 8	wM21415AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 1	wM21432AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 10	wM21441AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 11	wM21442AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 12	wM21443AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 13	wM21444AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 14	wM21445AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 15	wM21446AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 16	wM21447AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 2	wM21433AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 3	wM21434AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 4	wM21435AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 5	wM21436AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 6	wM21437AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 7	wM21438AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 8	wM21439AU\x0D\x0A
Mix-point Mute Input Aux 3 Output Exp. 9	wM21440AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send A	wM21416AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send B	wM21417AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input Aux 3 Output V. Send C	wM21418AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send D	wM21419AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send E	wM21420AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send F	wM21421AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send G	wM21422AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send H	wM21423AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send I	wM21424AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send J	wM21425AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send K	wM21426AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send L	wM21427AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send M	wM21428AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send N	wM21429AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send O	wM21430AU\x0D\x0A
Mix-point Mute Input Aux 3 Output V. Send P	wM21431AU\x0D\x0A
Mix-point Mute Input Aux 4 Output 1	wM21500AU\x0D\x0A
Mix-point Mute Input Aux 4 Output 4	wM21503AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 1	wM21508AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 2	wM21509AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 3	wM21510AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 4	wM21511AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 5	wM21512AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 6	wM21513AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 7	wM21514AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Aux 8	wM21515AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 1	wM21532AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 10	wM21541AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 11	wM21542AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 12	wM21543AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 13	wM21544AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 14	wM21545AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 15	wM21546AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 16	wM21547AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 2	wM21533AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 3	wM21534AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 4	wM21535AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 5	wM21536AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 6	wM21537AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 7	wM21538AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 8	wM21539AU\x0D\x0A
Mix-point Mute Input Aux 4 Output Exp. 9	wM21540AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send A	wM21516AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send B	wM21517AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send C	wM21518AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send D	wM21519AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute Input Aux 4 Output V. Send E	wM21520AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send F	wM21521AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send G	wM21522AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send H	wM21523AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send I	wM21524AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send J	wM21525AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send K	wM21526AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send L	wM21527AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send M	wM21528AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send N	wM21529AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send O	wM21530AU\x0D\x0A
Mix-point Mute Input Aux 4 Output V. Send P	wM21531AU\x0D\x0A
Mix-point Mute Input Aux 5 Output 1	wM21600AU\x0D\x0A
Mix-point Mute Input Aux 5 Output 4	wM21603AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 1	wM21608AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 2	wM21609AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 3	wM21610AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 4	wM21611AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 5	wM21612AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 6	wM21613AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 7	wM21614AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Aux 8	wM21615AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 1	wM21632AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 10	wM21641AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 11	wM21642AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 12	wM21643AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 13	wM21644AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 14	wM21645AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 15	wM21646AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 16	wM21647AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 2	wM21633AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 3	wM21634AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 4	wM21635AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 5	wM21636AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 6	wM21637AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 7	wM21638AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 8	wM21639AU\x0D\x0A
Mix-point Mute Input Aux 5 Output Exp. 9	wM21640AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send A	wM21616AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send B	wM21617AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send C	wM21618AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send D	wM21619AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send E	wM21620AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send F	wM21621AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input Aux 5 Output V. Send G	wM21622AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send H	wM21623AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send I	wM21624AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send J	wM21625AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send K	wM21626AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send L	wM21627AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send M	wM21628AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send N	wM21629AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send O	wM21630AU\x0D\x0A
Mix-point Mute Input Aux 5 Output V. Send P	wM21631AU\x0D\x0A
Mix-point Mute Input Aux 6 Output 1	wM21700AU\x0D\x0A
Mix-point Mute Input Aux 6 Output 4	wM21703AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 1	wM21708AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 2	wM21709AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 3	wM21710AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 4	wM21711AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 5	wM21712AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 6	wM21713AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 7	wM21714AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Aux 8	wM21715AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 1	wM21732AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 10	wM21741AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 11	wM21742AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 12	wM21743AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 13	wM21744AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 14	wM21745AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 15	wM21746AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 16	wM21747AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 2	wM21733AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 3	wM21734AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 4	wM21735AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 5	wM21736AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 6	wM21737AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 7	wM21738AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 8	wM21739AU\x0D\x0A
Mix-point Mute Input Aux 6 Output Exp. 9	wM21740AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send A	wM21716AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send B	wM21717AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send C	wM21718AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send D	wM21719AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send E	wM21720AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send F	wM21721AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send G	wM21722AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send H	wM21723AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute Input Aux 6 Output V. Send I	wM21724AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send J	wM21725AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send K	wM21726AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send L	wM21727AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send M	wM21728AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send N	wM21729AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send O	wM21730AU\x0D\x0A
Mix-point Mute Input Aux 6 Output V. Send P	wM21731AU\x0D\x0A
Mix-point Mute Input Aux 7 Output 1	wM21800AU\x0D\x0A
Mix-point Mute Input Aux 7 Output 4	wM21803AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 1	wM21808AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 2	wM21809AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 3	wM21810AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 4	wM21811AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 5	wM21812AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 6	wM21813AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 7	wM21814AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Aux 8	wM21815AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 1	wM21832AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 10	wM21841AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 11	wM21842AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 12	wM21843AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 13	wM21844AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 14	wM21845AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 15	wM21846AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 16	wM21847AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 2	wM21833AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 3	wM21834AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 4	wM21835AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 5	wM21836AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 6	wM21837AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 7	wM21838AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 8	wM21839AU\x0D\x0A
Mix-point Mute Input Aux 7 Output Exp. 9	wM21840AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send A	wM21816AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send B	wM21817AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send C	wM21818AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send D	wM21819AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send E	wM21820AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send F	wM21821AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send G	wM21822AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send H	wM21823AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send I	wM21824AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send J	wM21825AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input Aux 7 Output V. Send K	wM21826AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send L	wM21827AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send M	wM21828AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send N	wM21829AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send O	wM21830AU\x0D\x0A
Mix-point Mute Input Aux 7 Output V. Send P	wM21831AU\x0D\x0A
Mix-point Mute Input Aux 8 Output 1	wM21900AU\x0D\x0A
Mix-point Mute Input Aux 8 Output 4	wM21903AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 1	wM21908AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 2	wM21909AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 3	wM21910AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 4	wM21911AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 5	wM21912AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 6	wM21913AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 7	wM21914AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Aux 8	wM21915AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 1	wM21932AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 10	wM21941AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 11	wM21942AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 12	wM21943AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 13	wM21944AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 14	wM21945AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 15	wM21946AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 16	wM21947AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 2	wM21933AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 3	wM21934AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 4	wM21935AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 5	wM21936AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 6	wM21937AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 7	wM21938AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 8	wM21939AU\x0D\x0A
Mix-point Mute Input Aux 8 Output Exp. 9	wM21940AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send A	wM21916AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send B	wM21917AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send C	wM21918AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send D	wM21919AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send E	wM21920AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send F	wM21921AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send G	wM21922AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send H	wM21923AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send I	wM21924AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send J	wM21925AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send K	wM21926AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send L	wM21927AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Input Aux 8 Output V. Send M	wM21928AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send N	wM21929AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send O	wM21930AU\x0D\x0A
Mix-point Mute Input Aux 8 Output V. Send P	wM21931AU\x0D\x0A
Mix-point Mute Input V. Return A Output 1	wM22000AU\x0D\x0A
Mix-point Mute Input V. Return A Output 4	wM22003AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 1	wM22008AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 2	wM22009AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 3	wM22010AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 4	wM22011AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 5	wM22012AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 6	wM22013AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 7	wM22014AU\x0D\x0A
Mix-point Mute Input V. Return A Output Aux 8	wM22015AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 1	wM22032AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 10	wM22041AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 11	wM22042AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 12	wM22043AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 13	wM22044AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 14	wM22045AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 15	wM22046AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 16	wM22047AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 2	wM22033AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 3	wM22034AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 4	wM22035AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 5	wM22036AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 6	wM22037AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 7	wM22038AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 8	wM22039AU\x0D\x0A
Mix-point Mute Input V. Return A Output Exp. 9	wM22040AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send A	wM22016AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send B	wM22017AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send C	wM22018AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send D	wM22019AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send E	wM22020AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send F	wM22021AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send G	wM22022AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send H	wM22023AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send I	wM22024AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send J	wM22025AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send K	wM22026AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send L	wM22027AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send M	wM22028AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send N	wM22029AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return A Output V. Send O	wM22030AU\x0D\x0A
Mix-point Mute Input V. Return A Output V. Send P	wM22031AU\x0D\x0A
Mix-point Mute Input V. Return B Output 1	wM22100AU\x0D\x0A
Mix-point Mute Input V. Return B Output 4	wM22103AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 1	wM22108AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 2	wM22109AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 3	wM22110AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 4	wM22111AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 5	wM22112AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 6	wM22113AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 7	wM22114AU\x0D\x0A
Mix-point Mute Input V. Return B Output Aux 8	wM22115AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 1	wM22132AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 10	wM22141AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 11	wM22142AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 12	wM22143AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 13	wM22144AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 14	wM22145AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 15	wM22146AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 16	wM22147AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 2	wM22133AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 3	wM22134AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 4	wM22135AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 5	wM22136AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 6	wM22137AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 7	wM22138AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 8	wM22139AU\x0D\x0A
Mix-point Mute Input V. Return B Output Exp. 9	wM22140AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send A	wM22116AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send B	wM22117AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send C	wM22118AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send D	wM22119AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send E	wM22120AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send F	wM22121AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send G	wM22122AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send H	wM22123AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send I	wM22124AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send J	wM22125AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send K	wM22126AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send L	wM22127AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send M	wM22128AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send N	wM22129AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send O	wM22130AU\x0D\x0A
Mix-point Mute Input V. Return B Output V. Send P	wM22131AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return C Output 1	wM22200AU\x0D\x0A
Mix-point Mute Input V. Return C Output 4	wM22203AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 1	wM22208AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 2	wM22209AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 3	wM22210AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 4	wM22211AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 5	wM22212AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 6	wM22213AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 7	wM22214AU\x0D\x0A
Mix-point Mute Input V. Return C Output Aux 8	wM22215AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 1	wM22232AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 10	wM22241AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 11	wM22242AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 12	wM22243AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 13	wM22244AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 14	wM22245AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 15	wM22246AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 16	wM22247AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 2	wM22233AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 3	wM22234AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 4	wM22235AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 5	wM22236AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 6	wM22237AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 7	wM22238AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 8	wM22239AU\x0D\x0A
Mix-point Mute Input V. Return C Output Exp. 9	wM22240AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send A	wM22216AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send B	wM22217AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send C	wM22218AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send D	wM22219AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send E	wM22220AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send F	wM22221AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send G	wM22222AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send H	wM22223AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send I	wM22224AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send J	wM22225AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send K	wM22226AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send L	wM22227AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send M	wM22228AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send N	wM22229AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send O	wM22230AU\x0D\x0A
Mix-point Mute Input V. Return C Output V. Send P	wM22231AU\x0D\x0A
Mix-point Mute Input V. Return D Output 1	wM22300AU\x0D\x0A
Mix-point Mute Input V. Return D Output 4	wM22303AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return D Output Aux 1	wM22308AU\x0D\x0A
Mix-point Mute Input V. Return D Output Aux 2	wM22309AU\x0D\x0A
Mix-point Mute Input V. Return D Output Aux 3	wM22310AU\x0D\x0A
Mix-point Mute Input V. Return D Output Aux 4	wM22311AU\x0D\x0A
Mix-point Mute Input V. Return D Output Aux 5	wM22312AU\x0D\x0A
Mix-point Mute Input V. Return D Output Aux 6	wM22313AU\x0D\x0A
Mix-point Mute Input V. Return D Output Aux 7	wM22314AU\x0D\x0A
Mix-point Mute Input V. Return D Output Aux 8	wM22315AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 1	wM22332AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 10	wM22341AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 11	wM22342AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 12	wM22343AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 13	wM22344AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 14	wM22345AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 15	wM22346AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 16	wM22347AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 2	wM22333AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 3	wM22334AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 4	wM22335AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 5	wM22336AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 6	wM22337AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 7	wM22338AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 8	wM22339AU\x0D\x0A
Mix-point Mute Input V. Return D Output Exp. 9	wM22340AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send A	wM22316AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send B	wM22317AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send C	wM22318AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send D	wM22319AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send E	wM22320AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send F	wM22321AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send G	wM22322AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send H	wM22323AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send I	wM22324AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send J	wM22325AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send K	wM22326AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send L	wM22327AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send M	wM22328AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send N	wM22329AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send O	wM22330AU\x0D\x0A
Mix-point Mute Input V. Return D Output V. Send P	wM22331AU\x0D\x0A
Mix-point Mute Input V. Return E Output 1	wM22400AU\x0D\x0A
Mix-point Mute Input V. Return E Output 4	wM22403AU\x0D\x0A
Mix-point Mute Input V. Return E Output Aux 1	wM22408AU\x0D\x0A
Mix-point Mute Input V. Return E Output Aux 2	wM22409AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return E Output Aux 3	wM22410AU\x0D\x0A
Mix-point Mute Input V. Return E Output Aux 4	wM22411AU\x0D\x0A
Mix-point Mute Input V. Return E Output Aux 5	wM22412AU\x0D\x0A
Mix-point Mute Input V. Return E Output Aux 6	wM22413AU\x0D\x0A
Mix-point Mute Input V. Return E Output Aux 7	wM22414AU\x0D\x0A
Mix-point Mute Input V. Return E Output Aux 8	wM22415AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 1	wM22432AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 10	wM22441AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 11	wM22442AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 12	wM22443AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 13	wM22444AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 14	wM22445AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 15	wM22446AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 16	wM22447AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 2	wM22433AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 3	wM22434AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 4	wM22435AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 5	wM22436AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 6	wM22437AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 7	wM22438AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 8	wM22439AU\x0D\x0A
Mix-point Mute Input V. Return E Output Exp. 9	wM22440AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send A	wM22416AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send B	wM22417AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send C	wM22418AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send D	wM22419AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send E	wM22420AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send F	wM22421AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send G	wM22422AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send H	wM22423AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send I	wM22424AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send J	wM22425AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send K	wM22426AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send L	wM22427AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send M	wM22428AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send N	wM22429AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send O	wM22430AU\x0D\x0A
Mix-point Mute Input V. Return E Output V. Send P	wM22431AU\x0D\x0A
Mix-point Mute Input V. Return F Output 1	wM22500AU\x0D\x0A
Mix-point Mute Input V. Return F Output 4	wM22503AU\x0D\x0A
Mix-point Mute Input V. Return F Output Aux 1	wM22508AU\x0D\x0A
Mix-point Mute Input V. Return F Output Aux 2	wM22509AU\x0D\x0A
Mix-point Mute Input V. Return F Output Aux 3	wM22510AU\x0D\x0A
Mix-point Mute Input V. Return F Output Aux 4	wM22511AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return F Output Aux 5	wM22512AU\x0D\x0A
Mix-point Mute Input V. Return F Output Aux 6	wM22513AU\x0D\x0A
Mix-point Mute Input V. Return F Output Aux 7	wM22514AU\x0D\x0A
Mix-point Mute Input V. Return F Output Aux 8	wM22515AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 1	wM22532AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 10	wM22541AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 11	wM22542AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 12	wM22543AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 13	wM22544AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 14	wM22545AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 15	wM22546AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 16	wM22547AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 2	wM22533AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 3	wM22534AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 4	wM22535AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 5	wM22536AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 6	wM22537AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 7	wM22538AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 8	wM22539AU\x0D\x0A
Mix-point Mute Input V. Return F Output Exp. 9	wM22540AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send A	wM22516AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send B	wM22517AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send C	wM22518AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send D	wM22519AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send E	wM22520AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send F	wM22521AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send G	wM22522AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send H	wM22523AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send I	wM22524AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send J	wM22525AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send K	wM22526AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send L	wM22527AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send M	wM22528AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send N	wM22529AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send O	wM22530AU\x0D\x0A
Mix-point Mute Input V. Return F Output V. Send P	wM22531AU\x0D\x0A
Mix-point Mute Input V. Return G Output 1	wM22600AU\x0D\x0A
Mix-point Mute Input V. Return G Output 4	wM22603AU\x0D\x0A
Mix-point Mute Input V. Return G Output Aux 1	wM22608AU\x0D\x0A
Mix-point Mute Input V. Return G Output Aux 2	wM22609AU\x0D\x0A
Mix-point Mute Input V. Return G Output Aux 3	wM22610AU\x0D\x0A
Mix-point Mute Input V. Return G Output Aux 4	wM22611AU\x0D\x0A
Mix-point Mute Input V. Return G Output Aux 5	wM22612AU\x0D\x0A
Mix-point Mute Input V. Return G Output Aux 6	wM22613AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Input V. Return G Output Aux 7	wM22614AU\x0D\x0A
Mix-point Mute Input V. Return G Output Aux 8	wM22615AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 1	wM22632AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 10	wM22641AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 11	wM22642AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 12	wM22643AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 13	wM22644AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 14	wM22645AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 15	wM22646AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 16	wM22647AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 2	wM22633AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 3	wM22634AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 4	wM22635AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 5	wM22636AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 6	wM22637AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 7	wM22638AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 8	wM22639AU\x0D\x0A
Mix-point Mute Input V. Return G Output Exp. 9	wM22640AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send A	wM22616AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send B	wM22617AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send C	wM22618AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send D	wM22619AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send E	wM22620AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send F	wM22621AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send G	wM22622AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send H	wM22623AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send I	wM22624AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send J	wM22625AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send K	wM22626AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send L	wM22627AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send M	wM22628AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send N	wM22629AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send O	wM22630AU\x0D\x0A
Mix-point Mute Input V. Return G Output V. Send P	wM22631AU\x0D\x0A
Mix-point Mute Input V. Return H Output 1	wM22700AU\x0D\x0A
Mix-point Mute Input V. Return H Output 4	wM22703AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 1	wM22708AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 2	wM22709AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 3	wM22710AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 4	wM22711AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 5	wM22712AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 6	wM22713AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 7	wM22714AU\x0D\x0A
Mix-point Mute Input V. Return H Output Aux 8	wM22715AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Input V. Return H Output Exp. 1	wM22732AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 10	wM22741AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 11	wM22742AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 12	wM22743AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 13	wM22744AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 14	wM22745AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 15	wM22746AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 16	wM22747AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 2	wM22733AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 3	wM22734AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 4	wM22735AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 5	wM22736AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 6	wM22737AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 7	wM22738AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 8	wM22739AU\x0D\x0A
Mix-point Mute Input V. Return H Output Exp. 9	wM22740AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send A	wM22716AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send B	wM22717AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send C	wM22718AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send D	wM22719AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send E	wM22720AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send F	wM22721AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send G	wM22722AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send H	wM22723AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send I	wM22724AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send J	wM22725AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send K	wM22726AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send L	wM22727AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send M	wM22728AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send N	wM22729AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send O	wM22730AU\x0D\x0A
Mix-point Mute Input V. Return H Output V. Send P	wM22731AU\x0D\x0A
Mix-point Mute Input V. Return I Output 1	wM22800AU\x0D\x0A
Mix-point Mute Input V. Return I Output 4	wM22803AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 1	wM22808AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 2	wM22809AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 3	wM22810AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 4	wM22811AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 5	wM22812AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 6	wM22813AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 7	wM22814AU\x0D\x0A
Mix-point Mute Input V. Return I Output Aux 8	wM22815AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 1	wM22832AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 10	wM22841AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return I Output Exp. 11	wM22842AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 12	wM22843AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 13	wM22844AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 14	wM22845AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 15	wM22846AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 16	wM22847AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 2	wM22833AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 3	wM22834AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 4	wM22835AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 5	wM22836AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 6	wM22837AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 7	wM22838AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 8	wM22839AU\x0D\x0A
Mix-point Mute Input V. Return I Output Exp. 9	wM22840AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send A	wM22816AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send B	wM22817AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send C	wM22818AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send D	wM22819AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send E	wM22820AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send F	wM22821AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send G	wM22822AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send H	wM22823AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send I	wM22824AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send J	wM22825AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send K	wM22826AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send L	wM22827AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send M	wM22828AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send N	wM22829AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send O	wM22830AU\x0D\x0A
Mix-point Mute Input V. Return I Output V. Send P	wM22831AU\x0D\x0A
Mix-point Mute Input V. Return J Output 1	wM22900AU\x0D\x0A
Mix-point Mute Input V. Return J Output 4	wM22903AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 1	wM22908AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 2	wM22909AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 3	wM22910AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 4	wM22911AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 5	wM22912AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 6	wM22913AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 7	wM22914AU\x0D\x0A
Mix-point Mute Input V. Return J Output Aux 8	wM22915AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 1	wM22932AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 10	wM22941AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 11	wM22942AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 12	wM22943AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Mute Input V. Return J Output Exp. 13	wM22944AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 14	wM22945AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 15	wM22946AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 16	wM22947AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 2	wM22933AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 3	wM22934AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 4	wM22935AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 5	wM22936AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 6	wM22937AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 7	wM22938AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 8	wM22939AU\x0D\x0A
Mix-point Mute Input V. Return J Output Exp. 9	wM22940AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send A	wM22916AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send B	wM22917AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send C	wM22918AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send D	wM22919AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send E	wM22920AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send F	wM22921AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send G	wM22922AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send H	wM22923AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send I	wM22924AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send J	wM22925AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send K	wM22926AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send L	wM22927AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send M	wM22928AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send N	wM22929AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send O	wM22930AU\x0D\x0A
Mix-point Mute Input V. Return J Output V. Send P	wM22931AU\x0D\x0A
Mix-point Mute Input V. Return K Output 1	wM23000AU\x0D\x0A
Mix-point Mute Input V. Return K Output 4	wM23003AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 1	wM23008AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 2	wM23009AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 3	wM23010AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 4	wM23011AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 5	wM23012AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 6	wM23013AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 7	wM23014AU\x0D\x0A
Mix-point Mute Input V. Return K Output Aux 8	wM23015AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 1	wM23032AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 10	wM23041AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 11	wM23042AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 12	wM23043AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 13	wM23044AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 14	wM23045AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Input V. Return K Output Exp. 15	wM23046AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 16	wM23047AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 2	wM23033AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 3	wM23034AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 4	wM23035AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 5	wM23036AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 6	wM23037AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 7	wM23038AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 8	wM23039AU\x0D\x0A
Mix-point Mute Input V. Return K Output Exp. 9	wM23040AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send A	wM23016AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send B	wM23017AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send C	wM23018AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send D	wM23019AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send E	wM23020AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send F	wM23021AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send G	wM23022AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send H	wM23023AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send I	wM23024AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send J	wM23025AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send K	wM23026AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send L	wM23027AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send M	wM23028AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send N	wM23029AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send O	wM23030AU\x0D\x0A
Mix-point Mute Input V. Return K Output V. Send P	wM23031AU\x0D\x0A
Mix-point Mute Input V. Return L Output 1	wM23100AU\x0D\x0A
Mix-point Mute Input V. Return L Output 4	wM23103AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 1	wM23108AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 2	wM23109AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 3	wM23110AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 4	wM23111AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 5	wM23112AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 6	wM23113AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 7	wM23114AU\x0D\x0A
Mix-point Mute Input V. Return L Output Aux 8	wM23115AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 1	wM23132AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 10	wM23141AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 11	wM23142AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 12	wM23143AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 13	wM23144AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 14	wM23145AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 15	wM23146AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 16	wM23147AU\x0D\x0A

Global Scriptor Module Communication Sheet

Mix-point Mute Input V. Return L Output Exp. 2	wM23133AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 3	wM23134AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 4	wM23135AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 5	wM23136AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 6	wM23137AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 7	wM23138AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 8	wM23139AU\x0D\x0A
Mix-point Mute Input V. Return L Output Exp. 9	wM23140AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send A	wM23116AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send B	wM23117AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send C	wM23118AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send D	wM23119AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send E	wM23120AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send F	wM23121AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send G	wM23122AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send H	wM23123AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send I	wM23124AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send J	wM23125AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send K	wM23126AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send L	wM23127AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send M	wM23128AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send N	wM23129AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send O	wM23130AU\x0D\x0A
Mix-point Mute Input V. Return L Output V. Send P	wM23131AU\x0D\x0A
Mix-point Mute Input V. Return M Output 1	wM23200AU\x0D\x0A
Mix-point Mute Input V. Return M Output 4	wM23203AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 1	wM23208AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 2	wM23209AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 3	wM23210AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 4	wM23211AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 5	wM23212AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 6	wM23213AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 7	wM23214AU\x0D\x0A
Mix-point Mute Input V. Return M Output Aux 8	wM23215AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 1	wM23232AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 10	wM23241AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 11	wM23242AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 12	wM23243AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 13	wM23244AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 14	wM23245AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 15	wM23246AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 16	wM23247AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 2	wM23233AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 3	wM23234AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return M Output Exp. 4	wM23235AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 5	wM23236AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 6	wM23237AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 7	wM23238AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 8	wM23239AU\x0D\x0A
Mix-point Mute Input V. Return M Output Exp. 9	wM23240AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send A	wM23216AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send B	wM23217AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send C	wM23218AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send D	wM23219AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send E	wM23220AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send F	wM23221AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send G	wM23222AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send H	wM23223AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send I	wM23224AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send J	wM23225AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send K	wM23226AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send L	wM23227AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send M	wM23228AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send N	wM23229AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send O	wM23230AU\x0D\x0A
Mix-point Mute Input V. Return M Output V. Send P	wM23231AU\x0D\x0A
Mix-point Mute Input V. Return N Output 1	wM23300AU\x0D\x0A
Mix-point Mute Input V. Return N Output 4	wM23303AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 1	wM23308AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 2	wM23309AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 3	wM23310AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 4	wM23311AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 5	wM23312AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 6	wM23313AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 7	wM23314AU\x0D\x0A
Mix-point Mute Input V. Return N Output Aux 8	wM23315AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 1	wM23332AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 10	wM23341AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 11	wM23342AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 12	wM23343AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 13	wM23344AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 14	wM23345AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 15	wM23346AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 16	wM23347AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 2	wM23333AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 3	wM23334AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 4	wM23335AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 5	wM23336AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return N Output Exp. 6	wM23337AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 7	wM23338AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 8	wM23339AU\x0D\x0A
Mix-point Mute Input V. Return N Output Exp. 9	wM23340AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send A	wM23316AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send B	wM23317AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send C	wM23318AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send D	wM23319AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send E	wM23320AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send F	wM23321AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send G	wM23322AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send H	wM23323AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send I	wM23324AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send J	wM23325AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send K	wM23326AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send L	wM23327AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send M	wM23328AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send N	wM23329AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send O	wM23330AU\x0D\x0A
Mix-point Mute Input V. Return N Output V. Send P	wM23331AU\x0D\x0A
Mix-point Mute Input V. Return O Output 1	wM23400AU\x0D\x0A
Mix-point Mute Input V. Return O Output 4	wM23403AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 1	wM23408AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 2	wM23409AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 3	wM23410AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 4	wM23411AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 5	wM23412AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 6	wM23413AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 7	wM23414AU\x0D\x0A
Mix-point Mute Input V. Return O Output Aux 8	wM23415AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 1	wM23432AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 10	wM23441AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 11	wM23442AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 12	wM23443AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 13	wM23444AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 14	wM23445AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 15	wM23446AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 16	wM23447AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 2	wM23433AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 3	wM23434AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 4	wM23435AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 5	wM23436AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 6	wM23437AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 7	wM23438AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return O Output Exp. 8	wM23439AU\x0D\x0A
Mix-point Mute Input V. Return O Output Exp. 9	wM23440AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send A	wM23416AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send B	wM23417AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send C	wM23418AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send D	wM23419AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send E	wM23420AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send F	wM23421AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send G	wM23422AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send H	wM23423AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send I	wM23424AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send J	wM23425AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send K	wM23426AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send L	wM23427AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send M	wM23428AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send N	wM23429AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send O	wM23430AU\x0D\x0A
Mix-point Mute Input V. Return O Output V. Send P	wM23431AU\x0D\x0A
Mix-point Mute Input V. Return P Output 1	wM23500AU\x0D\x0A
Mix-point Mute Input V. Return P Output 4	wM23503AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 1	wM23508AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 2	wM23509AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 3	wM23510AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 4	wM23511AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 5	wM23512AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 6	wM23513AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 7	wM23514AU\x0D\x0A
Mix-point Mute Input V. Return P Output Aux 8	wM23515AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 1	wM23532AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 10	wM23541AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 11	wM23542AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 12	wM23543AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 13	wM23544AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 14	wM23545AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 15	wM23546AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 16	wM23547AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 2	wM23533AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 3	wM23534AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 4	wM23535AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 5	wM23536AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 6	wM23537AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 7	wM23538AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 8	wM23539AU\x0D\x0A
Mix-point Mute Input V. Return P Output Exp. 9	wM23540AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 10/8/2024

Mix-point Mute Input V. Return P Output V. Send A	wM23516AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send B	wM23517AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send C	wM23518AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send D	wM23519AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send E	wM23520AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send F	wM23521AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send G	wM23522AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send H	wM23523AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send I	wM23524AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send J	wM23525AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send K	wM23526AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send L	wM23527AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send M	wM23528AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send N	wM23529AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send O	wM23530AU\x0D\x0A
Mix-point Mute Input V. Return P Output V. Send P	wM23531AU\x0D\x0A
Output Attenuation Output 1	wG60000AU\x0D\x0A
Output Attenuation Output 4	wG60003AU\x0D\x0A
Output Mute Output 1	wM60000AU\x0D\x0A
Output Mute Output 4	wM60003AU\x0D\x0A
Output Post-mixer Trim Output 1	wG60100AU\x0D\x0A
Output Post-mixer Trim Output 4	wG60103AU\x0D\x0A
Phantom Power Input 1	wZ40000AU\x0D
Phantom Power Input 6	wZ40005AU\x0D
Player Control Player ID 1	w1PLAY\x0D
Player Control Player ID 8	w8PLAY\x0D
Player Filename Status Player ID 1	wA1CPLY\x0D
Player Filename Status Player ID 8	wA8CPLY\x0D
Player Repeat Player ID 1	wM1CPLY\x0D
Player Repeat Player ID 8	wM8CPLY\x0D
Pre-mixer Gain Input 1	wG40100AU\x0D\x0A
Pre-mixer Gain Input 6	wG40105AU\x0D\x0A
Pre-mixer Mute Input 1	wM40100AU\x0D\x0A
Pre-mixer Mute Input 6	wM40105AU\x0D\x0A
Registration Status Line 1	wRS1VOIP\x0D
Registration Status Line 8	wRS8VOIP\x0D
USB Call Status	wH1UPHN\x0D
Virtual Return Gain Input A	wG50100AU\x0D\x0A
Virtual Return Gain Input B	wG50101AU\x0D\x0A
Virtual Return Gain Input C	wG50102AU\x0D\x0A
Virtual Return Gain Input D	wG50103AU\x0D\x0A
Virtual Return Gain Input E	wG50104AU\x0D\x0A
Virtual Return Gain Input F	wG50105AU\x0D\x0A
Virtual Return Gain Input G	wG50106AU\x0D\x0A

Global Scripter Module Communication Sheet

Virtual Return Gain Input H	wG50107AU\x0D\x0A
Virtual Return Gain Input I	wG50108AU\x0D\x0A
Virtual Return Gain Input J	wG50109AU\x0D\x0A
Virtual Return Gain Input K	wG50110AU\x0D\x0A
Virtual Return Gain Input L	wG50111AU\x0D\x0A
Virtual Return Gain Input M	wG50112AU\x0D\x0A
Virtual Return Gain Input N	wG50113AU\x0D\x0A
Virtual Return Gain Input O	wG50114AU\x0D\x0A
Virtual Return Gain Input P	wG50115AU\x0D\x0A
Virtual Return Mute Input A	wM50100AU\x0D\x0A
Virtual Return Mute Input B	wM50101AU\x0D\x0A
Virtual Return Mute Input C	wM50102AU\x0D\x0A
Virtual Return Mute Input D	wM50103AU\x0D\x0A
Virtual Return Mute Input E	wM50104AU\x0D\x0A
Virtual Return Mute Input F	wM50105AU\x0D\x0A
Virtual Return Mute Input G	wM50106AU\x0D\x0A
Virtual Return Mute Input H	wM50107AU\x0D\x0A
Virtual Return Mute Input I	wM50108AU\x0D\x0A
Virtual Return Mute Input J	wM50109AU\x0D\x0A
Virtual Return Mute Input K	wM50110AU\x0D\x0A
Virtual Return Mute Input L	wM50111AU\x0D\x0A
Virtual Return Mute Input M	wM50112AU\x0D\x0A
Virtual Return Mute Input N	wM50113AU\x0D\x0A
Virtual Return Mute Input O	wM50114AU\x0D\x0A
Virtual Return Mute Input P	wM50115AU\x0D\x0A