

EXERCISE 1

SGN-1156 Signal Processing Techniques
<http://www.cs.tut.fi/courses/SGN-1156>
Tampere University of Technology
Germán Gómez-Herrero, <http://germangh.com>

November 12, 2009

PROBLEM 1: Consider a system with the following input-output relationship:

$$y[n] = \frac{1}{x[n]} + x[n-1]$$

where $x[n]$ is the input to the system and $y[n]$ is the system's output. Is this system linear? Is it time-invariant? Is it stable?. Could you determine the output of the system to an arbitrary input by using only the system's impulse response?. Justify your answers.

PROBLEM 2: Consider a system with the following input-output relationship:

$$y[n] = (n-1)^2 x[n]$$


where $x[n]$ is the input to the system and $y[n]$ is the system's output. Is this system linear? Is it time-invariant? Is it causal? Is it stable?

PROBLEM 3: Consider a system with the following input-output relationship:

$$y[n] = x[n] + 2x[n-5]$$

where $x[n]$ is the input to the system and $y[n]$ is the system's output. Is this system stable?

PROBLEM 4 (problem 2.64 from the book): Determine the expression for the impulse response of the LTI system in the figure below.

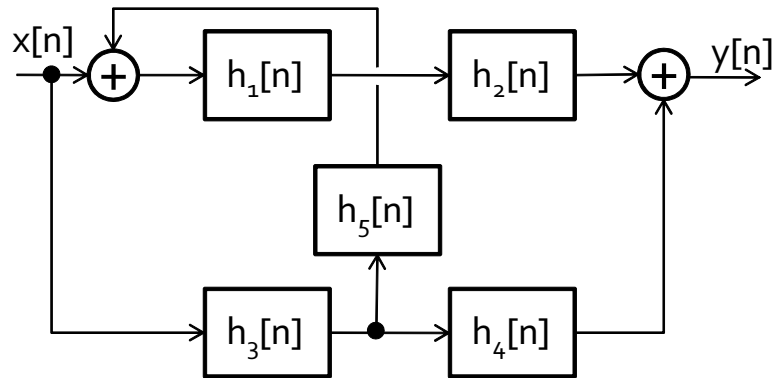

PROBLEM 5 (problem 2.48 from the book): A periodic sequence $\tilde{x}[n]$ with a period N is applied as an input to an LTI discrete-time system characterized by an impulse response $h[n]$ generating an output $y[n]$. Is $y[n]$ a periodic sequence? If it is, what is its period?