


# Dazzelite Assembly Instructions

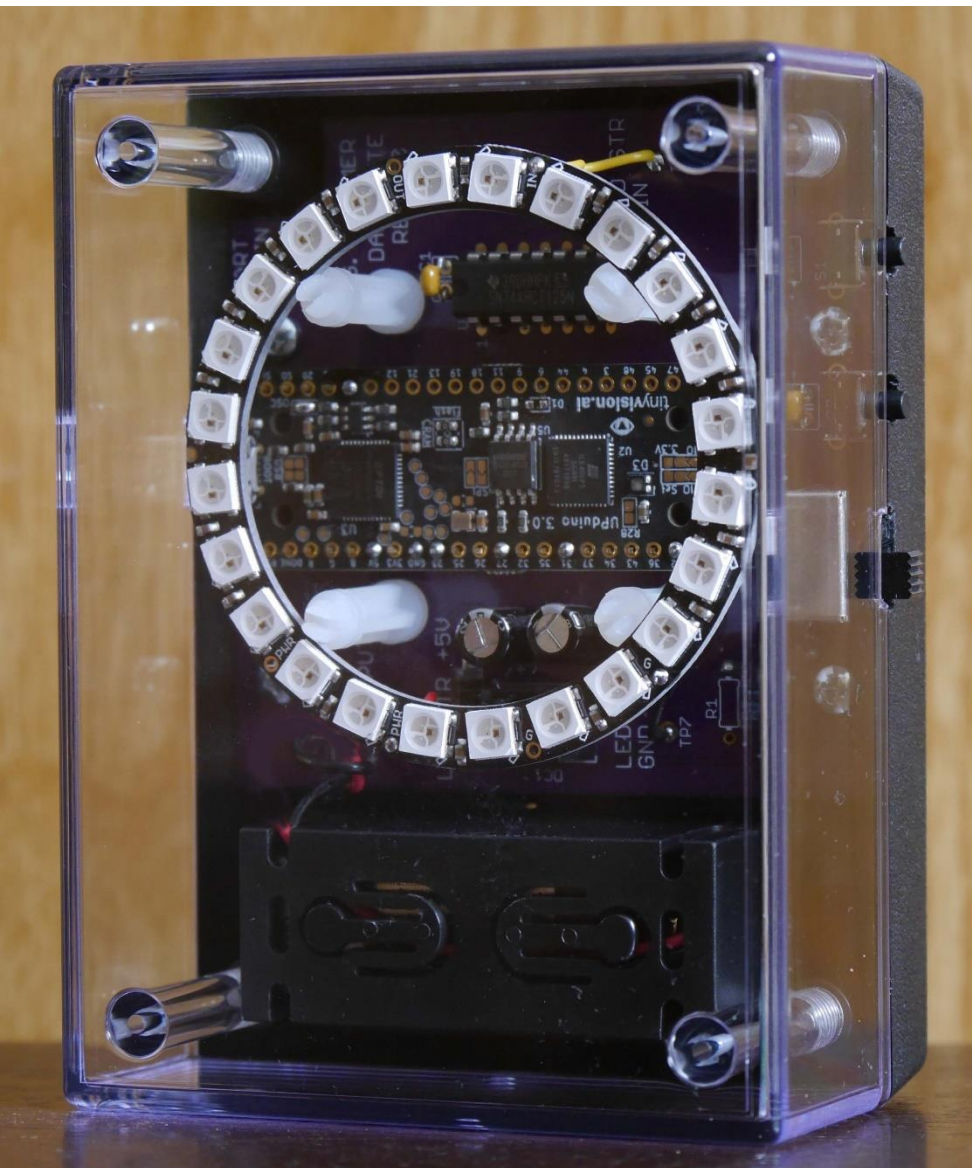

Revision: A.1

Grant Grummer

2/27/2020

# Dazzelite Assembly Instructions

## Table of Contents

Introduction .....	1
Tools required .....	1
PCB Assembly Instructions.....	1
Case Cutouts .....	3
Bottom (Opaque) Drilling and Cutouts .....	3
Top (Transparent) Case S2 and USB Cutouts .....	5
Connecting Battery Wires .....	6
Assembly Note .....	6

## Introduction

These instructions cover how to build a Dazzelite using a custom PCB installed into a beautiful case. The case (listed in the DazzelitePL spreadsheet parts list) has a plastic transparent top and an opaque bottom. It is assumed that all the parts, listed in the Dazzelite parts list, have been acquired before starting this assembly process.

## Tools required

The following list of tools are needed to build a Dazzelite:


- Soldering iron
- Solder
- Drill
- 3/16" drill bit (an optional small ~3/32" bit is helpful for drilling a pilot hole first)
- Philips screwdriver, #1
- Masking tape (optional but highly recommended)
- Wire cutters/strippers
- Small pliers
- Hobby knife (like an X-Acto knife)

## PCB Assembly Instructions


Only through hole parts are used in Dazzelite in order to make the PCB assembly easy to construct.

1. The UPduino board will need to be reworked before it can be used. It's easier to do this rework before installing it onto the Dazzelite PCB. The rework involves the following two steps.
  - a. Apply a blob of solder across the OSC solder jumper
  - b. Highly recommend desoldering and removing LED D1. It distracts from the ring display.

## Dazzelite Assembly Instructions

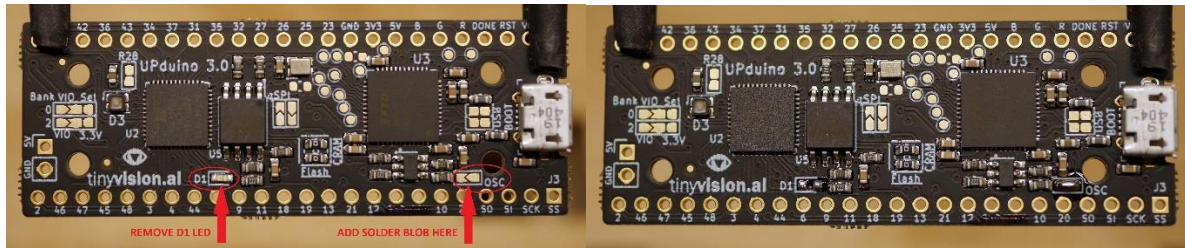


2. Insert the supports for the LED ring after all components have been soldered to the PCB
3. Break off 2 sets of 2 pins from the headers supplied with the UPduino
  - a. One set is used for the 5V and GND pins furthest from the USB connector
  - b. The second set is used for TP3 and TP4 on the PCB
4. Place the headers on the PCB and the UPduino on the headers
  - a. None of the 8 pins on either side furthest from the USB connector, need to be connected to the PCB
  - b. All the other pins on the UPduino do not need to be soldered to the PCB (refer to schematic), but they can if desired.
  - c. All 5V and GND pins should be soldered to the PCB (including the ones furthest from the USB connector)
5. Solder all components to the component side of the PCB, except the LED ring which is placed above the PCB on supports (in the following steps)

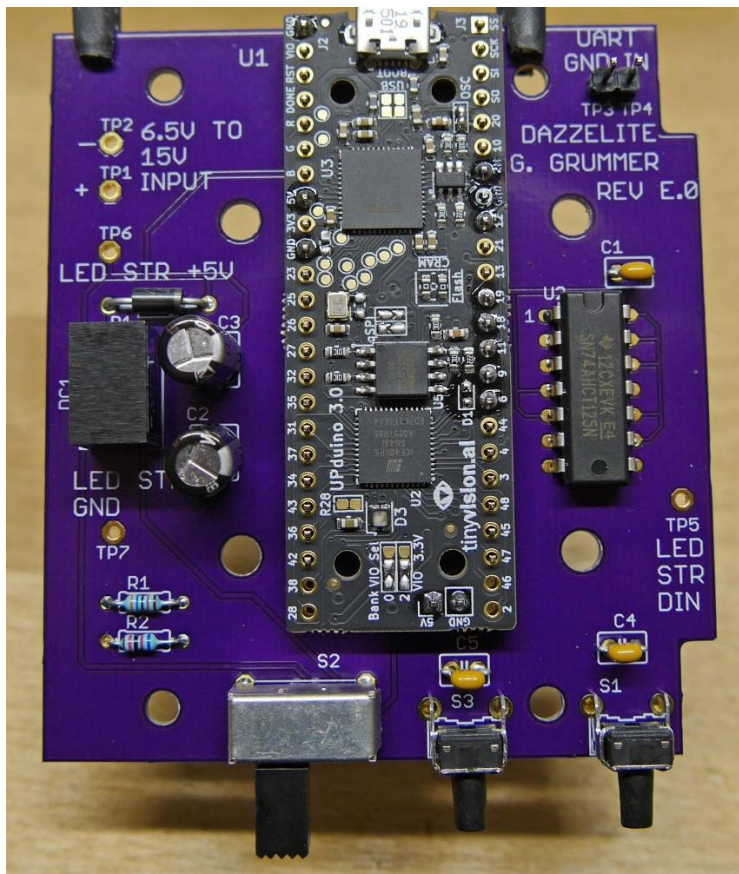

## Dazzelite Assembly Instructions

6. Rotate the LED ring so that the “IN” and “OUT” holes on the ring are the same distance to the edge of the PCB
7. Place ring onto the supports

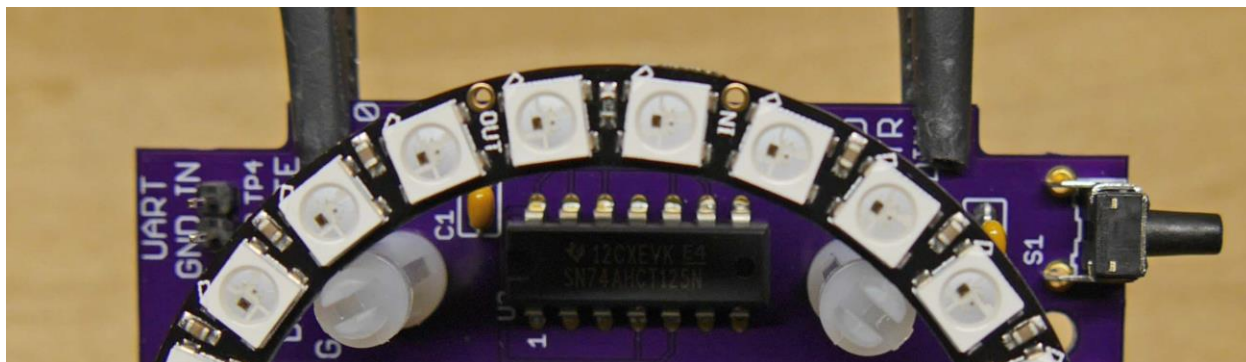

8. Solder the following 1-inch long wires from PCB to ring
  - a. TP5 on the PCB to IN on the ring
  - b. TP6 on the PCB to PWR on the ring
  - c. TP7 on the PCB to G on the ring
9. Do not attach the battery wires yet, it will be done in a later section

### Case Cutouts

These instructions are from the perspective of the 9V battery part of case up and looking into the case. The cutout for the USB is on the right side and the cutouts for the switches are on the left side.

To avoid scratching the top (transparent) section, put masking tape on the outside of it. Cover the whole top and the top two thirds of the sides.



### Bottom (Opaque) Drilling and Cutouts

The top and bottom sections should not be attached.



# Dazzelite Assembly Instructions

All drill holes are located 5/8” from the bottom of the case.

The following table lists the locations of the drill holes from the side opposite the battery.


Part	From Case Side Opposite Battery
S1 PB SW Location	13/16
S3 PB SW Location	1 & 7/16
S2 Slide SW Location	1 & 15/16 and
	2 & 3/16
USB Location	1 & 5/8 and
	1 & 13/16

Table 1: Drill Hole Locations



After the holes are drilled, make slots from the holes by cutting away the material from the side of the holes to the top on the bottom section of the case. Also cut away the material between the S2 (slide switch) holes and the USB holes.

## Dazzelite Assembly Instructions

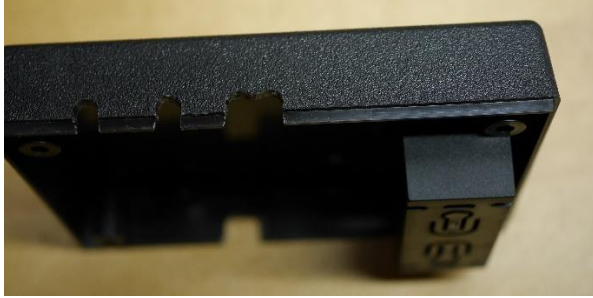

### Top (Transparent) Case S2 and USB Cutouts

Temporarily place the top and bottom sections together. The manufacturing plastic insertion dot side of the top section should align with the battery holder side of the case.



Mark (with the utility knife) where bottom section cutout for the S2 and USB cutouts meets the top section. There should now be 2 marks on each side. Separate the top and bottom sections. In each mark, cut down 0.1" to the thicker part of the top section. Cut away the thinner part (of the case) between the 2 marks on each side.



# Dazzelite Assembly Instructions

## Connecting Battery Wires

Temporary place the assembled PCB in the bottom section of the case. The battery wires go through the battery holder nearest to the “6.5V TO 15V INPUT” text on the PCB. The battery connector is placed at the opposite end of the battery holder.

Lift the assembled PCB so the battery wires can be soldered onto the board. The red (positive) wire connects to TP1 and the black (negative) wire connects to TP2.

## Assembly Note

Unfortunately, the UPduino board was built with the USB connector recessed into the PCB. This makes it difficult to access the connector through the case. So, just prior to screwing the PCB into the case, gently push the PCB towards the USB slot and hold it there. Now screw the board into the case. This helps get the USB connector closer to the case.