




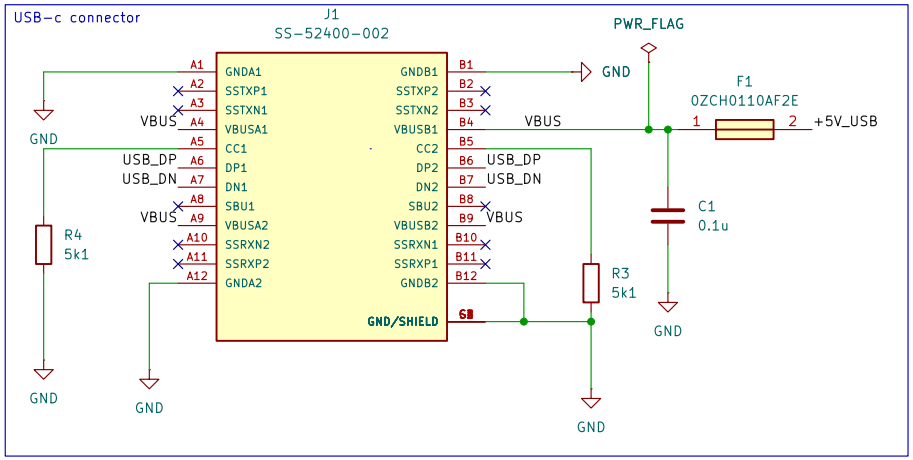


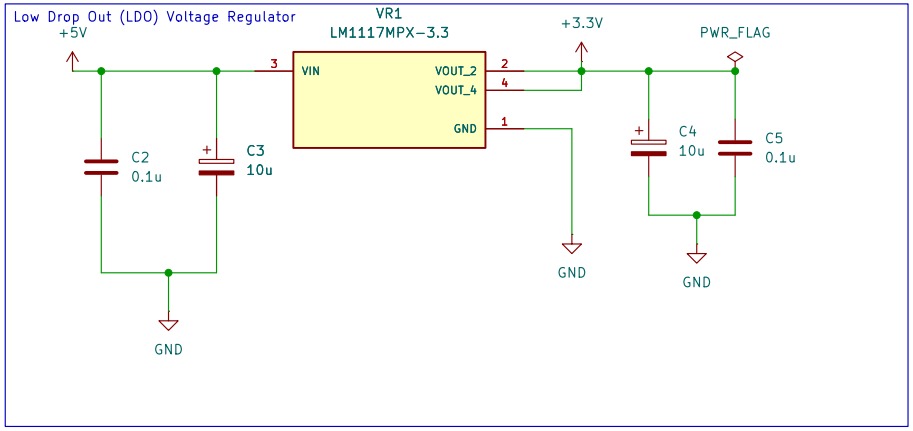

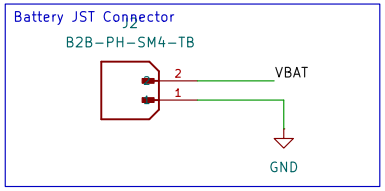

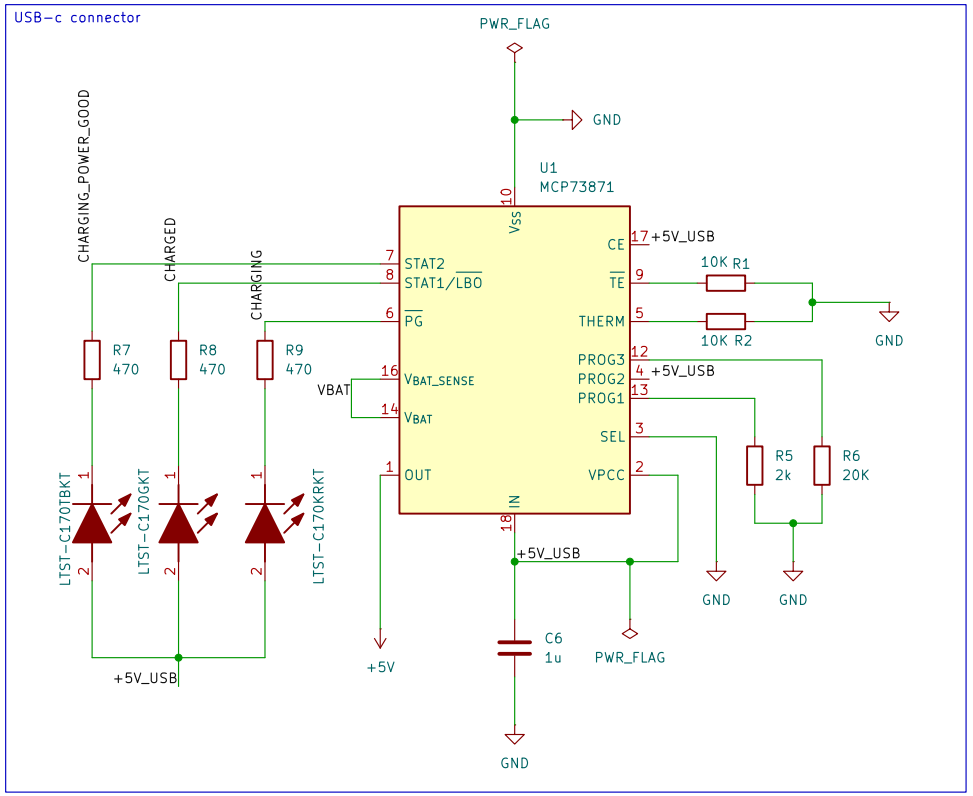

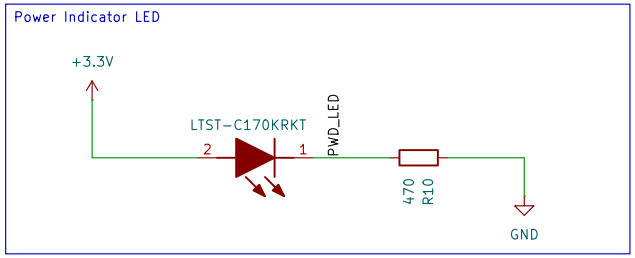






Sheet: /
File: Demo.kicad_sch


Title: ESP32 Sensor Board – Root


Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.7		Id: 1/4

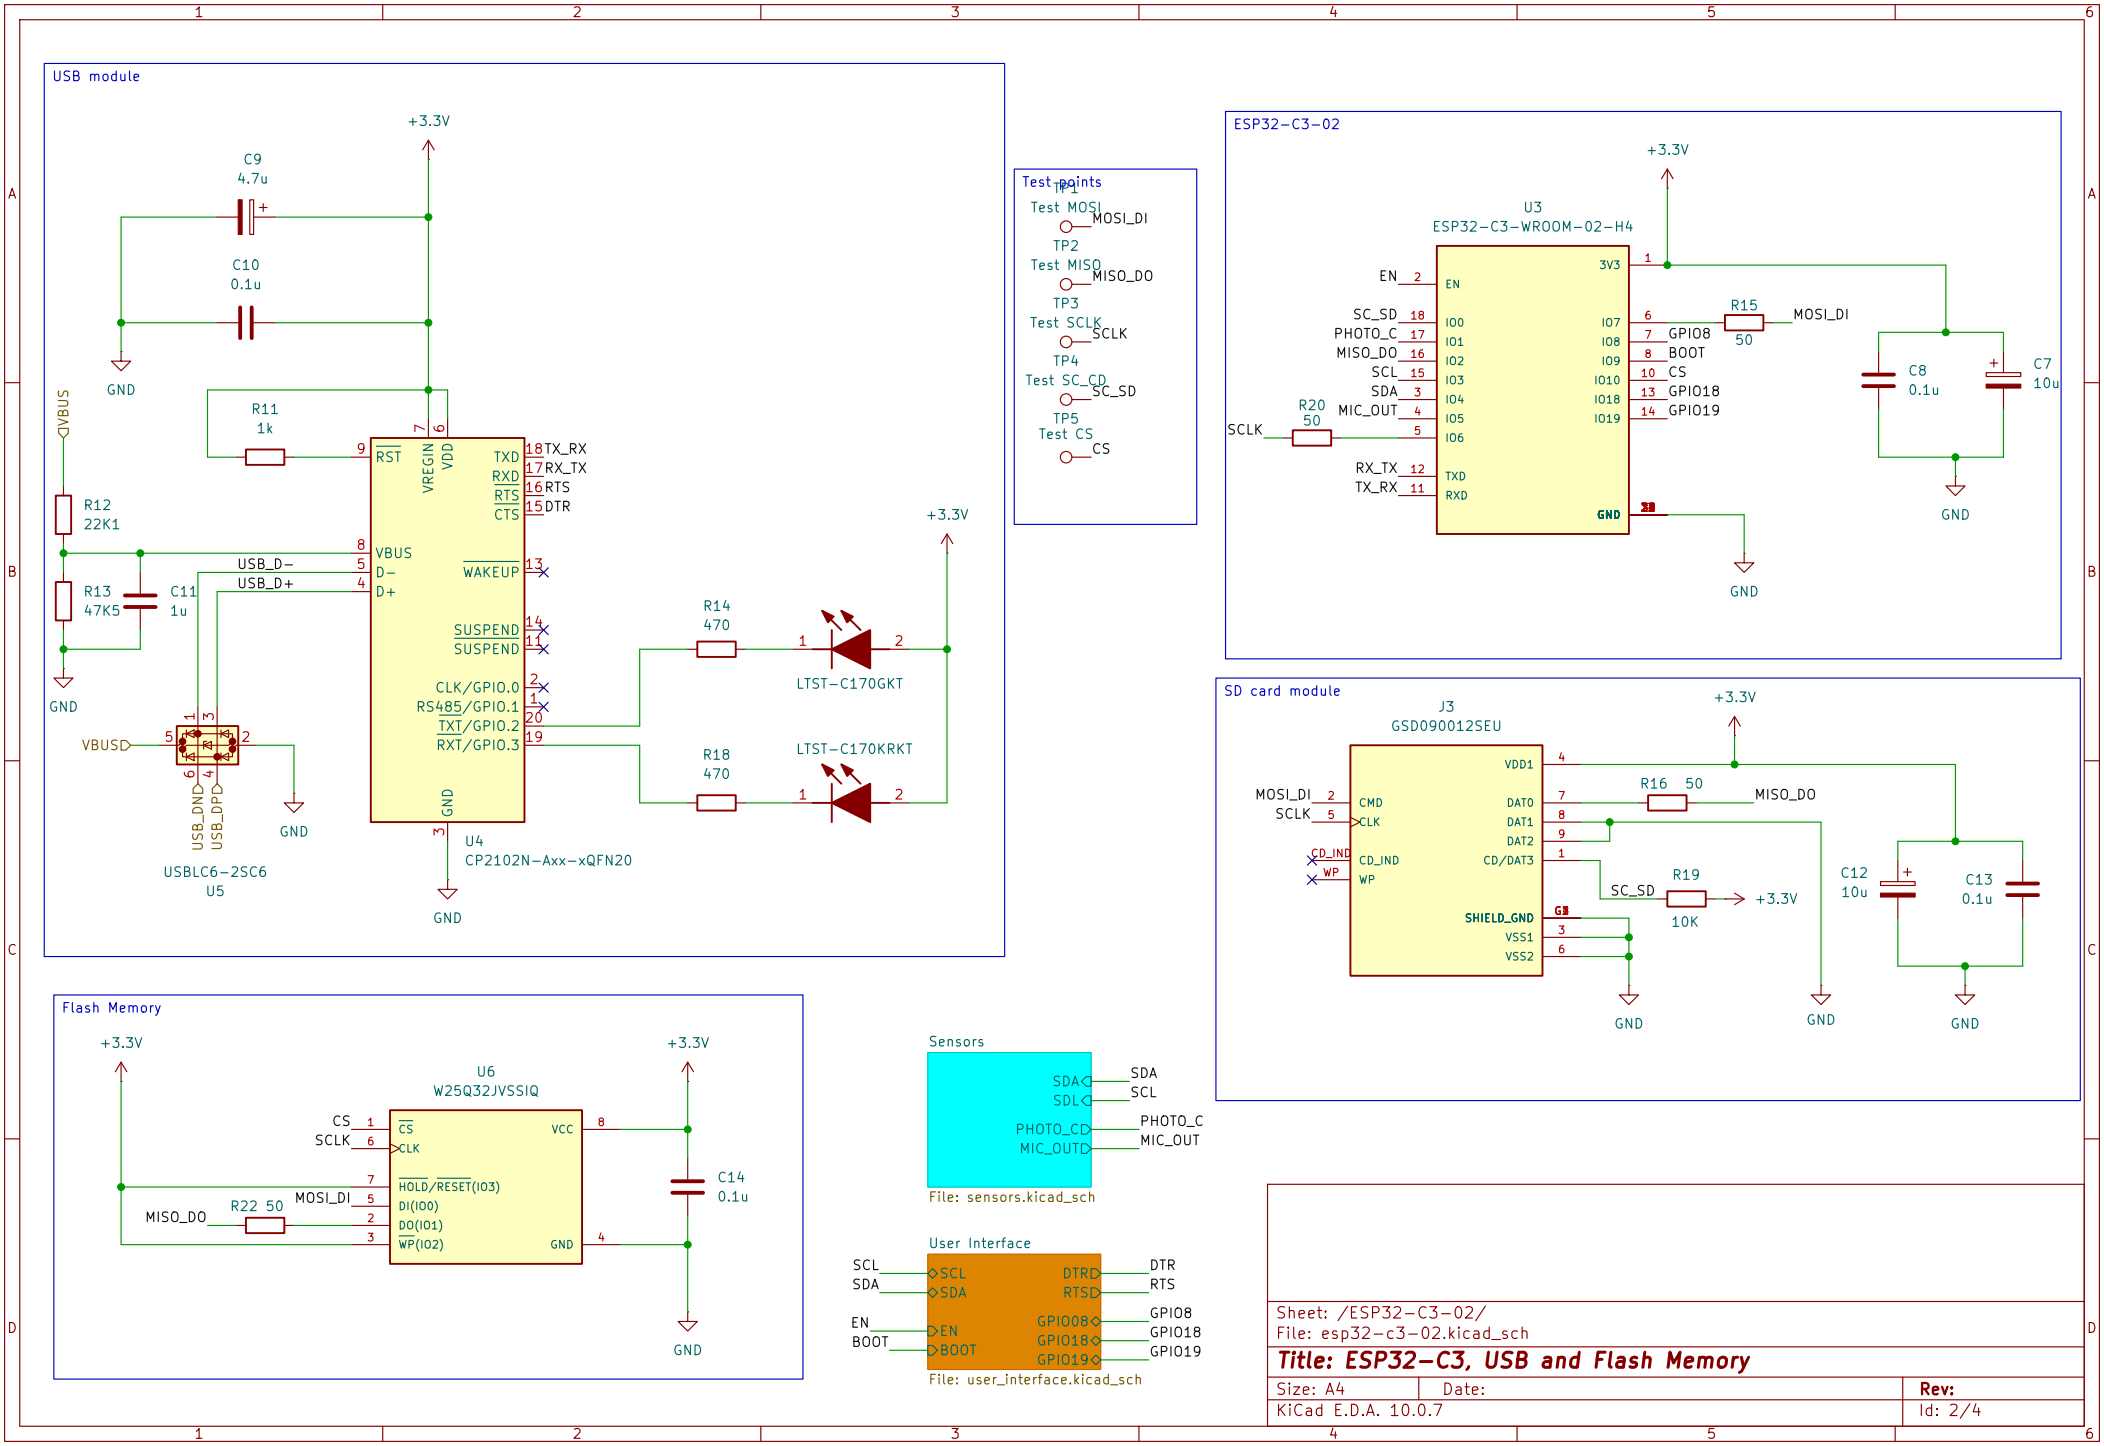
USB module
+3.3V
C9
4.7u
C10
0.1u
GND
VBUS
R11
1k
R12
22K1
R13
47K5
C11
1u
USB_D-
USB_D+
VBUSD
USB_DND
USB_DPD
USBLC6-2SC6
U5
RST
VREGIN
VDD
VBUS
D-
D+
WAKEUP
SUSPEND
CLK/GPIO.0
RS485/GPIO.1
TXT/GPIO.2
RXT/GPIO.3
TXD
RXD
RTS
CTS
TX_RX
RX_TX
RTS
DTR
U4
CP2102N-Axx-xQFN20
R14
470
R18
470
LTST-C170GKT
LTST-C170KRKT
Test points
TP1
Test MOSI
MOSI_DI
TP2
Test MISO
MISO_DO
TP3
Test SCLK
SCLK
TP4
Test SC_CD
SC_SD
TP5
Test CS
CS
ESP32-C3-02
U3
ESP32-C3-WROOM-02-H4
EN
SC_SD
PHOTO_C
MISO_DO
SCL
SDA
MIC_OUT
SCLK
RX_TX
TX_RX
IO0
IO1
IO2
IO3
IO4
IO5
IO6
TXD
RXD
3V3
IO7
IO8
IO9
IO10
IO18
IO19
GND
R15
50
R20
50
GPIO8
BOOT
CS
GPIO18
GPIO19
C8
0.1u
C7
10u
SD card module
J3
GSD090012SEU
MOSI_DI
SCLK
CD_IND
WP
CMD
CLK
CD_IND
WP
VDD1
DAT0
DAT1
DAT2
CD/DAT3
SHIELD_GND
VSS1
VSS2
R16
50
MISO_DO
R19
10K
SC_SD
C12
10u
C13
0.1u
Flash Memory
U6
W25Q32JVSSIQ
CS
SCLK
MISO_DO
MOSI_DI
R22 50
CS
CLK
HOLD/RESET(IO3)
DI(IO0)
DO(IO1)
WP(IO2)
VCC
GND
C14
0.1u
Sensors
SDA
SDL
PHOTO_C
MIC_OUT
File: sensors.kicad_sch
User Interface
SCL
SDA
EN
BOOT
DTR
RTS
GPIO8
GPIO18
GPIO19
File: user_interface.kicad_sch
Sheet: /ESP32-C3-02/
File: esp32-c3-02.kicad_sch
Title: ESP32-C3, USB and Flash Memory
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 2/4

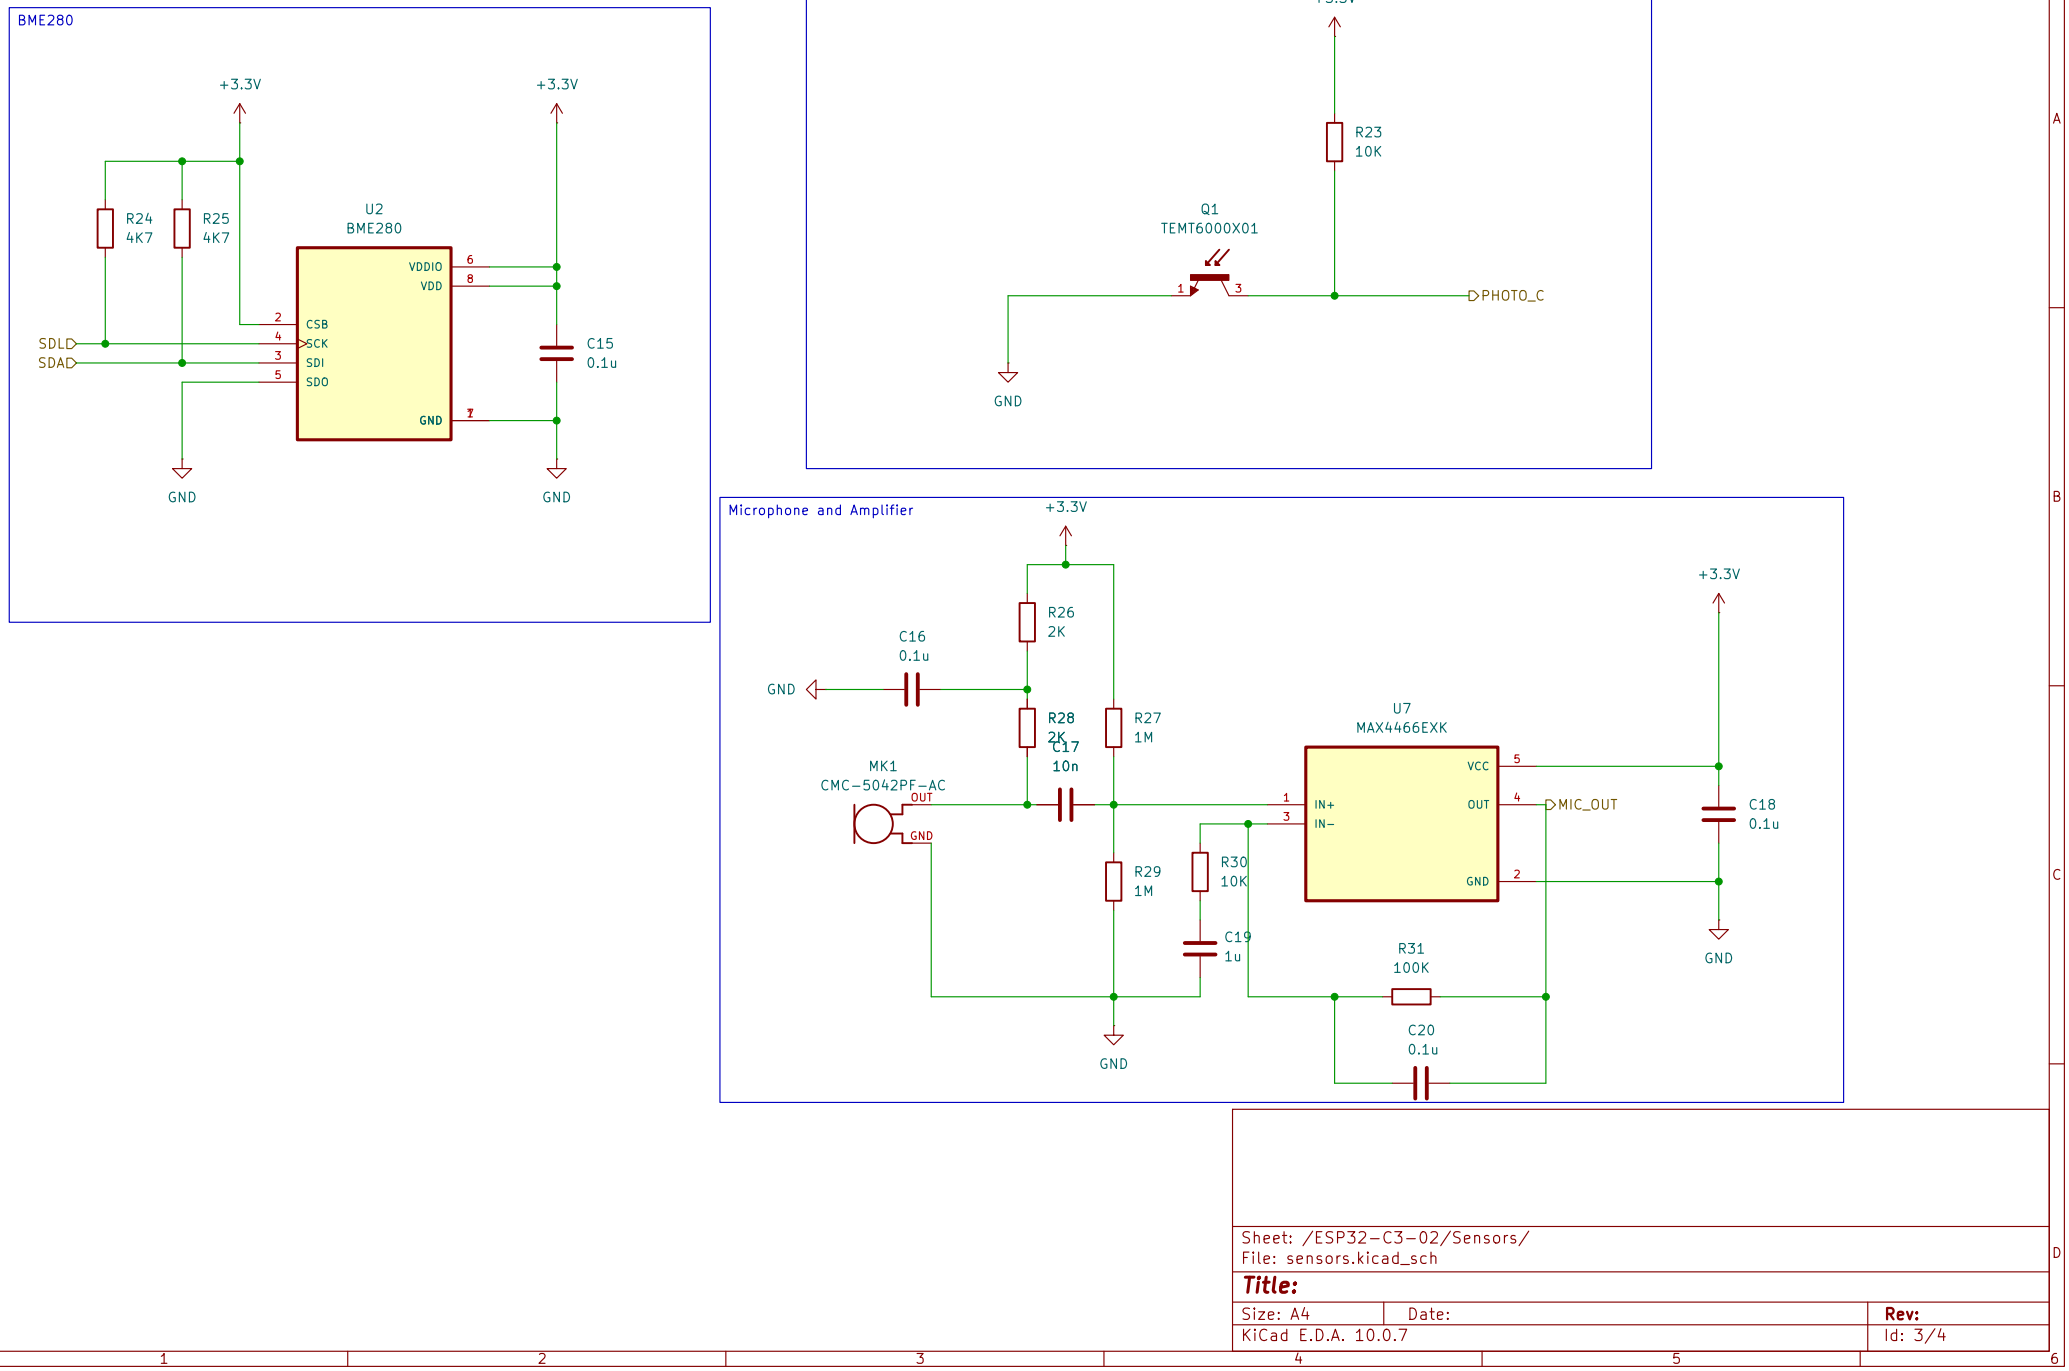
BME280
+3.3V
+3.3V
R24
4K7
R25
4K7
U2
BME280
VDDIO
VDD
CSB
SCK
SDI
SDO
GND
SDLD
SDAD
C15
0.1u
GND
GND
PHOTO SENSOR
+3.3V
R23
10K
Q1
TEMT6000X01
PHOTO_C
GND
Microphone and Amplifier
+3.3V
R26
2K
C16
0.1u
GND
R28
2K
R27
1M
C17
10n
MK1
CMC-5042PF-AC
OUT
GND
R29
1M
R30
10K
C19
1u
GND
U7
MAX4466EXK
VCC
IN+
IN-
OUT
GND
MIC_OUT
+3.3V
C18
0.1u
GND
R31
100K
C20
0.1u
Sheet: /ESP32-C3-02/Sensors/
File: sensors.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 3/4

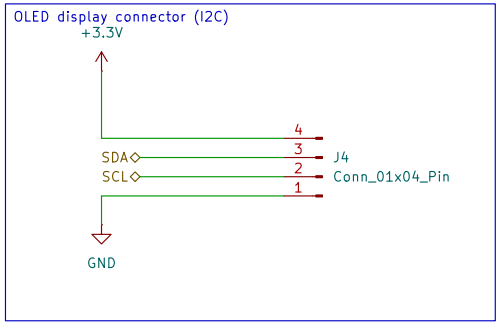

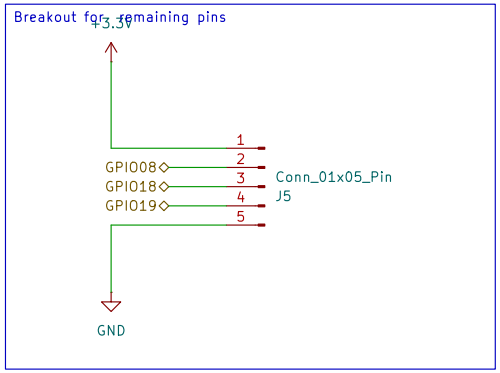

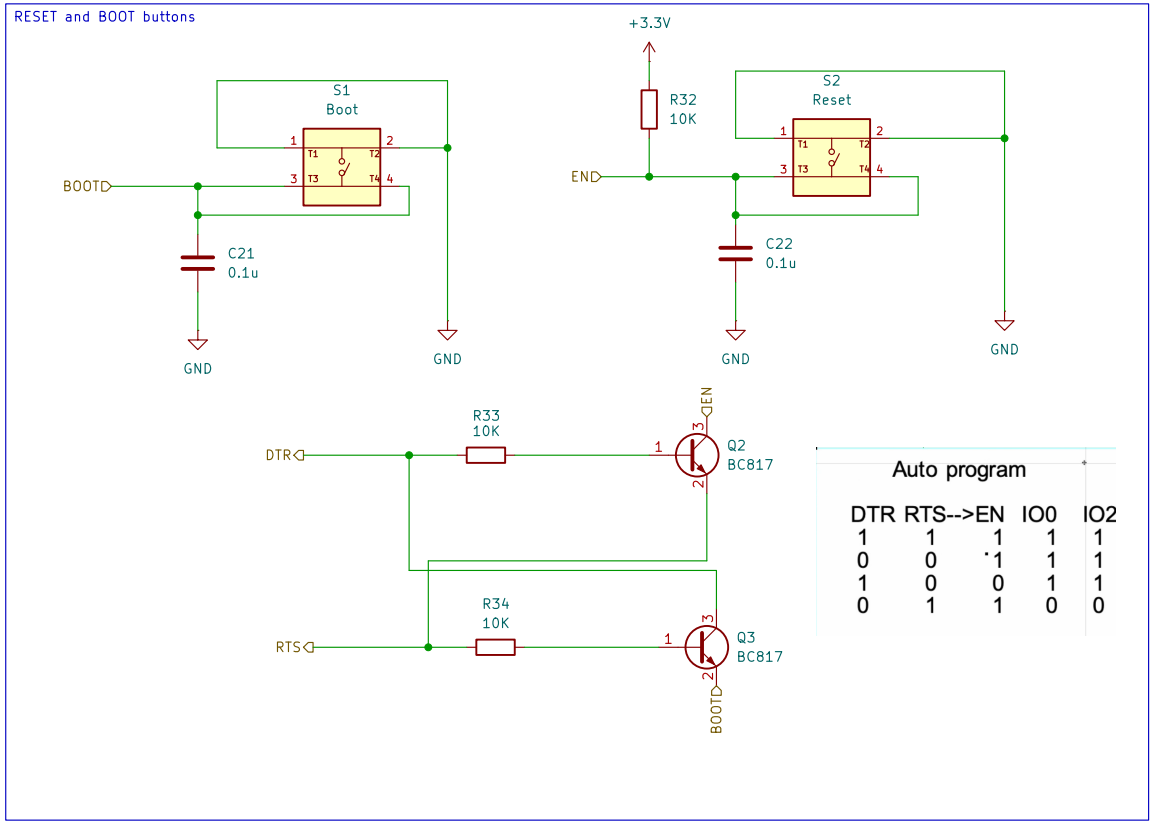

Sheet: /ESP32-C3-02/User Interface/
File: user_interface.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 4/4