


USB-C CONNECTOR FOR NINTENDO DS LITE

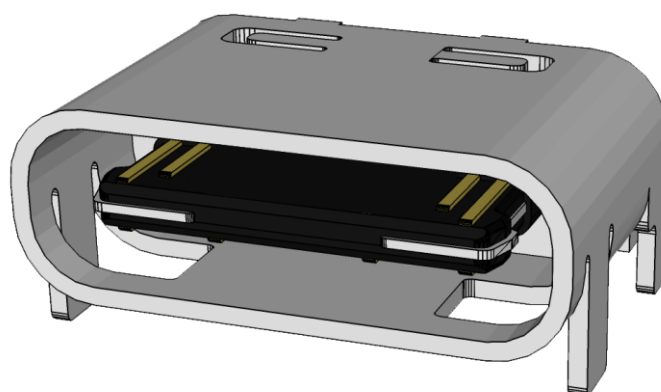

NINTENDO DS LITE USB-C CONNECTOR

[HTTPS://SHOP.GILTESA.COM/PRODUCT/NINTENDO-DS-LITE-USB-C-CONNECTOR/](https://shop.giltesa.com/product/nintendo-ds-lite-usb-c-connector/)

**PLEASE READ THROUGH THESE INSTRUCTIONS
ENTIRELY BEFORE ATTEMPTING TO INSTALL**

**WARNING: IF YOU ARE NOT COMFORTABLE WITH
SOLDERING, OR PERFORMING ANY STEP IN THIS
GUIDE, DO NOT PERFORM THE INSTALL YOURSELF.
FIND SOMEONE WHO IS COMFORTABLE TO DO IT FOR
YOU.**

INDEX

| | |
|---|----|
| DESCRIPTION | 4 |
| FEATURES | 4 |
| INCLUDED | 4 |
| RECOMMENDED / REQUIRED [NOT INCLUDED] | 4 |
| NOTES..... | 4 |
| INSTALLATION STEPS | 5 |
| PRE INSTALLATION STEPS..... | 5 |
| 1. DISASSEMBLY THE NINTENDO DS LITE | 5 |
| INSTALLATION STEPS..... | 9 |
| 1. PROTECT THE NEAREST COMPONENTS..... | 9 |
| 2. REMOVE UNNECESSARY COMPONENTS | 10 |
| 3. CLEAN THE BOARD..... | 11 |
| 4. INSTALLATION OF THE USB-C BOARD..... | 12 |
| 5. FINISHING THE INSTALLATION | 14 |

DESCRIPTION

This product is a special USB-C connector which can be used to be directly soldered on the Nintendo DS Lite mainboard.

FEATURES

- The USB-C connector match 100% perfect with the original connector shape and legs polarity.

INCLUDED

- USB-C connector

RECOMMENDED / REQUIRED [NOT INCLUDED]

- Tri-wing and Phillips screwdriver
- Soldering iron
- Tin
- Desoldering pump
- Desoldering mesh
- Isopropyl alcohol

NOTES

It's not compatible with USB-C to USB-C cables. Only normal cables USB to USB-C work.

INSTALLATION STEPS


Please, carefully read the following steps for a successful installation.

PRE INSTALLATION STEPS

Before the installation, your Nintendo DS Lite may need some extra steps to have it ready for the kit.

1. DISASSEMBLY THE NINTENDO DS LITE

Nintendo DS Lite use the **tri-wing** and **phillips screws** to close the shell. First remove the game cartridges, stylus, and battery.

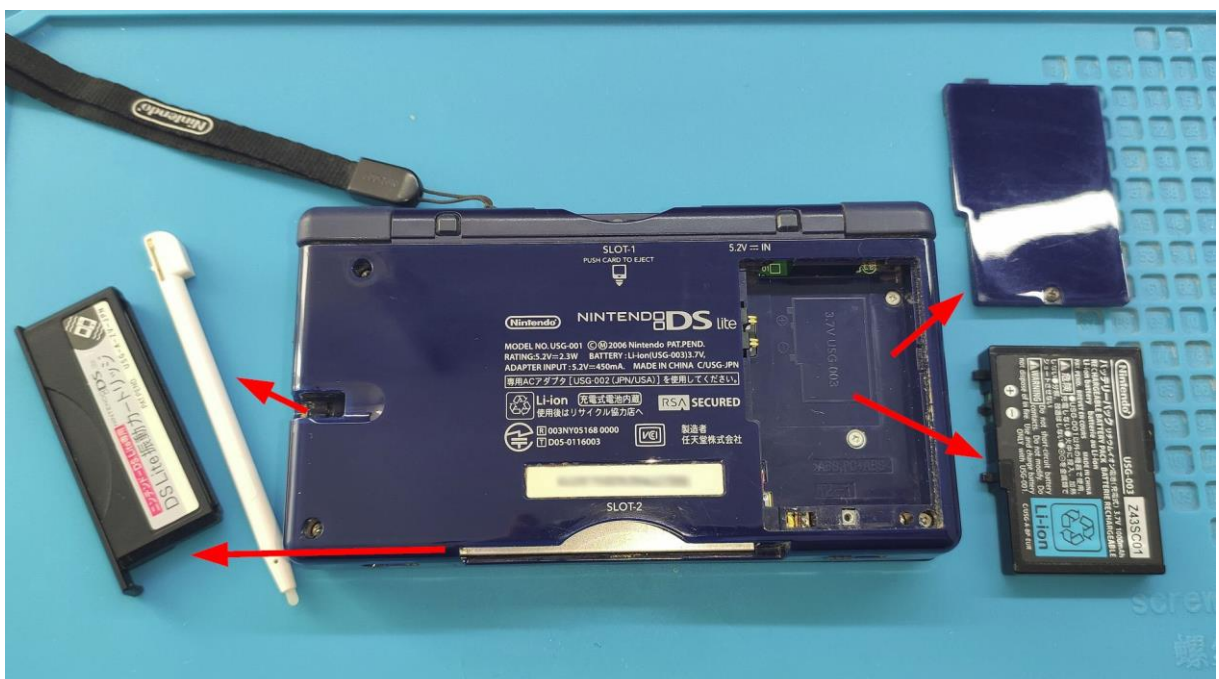

Then remove the two-screw silicon covers.




And the seven screws which hold the bottom plastic shell.



Once the mainboard is exposed, it needs to be removed from the top shell.




Remove the L and R buttons, the WiFi module (disconnect the black cable) and the two screws:

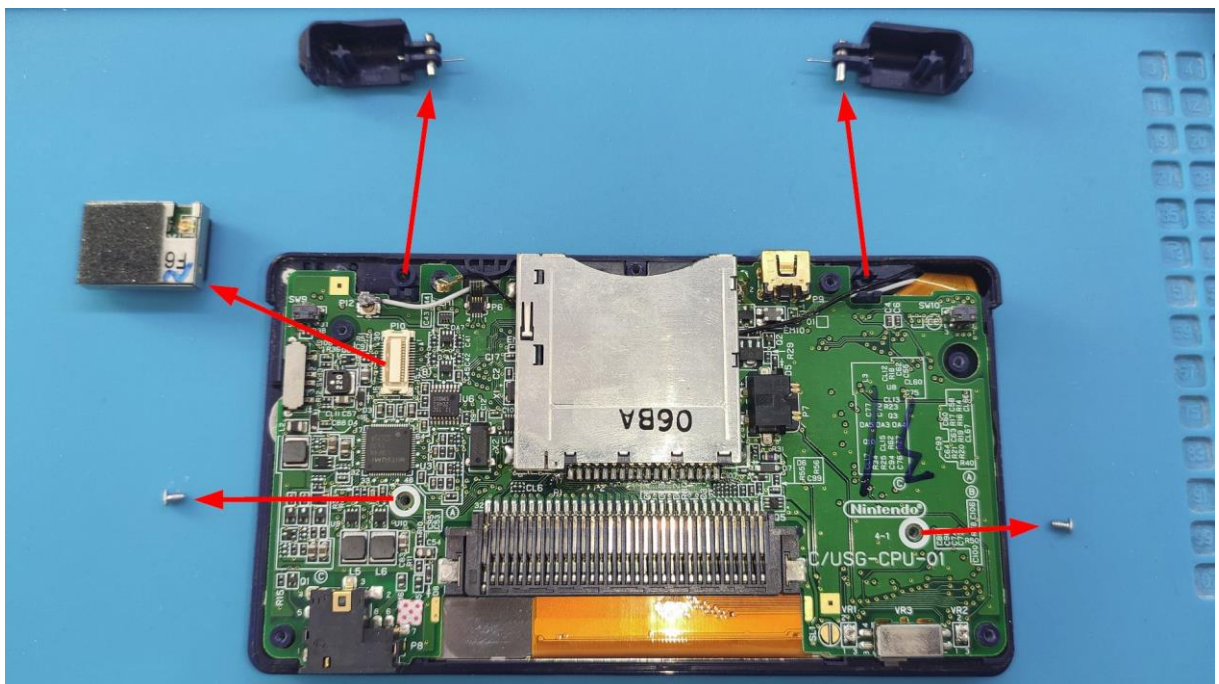

Then, disconnect the white cable and the flex cable (**Lift up on the plastic retainer**, grasp the cable, and **pull back** to disconnect it)

The black cable is under the DS cartridge reader, remove the cable sliding it to the right.

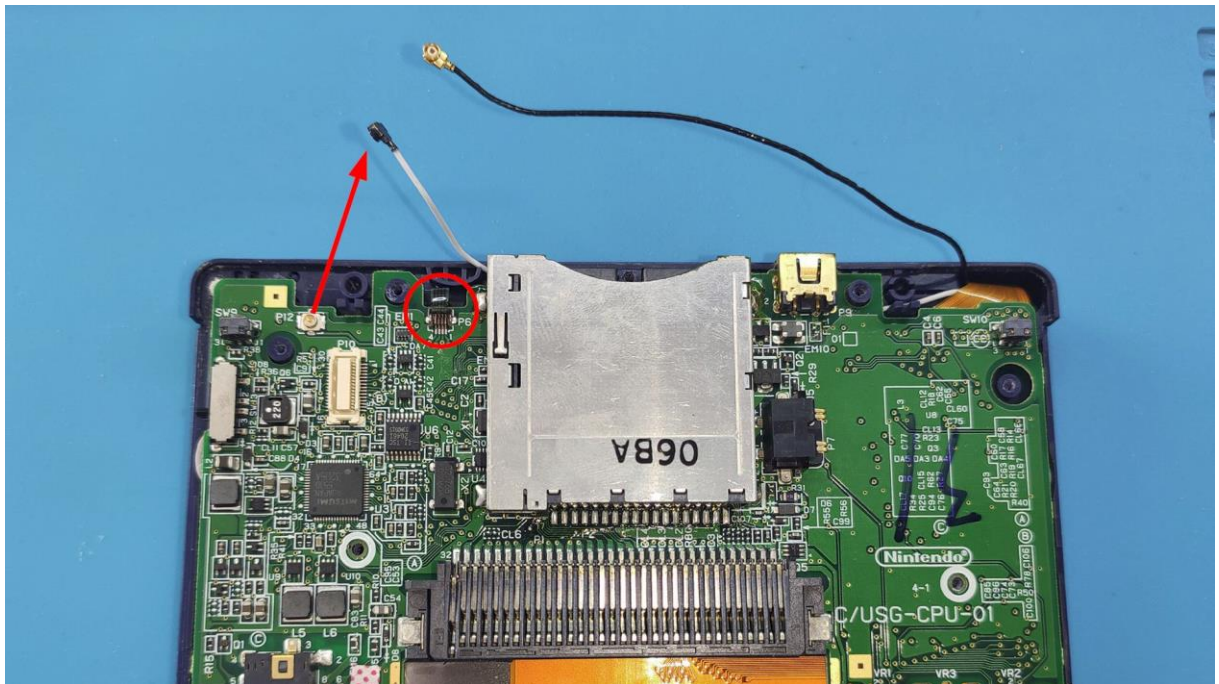


Remove the board with the bottom screen. Once you can see the two screen cables, disconnect them (**Lift up on the plastic retainer**, grasp the cable, and **pull back** to disconnect it)



INSTALLATION STEPS

1. PROTECT THE NEAREST COMPONENTS

Use Kapton tape to protect and avoid any damage to the electronic components that are next to the connector.

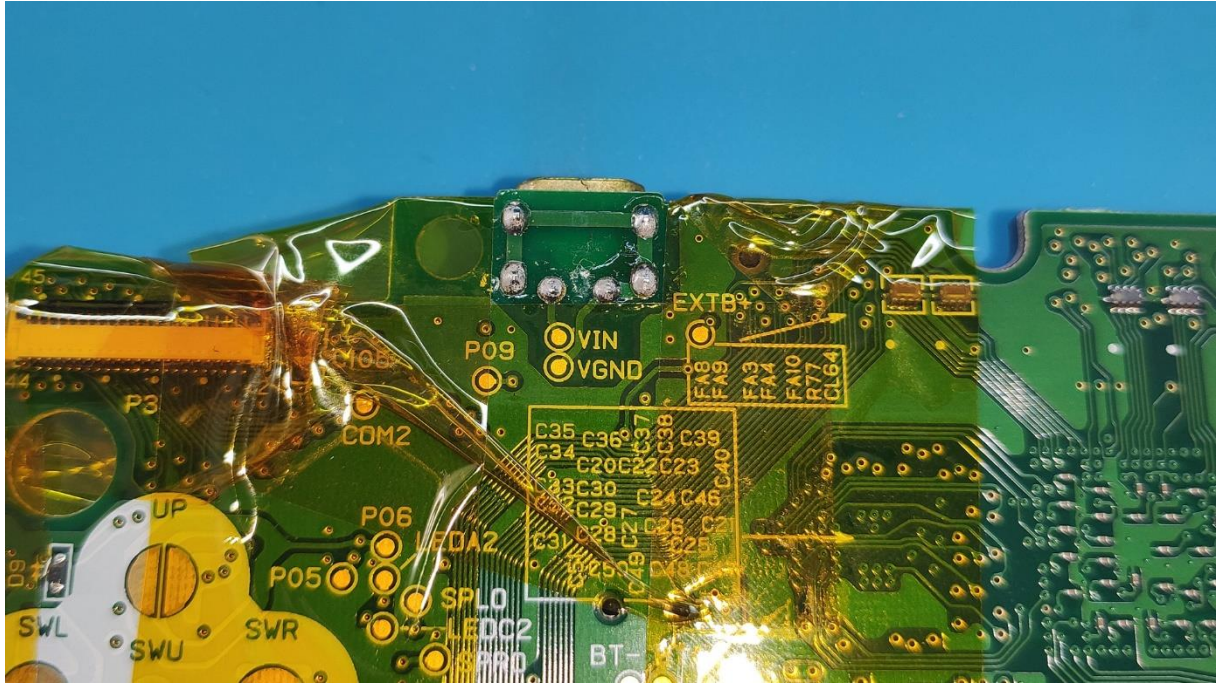


2. REMOVE UNNECESSARY COMPONENTS

This installation only requires removing the power connector. However, it has many legs, and it may be hard to remove.

If you have an air solder station, you can remove it easily, but protect perfect the nearest places with Kapton tape or something may be burn.


Otherwise, the recommendation is using a **desoldering pump** which will help to remove the tin from each hole/pad.

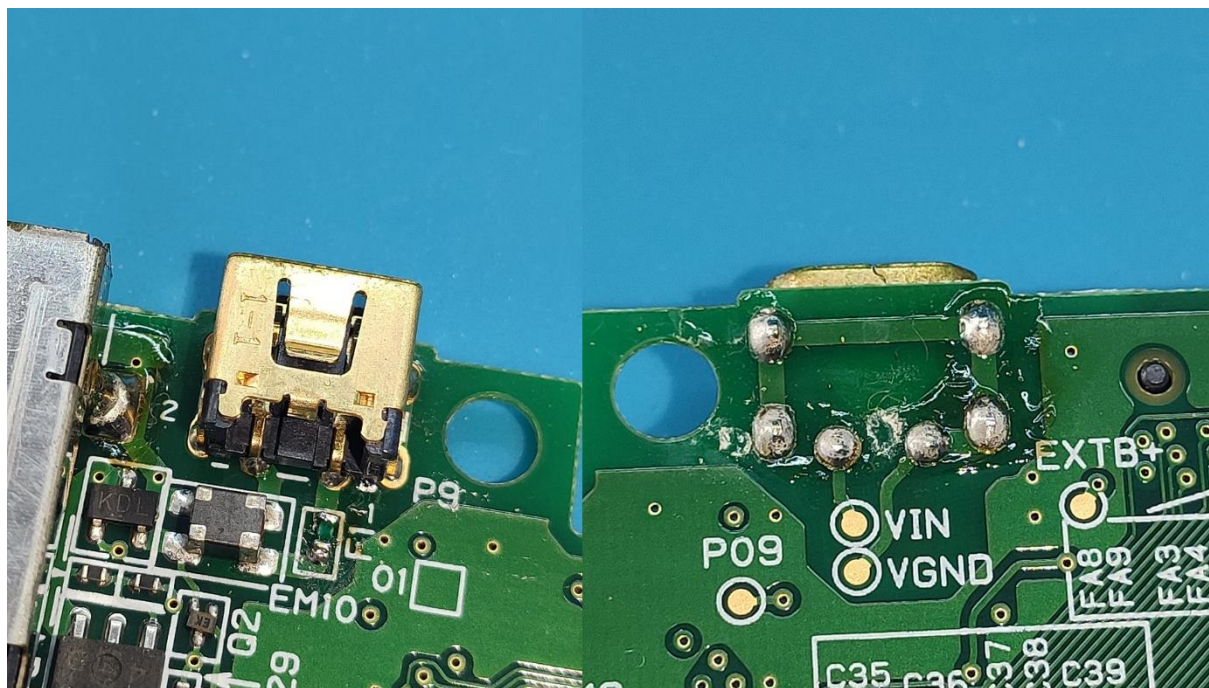

Start removing the tin from the VIN leg, which is easier. Then continue with the VGND leg which is connected also to the 4 connector shield legs. If you heat enough the 5 legs will melt at the same time and then the connector will move down.



3. CLEAN THE BOARD

After the component is removed, it may be dirty, clean both sides.

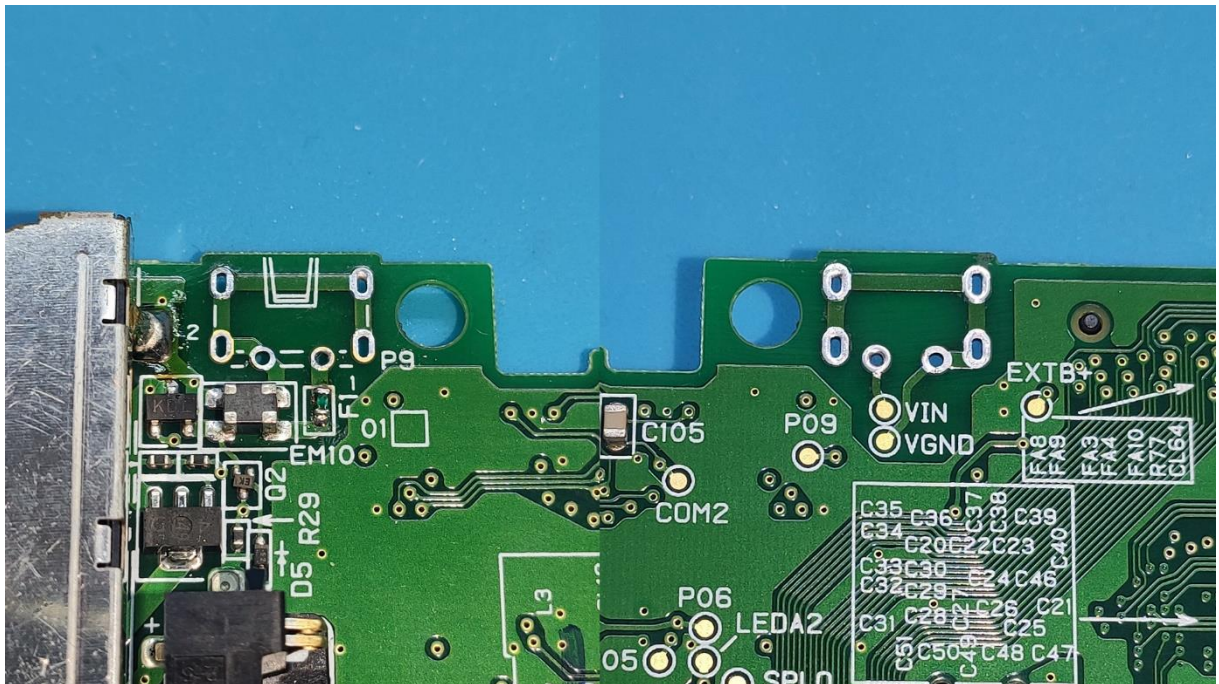


4. INSTALLATION OF THE USB-C BOARD

Take the USB-C connector and put it the mainboard.

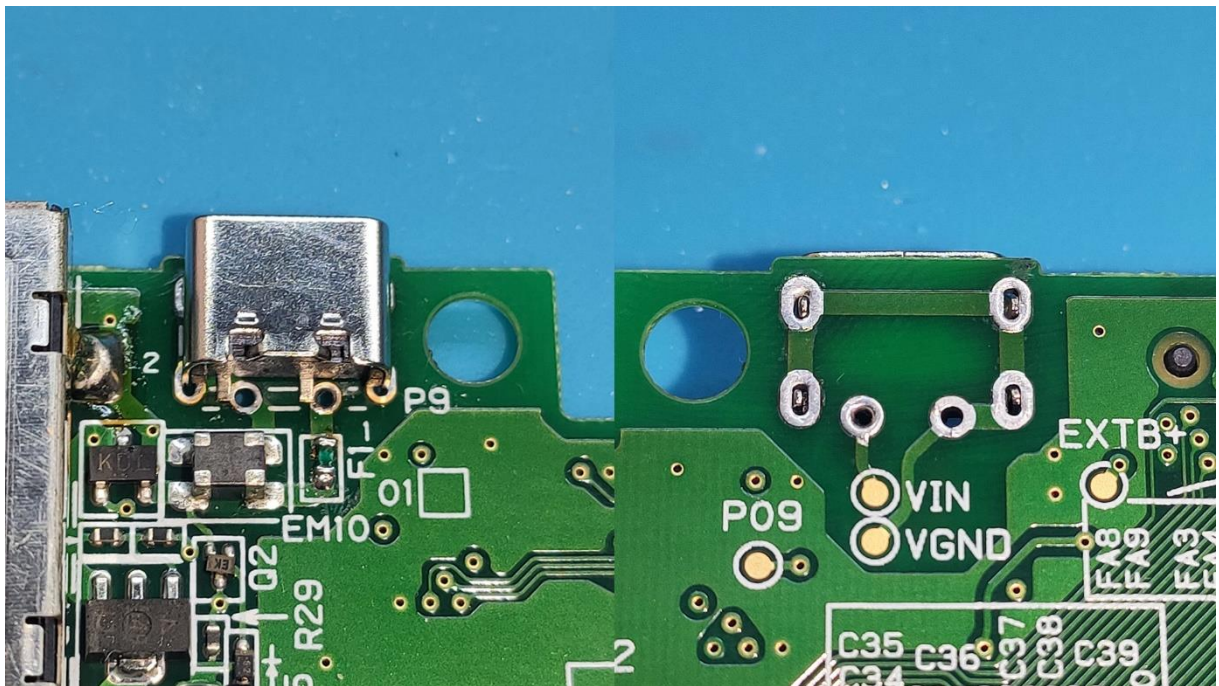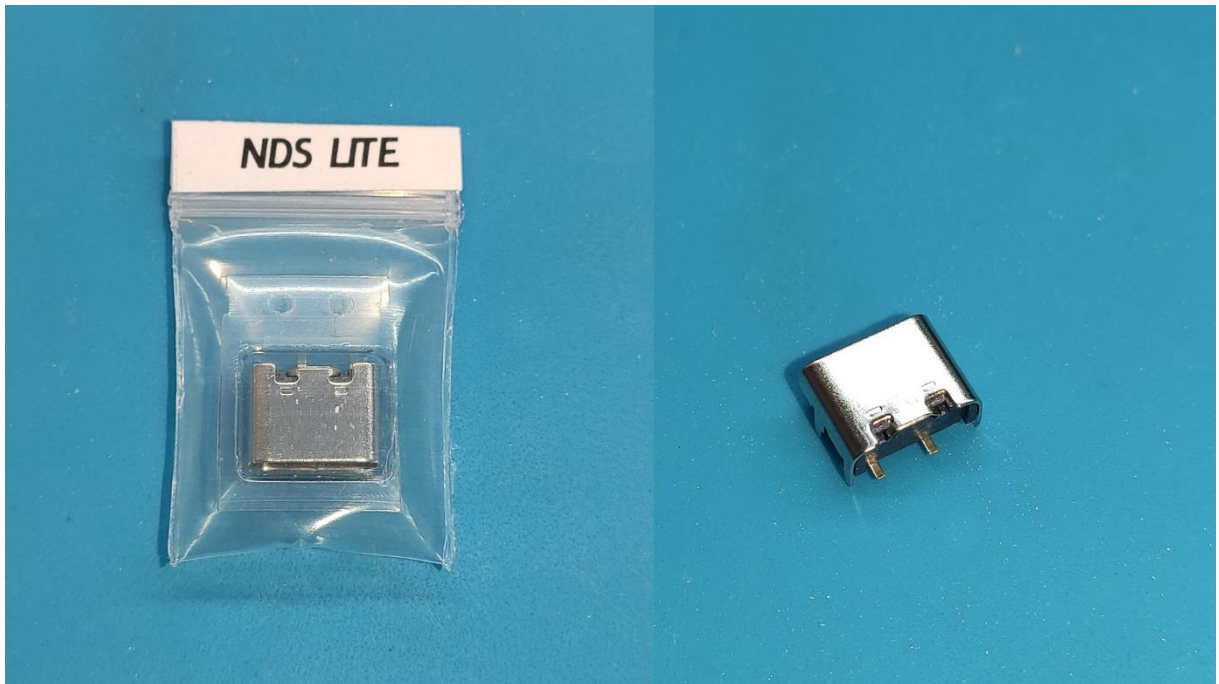

Solder it. Be sure it is completely flat to the mainboard.

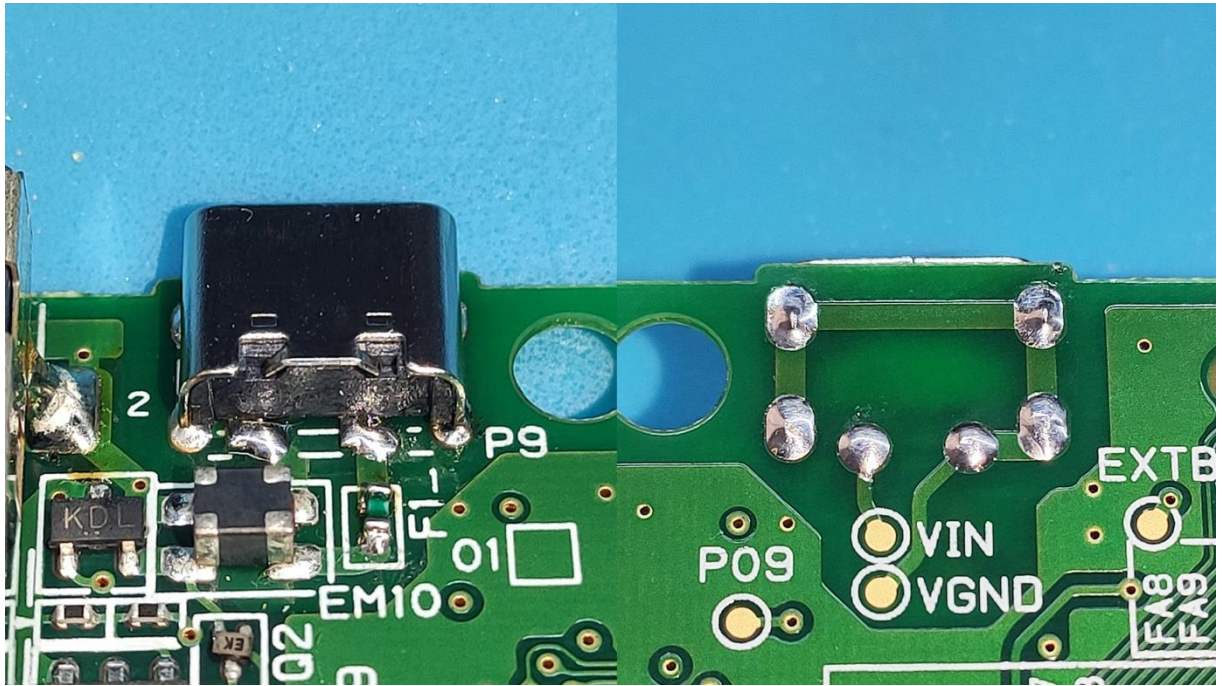

5. FINISHING THE INSTALLATION

Now, you can put the mainboard back to the shell, and put the screws and cables as before. Enjoy it!

