POWERMATIC 1200

Panel drawings

Layout, terminal jumpers, labels, backpanel mounting, and enclosure holes.

Current layout

FH1 follows 5K, G4, and the existing end stop on the lower rail. The former 4E/4F/4G terminals are retired.

K1/K2 drawing update

The module-layout sheet still depicts the former BB1/BB2 busbars. The 4 November wiring plan replaces those two pieces with six black 14 AWG jumpers. Follow rows 1-6 of Wire_installation_guide.pdf and the K1/K2 section of WIRING_STANDARD.md.

Printing

These are 11 x 17 inch sheets with mixed orientation. Print the enclosure-hole sheet (PDF page 6) at exactly 96% for its 1:1 details; check the 1 inch scale bar. Use written dimensions for mounting and location views. The module layout shows schematic spacing, not dimensional clearances.

Page guide

PDF pages	Contents
2	DIN-rail module layout
3	Terminal jumper installation guide
4	Terminal marker placement and splits
5	Approved backpanel screw-location sheet
6	Enclosure hole layout, Rev I

Consolidated 9 November 2026. Original sheets retain their dimensions and content. Use PDF bookmarks to select a section.


POWERMATIC 1200

DIN-rail module layout


FRONT VIEW

Schematic arrangement


UPPER RAIL

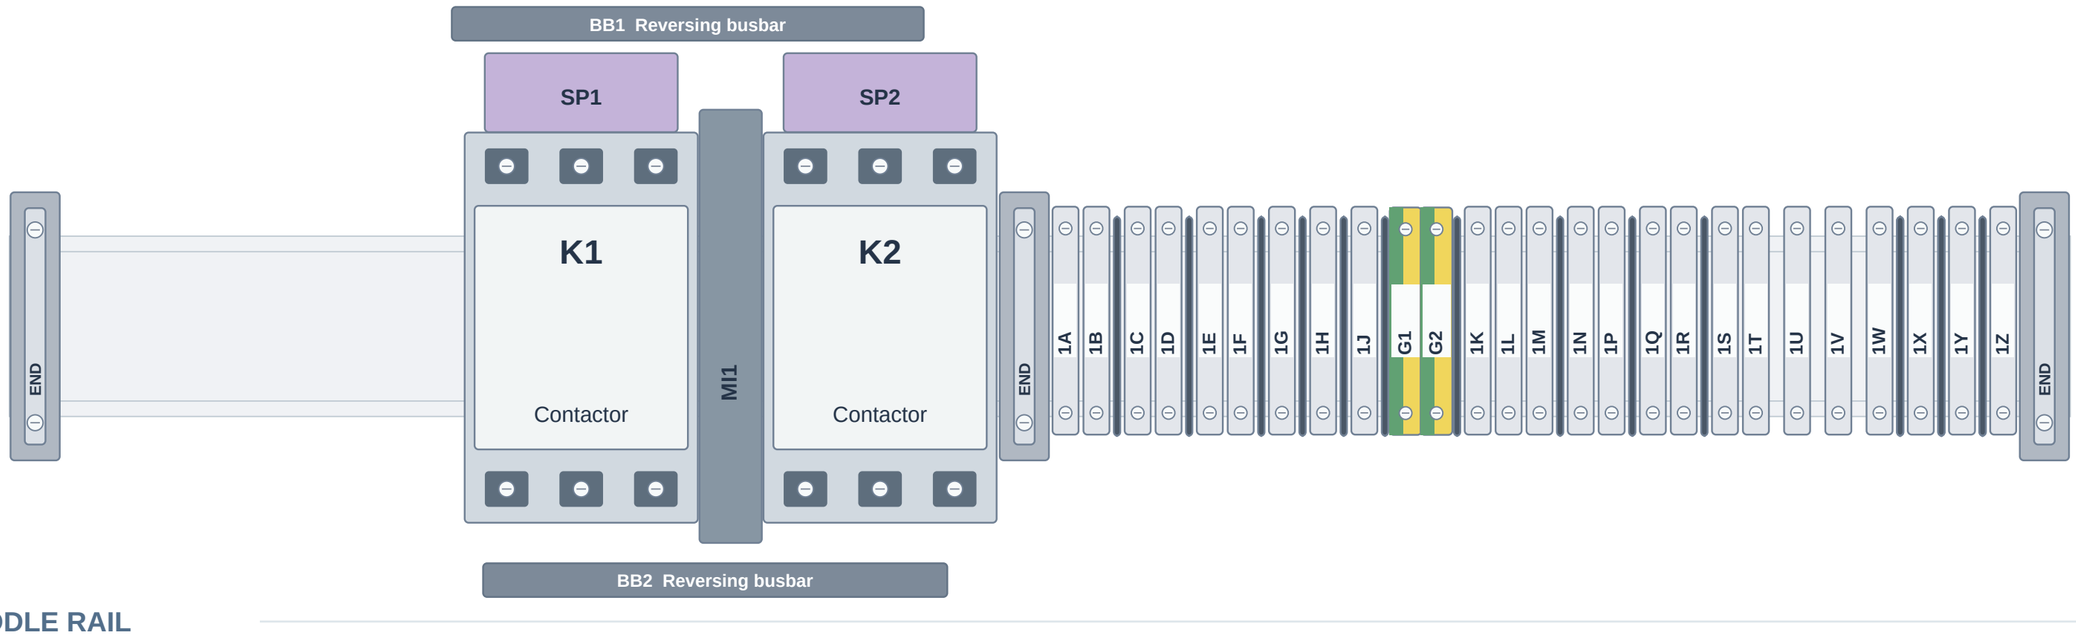

MIDDLE RAIL

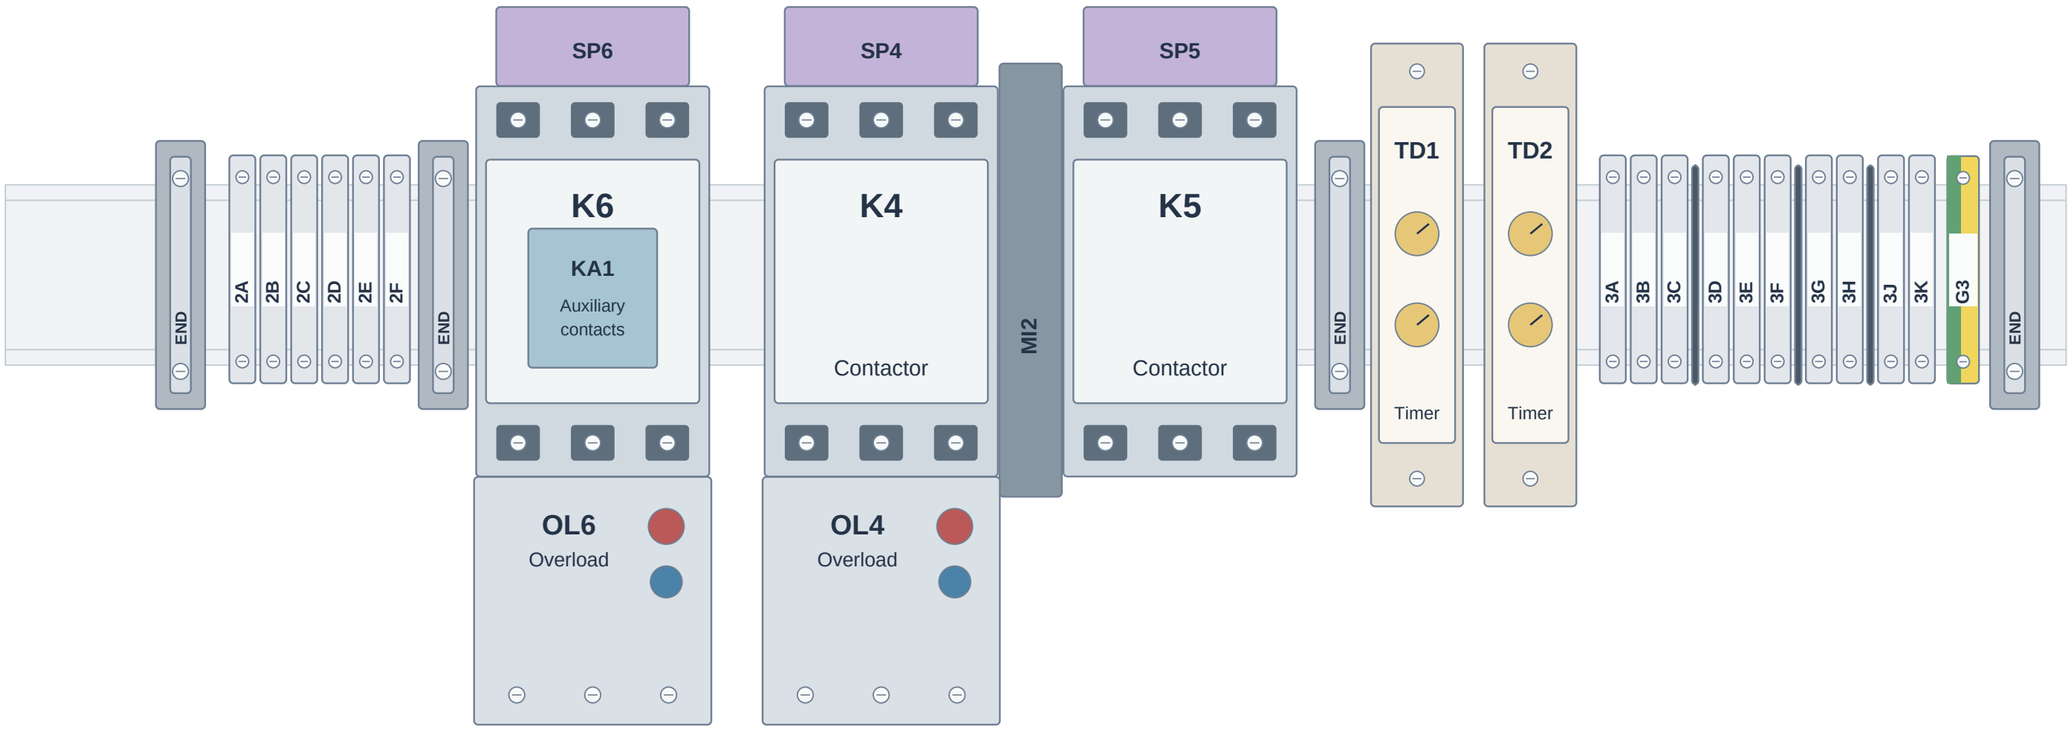

LOWER RAIL

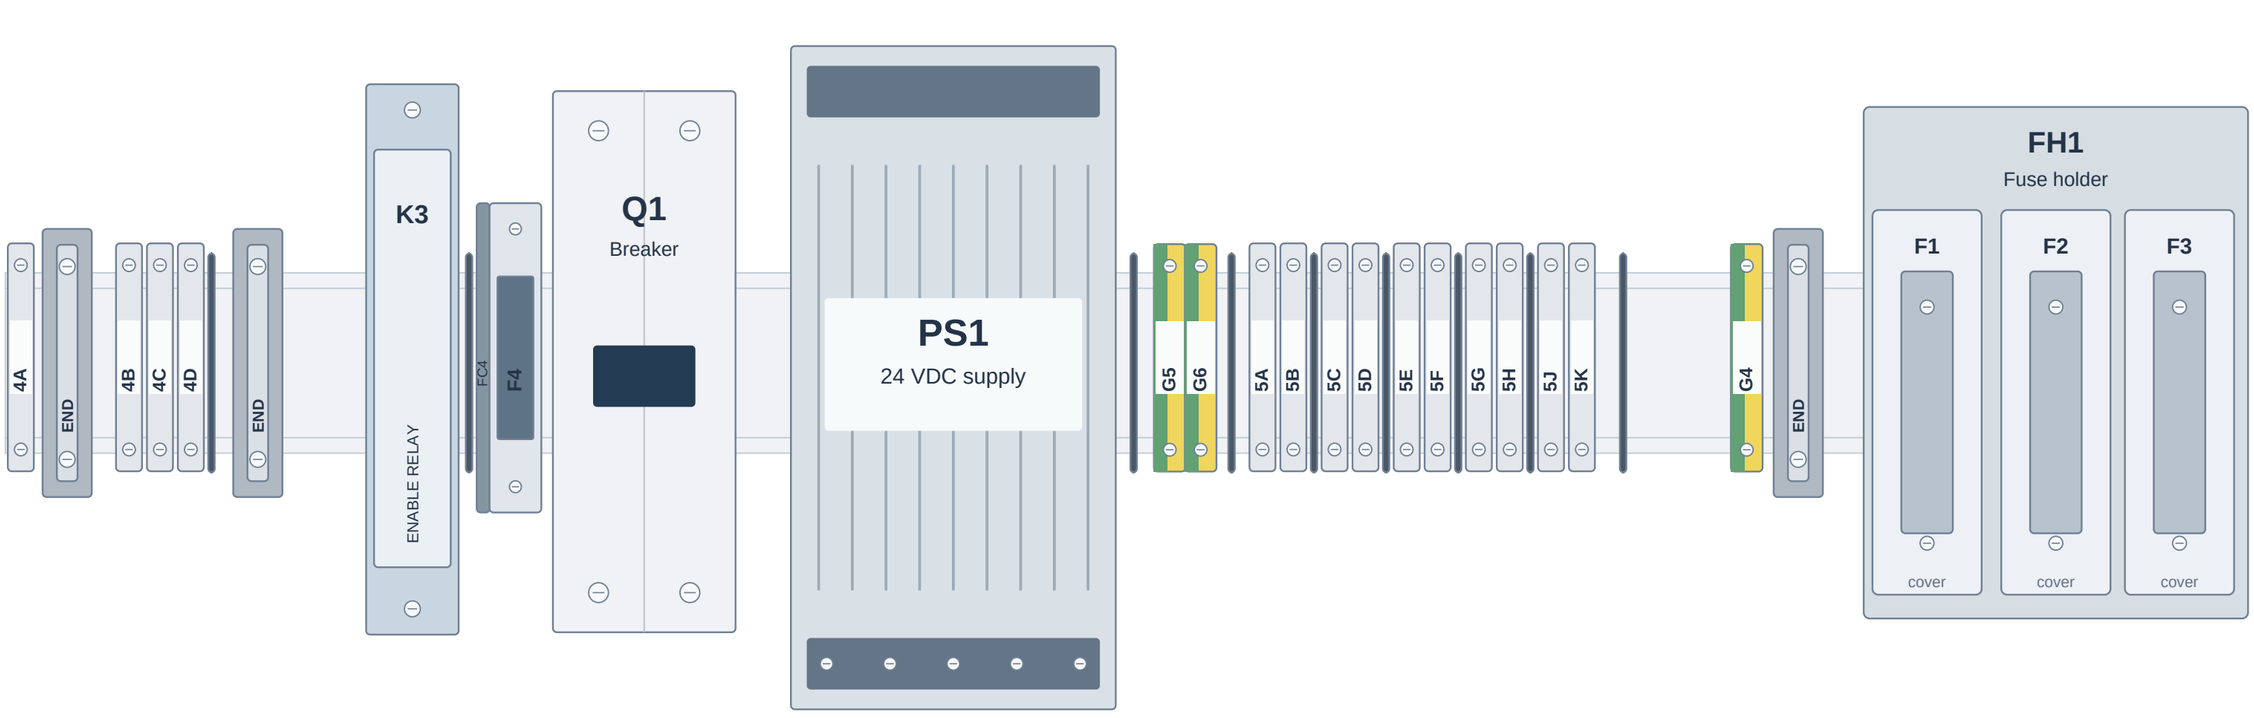

Lower-right order: 5K / G4 / existing end stop / FH1

Rails and ducts unchanged. Extra stop at FH1 right desired, not installed. FH1 right edge approx. 15 mm from backplate.

Feedthrough terminal

PE terminal

End brackets / separators

Coil suppressor

Installation revision | 30 October 2026

Components and attached accessories

Schematic spacing and module envelopes: do not use for dimensional clearance or DIN-rail cutting.

TERMINAL JUMPERS

REVIEW D | 30 OCT 2026

POWERMATIC 1200 / FRONT VIEW / MODULE + LETTER / GROUNDS G#

18 sections
13 x 2-pole + 4 x 3-pole + 1 x 6-pole

44 contact poles
26 adjacent links


5 stock bars
One pack of five KN-10J12 ten-pole bars

Fit only the numbered teal sections. 4E / 4F / 4G are removed; G4 remains.

Match labels to the installed blocks before fitting. All 18 jumper sections are unchanged.

UPPER RAIL / MODULE 1


All terminal blocks are to the right of K1 / K2. Read left to right.

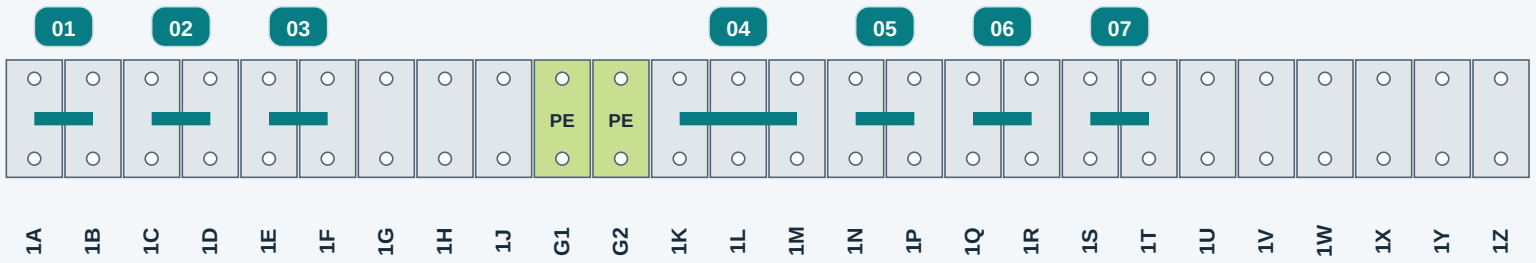


- ☐ 01 M1_T1 2P
- ☐ 02 M1_T2 2P
- ☐ 03 M1_T3 2P
- ☐ 04 DIRECTION_ENABLE 3P
- ☐ 05 DIRECTION_FWD_CMD 2P
- ☐ 06 DIRECTION_REV_CMD 2P
- ☐ 07 CONTROL_RUN_ENABLE 2P

MIDDLE RAIL / MODULES 2 + 3

0V bank at left; sequence-control banks to the right of TD1 / TD2.

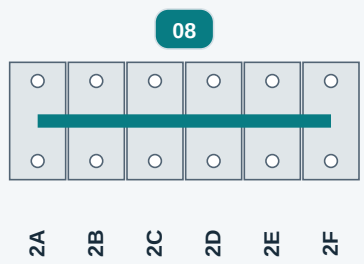


K6 / K4 / K5
then TD1 / TD2

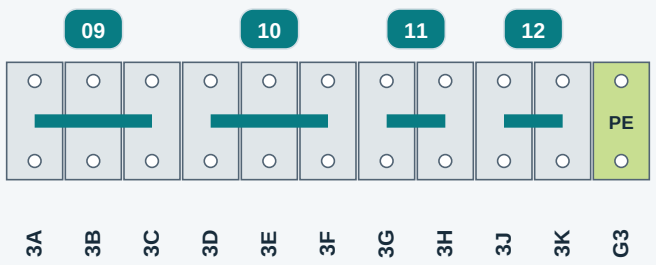


- ☐ 08 0V 6P
- ☐ 09 CONTROL_RUN_ENABLE 3P
- ☐ 10 HIGH_SEQUENCE_ENABLE 3P
- ☐ 11 HIGH_SEQUENCE_TRIGGER 2P
- ☐ 12 LOW_SEQUENCE_ENABLE 2P

LOWER RAIL / MODULES 4 + 5

Lower-right end: 5K, G4, existing end stop, FH1. No bar on any PE block.



K3 / F4 / Q1 / PS1
between terminal groups

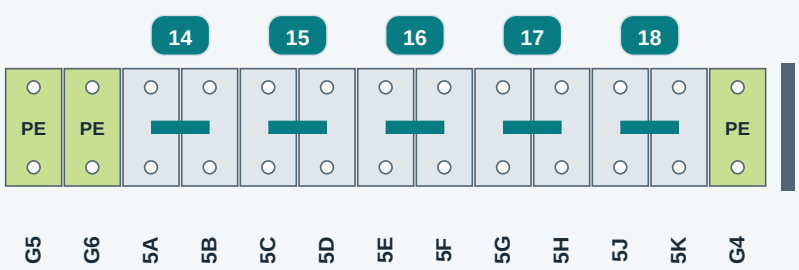

FH1
same orientation

- ☐ 13 +24V 3P
- ☐ 14 L1_SW 2P
- ☐ 15 L2_SW 2P
- ☐ 16 L1_DIR 2P
- ☐ 17 L2_DIR 2P
- ☐ 18 L3_DIR 2P

CUT PLAN / FIVE 10-POLE STOCK BARS

Count poles, not length. Cut, deburr and remove all chips before fitting.

A	08 / 6P		01 / 2P	02 / 2P
B	04 / 3P	09 / 3P	03 / 2P	05 / 2P
C	10 / 3P	13 / 3P	06 / 2P	07 / 2P
D	11 / 2P	12 / 2P	14 / 2P	15 / 2P	16 / 2P
E	17 / 2P	18 / 2P	6 POLES REMAIN		

INSTALL / CHECK

1 Match and fit

Match terminal IDs first. Seat each bar in its own bank.
Do not bridge adjacent different circuits.

2 Tighten

KN-10J12 jumper screws: 0.4-0.6 N m (3.5-5.3 lb-in).
Use a torque screwdriver.

3 Separate and cover

Retain separators and end covers. Fit KN-TC-1S covers.
Keep cut bar ends from touching adjacent banks.

4 Verify before wiring

Check each bank for continuity and isolation from neighbors.
PE blocks bond through their rail feet; use no KN-10J12 bar.

Inter-rail bonding wires remain in the wire schedule. Position diagram is schematic; not to scale.

PCB ae6e23858dedb8c8... | 60 terminal blocks | 123 wire records | extra FH1 right stop outstanding

OEM torque and accessory references: see Terminal_jumper_review_notes.md and WIRING_STANDARD.md.

Terminal marker placement + splits


Front view into enclosure. Put the same ID on both ends; both rows read left to right.

BLACK BARS: separator locations. RED TRIANGLES: split here.

BLUE LINKS: try these markers connected; split further if every clip does not seat freely.

UPPER RAIL - 26 blocks

Terminal bank to the right of K1 / K2.

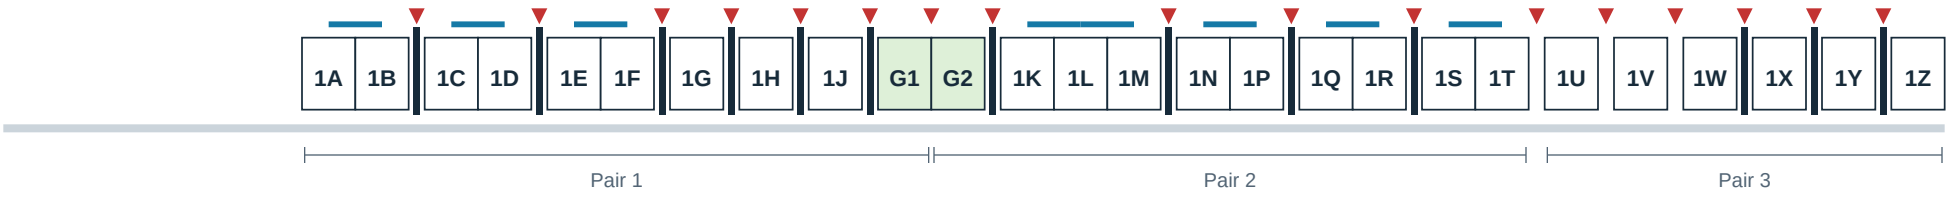


MIDDLE RAIL - 17 blocks

Left bank, then the bank at the right of the timer modules.



LOWER RAIL - 17 blocks

Lower-left blocks, then the lower-right bank ending with 5K and G4.

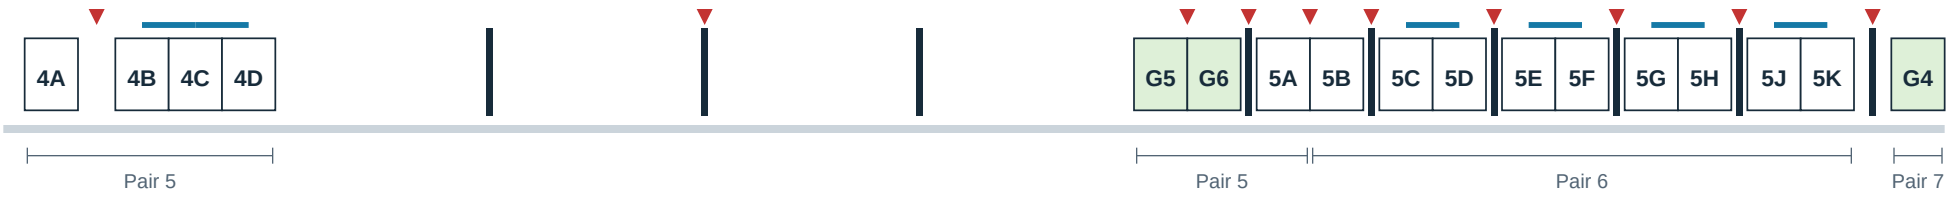

60 blocks / 120 markers. Green = grounds; cut individually. Discard both copies of retired 4E / 4F / 4G.


The saved board has 28 separator objects at 25 locations; three overlapping upper locations are shown once.

Cutting plan for the printed strips

Use this plan for BOTH matching strips in each pair. Keep the printed left-to-right order.

RED BARS = cut tape and separate markers. BLUE SECTIONS = candidates to leave connected.


Blue sections follow uninterrupted gray banks; joined-marker pitch and cover clearance still need a fit check.

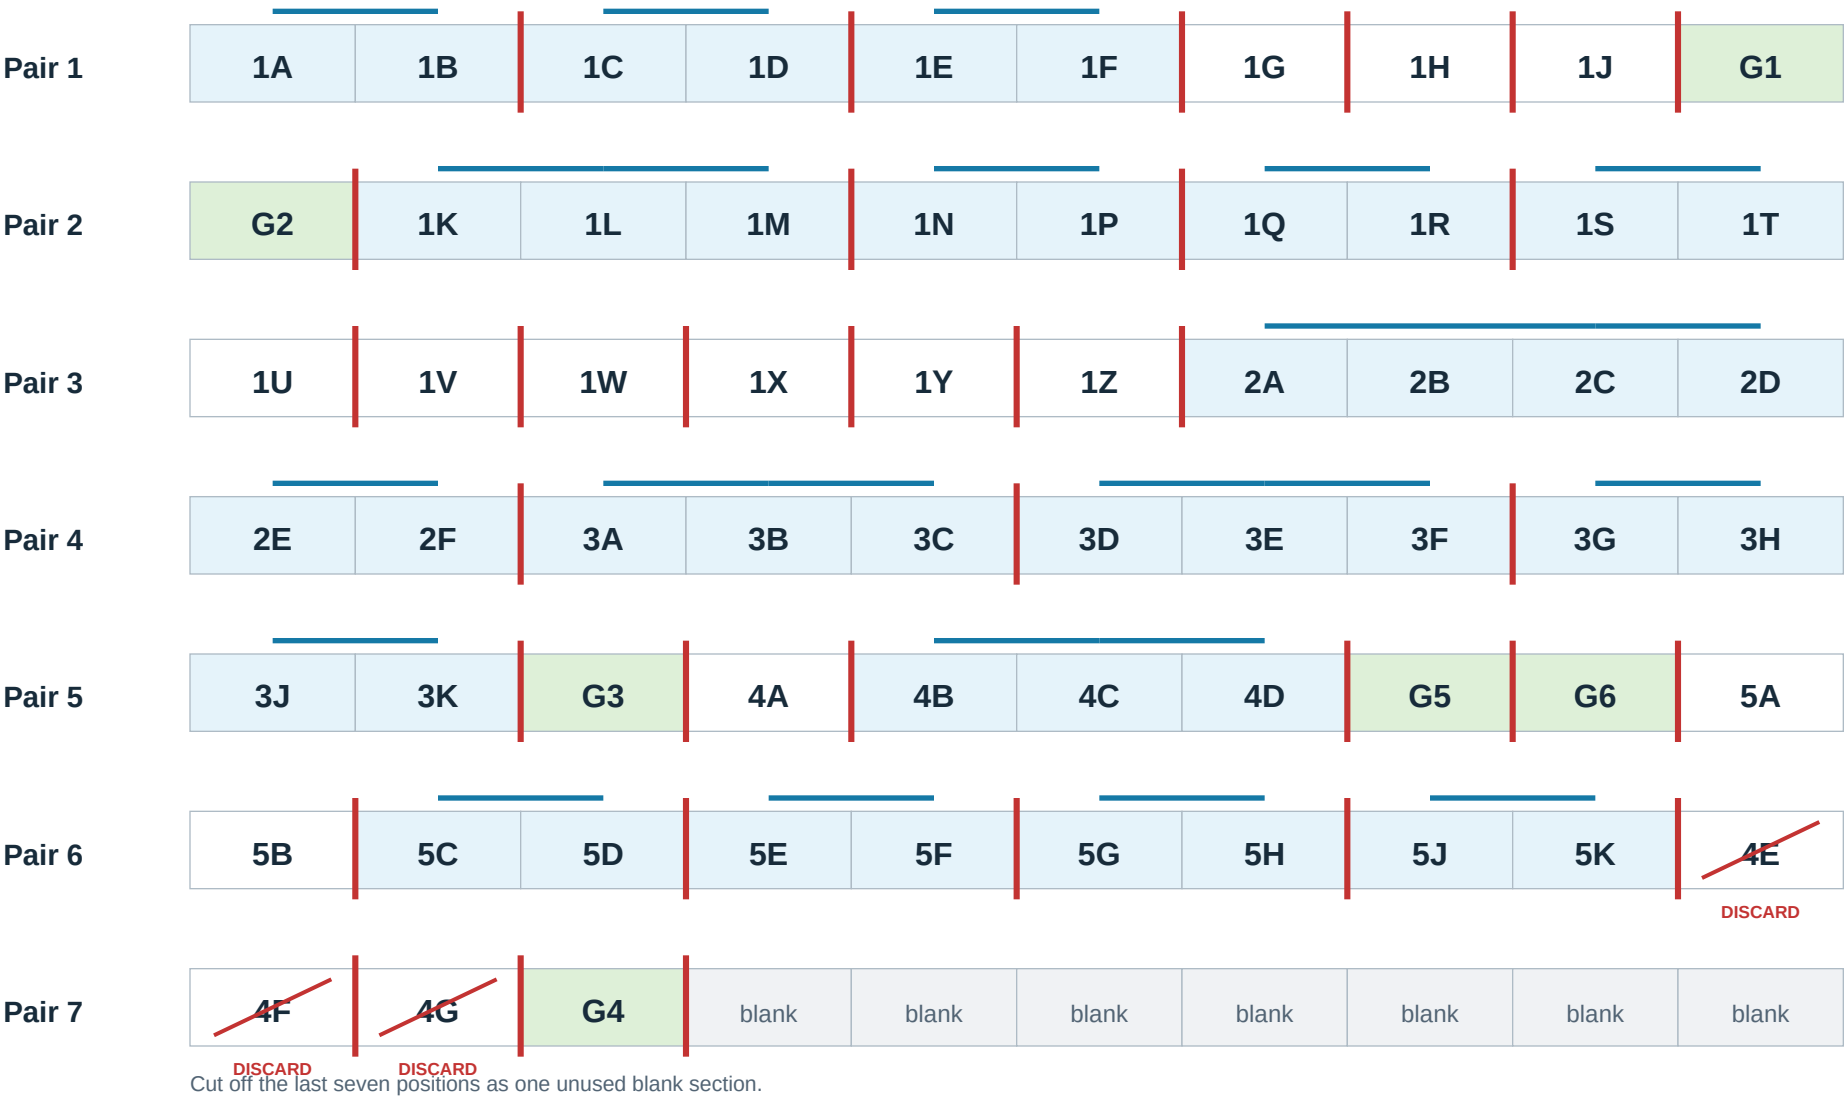

Cut off the last seven positions as one unused blank section.

Do not bridge separators, end covers, gaps, or transitions to ground blocks with connected markers.

A cut may also be required where a printed pair ends partway through one continuous terminal bank.

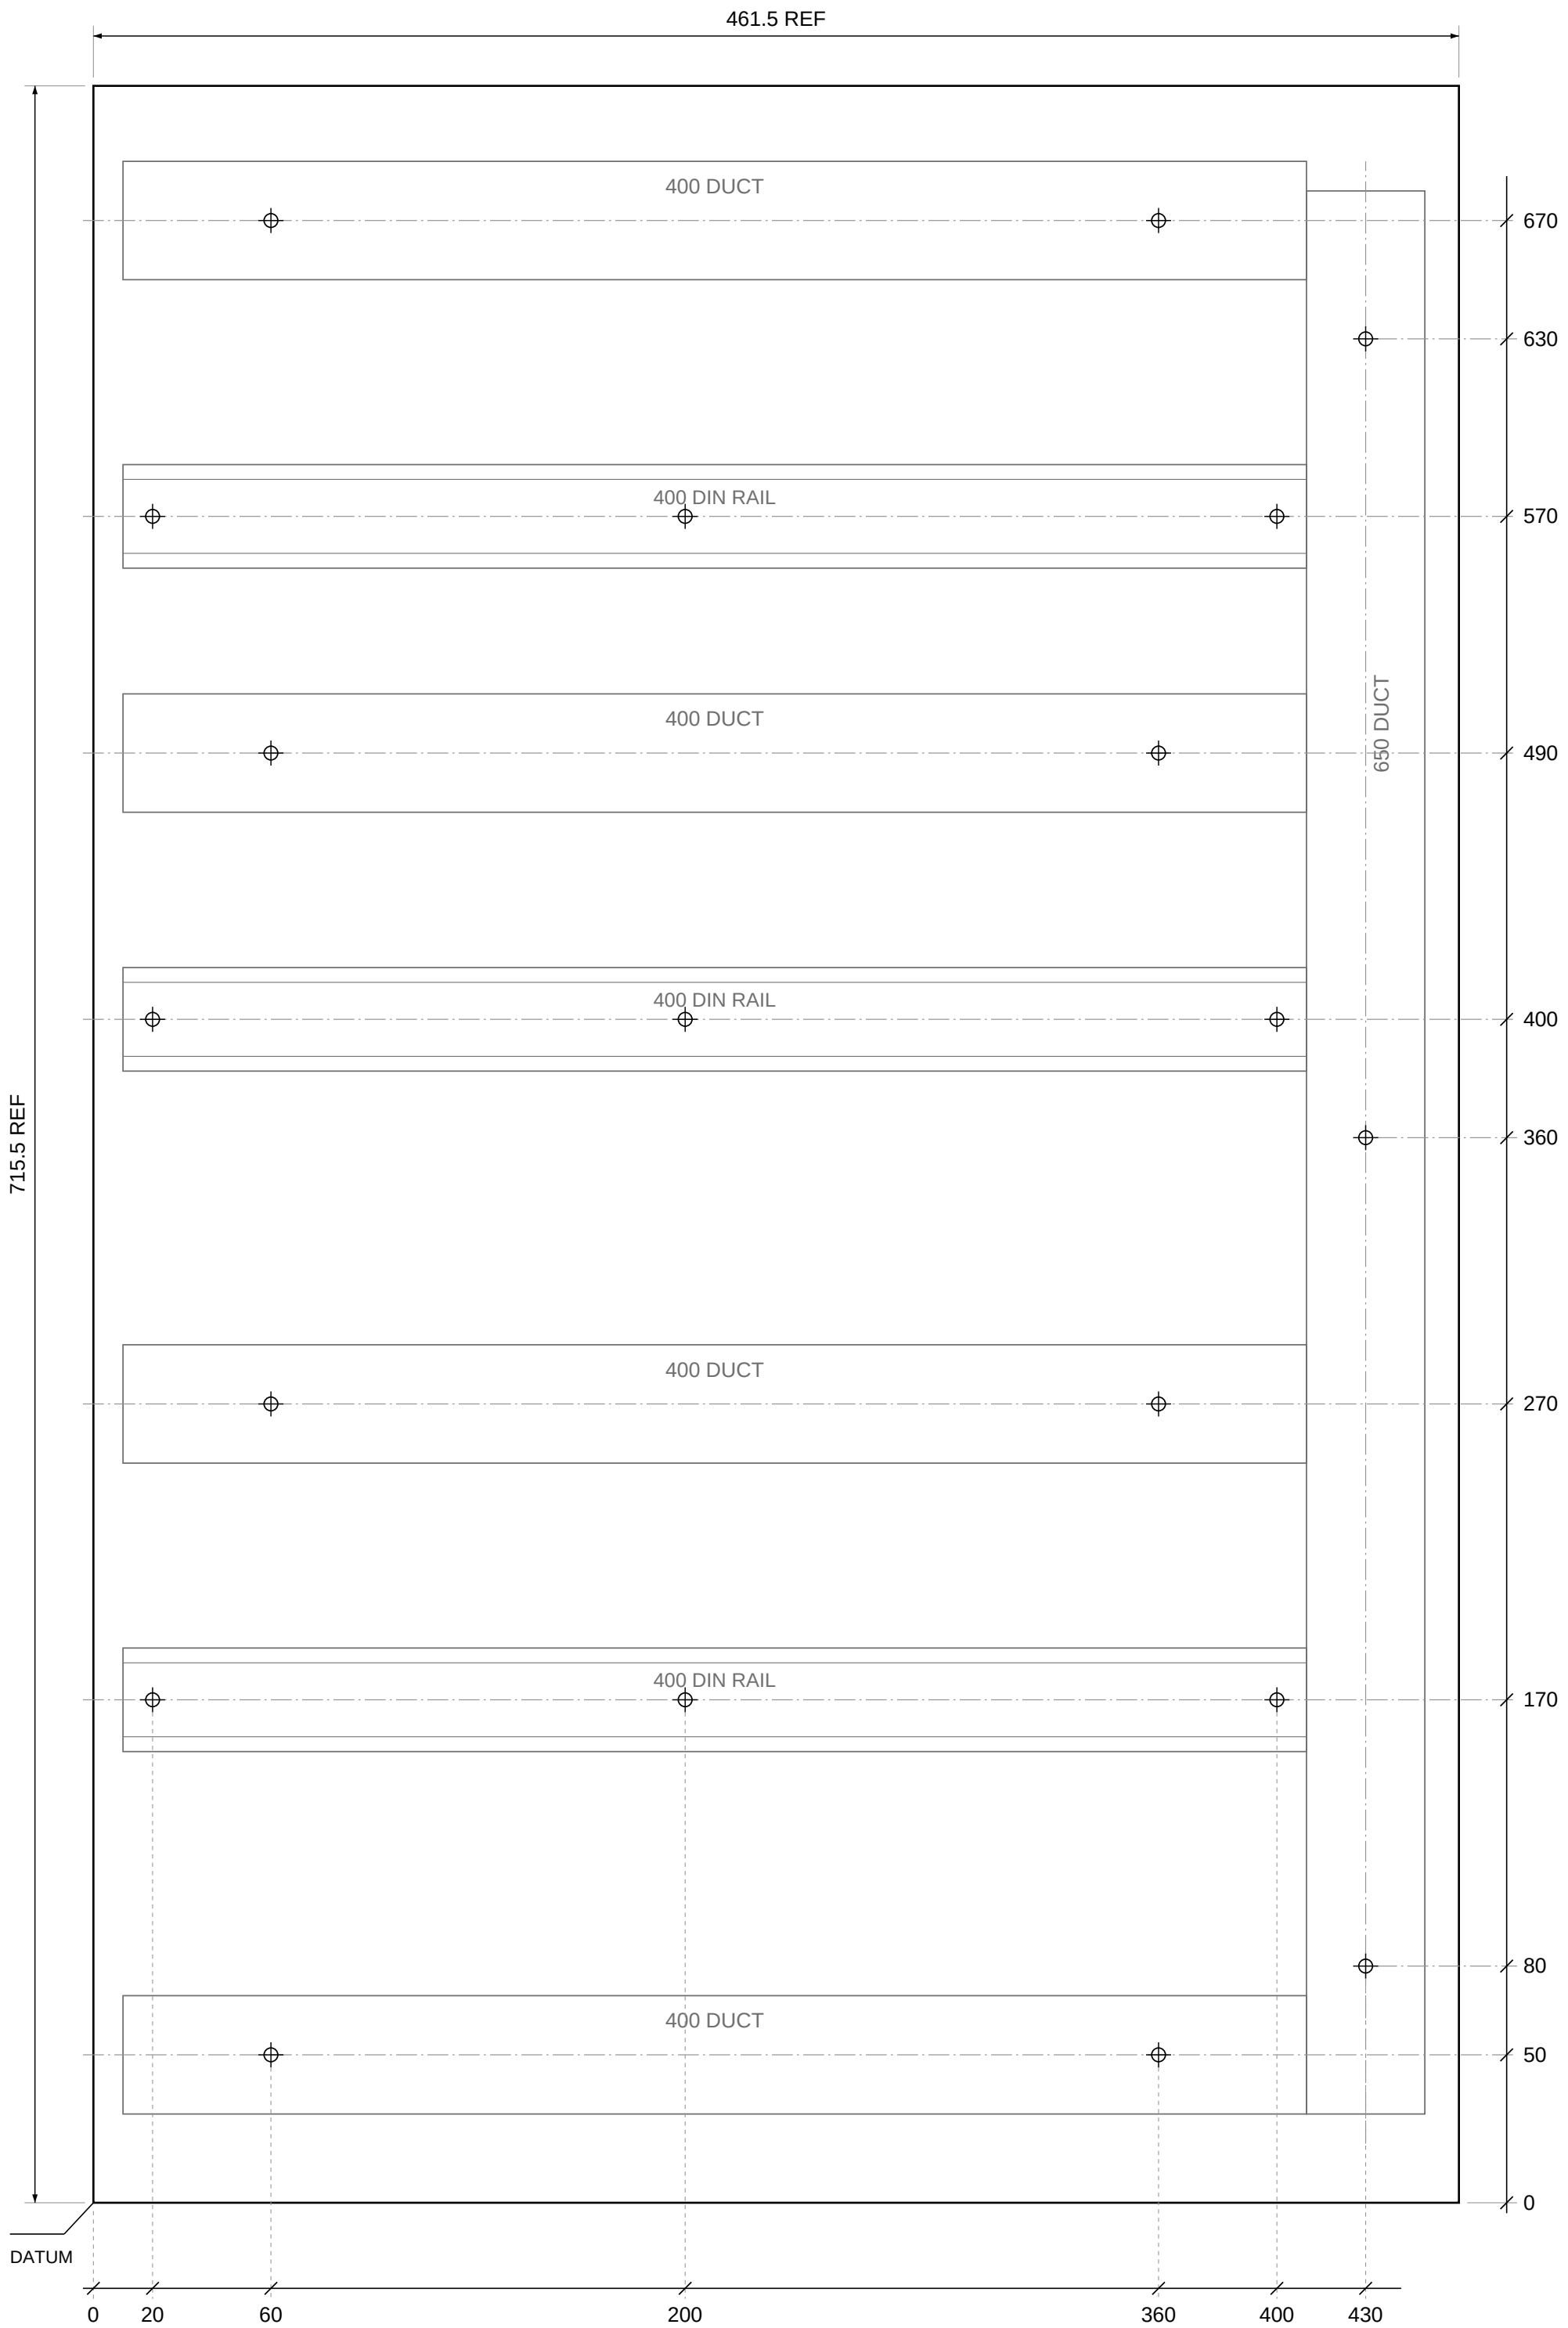

ORIGIN: LOWER-LEFT BACKPLATE CORNER. CENTER MARKS: 20 SCREW LOCATIONS; DRILL SIZE TBD.

POWERMATIC 1200 - BACKBOARD LAYOUT

HAMMOND EP3020 | FRONT VIEW | DIMENSIONS IN mm

PM1200-BP-01

REV G / 2026-10-27

SHEET 1 OF 1

SCALE 1:2 | 11 x 17


ENCLOSURE HOLE LAYOUT

POWERMATIC 1200 / EN4SD30208GY / DIMENSIONS IN mm


REV I

29 OCT 2026


TOP / LOOKING DOWN

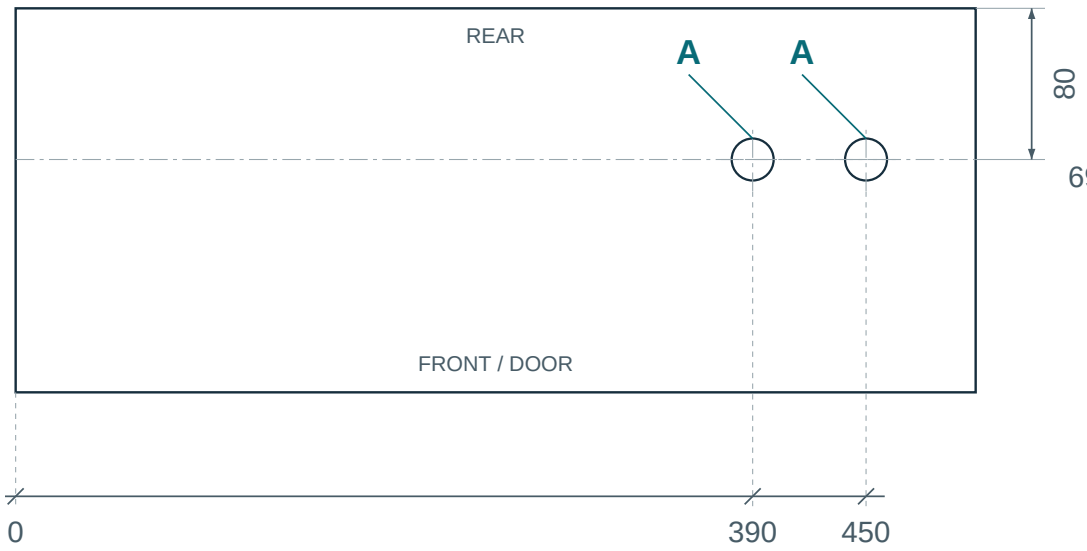

RIGHT SIDE / OUTSIDE

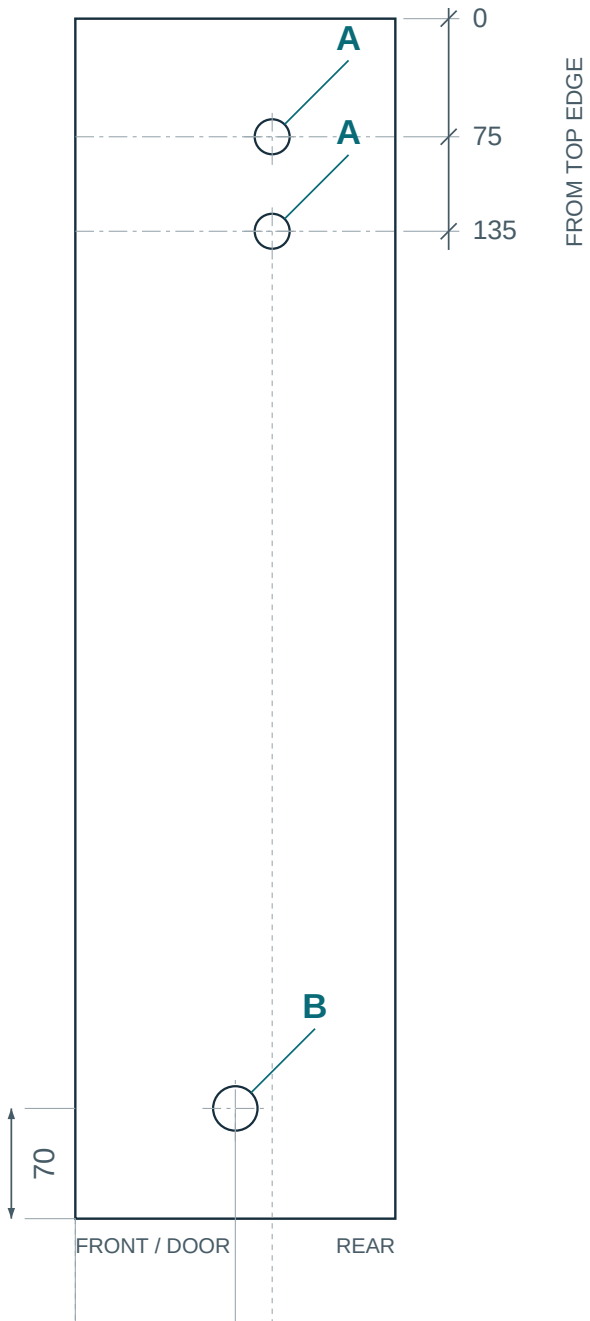

LEFT SIDE / OUTSIDE

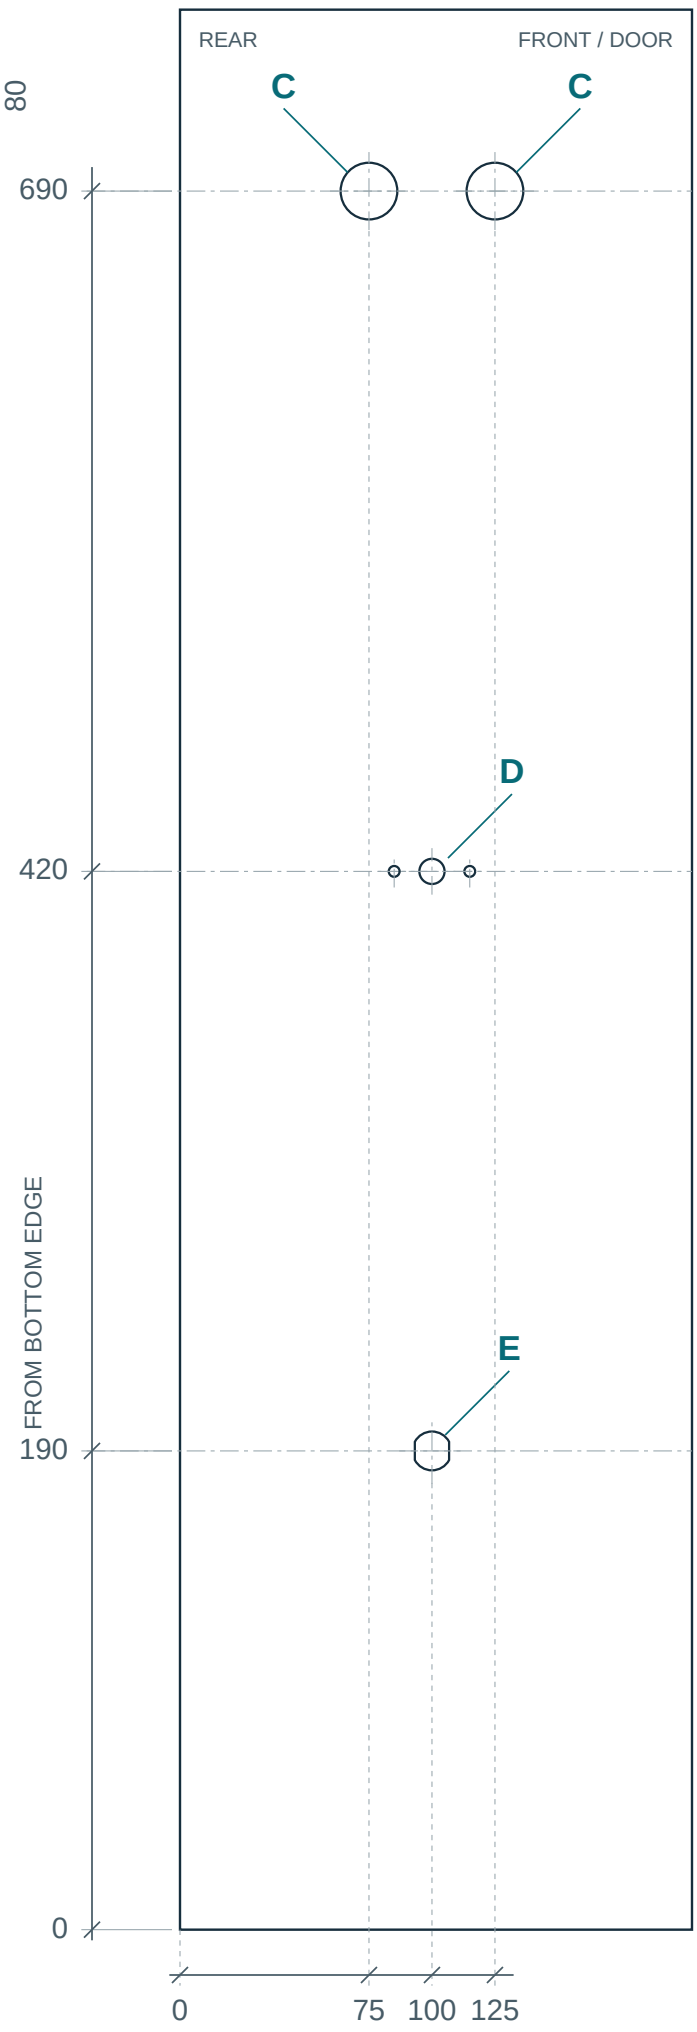


Use either the top or right A pair.

Unused pair: 2 x MCMC 9357K15.

Gasket included; hex nut, no wings.

A 4 HOLES

PILOT 1/2 in




Ø22.2 / 7/8 in

MCMC 34685A265

B 1 HOLE

PILOT 7/8 in




Ø28.2 / 1-7/64 in

MCMC 34685A186

C 2 HOLES


PILOT 1/2 in



Ø22.5

MCMC 34685A218

D 1 PATTERN

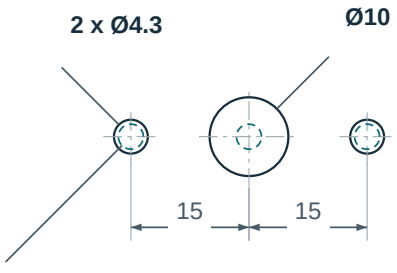


3 x PILOT 1/8 in

PUNCH: N/A - DRILL

DEPTH-ALIGNED

E DRILL + FILE

FILE HATCH

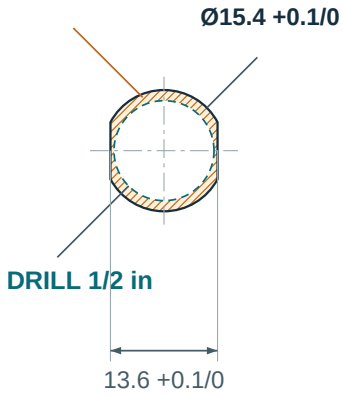

PUNCH: N/A - DRILL + FILE

FLATS VERTICAL

1 in CHECK

PRINT: 11 x 17 PORTRAIT AT 96% | DETAILS PRINT 1:1 | LOCATION VIEWS REDUCED

11 HOLES