

ESCON 50/5 – Wiring Overview

On the following pages you will find the wiring information based on the configuration you performed in «ESCON Studio».

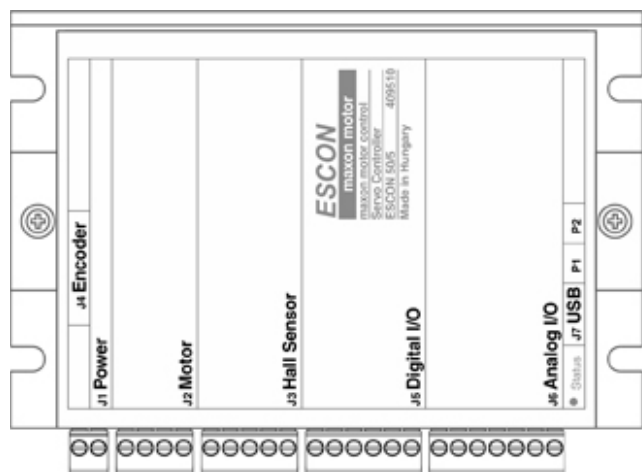



Figure 1-3 Interfaces – Location



Remark

-  Ground safety earth connection (optional)

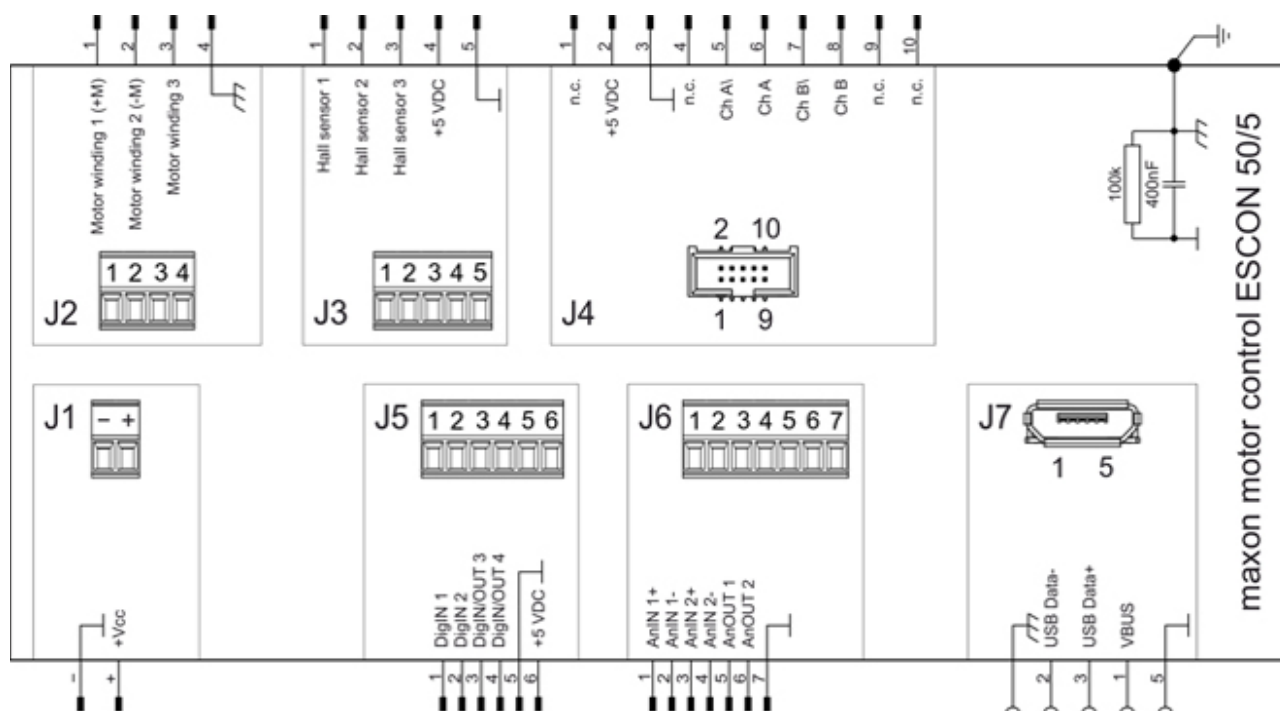


Figure 1-4 Interfaces – Pin Assignment

J1 Power		
Pin	Signal	Configured Purpose
–	Power_GND	Ground of supply voltage
+	+V _{cc}	Power supply voltage (+10...+50 VDC)

J2 Motor		
Pin	Signal	Configured Purpose
1	DC: Motor (+M) EC: Motor winding 1	DC motor: Motor+
2	DC: Motor (–M) EC: Motor winding 2	DC motor: Motor–
3	DC: not connected EC: Motor winding 3	–
4	Motor shield	Cabel shield

J3 Hall Sensor		
Pin	Signal	Configured Purpose
1	Hall sensor 1	
2	Hall sensor 2	
3	Hall sensor 3	
4	+5 VDC	
5	GND	

J4 Encoder			Encoder Cable (275934)		
Pin	Signal	Configured Purpose	Head A	Color	Head B
1	not connected		1	brown	1
2	+5 VDC	Encoder supply voltage (+5 VDC; <=70 mA)	2	white	2
3	GND	Ground	3	red	3
4	not connected		4	white	4
5	Channel A\	Channel A complement	5	orange	5
6	Channel A	Channel A	6	white	6
7	Channel B\	Channel B complement	7	yellow	7
8	Channel B	Channel B	8	white	8
9	not connected		9	green	9
10	not connected		10	white	10

J5 Digital I/Os		
Pin	Signal	Configured Purpose
1	DigIN1	
2	DigIN2	Enable
3	DigIN/DigOUT3	
4	DigIN/DigOUT4	
5	GND	Ground
6	+5 VDC	Auxiliary output voltage (+5 VDC; <=10 mA)

J6 Analog I/Os		
Pin	Signal	Configured Purpose
1	AnIN1+	Set Value
2	AnIN1–	Set Value
3	AnIN2+	
4	AnIN2–	
5	AnOUT1	
6	AnOUT2	
7	GND	Ground

Potentiometers P1 / P2	
Potentiometer	Configured Purpose
P1	
P2	

J7 USB			USB Type A - micro B Cable (403968)		
Pin	Signal	Configured Purpose	Head A	Color	Head B
1	V _{BUS}	USB BUS supply voltage input +5 VDC	1		1
2	D–	USB Data– (twisted pair with Data+)	2		2
3	D+	USB Data+ (twisted pair with Data–)	3		3
4	ID	not connected	4		–
5	GND	USB ground	5		4