


DESi

Home Automation
Interface (HAI V3)

User Manual
HAI V3





DESi

DECLARATION OF CONFORMITY**Desi Alarm ve Güvenlik Sistemleri San. Tic. A.Ş.**

Address: Orta Mh. Anadolu Sk. No:1, Bayrampaşa / İSTANBUL

Tel: +90212 501 72 72 Fax: +90212 576 64 77

E-mail: desi@desi.com.tr Web: www.desi.com.tr

This declaration of conformity is issued under the sole responsibility of the manufacturer.
The object of the declaration described above is in conformity with the relevant Union
harmonisation legislation: Directive 2014/53/EU (Radio Equipment Directive).

Product Information

Product Name: Home Automation Interface V3

Model: 152.04.01.01.046

EU Directives

2014/53/EU – Radio Equipment Directive (RED)

2011/65/EU – RoHS Directive

Radio (RED – Article 3.2)

ETSI EN 300 328 V2.2.2

EMC (RED – Article 3.1(b))

ETSI EN 301 489-1 V2.2.3

ETSI EN 301 489-17 V3.2.4

Safety (RED – Article 3.1(a))

EN 62368-1:2018

Restriction of Hazardous Substances (RoHS)

EN IEC 63000:2018

Name Surname.....: Tuncay Erhan YANAR / CEO

Date of Issue.....: 17 / 11 / 2025

Signature.....:

DESi ALARM VE GÜVENLİK SİSTEMLERİ


SANAYİ VE TİCARET ANONİM ŞİRKETİ

Orta Mah. Topkapı Mahallesi Çarşı Sok. No:1

Bayrampaşa / İstanbul Tel:0212 501 72 72

Devletçe V.D. 2930490304 Tic. Sic. No: 271921

1. TECHNICAL SPECIFICATIONS and INSTALLATION

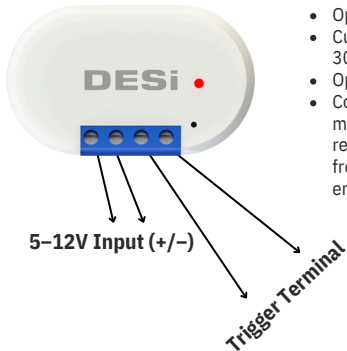

- Operating Range: 5 - 12 V DC
- Current Consumption: Maximum 30 mA
- Operating Conditions: 0 - 40°C
- Control Distance: Up to 15 meters (This range may be reduced due to interference from other wireless units in the environment)

2. GENERAL INFORMATION and WARNINGS

- If there is any issue with the door or locking mechanism, it must be resolved first. The door's mechanical components and lock mechanism should function properly.
- If there is a problem with the device, you should contact your vendor.
- The device should be protected from heavy water exposure and direct sunlight.
- Do not touch the electronic components of the device with conductive metal or sharp objects.
- Do not use water or abrasive chemical substances to clean the device.

IMPORTANT NOTE: The device must be set up using the DESi Smart application.

2.1. PREPARATION

All settings, pairing with the smart lock, and adjustments are carried out through the DESi Smart application.

To use this product, you must first be the owner and master user of a DESi smart lock or relay.

Compatible DESi Products

Utopic R (device type AD, AR ve AD-O)

Utopic RX


Utopic P

Smart Relay




3. INITIAL SETUP

- Open the app and tap the '+' icon at the bottom right, then go to the 'Accessories (BL)' tab.
- Power on the device. This will activate the device's pairing mode.
- Follow the steps in the app to complete the registration process.

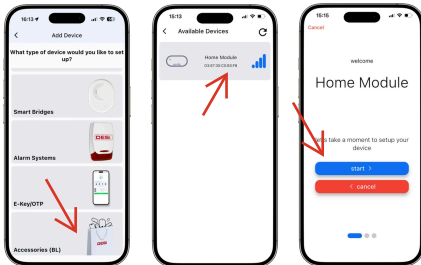


3.1. PAIRING WITH THE SMART LOCK

- In the app, tap on the 'Home Module' device.
- Press the 'Bind Device'.
- A list of smart locks you have access to will appear.
- Tap the lock you wish to pair with and wait until the process completes.

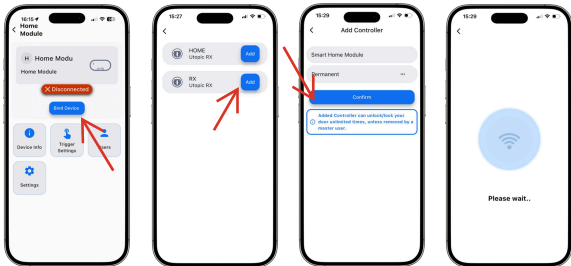

3.2. TRIGGER SETTINGS

- In the app, tap on the 'Home Module' device.
- Go to the 'Trigger Settings'.
- Choose trigger type and assign the functions of the trigger terminals, then save.

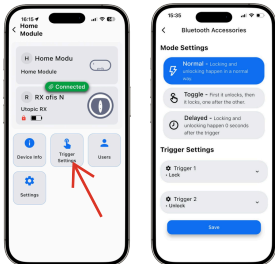

3.2.1. TRIGGER TYPES


Normal: Locking and unlocking operations occur in the standard way.

Toggle: Locking and unlocking alternate sequentially. For example, if the first trigger unlocks, the next trigger will lock. This sequence continues alternately.

Delayed: Locking and unlocking operations occur 3-4 seconds after the trigger.


3.3. ADDING A NEW MASTER

- In the app, tap on the 'Home Module' device.
- Tap the 'Users' tab and enter the email address associated with the DESi Smart account of the person you'd like to invite.
- The user who accepts the invitation can now manage the smart home module.
- A total of 3 administrators can be added.

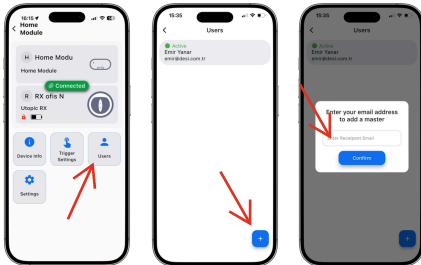

3.4. DEVICE INFORMATION SCREEN

- On this screen, you can see all the details of your device.
- You can view your device's version and hardware information.
- You can see the total number of registered users.
- You can check the connection status.

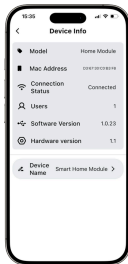

4. FACTORY RESET

- In the app, tap on the 'Home Module' device.
- Go to the Settings tab.
- Tap on the 'Factory Reset' at the bottom and confirm.
- After this process, the connection with the smart lock will be disconnected and the device will be reset.

4.1. HARD RESET WITHOUT APP

If you delete the device only through the mobile application, this action will prevent you from pairing the device again.

- Disconnect the power supply.
- Using a thin object, press and hold the button located inside the small hole on the device, then restore the power while continuing to hold the button.
- The red LED will remain solid. After approximately 5 seconds, it will begin blinking — at that point, release the button.
- The device will then be reset.

