

1. Description

1.1. Project

Project Name	DMA_7-SEGMENT DISPLAY	
	COMMON ANODE	
Board Name	custom	
Generated with:	STM32CubeMX 6.2.1	
Date	04/23/2021	


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F401
MCU name	STM32F401RETx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4

2. Pinout Configuration

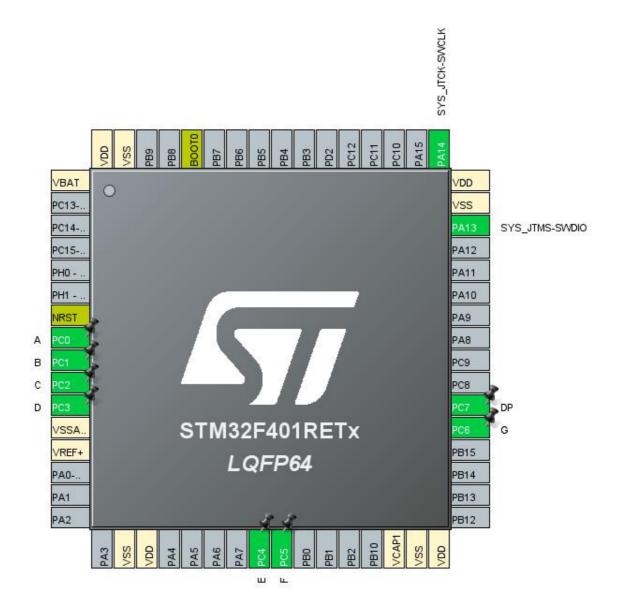


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
8	PC0 *	I/O	GPIO_Output	А
9	PC1 *	I/O	GPIO_Output	В
10	PC2 *	I/O	GPIO_Output	С
11	PC3 *	I/O	GPIO_Output	D
12	VSSA/VREF-	Power		
13	VREF+	Power		
18	VSS	Power		
19	VDD	Power		
24	PC4 *	I/O	GPIO_Output	Е
25	PC5 *	I/O	GPIO_Output	F
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
37	PC6 *	I/O	GPIO_Output	G
38	PC7 *	I/O	GPIO_Output	DP
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
60	воото	Boot		
63	VSS	Power		
64	VDD	Power		

^{*} The pin is affected with an I/O function

4. Clock Tree Configuration

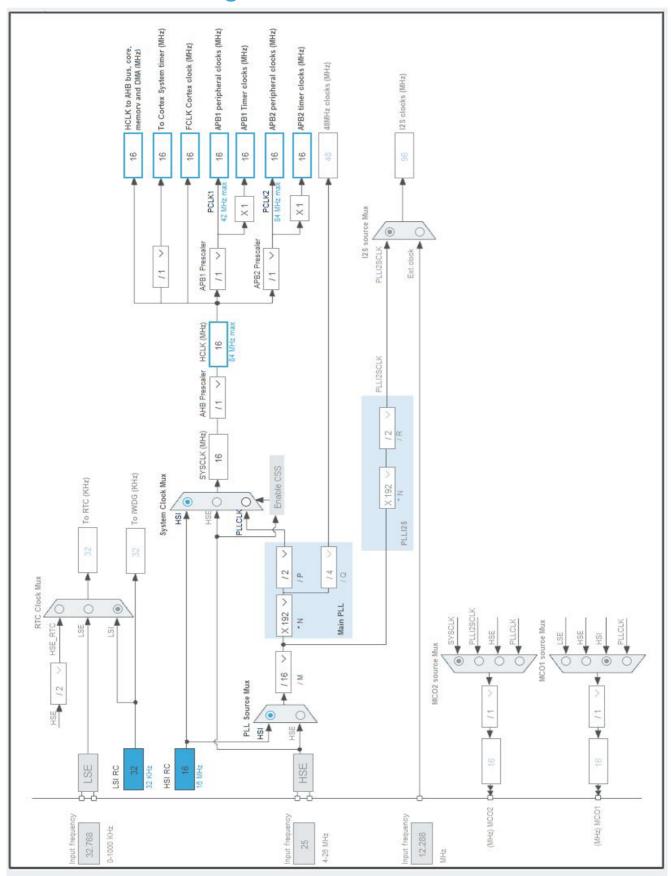

Page 4

5. Software Project

5.1. Project Settings

Name	Value	
Project Name	DMA_7-SEGMENT DISPLAY COMMON ANODE	
Project Folder	C:\Users\LUIS ARRES\STM32CubeIDE\workspace_1.6.0\PROJECTS MOOC	
Toolchain / IDE	STM32CubeIDE	
Firmware Package Name and Version	STM32Cube FW_F4 V1.26.1	
Application Structure	Advanced	
Generate Under Root	Yes	
Do not generate the main()	No	
Minimum Heap Size	0x200	
Minimum Stack Size	0x400	

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	No
consumption)	
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name	
1	MX_GPIO_Init	GPIO	
2	MX_DMA_Init	DMA	
3	SystemClock_Config	RCC	
4	MX_TIM1_Init	TIM1	

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F401
мси	STM32F401RETx
Datasheet	DS10086_Rev3

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale2-Medium	No Scale
Fetch Type	FLASH/ART/PREFETCH	n/a
CPU Frequency	84 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LPLV Flash- PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	21.6 mA	10 μΑ
Duration	0.1 ms	0.9 ms
DMIPS	105.0	0.0
Ta Max	101.44	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	2.17 mA
Battery Life	2 months, 4 days,	Average DMIPS	105.0 DMIPS
	8 hours	_	

6.6. Chart

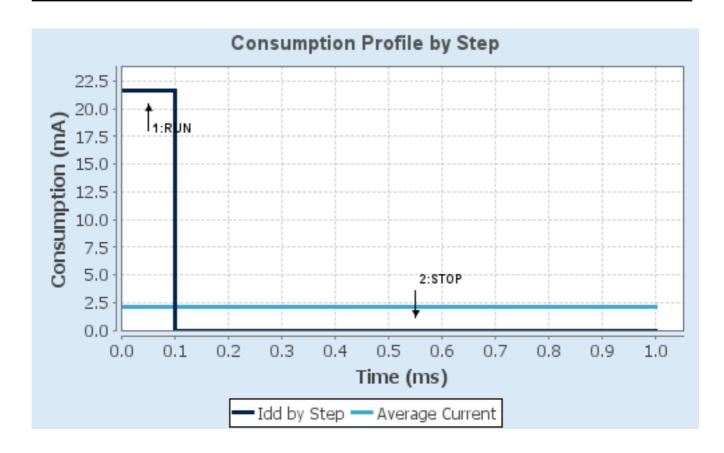

7. Peripherals and Middlewares Configuration

7.1. RCC

7.1.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Instruction Cache Enabled
Prefetch Buffer Enabled
Data Cache Enabled

Flash Latency(WS) 0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value 16

TIM Prescaler Selection Disabled

HSE Startup Timout Value (ms) 100

LSE Startup Timout Value (ms) 5000

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 2

7.2. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.3. TIM1

Clock Source: Internal Clock

7.3.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)

Counter Mode

Up

Counter Period (AutoReload Register - 16 bits value) 31999 *
Internal Clock Division (CKD) No Division

Repetition Counter (RCR - 8 bits value) 0

auto-reload preload Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

Trigger Event Selection Reset (UG bit from TIMx_EGR)

	DMA_7-SEGMENT DISPLAY COMMON ANODE Project Configuration Report
* User modified value	

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
SYS	PA13	SYS_JTMS- SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK- SWCLK	n/a	n/a	n/a	
GPIO	PC0	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	A
	PC1	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	В
	PC2	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	С
	PC3	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	D
	PC4	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	E
	PC5	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	F
	PC6	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	G
	PC7	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	DP

8.2. DMA configuration

DMA request	Stream	Direction	Priority
TIM1_UP	DMA2_Stream5	Memory To Peripheral	Low

TIM1_UP: DMA2_Stream5 DMA request Settings:

Mode: Circular *
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable *
Peripheral Data Width: Byte *

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA2 stream5 global interrupt	true	0	0
PVD interrupt through EXTI line 16		unused	
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 update interrupt and TIM10 global interrupt		unused	
TIM1 trigger and commutation interrupts and TIM11 global interrupt		unused	
TIM1 capture compare interrupt	unused		
FPU global interrupt		unused	

8.3.2. NVIC Code generation


Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
DMA2 stream5 global interrupt	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

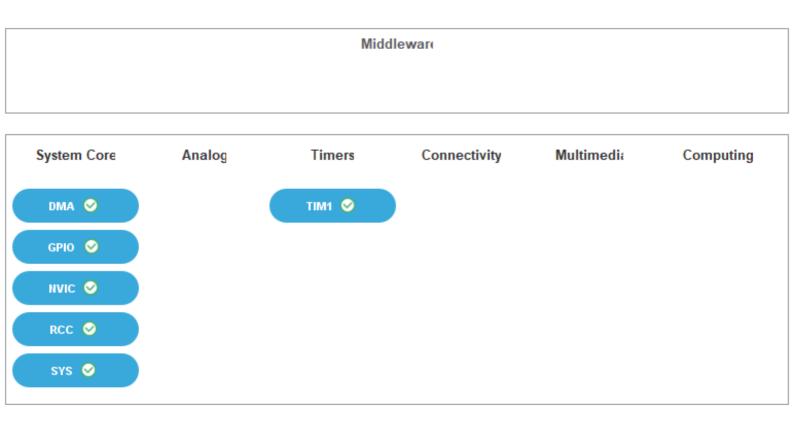

10. Docs & Resources

Type Link

Datasheet http://www.st.com/resource/en/datasheet/DM00102166.pdf

Reference http://www.st.com/resource/en/reference_manual/DM00096844.pdf

manual

Programming http://www.st.com/resource/en/programming_manual/DM00046982.pdf

manual

Errata sheet http://www.st.com/resource/en/errata_sheet/DM00158624.pdf

Application note http://www.st.com/resource/en/application_note/CD00167594.pdf

Application note http://www.st.com/resource/en/application_note/CD00211314.pdf

Application note http://www.st.com/resource/en/application_note/CD00249778.pdf

Application note http://www.st.com/resource/en/application_note/CD00259245.pdf

Application note http://www.st.com/resource/en/application_note/CD00264321.pdf

Application note http://www.st.com/resource/en/application_note/CD00264342.pdf

Application note http://www.st.com/resource/en/application_note/CD00264379.pdf

Application note http://www.st.com/resource/en/application_note/DM00024853.pdf

Application note http://www.st.com/resource/en/application_note/DM00040802.pdf

Application note http://www.st.com/resource/en/application_note/DM00040808.pdf

Application note http://www.st.com/resource/en/application_note/DM00042534.pdf

Application note http://www.st.com/resource/en/application_note/DM00046011.pdf

Application note http://www.st.com/resource/en/application_note/DM00072315.pdf

Application note http://www.st.com/resource/en/application_note/DM00073742.pdf

Application note http://www.st.com/resource/en/application_note/DM00073853.pdf

Application note http://www.st.com/resource/en/application_note/DM00080497.pdf

Application note http://www.st.com/resource/en/application_note/DM00081379.pdf

Application note http://www.st.com/resource/en/application_note/DM00115714.pdf

Application note http://www.st.com/resource/en/application_note/DM00129215.pdf

•••

Application note http://www.st.com/resource/en/application_note/DM00156364.pdf

Application note http://www.st.com/resource/en/application_note/DM00160482.pdf

Application note	http://www.st.com/resource/en/application_note/DM00144612.pdf
Application note	http://www.st.com/resource/en/application_note/DM00213525.pdf
Application note	http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note	http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note	http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note	http://www.st.com/resource/en/application_note/DM00226326.pdf
Application note	http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note	http://www.st.com/resource/en/application_note/DM00281138.pdf
Application note	http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00325582.pdf
Application note	http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note	http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note	http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note	http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note	http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note	http://www.st.com/resource/en/application_note/DM00431633.pdf
Application note	http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note	http://www.st.com/resource/en/application_note/DM00536349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00725181.pdf