


折页正面

S13 USER'S GUIDE

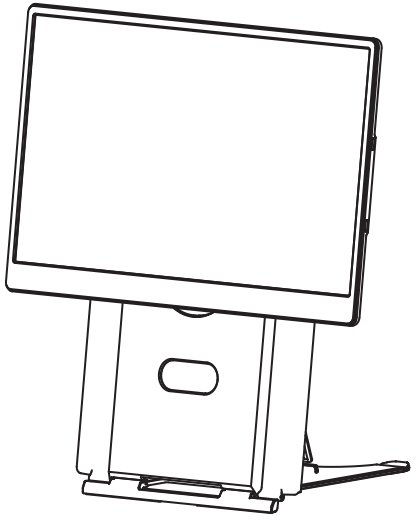

Friendly Reminders:

1. Ensure a secure connection of the Type-C data cable to the device interface.
2. This product seamlessly supports all Type-C functions, including charging and video, through a single integrated cable. In the event of screen power issues or restart difficulties, kindly provide external power of 5V, 2A.

WindowsMacAndroid

Product Attributes


Menu/Selection/Confirmation Button
Press and hold for 2 seconds to return. Press and hold for 3 seconds to shut down

TYPE-C2
TYPE-C1
MINI HDMI

Toggle down "Minus"
Backlight Adjustment Button

Toggle up "Plus"
Volume Adjustment Button

Accessories




The mounting hole specification is VESA 75x75 mm, and the screw specification is M4.


Parameters

Weight:	1.26kg	Screen Size:	15.6 Inches
Aspect Ratio:	16:9	Panel Type:	IPS Wide Viewing Angle
Size:	371.3×226.6×33.6mm	Brightness:	330cd/m ²
Refresh Rate:	60Hz	Type-C Input:	5V-20V / 5A Max
Resolution:	1920×1080P	Type-C Output:	5V-20V / 4.25A Max


Single Screen Stand Installation

1. Expand the monitor



Hold the suction cup, along the track, slide to the bottom right, to pull out the skateboard.




Disassemble the screen here

You need to pull the skateboard apart to remove the screen.
*Note: Please unfold the screen step by step to avoid damaging it.
2. Open the stand/Install the screen



Note: Open the stand



*Note: For a better user experience, the support bracket must be installed in the slot.

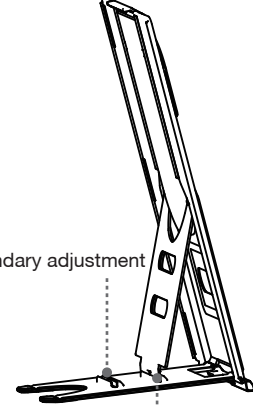


Secondary adjustment




Primary adjustment

Note: The downward extension travel is 189MM

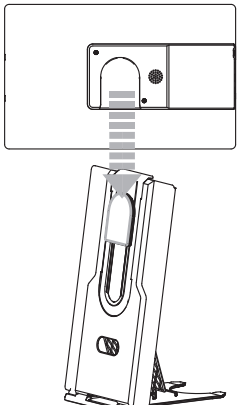


Note: Align the holes to install the screen.



Note: The screen supports 90-degree rotation.

***Note: To store the screen, follow the above sequence and operate in reverse.**

Display Angle




Landscape Display



Portrait Display

Storage



Pinch the suction cup and slide inward to retract the screen.

Connection Mode

Connect S13 with Laptop

TYPE-C Connection:
If your laptop has one full-functioned Type-C port, you can use one USB-C to USB-C cable to connect the product to your laptop. Please connect the cable from the first or second port on the screen extender to the full-functioned Type-C ports of your laptop.


USB and HDMI port Connection:
If your laptop has one USB-A or USB-C port and one HDMI port, please use two cables (one HDMI to MINI HDMI cable + one USB-A or USB-C to USB-C cable) to connect the screen.

Note:
1. The HDMI-to-MINI HDMI cable must be connected to the MINI HDMI port of the video screen extender. The USB-A or USB-C to USB-C cable must be connected to the first or second port for power supply.
2. If the display has no signal or the signal is unstable after connection, please connect an external 5V/2A power adapter to power the screen extender.

封面


折页背面

Audio Settings

1. Switch settings of Windows 10 computer end output
- 1.1 Right click the loudspeaker icon down-right

- 1.2 Select "switch on sound " in pop-up dialog box
- 1.3 Left click "turn on sound settings" and pop-up the box as provided. Here users can set about sound;

Here users can set about sound

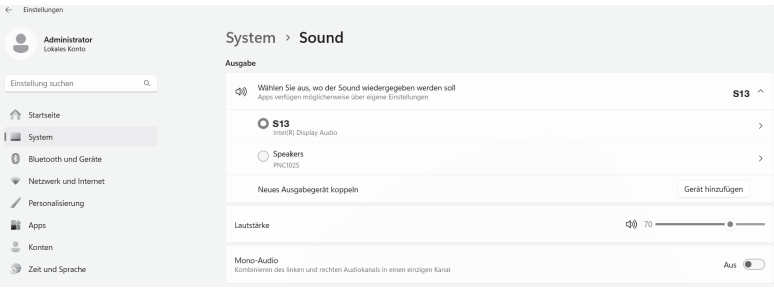1. Master volume;
2. Select output device: (S13 / Speaker);
3. Device attributes.




Settings of MACOS computer end sound

1. Switch settings of MAC computer end sound output
2. Click computer's "settings" APP


3. Select "sound" in dialog box and pop-up as provided:
Click "output", users can do settings about sound;

1. Select output device: (S13 / Speaker)

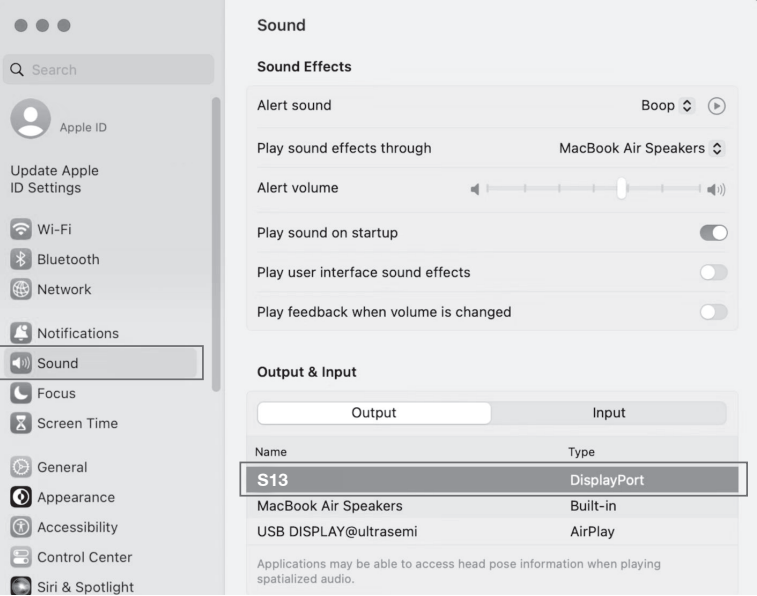

Display Mode

Windows 10 / Windows 11 Display Settings

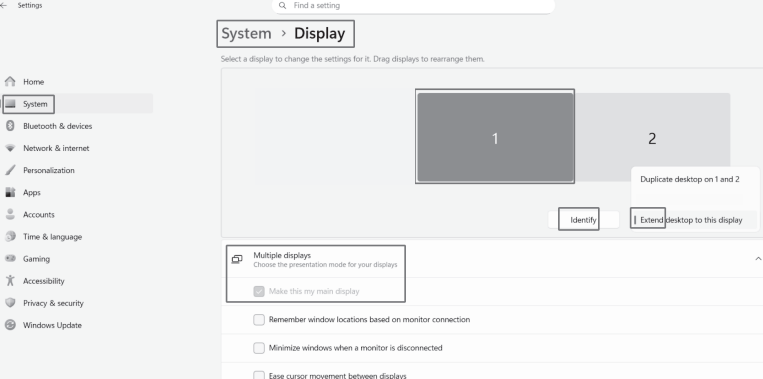1. Right-click a blank area of the desktop. Select 'Display Settings' from the pop-up dialogue box. Left-click "Display Settings" to open the settings dialogue box, as shown.

2. Under the "Rearrange displays" section, drag and drop each display to rearrange them according to their physical layout on your desktop. Scroll to the bottom of the page to further configure the display for extended or mirrored mode.


Display Mode

MacOS 13 Ventura Display Settings

- 1.1 Enter the "System Preferences" menu

- 1.2 Configure your monitor
In this menu, you can set the resolution and mirror/expand the display you want.


Display Mode

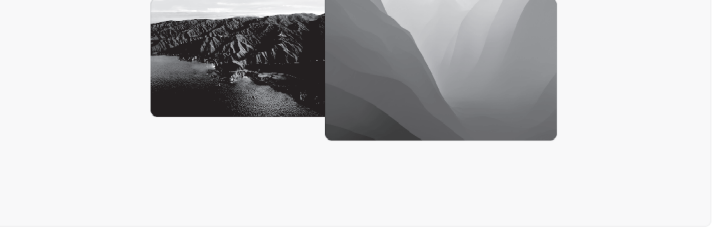- 1.3 Arrange Displays
To rearrange displays, drag them to the desired position. To mirror displays, hold Option key while dragging them on top of each other. To relocate the menu bar, drag it to a different display.


Delivery, Storage, and Usage Requirements

In order to ensure the normal use of this product and prevent accidents such as electric shock or fire, please read and understand all use requirements and operation procedures before using. Please strictly abide by the following requirements.

1. Please tear off the protective film on the screen surface before use.
2. The DC power supply required by this product is AC/DC power adapter, which should be far away from heat source and placed in a well ventilated place. The AC power socket and AC power line should be well grounded and can withstand enough current demand.
3. The DC power input required by this product is 5v-20v ± 2V.
4. Attention should be paid to avoid excessive humidity and dust, so as to avoid circuit corrosion and failure.
5. Screen surface should not be challenged by external force.
6. Do not use sharp tools to touch the screen surface.
7. This product fits general business and domestic use, and ambient temperature ranging from -20-60°C is recommended.
8. Please power off power source when stop using device.

封底