

# **A two-way APRS iGate that only transmits to my whitelist**

**KD3CCO**

Bi-directional cell phone to HT text messaging

# I wanted to text my wife from a radio where there is no cell coverage

An SMS leaves a phone, crosses the internet, reaches a gateway I own, and comes out of a radio.

The phone end is an ordinary text message. **The radio end needs no cell service.** That last leg is the project.



# Radio to phone already works, free, with no hardware

**Radio to phone already works — for everyone, for free.** NA7Q runs an APRS-to-SMS bridge, documented at [aprs.wiki](https://aprs.wiki). It answers to `SMS` on the air, and to `866-352-4096` from a phone.

1. **Opt the number in** on this form. Ten digits, press the button. It is a carrier requirement — skip it and your messages vanish with **no error anywhere**.
2. **From the radio**, send an APRS message to `SMS` reading `@2125550123 your text`.

Five minutes, using the radio you have.

The screenshot shows a mobile browser interface for the [aprs.wiki](https://aprs.wiki) website. The status bar at the top shows the time as 12:40 and various icons. The browser address bar displays 'aprs.wiki'. The main content area has a dark background with a textured pattern. It contains a white text box with the following text: 'All SMS users are required to opt-in due to carrier regulations used by this service. By opting in below, you agree to receive SMS messages from APRS or Winlink users of this service.' Below this is the 'Opt-In' section, which includes a text input field labeled 'Enter your phone number to opt-in:', a dropdown menu showing 'US, PR, & CA - 10 Digits / AU - 11 Digits / UK - 12 Digits', a text input field labeled 'Enter your phone number', a checkbox, and a black button labeled 'OPT-IN'. Below the 'Opt-In' section is the 'Opt-Out' section, which includes a text input field labeled 'Enter your phone number to opt-out:', a dropdown menu showing 'US, PR, & CA - 10 Digits / AU - 11 Digits / UK - 12 Digits', a text input field labeled 'Enter your phone number', and a black button labeled 'OPT-OUT'. At the bottom of the form is a blue link labeled 'Privacy Policy'.

12:40

aprs.wiki

All SMS users are required to opt-in due to carrier regulations used by this service. By opting in below, you agree to receive SMS messages from APRS or Winlink users of this service.

### Opt-In

Enter your phone number to opt-in:  
US, PR, & CA – 10 Digits / AU – 11 Digits / UK – 12 Digits

Enter your phone number

☐

Opt-In

**OPT-IN**

### Opt-Out

Enter your phone number to opt-out:  
US, PR, & CA – 10 Digits / AU – 11 Digits / UK – 12 Digits

Enter your phone number

**OPT-OUT**

[Privacy Policy](#)

## Then set up an alias, so the number never goes on the air again

APRS is transmitted in clear text and archived publicly. Address a phone by its raw number and you publish that number, beside your callsign, on every single message.

Send one message to SMS :

```
#alias #add wife 5705550123
```

It answers "**Alias Added.**" From then on you address @wife , and the number is never transmitted again.

Send that same command from the phone instead, and it never touches RF at all.




# Getting a message back to the radio is the half you need to build yourself

That bridge carries my text to a phone. Nothing sends one back to me.


Most iGates are **receive only**: they listen on 144.390 and pass what they hear up to the internet. Nothing goes back down. Going the other way means running **a transmitter that traffic from the internet can key**. That is why I built my own instead of asking someone to enable it on theirs.

# For my iGate, only APRS messages addressed to a callsign on my whitelist are ever transmitted

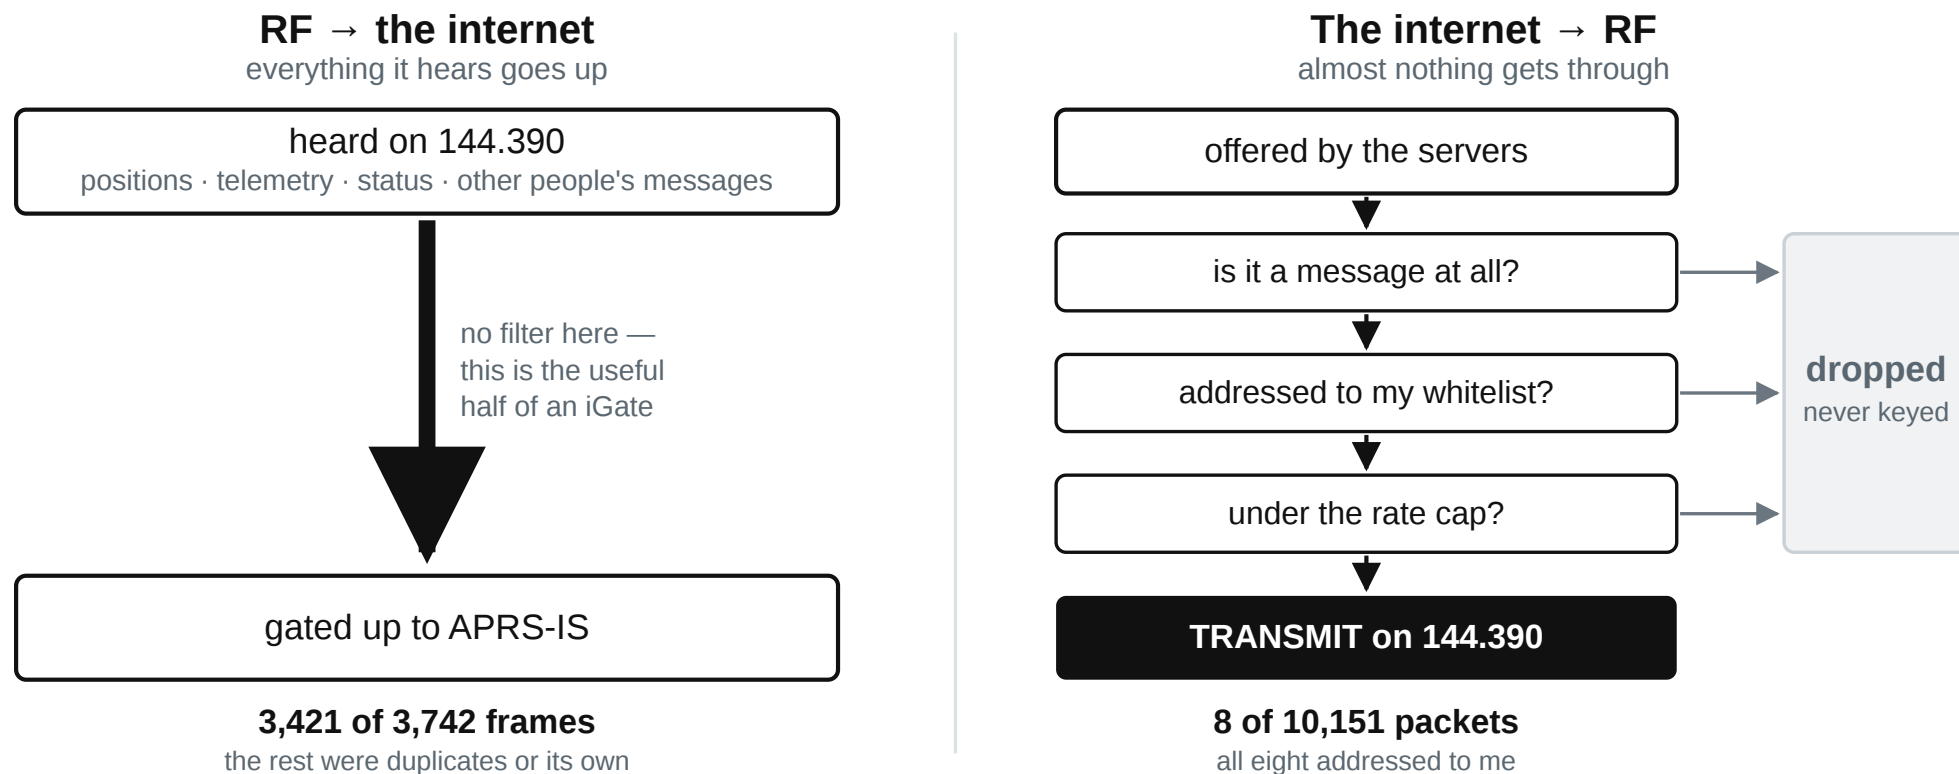


Measured over thirty hours. From every other operator's point of view this station is receive-only, so its beacon says receive-only.

# Both directions work, end to end, through the public SMS bridge

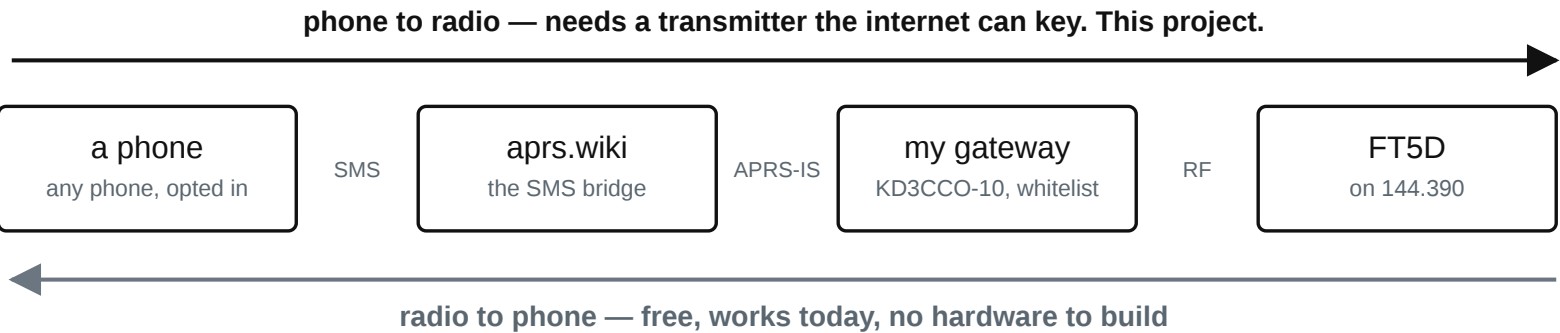

sent from the radio

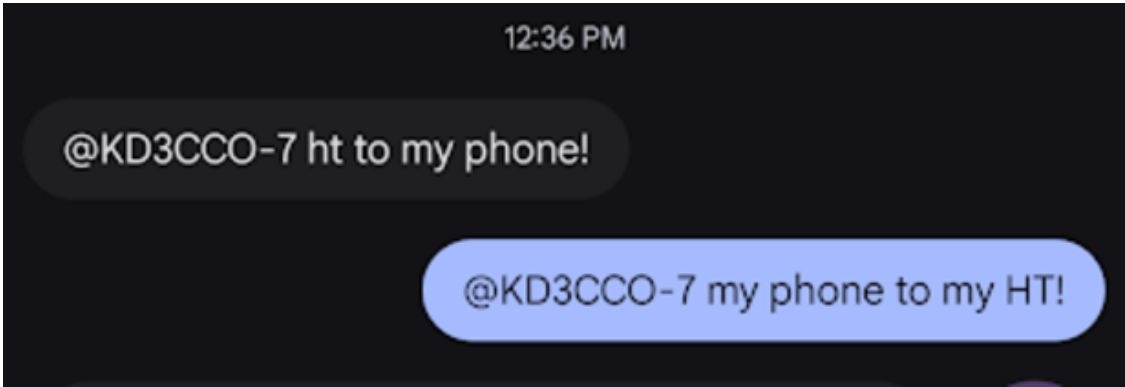

both messages, on the phone



the reply, back on the radio

# Four lines of configuration do the work that matters

```
IGFILTER  g/KD3CCO*      ALSO send me messages for these calls
FILTER IG  0 g/KD3CCO*    what I will put ON THE AIR – the whitelist
IGMSP      0              no courtesy exceptions to it
IGTXLIMIT  6 10           at most 6 packets a minute, 10 in five
```

**IGFILTER** widens what arrives; it does not narrow it. APRS-IS already sends an iGate traffic involving stations it has recently gated up — which is most of what you see arriving and being dropped. This *adds* a subscription: send me messages for my calls **whether or not I have heard that station lately**. Without it the downlink only reaches somebody already in earshot, which is the opposite of the point.

**FILTER IG 0** is the gate. It decides what reaches the transmitter. That one is the guarantee.

**IGTXLIMIT** is a hard ceiling whatever the rest of the config says — and Dire Wolf **drops** packets over it rather than queueing them.


**IGMSP 0** is the one I would have missed. Dire Wolf has a courtesy feature that transmits a **message sender's position** after relaying their message — regardless of any filter. I watched it put the SMS gateway's own beacon on the air.

# The monitor shows every packet and which direction it went

A phone in the shack, watching a round trip as it happens. **IS GATED** in green is the one packet the whitelist let onto the air; five seconds later the handheld's acknowledgement comes back on RF.

Over thirty hours the servers offered this station **10,151 packets. Eight reached the air** — every one a message to a whitelisted call. The other transmissions were its own beacons.

Every line is labeled with the direction it went, which is how I found three separate faults.

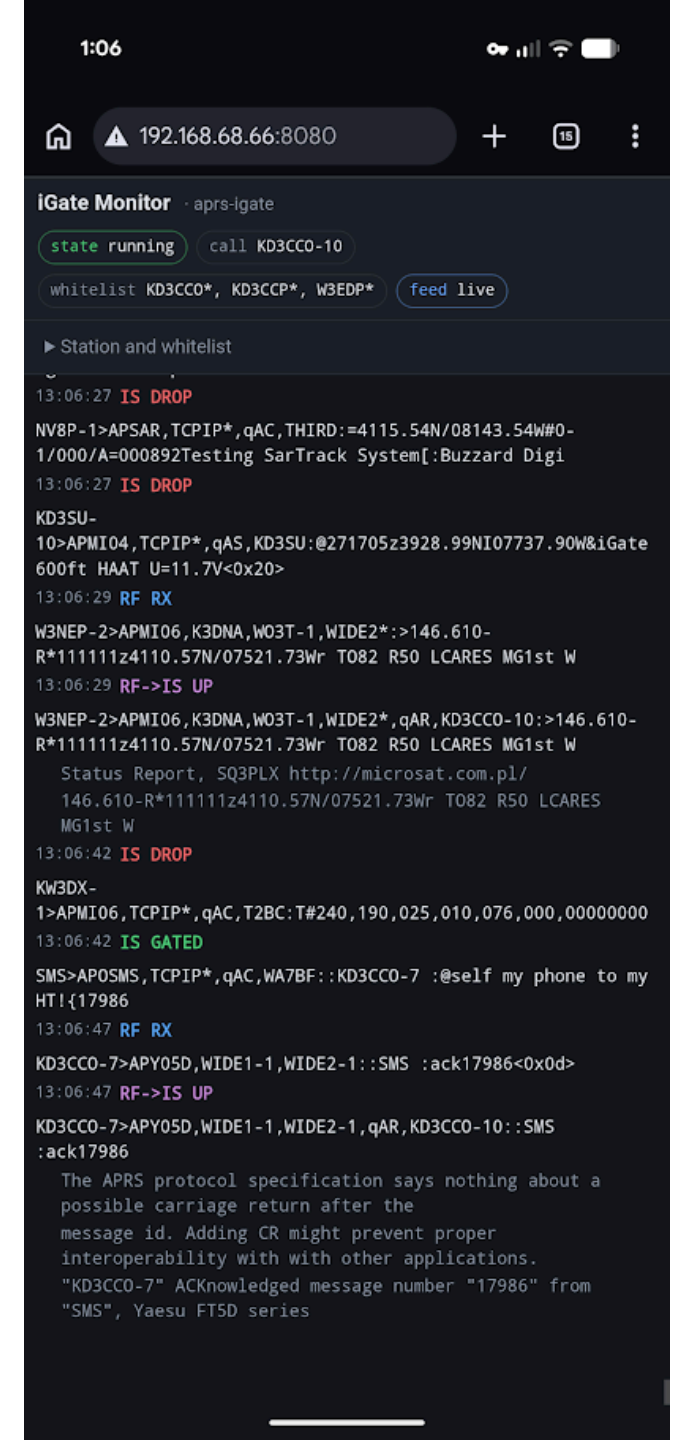

# It is a box you plug in and forget



A Raspberry Pi 3B+, a \$35 USB sound-card interface, and a mobile radio, on a side table in a spare room. No keyboard, no monitor, no screen.

# It now tests itself every four hours and says which link failed

```
step 1 OK: APRS-IS accepted it  
step 2 OK: the server routed it back to this gateway  
step 3 OK: the gateway transmitted it  
step 4 OK: KD3CCO-7 acknowledged it over RF
```

PASS — a message from the internet reached KD3CCO-7 and was acknowledged.

A beacon proves the transmitter keys. **Only an acknowledged message proves delivery.** This station spent hours beaoning normally while delivering nothing.


# It shuts itself down now, when the power goes

A UPS HAT on the GPIO header: a lithium cell that carries the Pi on its own for a while, and a battery-backed clock.

**The shutdown is the protection, not the battery.** A UPS that keeps the Pi running and then dies mid-write corrupts the card exactly as a pulled plug does. Thirty seconds after mains is lost it powers off, with most of the cell still unused.

**It does not keep the station on the air.** The radio is dark the moment mains goes. This only means the gateway goes down cleanly instead of badly.

The clock is the other half: until now this station came up with the wrong time and timestamped every packet it gated until the network corrected it.

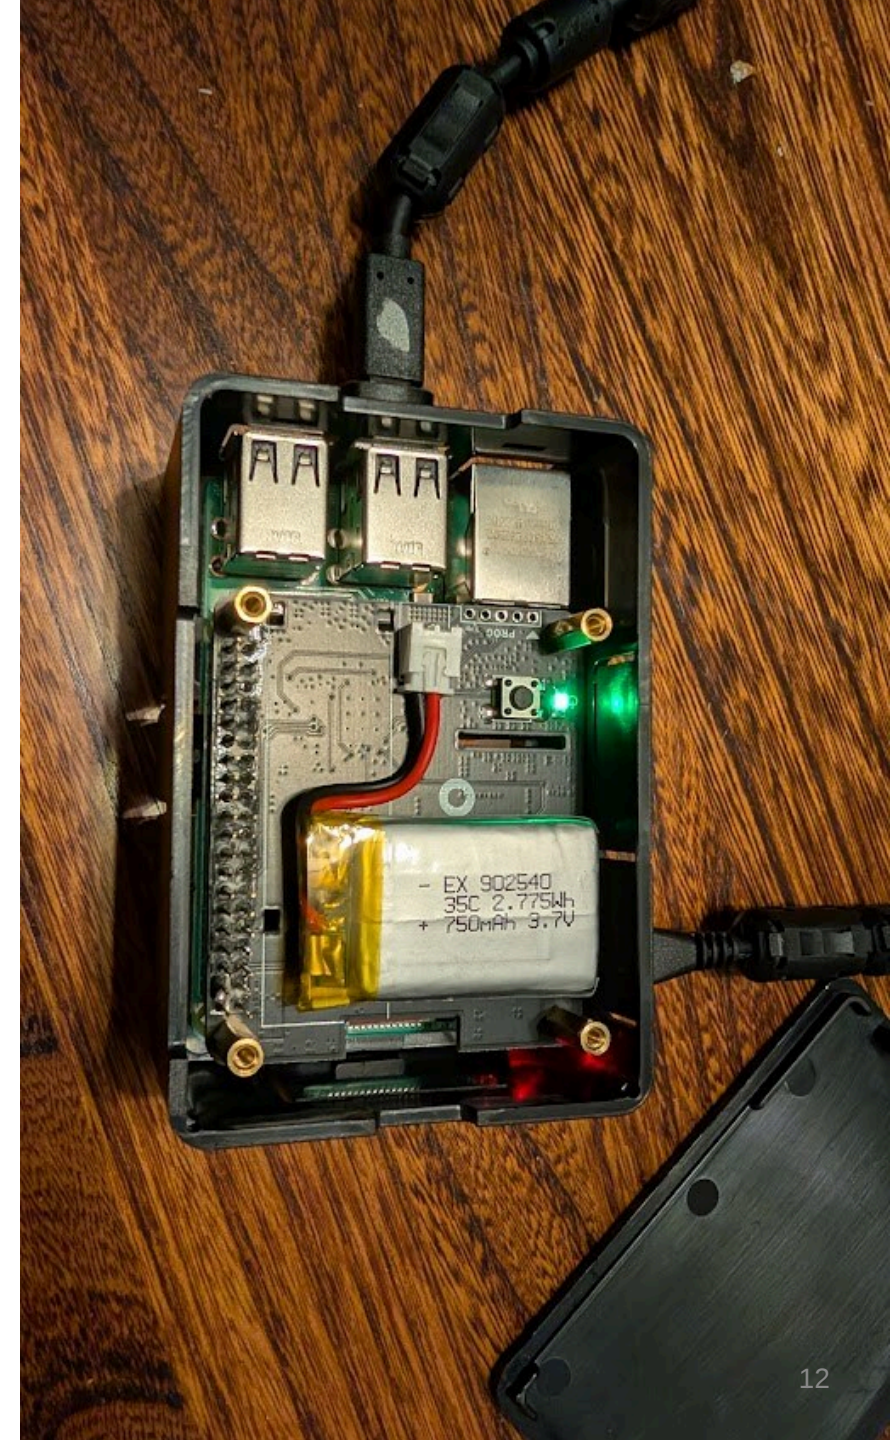

# The three faults that cost the most were none of them software

**An adapter cable in backwards.** Three conductors into a four-conductor socket grounded the PTT line, so the radio keyed a dead carrier until its own timeout. Receive was perfect and every log said the messages were sent.

**RF from its own antenna,** knocking the sound card off the USB bus — one reset every other transmission.

**An antenna that was not one.** A mobile whip indoors, sold as needing no ground plane, which still needed far more counterpoise than I gave it: the coax braid ended up doing the radiating. Eight decibels more power bought nothing.

All three were fixed by a slim jim up a fifteen-foot mast in the yard, a choke at the feedpoint, and a cable the right way round. **I guess I really am an amateur at this radio stuff.**



# What it takes, if you want one

**The gateway** — a Raspberry Pi 3B+, a microSD card, a 5 V supply.


**The radio interface** — a Digirig Lite, about \$35, and the cable for your radio. Mine was plugged in backwards for four hours.

**A 2 m radio** that will sit on 144.390 and accept external PTT. An FT-2900R here; a VX-6R and a Radtel both work on the same profile.

**A real antenna** — a slim jim outside, with a choke at the feedpoint. This mattered more than any software I wrote.

No CAT cable, no GPS, no display, no keyboard, no monitor — ever. **Try the whole thing in Docker on a laptop first**, before buying any of it.


# AI helps with faster code and better documentation practices

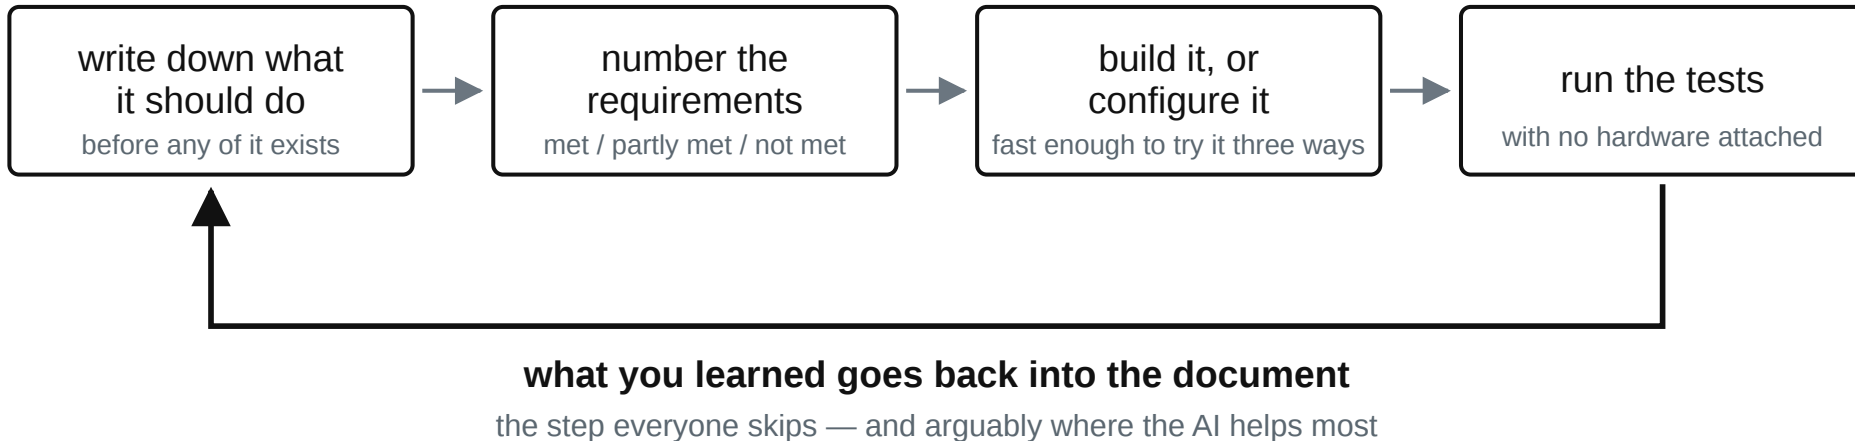

Hobby time arrives as confetti, so what decides whether a project happens is how much progress fits in twenty minutes. Writing the requirements down first, numbering them, and keeping an honest status used to be the part you skipped; it stops being overhead when the tedium is cheap.

**Its best trick is telling me what I did not know to ask** — write down how you think something should work, then ask what the alternatives are and what you are not accounting for.

# Code, documentation, slides and the blog in one window, where the assistant can see all of it

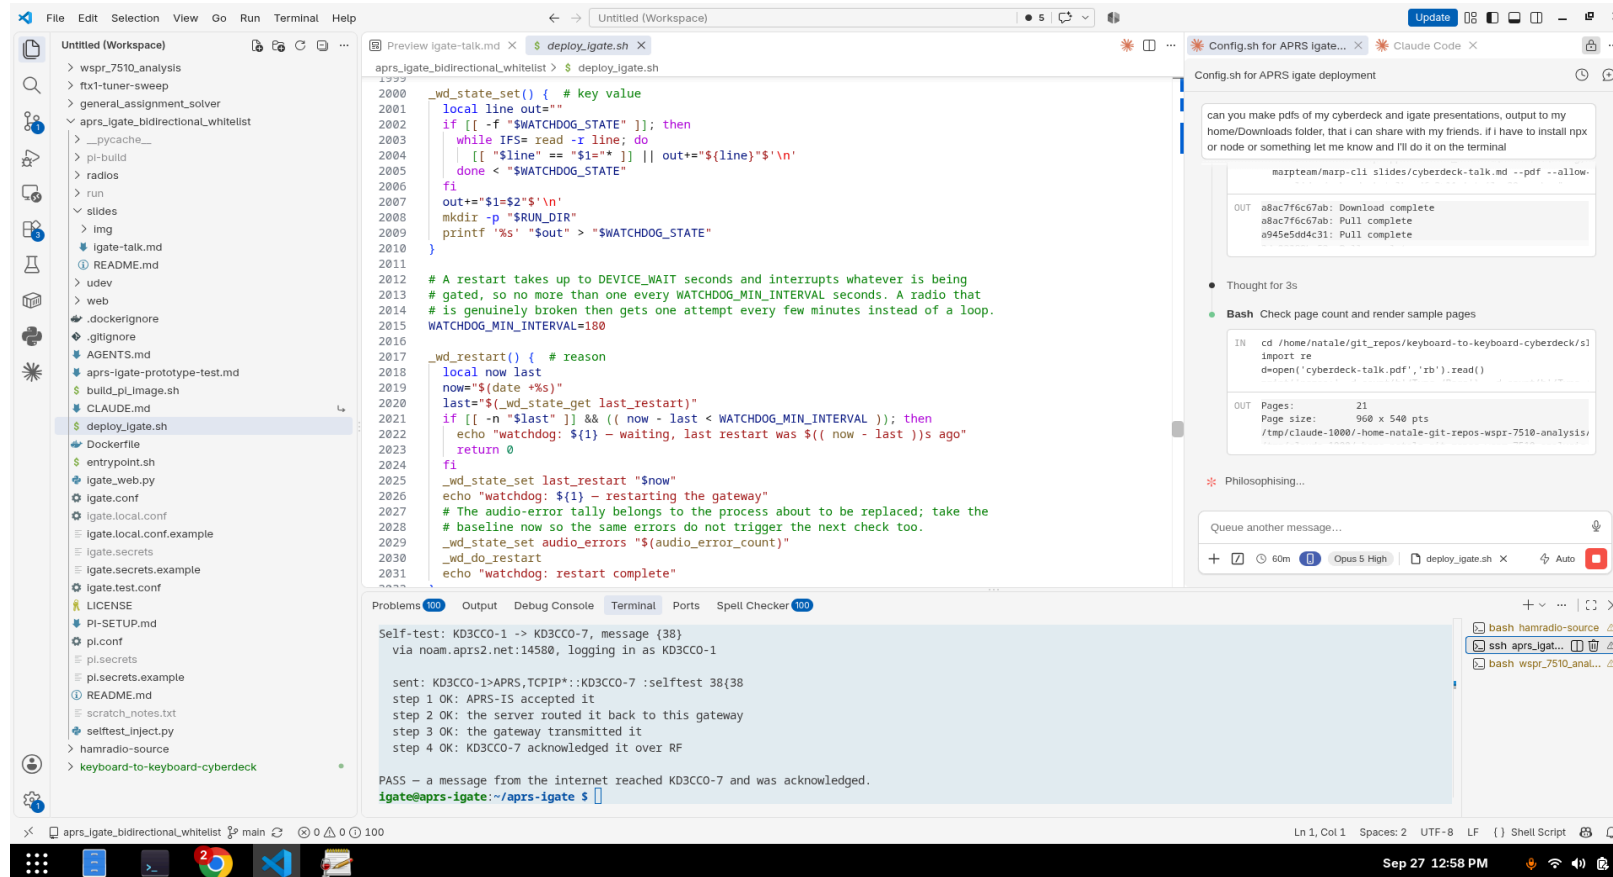

Documentation is markdown in the repository, beside the code. Everything advances in the same sitting, so nothing drifts. The blog is another repository in the same workspace; these slides are markdown in this one.

## **A text message to a radio, where there is no cell service**

When I am out past coverage with a handheld, somebody at home can reach me, and I can answer — through my own gateway

**Code, four quickstarts, and a step-by-step Pi build**

[github.com/hatandspecs/aprs\\_igate\\_bidirectional\\_whitelist](https://github.com/hatandspecs/aprs_igate_bidirectional_whitelist)

**Write-up, including everything that went wrong**

[hatandspecs.github.io/hamradio/articles/aprs-igate-bidirectional-whitelist/](https://hatandspecs.github.io/hamradio/articles/aprs-igate-bidirectional-whitelist/)

Runs in Docker on a laptop, or bare-metal on a \$35 Pi.

**KD3CCO** — questions welcome