Diffamp1: differential amplifier with NMOS pair, PMOS mirror load and cascoded tail

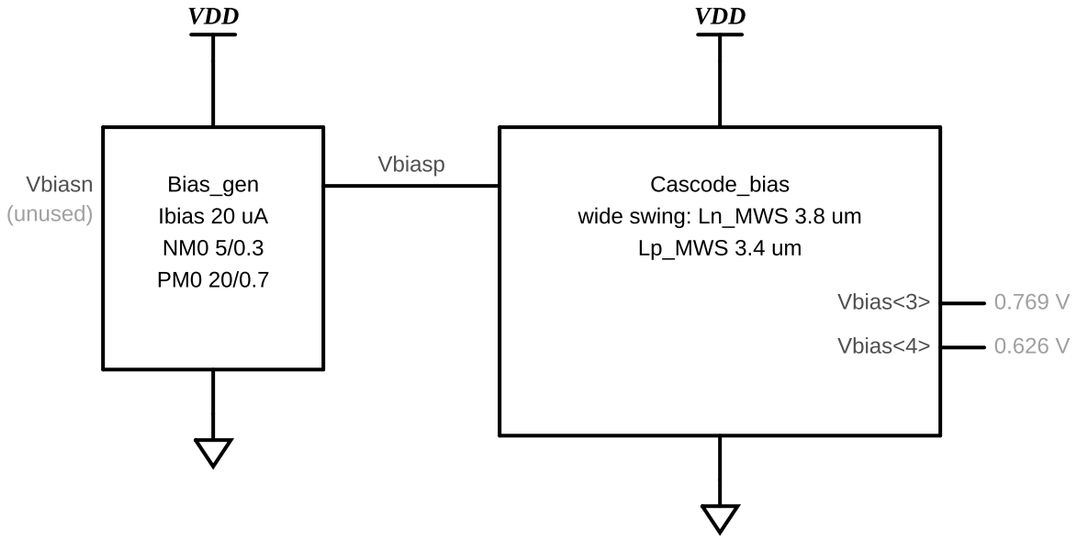

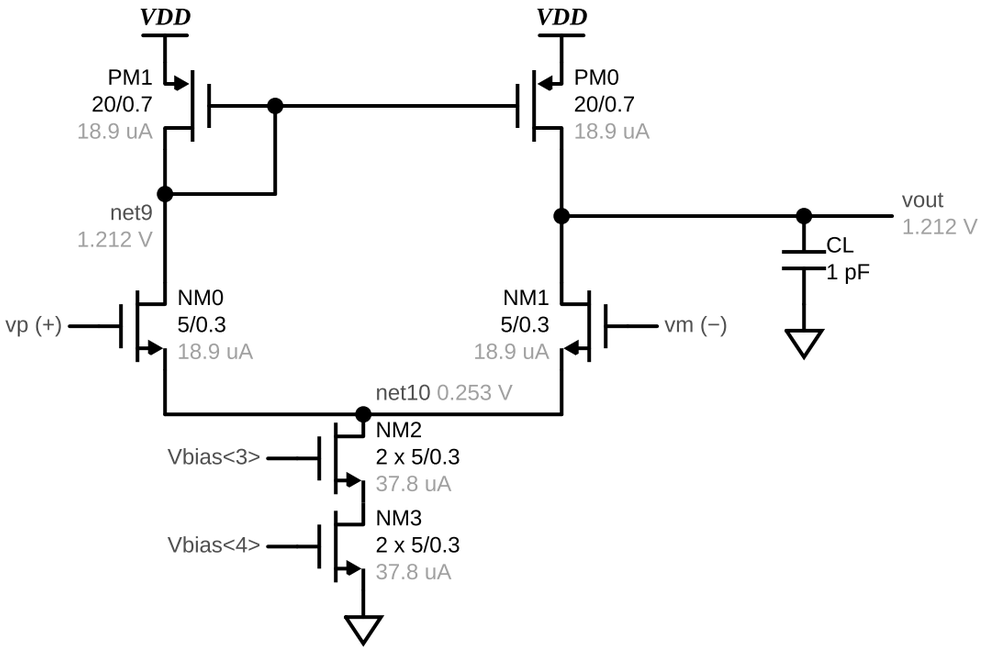

Sizes: multiplier x W/L in um (nf = 1), sky130 LVT devices. Currents and node voltages: tt, 27 °C, VDD = 1.8 V.
Simulated (ngspice, tt, 27 C): open-loop gain 29.6 dB, UGF 49.1 MHz.