FC_Amp: folded-cascode amplifier with NMOS input pair

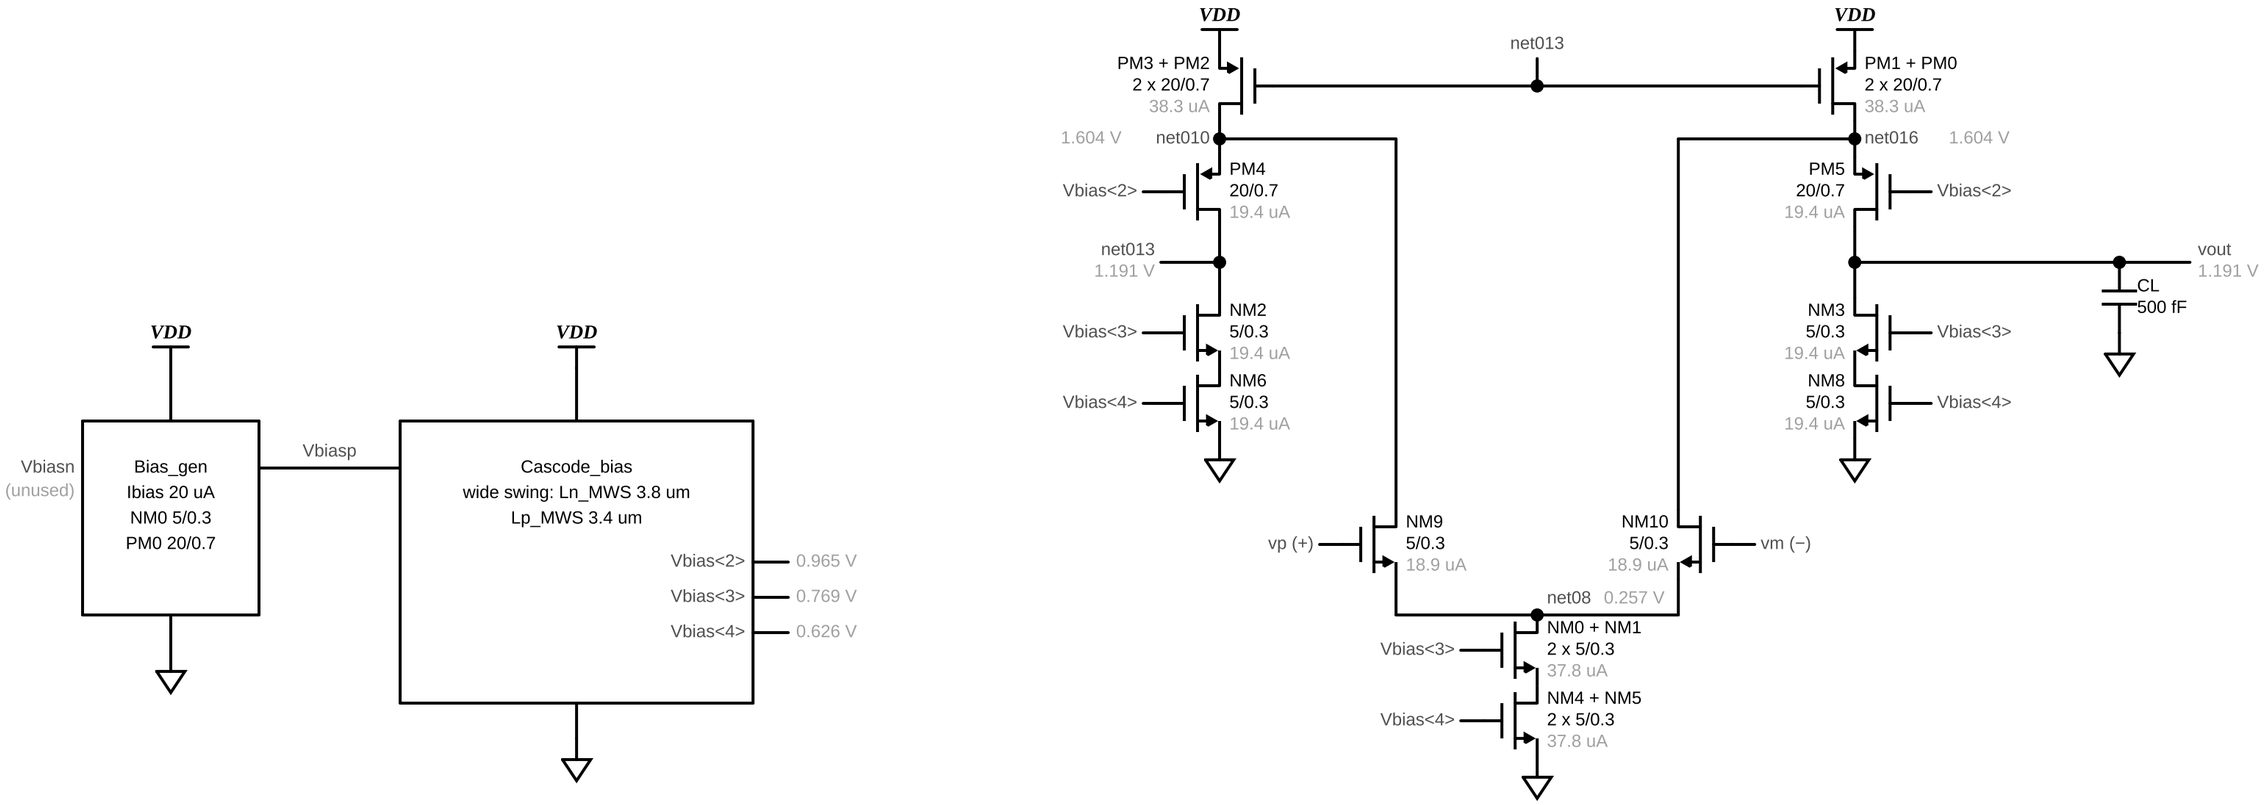


Sizes: multiplier x W/L in um (nf = 1), sky130 LVT devices. Currents and node voltages: tt, 27 °C, VDD = 1.8 V.
Self-biased PMOS mirror (gates on net013); PM4 / PM5 and NM2 / NM3 are the cascodes, NM6 / NM8 the sinks.
Simulated (ngspice, tt, 27 C): open-loop gain 43.4 dB, UGF 78.8 MHz.