Opamp1: two-stage Miller opamp, differential first stage and class-A second stage

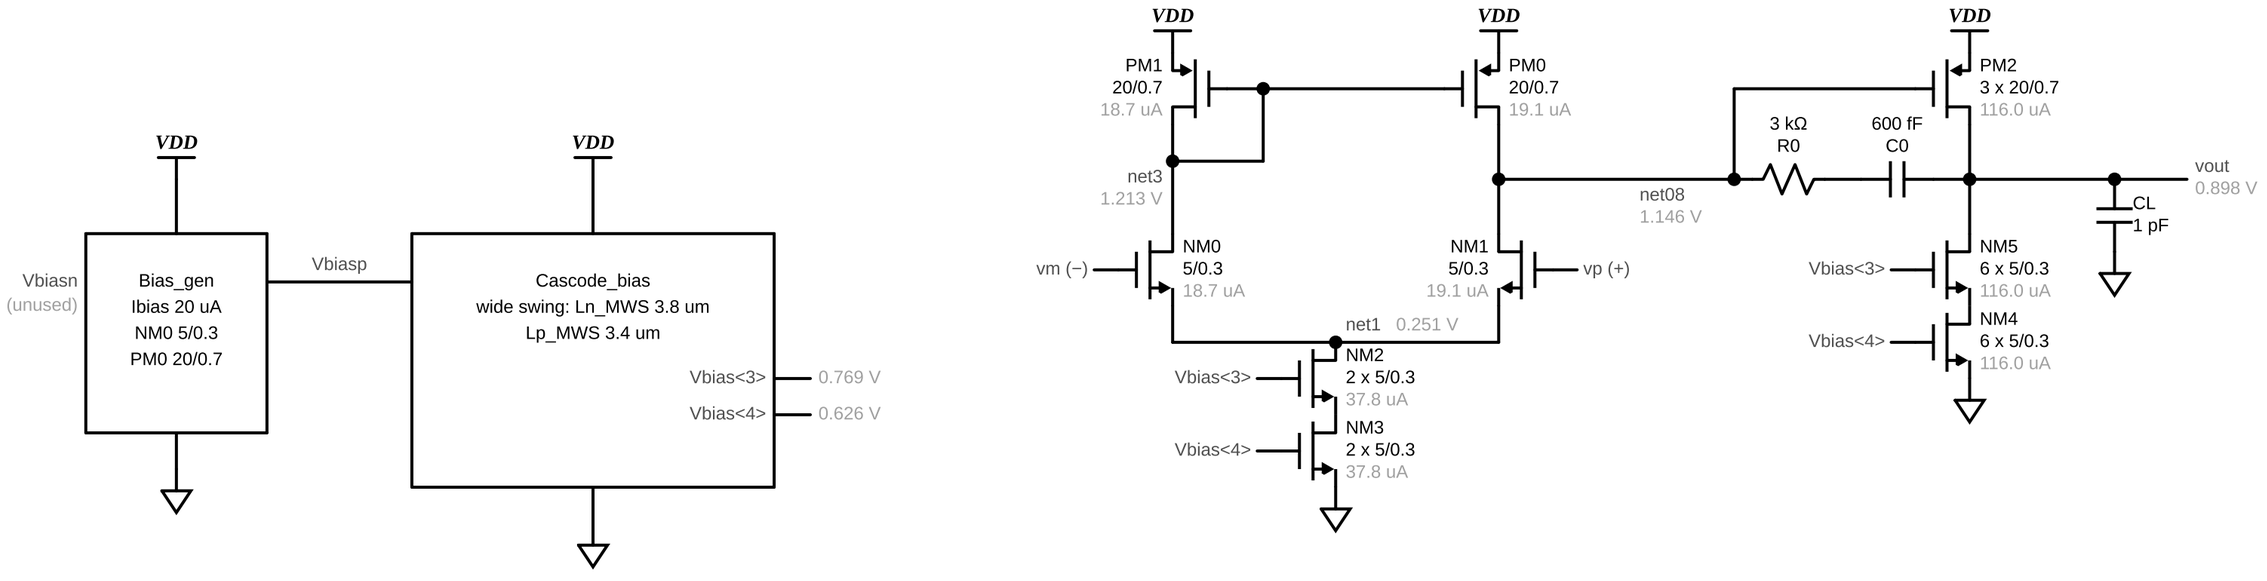

Sizes: multiplier x W/L in um (nf = 1), sky130 LVT devices. Currents and node voltages: tt, 27 °C, VDD = 1.8 V.
Rz and Cc: Miller compensation between net08 and vout.
Simulated (ngspice, tt, 27 C): loop gain 60.6 dB, UGF 79.0 MHz, PM 69.2 deg, GM 20.1 dB.