Opamp_2stg_FC_ClassA: folded-cascode first stage + class-A second stage (STB testbench)

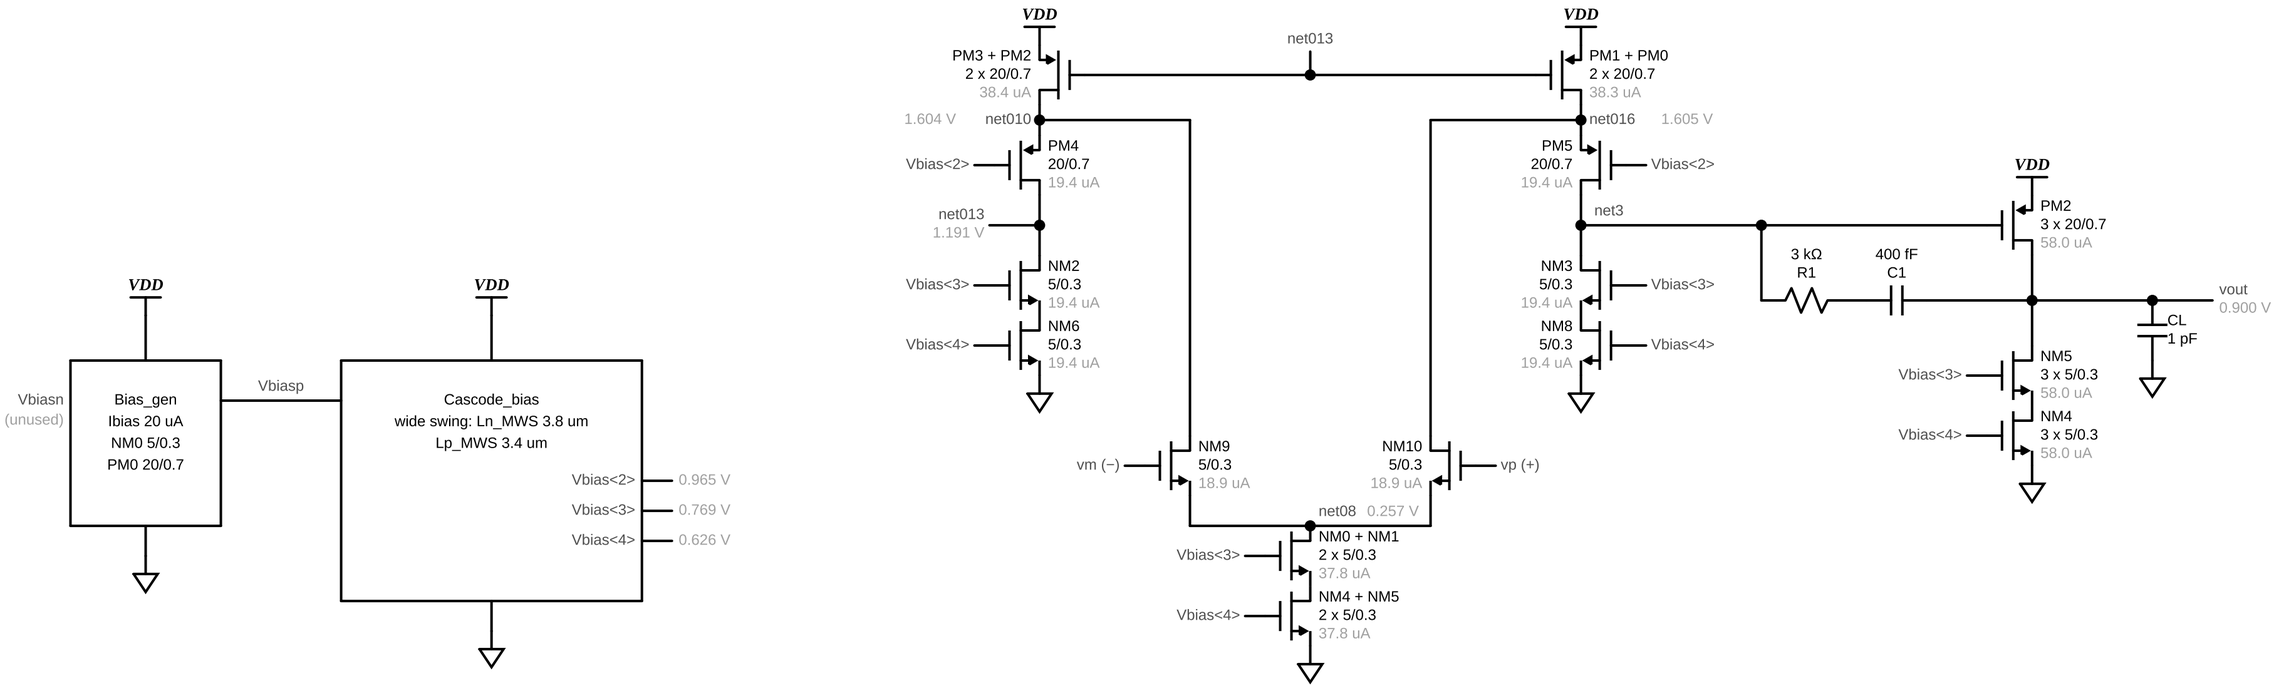

Sizes: multiplier x W/L in um (nf = 1), sky130 LVT devices. Currents and node voltages: tt, 27 °C, VDD = 1.8 V.
First stage = FC_Amp, second stage = ClassA_stg_PMOS; Rz and Cc between net3 and vout. Inputs are swapped at the top level because the second stage inverts.
Simulated (ngspice, tt, 27 C): loop gain 73.9 dB, UGF 71.3 MHz, PM 32.0 deg, GM 9.3 dB.