Opamp_2stg_Telescopic_ClassA: telescopic first stage + class-A second stage (STB testbench)

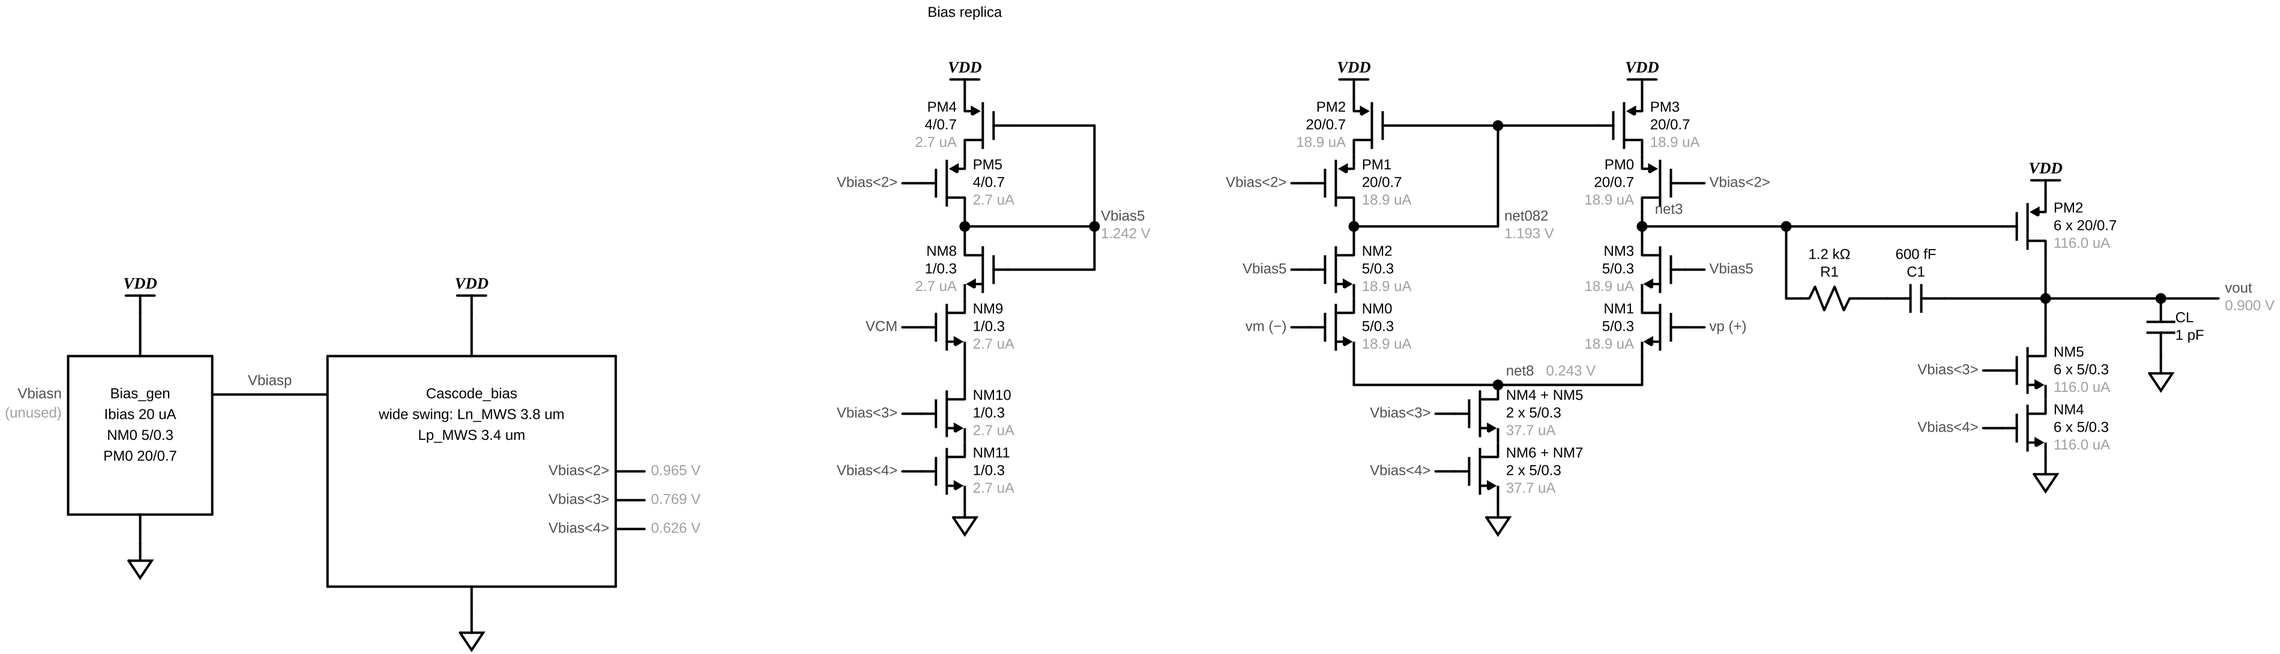

Sizes: multiplier x W/L in um (nf = 1), sky130 LVT devices. Currents and node voltages: tt, 27 °C, VDD = 1.8 V.
First stage = Telescopic_Amp, second stage = ClassA_stg_PMOS; Rz and Cc between net3 and vout. Inputs are swapped at the top level because the second stage inverts.
Simulated (ngspice, tt, 27 C): loop gain 81.9 dB, UGF 68.7 MHz, PM 49.3 deg, GM 13.3 dB.