

6

5


4

3


2

1



D




SECTION C-C

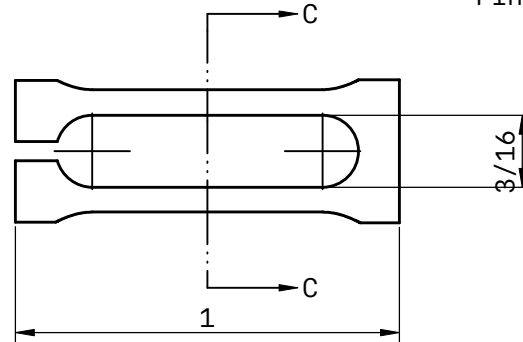

Fingers (4 pls)

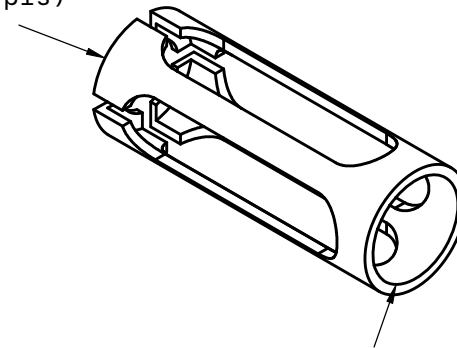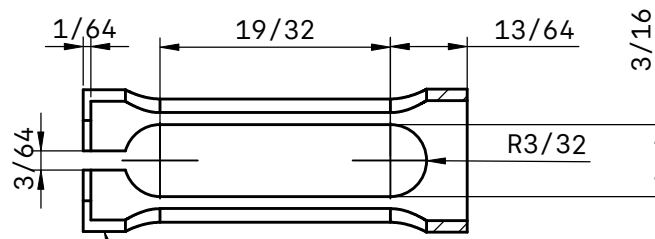Silver solder
Plug to this surfaceSaw slit with blade
0.05" or less

SECTION B-B

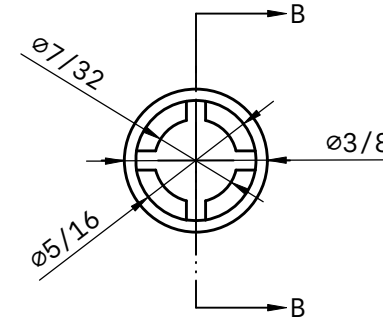

Steel or stainless steel. Flexible steel
desired since the fingers need to be
sprung opened enough to fit over a 7 mm
OD bearing.

All tolerances are ± 0.1 mm
and $\pm 0.2^\circ$ unless otherwise
indicated.

TITLE

Barrel

LAST UPDATED

12/04/22


UNITS

in

SHEET

1 / 1

THIRD ANGLE PROJECTION



SCALE

2:1

SIZE

A

6

5

4

3

2

1

A

A