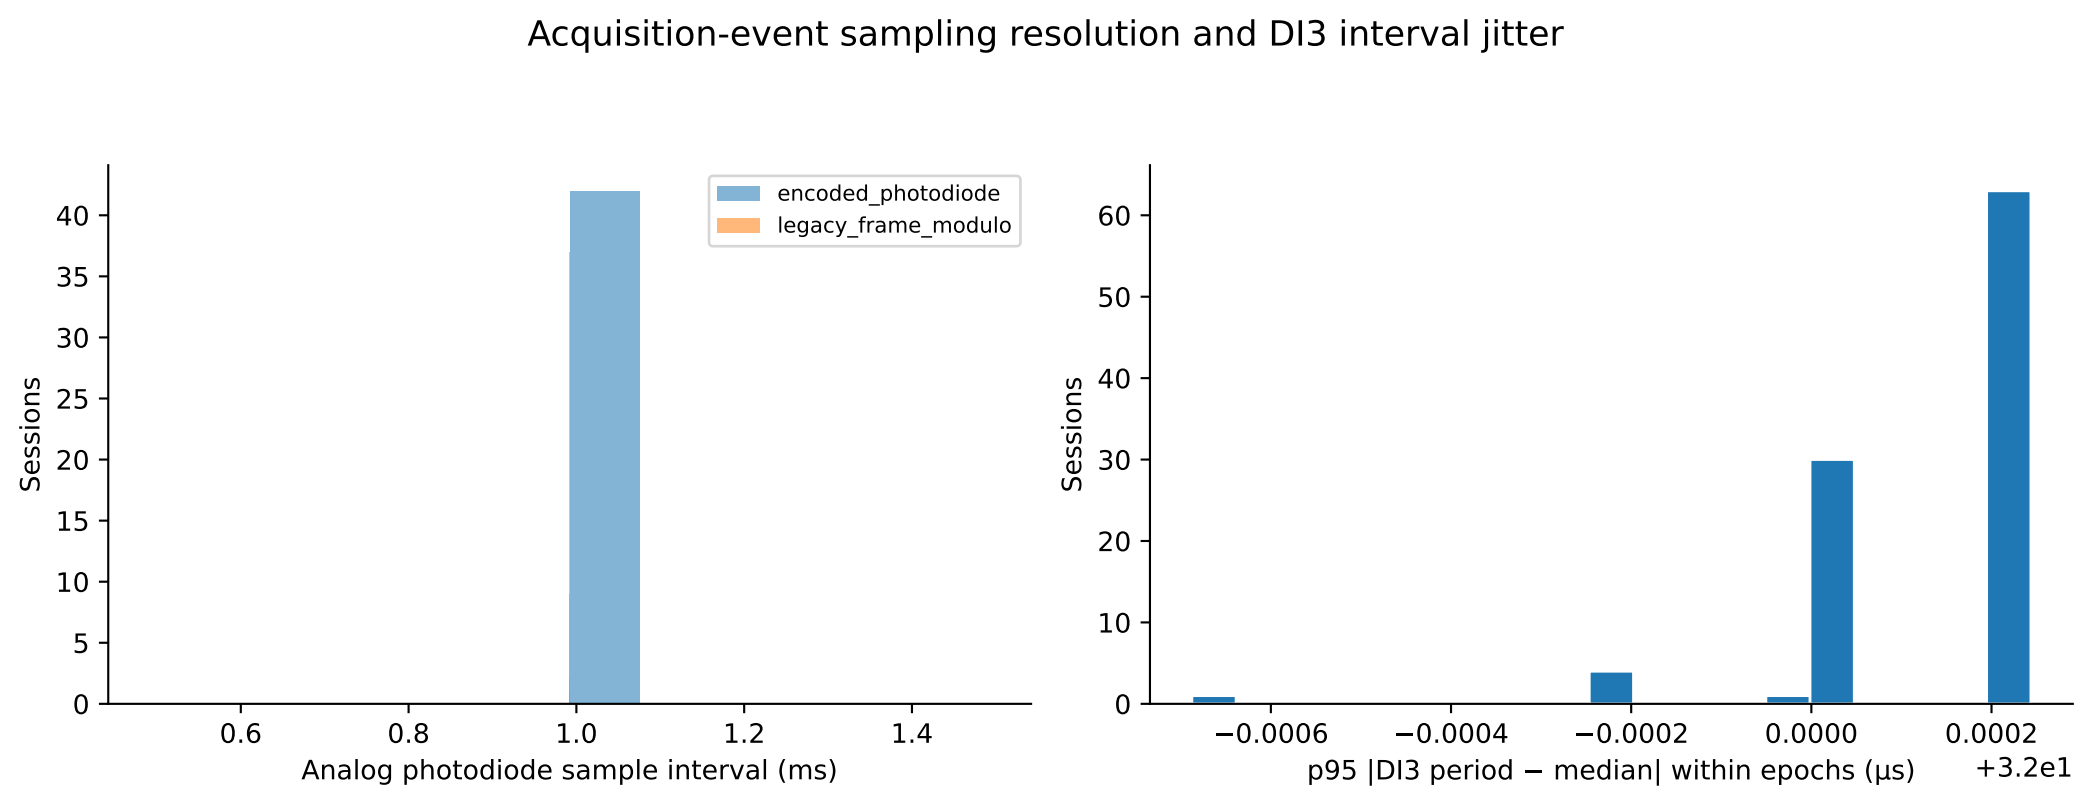
Acquisition-event sampling resolution and DI3 interval jitter
encoded_photodiode
legacy_frame_modulo
Sessions
0
5
10
15
20
25
30
35
40
0.6
0.8
1.0
1.2
1.4
Analog photodiode sample interval (ms)
Sessions
0
10
20
30
40
50
60
−0.0006
−0.0004
−0.0002
0.0000
0.0002
+3.2e1
p95 |DI3 period − median| within epochs (µs)
Source / method: Native index of HARP photodiode.pkl; digital rising edges from HARP_df.csv/DI3